

An Open Dataset for Human Activity Analysis using Smart Devices

Sébastien Faye, Nicolas Louveton, Sasan Jafarnejad, Roman Kryvchenko,

Thomas Engel

▶ To cite this version:

Sébastien Faye, Nicolas Louveton, Sasan Jafarnejad, Roman Kryvchenko, Thomas Engel. An Open Dataset for Human Activity Analysis using Smart Devices. 2017. hal-01586802

HAL Id: hal-01586802 https://hal.science/hal-01586802v1

Preprint submitted on 13 Sep 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

An Open Dataset for Human Activity Analysis using Smart Devices

Sébastien Faye¹ , Nicolas Louveton² , Sasan Jafarnejad¹ , Roman Kryvchenko¹ , and Thomas Engel¹

¹University of Luxembourg, SnT 6 avenue de la Fonte, L-4362 Esch-sur-Alzette, Luxembourg Email: firstname.lastname@uni.lu

²Université de Poitiers, CNRS, Centre de Recherches sur la Cognition et l'Apprentissage 5 rue Théodore Lefebvre, F-86000 Poitiers, France Email: nicolas.louveton@univ-poitiers.fr

Abstract

The study of human mobility and activities has opened up to an incredible number of studies in the past, most of which included the use of sensors distributed on the body of the subject. More recently, the use of smart devices has been particularly relevant because they are already everywhere and they come with accurate miniaturized sensors. Whether it is smartphones, smartwatches or smartglasses, each device can be used to describe complementary information such as emotions, precise movements, or environmental conditions. In this short paper, we release the applications we have developed and an example of a collected dataset. We propose that opening multi-sensors data from daily activities may enable new approaches to studying human behavior.

Keywords: Human Mobility, Smart Devices, Sensing Systems, Opendata

1 Overview

Our sensing system relies on the parallel use of three complementary devices, as described in Table 1 and Figure 1.

Device	Type	Main metrics	Battery during data collection	Network Interfaces
Google Nexus 5X	Phone	Contextual data	Up to 20h	LTE, Wi-Fi, Bluetooth
LG Watch Urbane 2	Watch	Physiological data	Up to 20h	LTE, Wi-Fi, Bluetooth
Jins MEME ES_R	Glasses	User activity	Up to 16h	Bluetooth

Table 1: Specification of the devices used in our studies.

First of all, a smartphone is used to capture mainly contextual data. Two applications are used: a simple data collection application based on the SWIPE open-source sensing system¹ [FLGE16], and a logbook application for obtaining real data on user activity (aTimeLogger²). SWIPE is a platform for sensing, recording and processing human dynamics using smartwatches and smartphones.

Then, a smartwatch is used primarily to capture the user's heart rate. Motion data is also collected, without being at the heart of the dataset due to its need to be configured with a low

¹https://github.com/sfaye/SWIPE

²http://www.atimelogger.com/

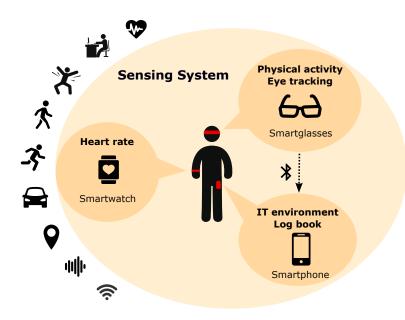


Figure 1: Overview

sampling frequency, which would drastically increase the dataset and drain the battery as well. An application based on SWIPE is used.

Finally, JINS MEME smartglasses are used. This model has the advantage of being compact and simple to carry. It does not have a camera or a screen; it simply has three types of sensors: an accelerometer (for detecting steps or activities), a gyroscope (for head movements) and an occulographic sensor (eye blinking, eye orientation). The official DataLogger application from JINS MEME is used³.

As stated in [FBTE17], the use of smart devices as key elements in an activity monitoring platform has been discussed for many years, in both industrial and research communities. By combining multiple smart devices and building a sensing system, it is possible to interpret physical actions, social interactions, IT environments and so on (e.g. [LL13, HLL⁺12]). Interested readers can refer to [FLGE16] to get an overview of existing sensing system architectures and solutions.

2 Dataset

In July 2017, a dataset has been collected from one of the co-authors from morning until evening for 15 consecutive days. During the data collection, the smartphone has been carried in the pocket for a considerable amount of time. The smartglasses have been used a few hours everyday.

This dataset is provided completely free of charge online⁴. The metrics collected by the different applications and their main parameters are described in Table 2.

³https://github.com/jins-meme/ES_R-DataLogger-for-Android ⁴https://goo.gl/RNx1SX

Step Detector Accelerometer Event-based Indicates whether the use taking a step or not. Step Counter Accelerometer Event-based Number of steps taken by user, detected by the Am system as a function of the celerometer. Battery Android 5,000 ms Battery level. Ambient light Light sensor ~5,000 ms Maximum absolute sound plitude returned by the m phone. Ambient light Light sensor ~5,000 ms List and number of Wi-Fi APs Wi-Fi APs Network 5,000 ms Travel speed, in m.s ⁻¹ . Speed GPS ~30,000 ms Travel speed, in m.s ⁻¹ . Activity Activity Event-based Same as above. Step Detector Accelerometer Event-based Same as above. Step Detector Accelerometer Event-based Same as above. Glasses Acceleration Three-axis groscop sensor 10 ms Three values describing the rent angular velocity. Guasses Acceleration Three-axis groscop sensor 10 ms Four values extracted from	Device	Metric	Source	Recording	Comments
Step Counter Accelerometer Event-based Number of steps taken by user, detected by the And system as a function of the celerometer. Battery Android 5,000 ms Battery level. Ambient sound Microphone 1,000 ms Maximum absolute sound plitude returned by the m phone. Ambient light Light sensor ~5,000 ms Ambient light level. Bluetooth Network 5,000 ms List and number of Bluet devices. Wi-Fi APs Network 5,000 ms List and number of Wi-Fi A Points. Speed GPS ~30,000 ms Travel speed, in m.s ⁻¹ . Activity Activity Event-based Same as above. Step Detector Accelerometer Event-based Same as above. Step Detector Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Step Detector Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Battery Android 5,000 ms Same as above. <tr< th=""><th>Watch</th><th>Heart rate</th><th></th><th></th><th>Heart rate, in beats per minute, provided by the optical heart rate sensor. Each value comes with an accuracy representing the status of the monitor during the reading.</th></tr<>	Watch	Heart rate			Heart rate, in beats per minute, provided by the optical heart rate sensor. Each value comes with an accuracy representing the status of the monitor during the reading.
Step CounterAccelerometerEvent-basedNumber of steps taken by user, detected by the Am system as a function of the celerometer.BatteryAndroid5,000 msBattery level.Ambient soundMicrophone1,000 msMaximum absolute sound plitude returned by the m phone.Ambient lightLight sensor~5,000 msAmbient light level.Bluetooth devicesNetwork5,000 msList and number of Bluet devices.Wi-Fi APsNetwork5,000 msList and number of Wi-Fi A Points.SpeedGPS~30,000 msTravel speed, in m.s ⁻¹ .ActivityActivity Recognition APIEvent-basedList of activities performe the user, sorted by the ac tivity.Step DetectorAccelerometerEvent-basedSame as above.Step CounterAccelerometerEvent-basedSame as above.BatteryAndroid5,000 msSame as above.BatteryAndroid5,000 msSame as above.Real activity accelerometeraTimeLogger appActivity tags manually sele by the user.GlassesAccelerationThree-axis accelerometerThree values describing the rent acceleration.Angular velocityThree-point Elec-Three values describing the rent angular velocity.		Step Detector	Accelerometer	Event-based	Indicates whether the user is taking a step or not.
Ambient sound Microphone 1,000 ms Maximum absolute sound plitude returned by the m phone. Ambient light Light sensor ~5,000 ms Ambient light level. Bluetooth Network 5,000 ms List and number of Bluet devices. Wi-Fi APs Network 5,000 ms List and number of Wi-Fi AP or Speed Speed GPS ~30,000 ms Travel speed, in m.s ⁻¹ . Activity Activity Event-based List of activities performe the user, sorted by the ser, sorted by the activity. Step Detector Accelerometer Event-based Same as above. Step Counter Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Real activity aTimeLogger - Activity tags manually sele by the user. Real activity Three-axis accelerometer 10 ms Three values describing the rent acceleration. Angular velocity Three-axis gyroscope sensor Three values describing the rent angular velocity. Four values extracted from		Step Counter	Accelerometer	Event-based	Number of steps taken by the user, detected by the Android system as a function of the ac-
Phone Ambient light Light sensor ~5,000 ms Ambient light level. Bluetooth Network 5,000 ms List and number of Bluet devices. Wi-Fi APs Network 5,000 ms List and number of Wi-Fi APoints. Speed GPS ~30,000 ms Travel speed, in <i>m.s⁻¹</i> . Activity Activity Event-based List of activities performed the user, sorted by the ser probable activity first. A codence is associated with eact tivity. Step Detector Accelerometer Event-based Same as above. Step Counter Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Real activity aTimeLogger - Activity tags manually sele by the user. Acceleration Three-axis accelerometer 10 ms Three values describing the rent angular velocity. Angular velocity Three-axis gyroscope sensor 10 ms Three values describing the rent angular velocity.			Android		
Bluetooth devicesNetwork5,000 msList and number of Bluet devices.Wi-Fi APsNetwork5,000 msList and number of Wi-Fi A Points.SpeedGPS~30,000 msTravel speed, in $m.s^{-1}$.ActivityActivityEvent-basedList of activities performed the user, sorted by the sprobable activity first. A c dence is associated with eac tivity.Step DetectorAccelerometerEvent-basedSame as above.Step DetectorAccelerometerEvent-basedSame as above.Step CounterAccelerometerEvent-basedSame as above.BatteryAndroid5,000 msSame as above.Real activityaTimeLogger appActivity tags manually sele by the user.AccelerationThree-axis 	Phone	Ambient sound	Microphone	$1,000\mathrm{ms}$	Maximum absolute sound am- plitude returned by the micro- phone.
devices devices. Wi-Fi APs Network 5,000 ms List and number of Wi-Fi APoints. Speed GPS ~30,000 ms Travel speed, in m.s ⁻¹ . Activity Activity Event-based List of activities performed the user, sorted by the sprobable activity first. A condence is associated with each tivity. Step Detector Accelerometer Event-based Same as above. Step Detector Accelerometer Event-based Same as above. Step Counter Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Real activity aTimeLogger – Activity tags manually sele by the user. Acceleration Three-axis accelerometer 10 ms Angular velocity Three-axis Three values describing the rent acceleration. Sensor Three-axis Three values describing the rent angular velocity.		Ambient light	Light sensor	\sim 5,000 ms	Ambient light level.
Wi-Fi APs Network 5,000 ms List and number of Wi-Fi A Points. Speed GPS ~30,000 ms Travel speed, in $m.s^{-1}$. Activity Activity Event-based List of activities performed the user, sorted by the sprobable activity first. A c dence is associated with eac tivity. Step Detector Accelerometer Event-based Same as above. Step Detector Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Real activity aTimeLogger - Activity tags manually sele by the user. Acceleration Three-axis accelerometer 10 ms Three values describing the rent acceleration. Angular velocity Three-axis gyroscope sensor Three values describing the 		Bluetooth	Network	$5,000\mathrm{ms}$	List and number of Bluetooth
Speed GPS ~30,000 ms Travel speed, in m.s ⁻¹ . Activity Activity Event-based List of activities performed the user, sorted by the sprobable activity first. A conduct of the user, sorted by the sprobable activity first. A conduct of the user, sorted with each tivity. Step Detector Accelerometer Event-based Same as above. Step Detector Accelerometer Event-based Same as above. Step Counter Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Real activity aTimeLogger - Activity tags manually sele app. Acceleration Three-axis Three values describing the rent acceleration. Angular velocity Three-axis 10 ms Three values describing the rent angular velocity. Corneo-retinal Three-point Elec- Four values extracted from		devices			devices.
ActivityActivityEvent-basedList of activities performed the user, sorted by the is probable activity first. A c dence is associated with eac tivity.Step DetectorAccelerometerEvent-basedSame as above.Step CounterAccelerometerEvent-basedSame as above.BatteryAndroid5,000 msSame as above.BatteryAndroid5,000 msSame as above.Real activityaTimeLogger-Activity tags manually sele by the user.AccelerationThree-axis accelerometer10 msThree values describing the rent acceleration.GlassesAngular velocityThree-axis gyroscope sensor10 msThree values describing the rent angular velocity.		Wi-Fi APs	Network	$5,000\mathrm{ms}$	List and number of Wi-Fi Access Points.
Glasses Recognition API the user, sorted by the sprobable activity first. A cdence is associated with eactivity. Step Detector Accelerometer Event-based Same as above. Step Counter Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Real activity aTimeLogger - Activity tags manually sele by the user. Acceleration Three-axis accelerometer 10 ms Three values describing the rent acceleration. Angular velocity Three-axis 10 ms Three values describing the rent angular velocity. Corneo-retinal Three-point Elec- Four values extracted from		Speed	GPS	$\sim 30,000 {\rm ms}$	Travel speed, in $m.s^{-1}$.
Step Counter Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Real activity aTimeLogger - Activity tags manually sele by the user. Glasses Acceleration Three-axis accelerometer 10 ms Three values describing the rent acceleration. Angular velocity Three-axis gyroscope sensor Three values describing the rent angular velocity. Corneo-retinal Three-point Elec- Four values extracted from		Activity		Event-based	List of activities performed by the user, sorted by the most probable activity first. A confi- dence is associated with each ac- tivity.
Step Counter Accelerometer Event-based Same as above. Battery Android 5,000 ms Same as above. Real activity aTimeLogger – Activity tags manually sele app. – Activity tags manually sele Acceleration Three-axis accelerometer 10 ms Angular velocity Three-axis 10 ms Three values describing the Corneo-retinal Three-point Elec- Four values extracted from		Step Detector	Accelerometer	Event-based	Same as above.
Real activity aTimeLogger app. - Activity tags manually sele by the user. Glasses Acceleration Three-axis accelerometer sensor 10 ms Three values describing the rent acceleration. Angular velocity Three-axis gyroscope sensor 10 ms Three values describing the rent angular velocity. Corneo-retinal Three-point Elec- Four values extracted from		Step Counter	Accelerometer	Event-based	Same as above.
Glasses Acceleration Three-axis accelerometer sensor 10 ms Three values describing the rent acceleration. Angular velocity Three-axis gyroscope sensor Three values describing the rent angular velocity. Corneo-retinal Three-point Elec- Four values extracted from		Battery	Android	$5,000\mathrm{ms}$	Same as above.
Glasses accelerometer sensor 10 ms rent acceleration. Angular velocity Three-axis gyroscope sensor Three values describing the rent angular velocity. Corneo-retinal Three-point Elec- Four values extracted from		Real activity		-	Activity tags manually selected by the user.
gyroscope sensor rent angular velocity. Corneo-retinal Three-point Elec- Four values extracted from	Glasses	Acceleration	accelerometer	$10\mathrm{ms}$	Three values describing the cur- rent acceleration.
Corneo-retinal Three-point Elec- Four values extracted from		Angular velocity		1	Three values describing the cur-
potential Sensor umentation for more info $tion^5$.		standing	Three-point Elec- trooculography		Four values extracted from the electrodes. See the official doc- umentation for more informa-

Table 2: Key metrics collected by the sensing systems.

3 Research Perspectives

While activity detection from smart-things sensors has largely been understood as quantification of physical activity, a greater intelligence of how humans are managing their time and their personal engagement in their various activities is both possible and desirable. Indeed, our daily lives are incorporating a continuously growing number of interactive systems. Obviously, these systems are bringing a good deal of disruption and distraction [Rod11], or might be disappointing in terms of usefulness and engagement. Solving these issues will make interactive services more context-relevant for users.

Such issues have been pointed out recently by [MLK], but scientific work in this field is still far from being consolidated. Conceptualization efforts have been made to better understand organization of time (e.g. [New94, STB09]). Work is also being undertaken to understand how an activity could be resolved as a combination of smaller chunks (e.g. [CIT16, CTIB15]). Finally, in [FLGE16, FBTE17], we recently proposed that wearable devices along with machine learning techniques might help classifying micro- and macro-activities, thus leading to new ways of understanding human activities and mobility.

The value of releasing the dataset and the data collection system presented in this paper is to allow the scientific community to grow beyond small-scale studies and to get a greater insight into what make a person engaged in an activity. We believe that wearable sensors are opening the way to new perspectives by bridging phenomenological description and quantification of daily and multi-scale behaviors.

Acknowledgments

This work was performed within the eGLASSES project, which is partially funded by NCBiR, FWF, SNSF, ANR and FNR under the ERA-NET CHIST-ERAII framework.

References

- [CIT16] Carrie J Cai, Shamsi T Iqbal, and Jaime Teevan. Chain Reactions: The Impact of Order on Microtask Chains. In Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems, pages 3143–3154, 2016.
- [CTIB15] Justin Cheng, Jaime Teevan, Shamsi T. Iqbal, and Michael S. Bernstein. Break It Down: A Comparison of Macro- and Microtasks. Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems - CHI '15, pages 4061– 4064, 2015.
- [FBTE17] Sébastien Faye, Walter Bronzi, Ibrahim Tahirou, and Thomas Engel. Characterizing user mobility using mobile sensing systems. International Journal of Distributed Sensor Networks, 13(8), 2017.
- [FLGE16] Sébastien Faye, Nicolas Louveton, Gabriela Gheorghe, and Thomas Engel. A twolevel approach to characterizing human activities from wearable sensor data. Journal of Wireless Mobile Networks, Ubiquitous Computing, and Dependable Applications (JoWUA), September 2016.

- [HLL⁺12] Manhyung Han, Young-Koo Lee, Sungyoung Lee, et al. Comprehensive context recognizer based on multimodal sensors in a smartphone. Sensors, 12(9):12588–12605, 2012.
- [LL13] Oscar D Lara and Miguel A Labrador. A survey on human activity recognition using wearable sensors. *IEEE Communications Surveys & Tutorials*, 15(3):1192–1209, 2013.
- [MLK] Akhil Mathur, Nicholas D Lane, and Fahim Kawsar. Engagement-Aware Computing: Modelling User Engagement from Mobile Contexts.
- [New94] Allen Newell. Unified theories of cognition. Harvard University Press, 1994.
- [Rod11] Claudia Roda. *Human attention in digital environments*. Cambridge University Press, 2011.
- [STB09] Dario D Salvucci, Niels A Taatgen, and Jelmer P Borst. Toward a unified theory of the multitasking continuum: from concurrent performance to task switching, interruption, and resumption. In Proceedings of the SIGCHI conference on human factors in computing systems, pages 1819–1828. ACM, 2009.