

CO2 kinetics in cheese matrix at 20°C position from interface (mm) A new methodology to monitor CO 2 transfer and determine its diffusivity and solubility in solid food

Estelle Chaix, Valérie Guillard

▶ To cite this version:

Estelle Chaix, Valérie Guillard. CO2 kinetics in cheese matrix at 20°C position from interface (mm) A new methodology to monitor CO 2 transfer and determine its diffusivity and solubility in solid food. 2012 EFFoST Annual Meeting - A Lunch Box for Tomorrow: An interactive combination of integrated analysis and specialized knowledge of food, Nov 2012, Montpellier, France. pp.1. hal-01601871

HAL Id: hal-01601871

https://hal.science/hal-01601871

Submitted on 6 Jun 2020


HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.




See discussions, stats, and author profiles for this publication at: https://www.researchgate.net/publication/282664390

CO2 kinetics in cheese matrix at 20°C position from interface (mm) A new methodology to monitor CO 2 transfer and determine...

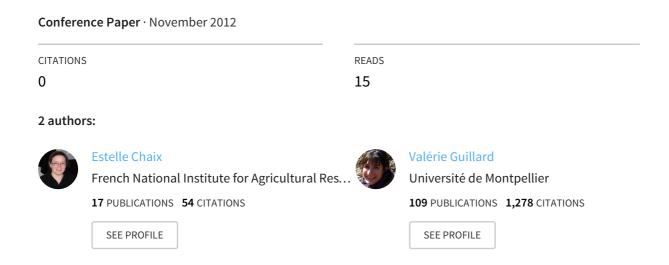

Some of the authors of this publication are also working on these related projects:

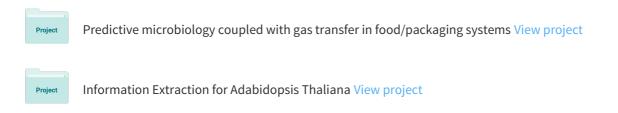





aae32

A new methodology to monitor CO_2 transfer and determine its diffusivity and solubility in solid food





Estelle CHAIX, Valérie GUILLARD

Contact: estelle.chaix@univ-montp2.fr; guillard@univ-montp2.fr

UMR IATE, CC 023, Université Montpellier 2, Place Eugène Bataillon, Montpellier, France

Carbon dioxide is usually added in modified atmosphere packaging (MAP) to extend food shelf life by reducing microbial degradation with its bacteriostatic properties.

MAP simulating tool based on the use of mass transfer models concomitantly with predictive microbiology would be the most appropriate method to allow a correct design and sizing of modified atmosphere packaging systems. Use of this model required first accurate determination of CO₂ solubility and diffusivity in solid food matrices.

Carbon dioxide transfer in food is characterised with a thermodynamic parameter, **solubility**, and a kinetic parameter, **diffusivity**. In the scientific literature, data on carbon dioxide diffusivity in non-respiring solid food matrix are mostly based on indirect measurements, with manometric or volumetric method. This is a method to acquire *in situ* the **diffusivity of carbon dioxide in solid matrices**.

Materials and Methods

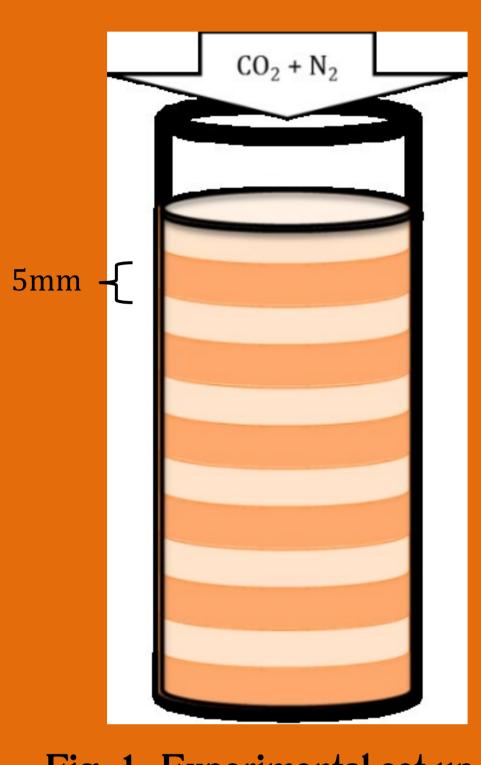


Fig. 1. Experimental set up for determining CO₂ diffusivity in food product

Measurement principle:

- Impose a gradient of carbon dioxide to the sample and monitor the carbon dioxide transfer kinetic
- Experimental design is to form a cylinder of the food matrix (2<x<8 cm) and apply at one end a flux of CO₂.
- After the phase of CO₂ diffusion (around 20 hours), the food matrix is rapidly demoulded and cut into fine slice (around 5 mm)
- CO₂ content is measured for each slice (time is a constant)

To determine the carbon dioxide content:

- Based on chemical titration used generally to measure the carbon dioxide content in food product and determine the carbon dioxide solubility

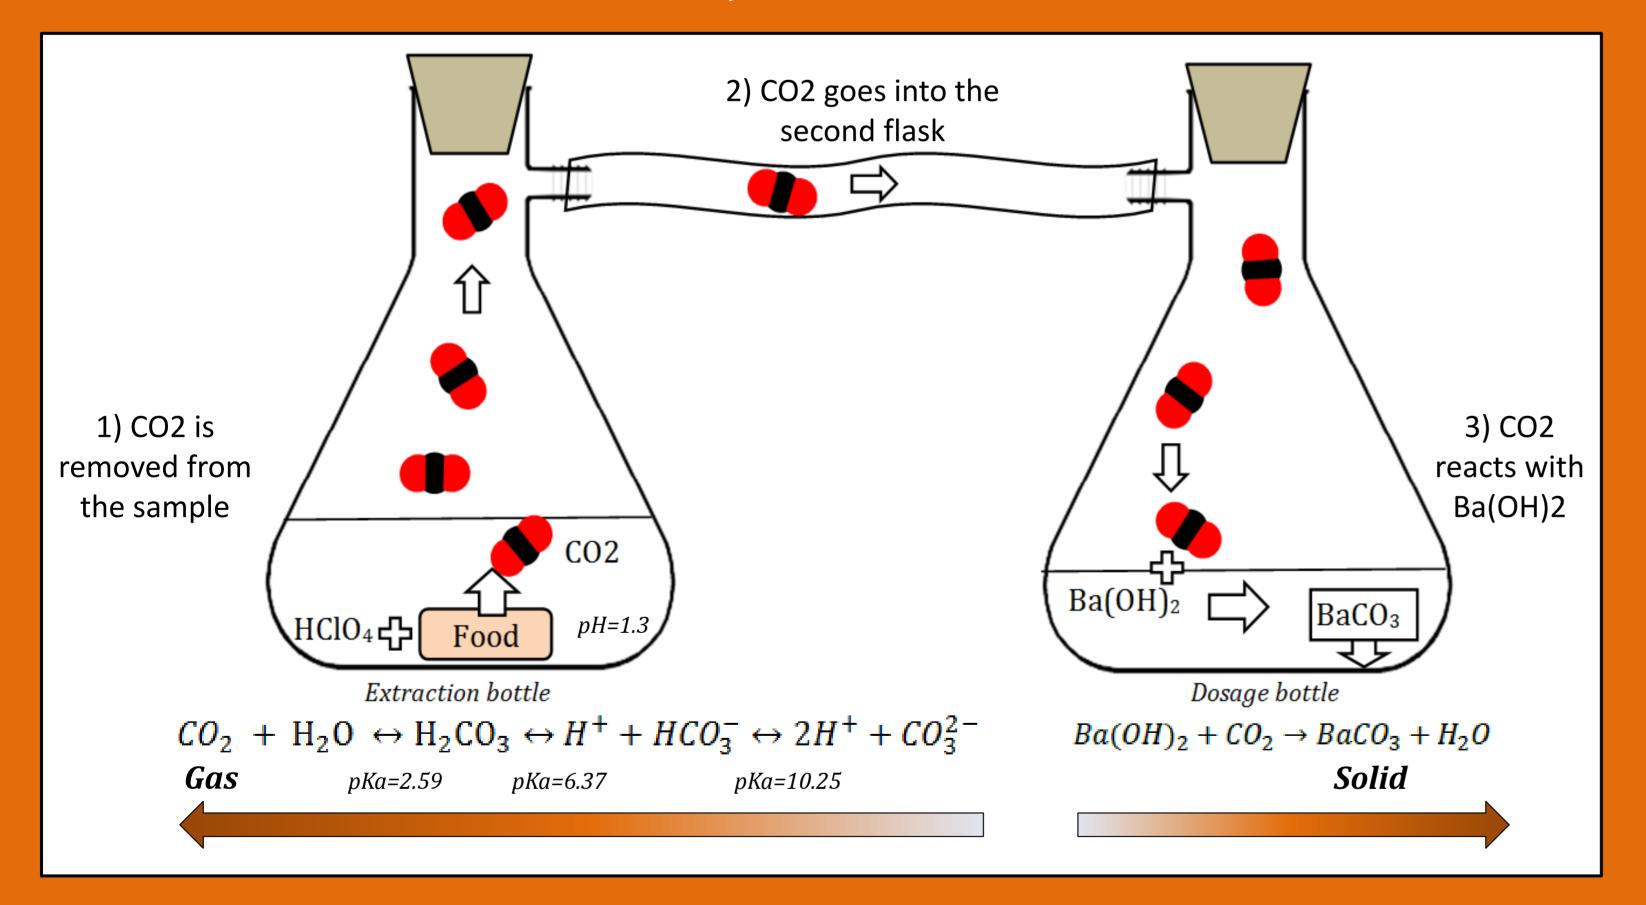


Fig. 2. Experimental set up used to measure CO_2 content: on the left, a bottle "extraction", where CO_2 is released; on the right, a bottle "dosage" where CO_2 is quantified.

Identify the diffusivity: Mathematical model

Fick's second law is used to model the carbon dioxide transfer and express the variation of the concentration with space (x) and time (t). The system of equations given in Fig 3 is numerically solved and programmed on MATLAB [®] software. Then the **diffusivity (D)** is identified by minimizing the sum of squared error between experimental and predict data.

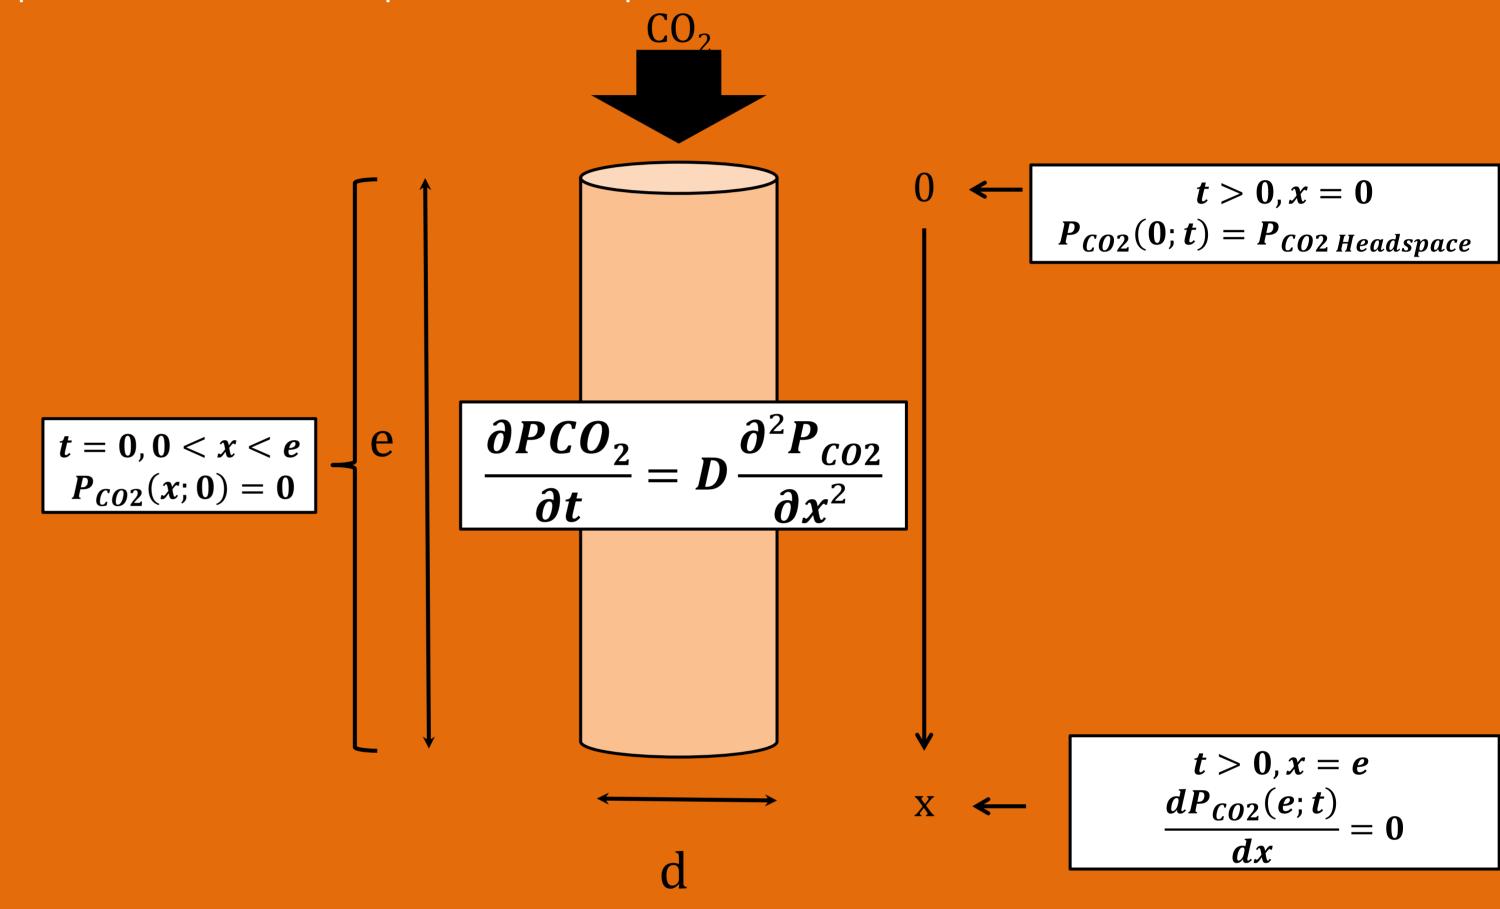


Fig 3. Infinite cylinder type system for the analysis of CO₂ transport in food matrix

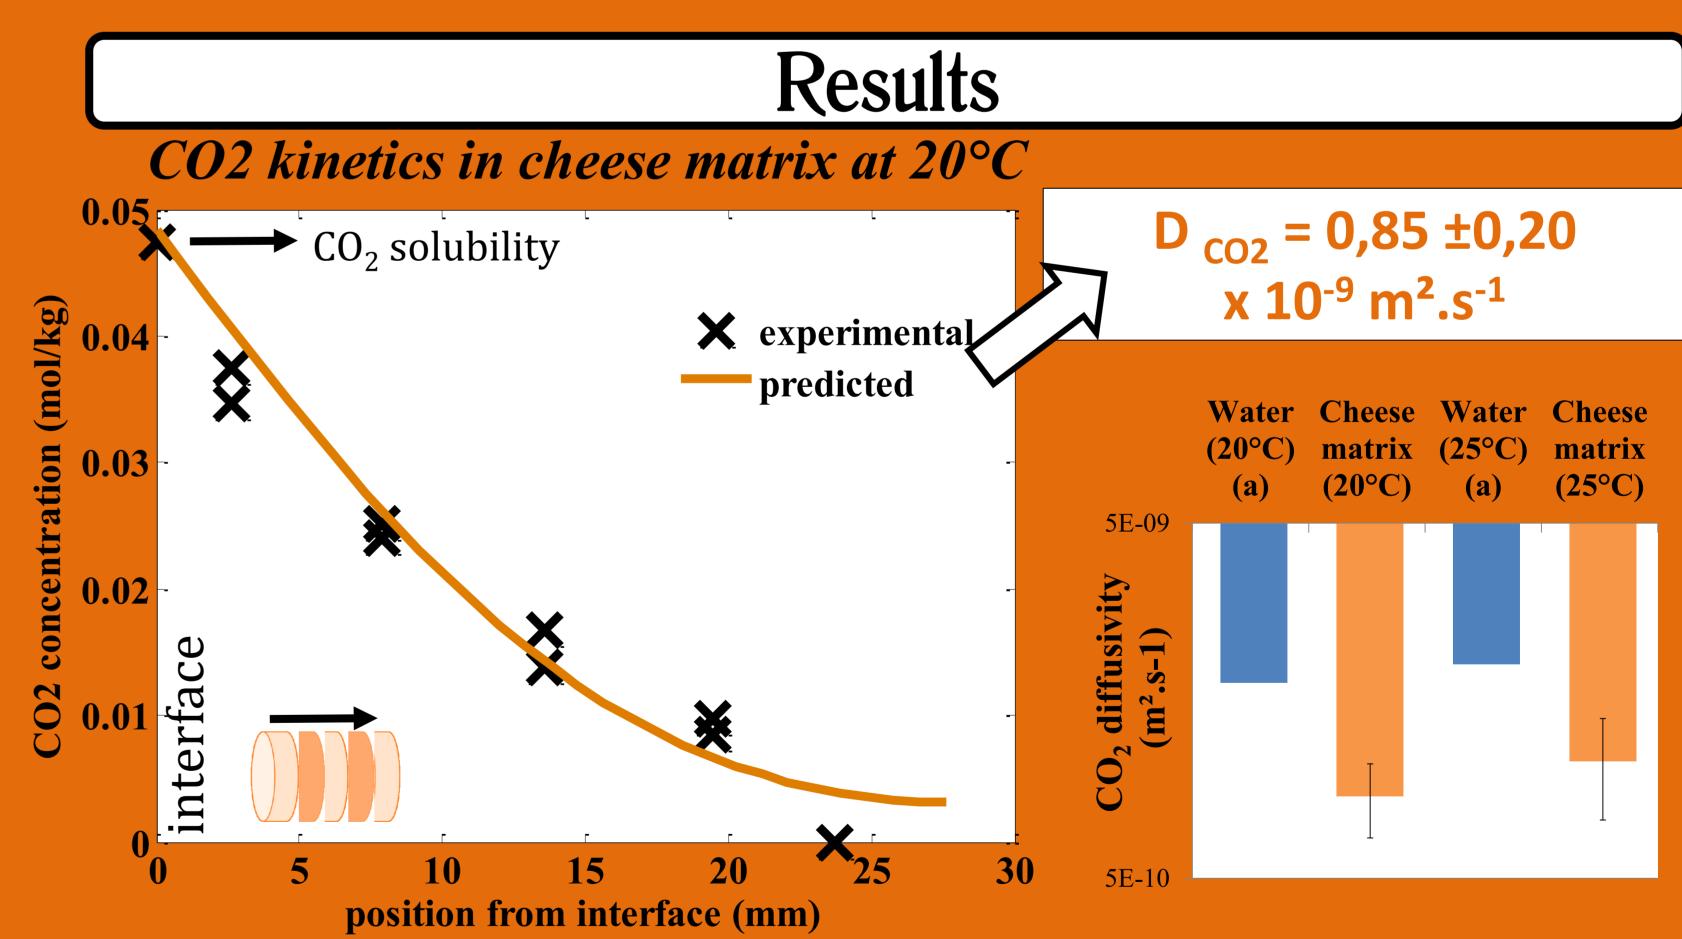


Fig 4. Experimental and predicted CO2 profiles in cheese matrix by distance of the interface

Fig 5. Data diffusivity of CO₂ in the literature versus experimental

Discussion

This method to determine the CO2 diffusivity is easy to implement and not expensive. It allows an evaluation of the kinetics of transfer of CO2. The values obtained by this method are in agreement with various literature data, including the existing data of carbon dioxide diffusivity in water (a) and are in the same order of data in other food products, such as fish (b) or meat (c).

However, experimental efforts must be pursued to have the lowest measurement error. One of the steps is critical: the cheese is cut in slices out of a controlled atmosphere, and each slice is weighed before desorption. This should be done in the shortest time possible.

This work presents an easy and inexpensive method, to measure carbon dioxide kinetic in solid food. CO₂ concentration is measured for each slice at constant time. Diffusivity is identified from a mathematical model based on Fick's second law. The first results obtain are in agreement with scientific literature data.

This work is done in the project MAP'Opt (2011-2015), funded by the French National Research Agency, whose full name is "Equilibrium gas composition in modified atmosphere packaging and food quality".