



HAL
open science

Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production

Cigdem Eskicioglu, Florian Monlau, Abdellatif Barakat, Ivet Ferrer, Prasad Kaparaju, Eric Trably, H el ene Carr ere

► To cite this version:

Cigdem Eskicioglu, Florian Monlau, Abdellatif Barakat, Ivet Ferrer, Prasad Kaparaju, et al.. Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 2017, 120, pp.32-42. 10.1016/j.watres.2017.04.068 . hal-01604979

HAL Id: hal-01604979

<https://hal.science/hal-01604979v1>

Submitted on 26 May 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destin ee au d ep ot et  a la diffusion de documents scientifiques de niveau recherche, publi es ou non,  emanant des  tablissements d'enseignement et de recherche fran ais ou  trangers, des laboratoires publics ou priv es.

Copyright

Accepted Manuscript

Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production

Cigdem Eskicioglu, Florian Monlau, Abdellatif Barakat, Ivet Ferrer, Prasad Kaparaju, Eric Trably, H el ene Carr ere

PII: S0043-1354(17)30336-6

DOI: [10.1016/j.watres.2017.04.068](https://doi.org/10.1016/j.watres.2017.04.068)

Reference: WR 12867

To appear in: *Water Research*


Received Date: 9 December 2016

Revised Date: 31 March 2017

Accepted Date: 28 April 2017

Please cite this article as: Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carr ere, H e ., Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production, *Water Research* (2017), doi: 10.1016/j.watres.2017.04.068.

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

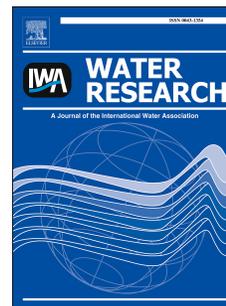

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carr ere, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI : [10.1016/j.watres.2017.04.068](https://doi.org/10.1016/j.watres.2017.04.068)

1 **Assessment of hydrothermal pretreatment of various lignocellulosic biomass with**
2 **CO₂ catalyst for enhanced methane and hydrogen production**

3
4 Cigdem Eskicioglu^{1,2,*}, Florian Monlau³, Abdellatif Barakat³, Ivet Ferrer⁴, Prasad Kaparaju^{2,5},
5 Eric Trably², H el ene Carr ere²

6
7 ¹UBC Bioreactor Technology Group, School of Engineering, The University of British
8 Columbia, Okanagan Campus, 3333 University Way, Kelowna, BC V1V 1V7, Canada

9
10 ²LBE, INRA, 11100, Narbonne, France

11
12 ³INRA, UMR 1208 Ing enierie des Agropolym eres et Technologies Emergentes (IATE) 2,
13 Place Pierre Viala, F-34060 Montpellier, France

14
15 ⁴GEMMA – Group of Environmental Engineering and Microbiology, Department of Civil and
16 Environmental Engineering, Universitat Polit ecnica de Catalunya Barcelona Tech, c/Jordi
17 Girona 1-3, Building D1, E-08034, Barcelona, Spain

18
19 ⁵Griffith School of Engineering, Nathan Campus, Griffith University, 170 Kessels Road, QLD
20 4111, Australia

21 _____
22 *Corresponding author

23 Tel: + 1 (250) 807-8544

24 E-mail: cigdem.eskicioglu@ubc.ca

25

1 Abstract

2 Hydrothermal pretreatment of five lignocellulosic substrates (i.e. wheat straw, rice straw,
3 biomass sorghum, corn stover and Douglas fir bark) were conducted in the presence of CO₂
4 as a catalyst. To maximize disintegration and conversion into bioenergy (methane and
5 hydrogen), pretreatment temperatures and subsequent pressures varied with a range of
6 26-175°C, and 25-102 bars, respectively. Among lignin, cellulose and hemicelluloses,
7 hydrothermal pretreatment caused the highest reduction (23-42%) in hemicelluloses while
8 delignification was limited to only 0-12%. These reductions in structural integrity resulted
9 in 20-30% faster hydrolysis rates during anaerobic digestion for the pretreated substrates
10 of straws, sorghum, and corn stover while Douglas fir bark yielded 172% faster
11 hydrolysis/digestion due to its highly refractory nature in the control. Furans and phenolic
12 compounds formed in the pretreated hydrolyzates were below the inhibitory levels for
13 methane and hydrogen production which had a range of 98 – 340 ml CH₄/ g volatile solids
14 (VS) and 5 – 26 ml H₂/ g VS, respectively. Results indicated that hydrothermal
15 pretreatment is able to accelerate the rate of biodegradation without generating high levels
16 of inhibitory compounds while showing no discernible effect on ultimate biodegradation.

17
18 **Keywords:** anaerobic digestion, dark fermentation, straw, sorghum, corn stover, Douglas
19 fir bark

20

1 **1. Introduction**

2 As energy sustainability concerns are increasing globally, alternatives to renewable energy
3 sources are being brought to the forefront. Among these renewable sources is the
4 development of an energy efficient biomass-to-biofuel process which can replace fossil fuel
5 use and reduce greenhouse gas emissions. In particular, lignocellulosic agricultural
6 residues have a very significant unutilized energy potential. For example, lignocellulosic
7 biomass is abundant all year round and often after the remaining portion is used as animal
8 feed it is burnt in an open environment which can further cause environmental concerns
9 (Palacios-Orueta et al., 2005; Bhatia et al., 2012). Another advantage of using
10 lignocellulosic waste for bioenergy is that it does not compete with land use for food
11 production.

12 Anaerobic digestion and dark fermentation have been extensively studied for their ability
13 to convert a wide variety of lignocellulosic biomass to methane (Sawatdeenarunat et al.,
14 2015) and biohydrogen (Singh et al., 2015), respectively. However, the complex structure
15 of lignocellulosic biomass, comprised of cellulose, hemicelluloses and lignin, does not
16 provide easy access for the biodegradable organics in bioreactors. Such limited
17 accessibility causes significantly lower methane/hydrogen yields than the theoretical
18 estimations based on biomass compositional/structural features (Monlau et al., 2012a;
19 Carrere et al., 2015). A review by Monlau et al. (2013a) states that the amount of lignin is
20 the most important factor when determining the biodegradability of lignocellulosic
21 biomass along with other factors, such as cellulose crystallinity and accessible surface area.
22 Therefore, research has focused on various pretreatment technologies utilizing mechanical
23 (Sharma et al., 1988; Palmowski and Muller, 2000), chemical (Sun et al., 2001; Zhu et al.,

1 2010; Monlau et al., 2013b), thermal (Kumar et al., 2009), and biological (Rouches et al.,
2 2016) methods or combinations (Monlau et al., 2013c) to dissolve lignin (delignification),
3 and to reduce cellulose crystallinity for increasing surface area and accessibility for better
4 enzymatic hydrolysis/microbial degradation. Following pretreatment, chemical methods
5 may have a high impact on downstream processes or the environment and limited
6 chemical recovery potential which may require further pH neutralization before digestion.
7 For example, high sodium may jeopardize digestate land application or inhibit
8 methanogens in digesters (Antonopoulou and Lyberatos, 2013; Carrere et al., 2016). For
9 enzymatic methods, typically, polysaccharides hiding under the lignin limit the enzymatic
10 activity, therefore are at times combined with other types of pretreatment (Sun and Cheng,
11 2002). Furthermore, depending on the type/intensity of the pretreatment applied (i.e.
12 dilute-acid, high temperature/pressure, steam explosion and thermo-alkaline
13 pretreatments), some of the inhibitory by-products of pretreatment, such as furfural, 5-
14 hydroxymethylfurfural (5-HMF) and phenolic compounds, to hydrogen and/or methane
15 formers have also been reported (Palmqvist and Hahn-Hagerdal, 2000; Horn et al., 2011;
16 Monlau et al., 2013c). Therefore, the chosen pretreatment method should reduce energy
17 demand, minimize use of chemicals and formation of inhibitory by-products, and allow for
18 reuse of co-products in a feasible biorefinery concept (Cherubini, 2010).

19 Hydrothermal pretreatment of lignocellulosic biomass at elevated temperatures/pressures
20 (150 - 300°C, initial pressure of 0-60 bar, 2-40 min) has garnered consideration for the
21 production of methane, hydrogen and bioethanol from lignocellulosic substrate as it
22 eliminates chemical addition and corrosion resistant material requirements for hydrolysis
23 reactors (Chandra et al., 2012; He et al., 2016). It has been traditionally applied in pulp

1 industries (Kubikova et al., 1996) and is considered more environmentally friendly
2 compared to other methods with higher sugar recovery in a relatively short period of time
3 and little to no inhibitor production (Kaparaju and Felby, 2010). It has been postulated that
4 when optimized the results are comparable to dilute-acid pretreatment, but without
5 chemical addition/post-neutralization. The use of CO₂ in hydrothermal pretreatment has
6 been shown to further enhance hydrolysis of various types of biomass, such as Eucalyptus
7 bark (Matsushita et al., 2010), corn stover (van Walsum and Shi, 2004), wheat straw
8 (Relvas et al., 2015), and various polysaccharides (Miyazawa and Funazukuri, 2005).
9 Carbonic acids generated in situ from water and added CO₂ can lower the pH of the solution
10 and act as an environmentally friendly acid catalyst accelerating hydrolytic organic
11 reactions at high-temperatures (Relvas et al., 2015). At the end of the pretreatment
12 process, CO₂ can be easily removed by depressurizing the reactor to atmospheric pressure,
13 avoiding the need of a subsequent treatment. The availability of CO₂ as a component in the
14 fermentation processes (i.e. bioethanol or biogas) makes this a potentially cost-effective
15 option for biomass pretreatment.

16 Although hydrothermal pretreatment with CO₂ pressurization is viewed as a promising
17 technology, the existing literature is limited to the aforementioned studies focusing only on
18 either the hydrolysis phase (van Walsum and Shi, 2004; Miyazawa and Funazukuri, 2005;
19 Matsushita et al., 2010; Relvas et al., 2015), or enhancement of methane yield from sewage
20 sludge (Spooner et al., 2007) and hydrogen yield from starch (Orozco et al., 2012).
21 However, no sufficient insight has been provided on the levels/effect of inhibitory
22 compounds on methane/hydrogen yields from common lignocellulosic biomass including
23 energy crops. Therefore, the objective of this study was to evaluate the entire impact of

1 hydrothermal pretreatment with CO₂ pressurization not only on the compositional
2 structure of various lignocellulosic substrates but also on the enhancement of methane and
3 hydrogen yields in anaerobic digestion and dark fermentation, respectively. The yields
4 were estimated from batch biochemical methane potential (BMP) and biochemical
5 hydrogen potential (BHP) assays. Additionally, potentially inhibitory compounds after
6 pretreatment were quantified.

7 **2. Materials and Methods**

8 **2.1. Lignocellulosic substrates**

9 The substrates tested included wheat straw (WS), biomass sorghum (B140) (S), rice straw
10 (RS), corn stover (CS), and Douglas fir bark (DFB) containing different solids (Table 1) and
11 compositional structure (cellulose, hemicellulose and Klason lignin). Wheat straw
12 (*Triticum aestivum*), grown in France (latitude: 48°50'18''N, longitude: 4°13'54.5''E), was
13 first processed using a cutting mill. It was further sieved to have a particle size range of 400
14 µm - 1 mm. Sorghum (B140) was produced at a site (latitude: 43.6491994, longitude:
15 3.874161111) in Montpellier Lavalette (France) in 2012. It was milled to pass a 1mm
16 screen. Rice straw was provided by RIZ Camargue CANAVERE (a local farm in Saint-Gilles
17 Languedoc-Roussillon region, south of France). It was first cut by a mill equipped with a 6
18 mm sieve followed by a 1 mm sieve (SM200, Retsch, GE). Corn stover was provided by
19 INRA Versailles (Paris region, France). The sample was coarsely cut to less than 2 mm by
20 knife milling (SM200, Retsch, GE). Douglas fir bark was supplied by Brassac Industries
21 sawmill (Tarn region, France). It was a heterogeneous size material (chips of 5–20 cm
22 length and 1 mm–3 cm thickness) produced from the debarking of 50 years old Douglas fir
23 trees harvested in April 2013. Douglas fir bark chips were first dried in an oven at 40°C

1 overnight to reach a moisture content of 8.87%. Knife milling was then performed in a
2 Retsch SM 100 system with a 6 mm and 2 mm size sieve at a speed of 1500 rpm.

3 **2.2. Hydrothermal pretreatment**

4 Hydrothermal pretreatment of substrates was conducted in a PARR 5500 High Pressure
5 Compact Reactor equipped with mechanical mixer, heater, and controller. The reactor had
6 an effective volume of 450 mL and was capable of achieving a maximum temperature and
7 pressure of 350°C and 200 bar, respectively. Upon addition of substrate (15 g) and distilled
8 water (300 g), the reactor was sealed and pressurized to the desired levels by a CO₂ line
9 from a cylinder/regulator. After pressurization the CO₂ line was disconnected and the
10 temperature/pressure increase in the reactor was recorded with respect to heating time
11 while the reactor content was being mixed at 140 rpm. The PARR reactor controller
12 allowed the pretreatment to be programed based on different ramping rates (temperature
13 increased per unit heating time). In this research, the heating duration was kept constant
14 (30 min) and at the end of the 30 min, the heater and mixer were turned off and the vessel
15 was immersed in an ice bath. When the temperature levels dropped below 40°C, the vessel
16 was slowly depressurized to atmospheric levels by turning on a pressure release valve
17 found on the reactor. The lid was opened and pretreated slurry was recovered. The solid
18 fraction was separated from the liquid fraction (hydrolyzate) via a mesh sieve with 150 µm
19 pore size (Figure 1). The use of the 150 µm sieve resulted in loss of 2.2 to 8.3% of TS in
20 substrates pretreated based on mass balance. Separation of liquid from the solid fraction
21 was necessary to conduct BHP assays on the solubilized sugars (main source of H₂
22 production) as well as to optimize BMP conditions separately for different fractions.

1 Pretreatments were applied in two separate stages. Stage I involved the pretreatment of
2 wheat straw at a wide range of set temperature and CO₂ pressure combinations for
3 preliminary screening. The pretreatment reactor was programmed to simulate four
4 different scenarios with set temperature/initial CO₂ pressure/duration time combinations
5 of 25°C/50 bar/30 min, 50°C/50 bar/30 min, 150°C/10 bar/30 min, and 150°C/50 bar/30
6 min, respectively. Based on the preliminary results on substrate characterization and
7 methane yields from Stage I, Stage II applied only the most intensive temperature/pressure
8 combination (150°C/50 bar/30 min) for the remaining four substrates (Table 2). The
9 observed (actual) maximum temperatures/pressures reached within 30 min of heating
10 was quite substrate specific due to differences in the interstitial volume of the solids and
11 therefore water absorption capacities of substrates affecting headspace pressure.
12 Therefore, in all of the pretreatment runs, maximum temperature reached exceeded the set
13 temperature due to common overshooting reported for Parr reactors without water or fan
14 cooling. Table 2 lists the actual maximum temperatures/pressures observed for each
15 substrate. The overshooting was higher (60%) at the low set-temperature (50°C) than that
16 (17%) of the high set temperature (150°C) as these reactors are designed to reach
17 temperatures up to 350°C in a short period of time.

18 **2.3. Anaerobic inocula**

19 *2.3.1. Inoculum for BMP assay*

20 The inoculum used for BMP assays was granular sludge from a mesophilic upflow
21 anaerobic sludge blanket (UASB) reactor utilizing wastewater from a sugar factory in
22 France. Prior to setting up the BMP assays, the inoculum was placed in a closed 5-L glass
23 vessel, diluted 10 times with distilled water to total solids (TS) and volatile solids (VS)

1 concentrations of 1.24 ± 0.01 and $1.08 \pm 0.02\%$ (by wt.), respectively, and mixed to break
2 apart the granules under endogenous anaerobic conditions (35°C for 5-7 days) to reduce
3 non-specific biogas generation. The inoculum had a maximum specific methanogenic
4 activity of 33 ± 2 mL $\text{CH}_4/\text{g VS/d}$, as measured by degrading 1.3 ± 0.3 g/L of ethanol as
5 chemical oxygen demand (COD).

6 2.3.2. *Inoculum for BHP assay*

7 Among the three inocula tested (granular sludge described above, activated sludge,
8 municipal sludge digested under low pH conditions in a BMP bottle), the inoculum chosen
9 for BHP assays was the activated sludge taken from the aeration tank at the municipal
10 wastewater treatment plant (WWTP) in Narbonne (France). The decision was based on
11 rate/extent of H_2 yields from a preliminary BHP assay (in four replicates) conducted with
12 glucose (5 g COD/L) at a substrate to inoculum ratio (S/I) of 10 g COD/g VS at mesophilic
13 temperature (37°C). The activated sludge had a TS and VS concentration of 0.46 ± 0.00 and
14 $0.33 \pm 0.00\%$ (by wt.), respectively, and achieved a maximum H_2 yield of 1.2 ± 0.2 mol
15 H_2/mol glucose within the first 39-40 hours while the granular sludge achieved a similar
16 yield (1.2 ± 0.1 mol H_2/mol glucose) only after 61 hours. The digested municipal sludge
17 reached a maximum yield of only 0.6 ± 0.2 mol H_2/mol glucose after 48 hours. Before the
18 addition to the BHP assays, all three inocula were thermally treated for 30 min in capped
19 glass tubes immersed in a water bath set at 90°C to inhibit the activity of methanogens.

20 2.4. **BMP Assay Set-up**

21 A total of four sets of BMP assays were conducted concurrently to determine methane
22 potential from liquid and solid fractions of pretreated substrates in both Stage I and II
23 (Figure 1; Table 2). A total of 72 bottles (including pretreated, non-pretreated substrates

1 and blanks in triplicates) were operated, with solid and liquid fractions set-up in bottles
2 with 600 mL (350 mL liquid) and 120 mL (80-84 mL liquid) total volumes, respectively.
3 BMP assays with solid fractions contained total substrate concentration of 5 g VS/L and the
4 amount of the substrate and granular inoculum added to each bottle was calculated
5 considering S/I ratio of $1 \frac{\text{g VS}}{\text{g VS}}$ which has been previously used for various lignocellulosic
6 substrates (Sambusiti et al., 2012a; Monlau et al., 2013b). For the liquid fractions, a
7 substrate concentration and S/I ratio in the bottles was 2.5 g COD/L and 0.5 g COD/g VS,
8 respectively. Each assay contained: macroelements (NH₄Cl, 286 mg/L; KH₂PO₄, 108 mg/L;
9 MgCl₂, 65 mg/L; CaCl₂, 32 mg/L), oligoelements (FeCl₂, 20 mg/L; CoCl₂, 5 mg/L; MnCl₂, 1
10 mg/L; NiCl₂, 1 mg/L; ZnCl₂, 0.5 mg/L; H₃BO₃, 0.5 mg/L; Na₂SeO₃, 0.5 mg/L; CuCl₂, 0.4 mg/L;
11 Na₂MoO₄, 0.1 mg/L), and a bicarbonate buffer solution (NaHCO₃, 2.6 g/L). Finally, the
12 nitrogen gas was purged into each bottle to remove the residual oxygen and the bottles
13 were sealed with septa/caps. The septa were then punctured to release excess N₂ pressure.
14 The bottles were placed on a shaker (at 90 rpm) in a temperature controlled room at 37°C.
15 Accumulated gas pressure in the bottles were measured with a digital manometer (LEO 2,
16 Keller, Switzerland), while biogas composition was analyzed by a gas chromatograph (GC)
17 every time excess pressure was released until bottles stopped producing biogas.

18 **2.5. BHP Assay Set-up**

19 Based on the biodegradation potential comparison among substrates from BMP, BHP
20 assays excluded Douglas fir bark and assessed hydrogen yields and by-products of dark
21 fermentation from liquid fraction of pretreated straws, sorghum and corn stover only at the
22 most intensive condition (set temp: 150°C, initial CO₂ pressure: 50 bar, 30 min). BHP assays
23 included a total of 21 bottles set-up with hydrolyzes of pretreated substrates and control

1 (glucose) in 3-5 replicates (depending on the volume recovered after pretreatment).
2 Bottles had total and liquid volume of 120 mL and 60 mL, respectively and the amount of
3 the substrate and inoculum needed for each bottle was calculated considering a S/I ratio of
4 $8.7 \frac{\text{g COD degradable}}{\text{g VS}}$, where degradable COD was estimated as total sugars (i.e. summation of
5 cellobiose, glucose, xylose, arabinose concentrations in Table 3) in hydrolyzates of
6 pretreated substrates. Each BHP assay contained a dilution solution prepared with
7 macroelements (NH_4Cl , 0.8 g/L; KH_2PO_4 , 0.5 g/L), oligoelements (FeCl_2 , 1.5 g/L; H_3BO_3 , 60
8 mg/L; CoCl_2 , 25 mg/L; MnSO_4 , 117 mg/L; NiCl_2 , 25 mg/L; ZnCl_2 , 70 mg/L; CuCl_2 , 15 mg/L;
9 Na_2MoO_4 , 25 mg/L), 1.2 mL/L vitamin solution (mixture of biotin, cyanocobalamin,
10 thiamine), and 2-(*N*-morpholino)ethanesulfonic acid (MES) buffer at 19.52 g/L. Upon
11 addition of substrate and dilution solution, pH of the bottle content was adjusted to 6 by
12 adding drops of NaOH solution (32% by vol.). Then thermally treated inoculum (activated
13 sludge) was added. Finally, the bottles were sealed with septa/caps and the nitrogen gas
14 was purged to each bottle to remove residual oxygen. The bottles were then placed on a
15 shaker (at 90 rpm) in a temperature controlled room at 37°C. Accumulated gas pressure in
16 the bottles was measured with a digital manometer (LEO 2, Keller, Switzerland), while
17 biogas composition was analyzed by a GC every time excess pressure was released until
18 cumulative hydrogen yields plateaued and the first signs of hydrogen consumption
19 (reduction in H_2 % in headspace) were observed. Upon termination of assays, metabolites
20 of dark fermentation were quantified.

21 **2.6. Analytical procedures**

22 The TS/VS analysis of raw/pretreated substrates and inocula was done according to the
23 Standard Methods, sections 2540 B and 2540 E, respectively (APHA, 2005). Quantification

1 of COD in liquid fractions of pretreated substrates were performed according to the closed
 2 reflux colorimetric method outlined by Standard Methods (APHA, 2005). Compositional
 3 analysis (i.e. cellulose, hemicelluloses and Klason lignin) on substrates were conducted
 4 using a strong hydrolysis method adapted from Sluiter et al. (2008). Raw or freeze-dried (-
 5 69°C, 0.21 Pa for 3 days) solid fraction of pretreated substrates (100 mg) were first
 6 hydrolyzed with H₂SO₄ (72% by vol.) in capped/mixed test tubes (in triplicates) at 30°C for
 7 1 h, then diluted to reach a final acid concentration of H₂SO₄ (4%) and kept at 120°C for 1 h.
 8 Upon cooling, the tube content was filtered via glass-fiber filters (0.45 µm) to separate
 9 insoluble residue, which was placed in a crucible and dried at 100°C for 24 h to yield
 10 Klason lignin content. The liquid fraction obtained after filtration was further filtered via
 11 0.2 µm syringe filters and analyzed by a high-performance liquid chromatograph (HPLC)
 12 equipped with a refractive index detector (Waters R410/Waters 2414) for structural
 13 carbohydrates (i.e. glucose, xylose, arabinose). Target compounds were separated by an
 14 Aminex HPX-87H column (300 x 7.8 mm, Bio-Rad) placed after a protective precolumn
 15 (Microguard cation H refill cartridges, Bio-Rad). The eluting solution was 4 mM H₂SO₄, and
 16 the flowrate, column/detector temperatures were 0.3 mL/min, 45°C, respectively. Cellulose
 17 and hemicellulose contents of lignocellulosic substrates were calculated as follows:

$$Cellulose (\% VS) = \frac{Glucose (\% VS)}{1.11} \quad (1)$$

$$Hemicellulose (\% VS) = \frac{[Xylose (\% VS) + Arabinose (\% VS)]}{1.13} \quad (2)$$

18 where 1.11 and 1.13 are the ratios of the molecular weights of glucose to glucan (180/162)
 19 and xylose/arabinose to xylan (150/132), respectively. Similarly, soluble sugars, inhibitory
 20 by-products of pretreatment (i.e. 5-HMF and furfural), as well as soluble metabolites of

1 BHP assays were also quantified by HPLC in liquid fractions filtered via 0.2 μm syringe
 2 filters. Poly-phenols were quantified by a colorimetric method at 735 nm by using Folin
 3 Ciocalteu reagent, Na_2CO_3 , and gallic acid as standard (Cicco et al., 2009).
 4 Biogas compositions were conducted by measuring the H_2S , CO_2 , O_2 , N_2 , CH_4 percentage
 5 with a Perkin Elmer Clarus 480 GC and H_2 , CO_2 , O_2 , N_2 , CH_4 percentage by a Clarus 580 GC,
 6 in BMP and BHP bottles, respectively. Both GCs were equipped with thermal conductivity
 7 detectors but used different carrier gasses (helium for GC 480, argon for GC 580). Volatile
 8 fatty acids (VFAs) in pretreated liquid fractions were measured by injecting filtered
 9 samples (0.2 μm) into the Clarus 580 GC equipped with an auto-sampler, flame ionization
 10 detector. Nitrogen was the carrier gas.

11 2.7. Kinetic rate estimation

12 Previous studies commonly used a first-order kinetic process to assess the advantage of
 13 different pretreatments on lignocellulosic and non-lignocellulosic substrates in terms of
 14 hydrolysis rate (Sambusiti et al., 2012a; Monlau et al., 2012b; Mirmohamadsadeghi et al.,
 15 2014; Hosseini Koupaie and Eskicioglu, 2016). In this study, all BMP assays generated
 16 biogas without any acute inhibition, therefore the first order kinetic constants were
 17 estimated by Equation (3) that does not take into account lag phase:

$$18 \quad BMP_t = BMP_{t \rightarrow \infty} (1 - \exp(-k \cdot t)) \quad (3)$$

19 where BMP_t is cumulative specific methane yield ($\text{ml CH}_4/\text{g VS}_{\text{added}}$) at a given time, t ,
 20 calculated from Equation (4) below; $BMP_{t \rightarrow \infty}$ is the ultimate specific methane yield (ml
 21 $\text{CH}_4/\text{g VS}_{\text{added}}$) obtained at the end of the assay; k is the first-order hydrolysis constant
 (1/d), and t is the digestion time (d).

$$BMP_t = (V_{CH_4,s,t} - V_{CH_4,blank,t})/VS_s \quad (4)$$

1 where $(V_{CH_4,s,t} - V_{CH_4,blank,t})$ is the net methane volume (ml) obtained from the substrate only,
 2 adjusted to the standard temperature (0°C) and pressure (1 atm) condition (STP); VS_s is the
 3 mass of substrate VS in the bottle (g).

4 In order to model BHP assays from pretreated hydrolyzates with initial lag period, the
 5 following modified Gompertz equation was used (Equation (5)):

$$H_t = P \exp \left\{ -\exp \left[\frac{Rm \cdot e}{P} (\lambda - t) + 1 \right] \right\} \quad (5)$$

6 Where P is the maximum specific cumulative H_2 production (ml H_2 /g VS_{added}); Rm is the
 7 maximum specific H_2 production rate (ml H_2 /g VS_{added} /h); λ is the lag phase (hr); t is the
 8 fermentation time (hr); and e is exp (1). H_t represents cumulative specific H_2 production
 9 expressed as ml H_2 /g VS_{added} at a given time (t) at STP (0°C, 1 atm).

10 Parameter estimation was conducted by fitting the measured to predicted BMP and BHP
 11 data and using the Microsoft Excel 2013 Solver function to estimate the values of k , P , Rm ,
 12 and λ . The coefficient of determination, R^2 , was used to evaluate the adequacy of fit.

13 3. Results and Discussion

14 3.1. Impact of pretreatment on chemical composition of substrates

15 The cellulose, hemicellulose, and Klason lignin compositions of five substrates before and
 16 after hydrothermal pretreatment in the presence of CO_2 are presented in Figure 2. For raw
 17 substrates, summation of cellulose, hemicellulose and lignin accounted for 93% (wheat
 18 straw), 76% (sorghum), 86% (rice straw), 68% (corn stover), and 91% (Douglas fir bark)
 19 of the initial VS, suggesting that sorghum and corn stover contained higher amount of
 20 organics (i.e. proteins, lipids and different sugars), not quantified in the compositional

1 analysis than those of the other substrates. Sambusiti et al. (2013a) reported $9 \pm 3\%$ and
2 $1.8 \pm 0.3\%$ of initial VS protein and fat, respectively, for *Sorghum sudanense* hybrid while
3 wheat straw had only $4 \pm 1\%$ protein and $0.9 \pm 0.8\%$ fat of the initial VS. Compared to
4 ranges reported in the literature (Baker, 1973; Taherzadeh and Karimi, 2007; Cherubini,
5 2010; Monlau et al., 2013a; Mirmohamadsadeghi et al., 2014), wheat straw (Lig: 26; Cell:
6 38; Hem: 30% VS), rice straw (Lig: 20; Cell: 37; Hem: 29% VS), corn stover (Lig: 14; Cell:
7 25; Hem: 18% VS), and Douglas fir bark (soft pinewood) (Lig: 28; Cell: 37; Hem: 25% VS)
8 yielded typical compositional analysis results. However for sorghum, literature varies
9 significantly based on the end-use of sorghum: biomass, forage, sorghum-sudangrass, and
10 sweet. Sambusiti et al. (2013b) compared different sorghums (seed sorghum stalks,
11 biomass sorghum, forage sorghum and three different sweet sorghums) and reported that
12 lignin, cellulose, and hemicellulose ranged in 19-21%, 18-29%, and 19-26% TS,
13 respectively. Interestingly, *Sorghum sudanense* hybrid grown in Lombardy region (Italy)
14 had only 4% VS lignin, while cellulose (49% VS) and hemicellulose (35% VS) were
15 significantly higher (Sambusiti et al., 2013b). Biomass 140 sorghum used in this study also
16 resulted in lower Klason lignin and higher cellulose and hemicellulose (Lig: 16; Cell: 33;
17 Hem: 27% VS) compared to biomass sorghum (Lig: 21; Cell: 23; Hem: 19% TS) in the study
18 of Monlau et al. (2012a). The results, on the other hand, were closer to another study that
19 compared 63 sweet sorghum collected worldwide and reported cellulose, hemicellulose,
20 and lignin ranges of 28-37%, 26-33%, and 17-23% by TS, respectively (Li et al., 2014).

21 During Stage I, hydrothermal pretreatment with CO₂ caused 4-18%, 8-11%, and 11-29%
22 reductions (relative to non-pretreated wheat straw) in lignin, cellulose, and hemicellulose
23 contents, respectively, with hemicelluloses being affected the most (Figure 2a). As

1 expected, the highest reduction in all three components was achieved at the most intensive
2 pretreatment (175°C/66 bar/30 min). During Stage II, other substrates showed a similar
3 behaviour with hemicellulose contents having the highest reductions, which were 28%,
4 16%, 23%, and 42% for sorghum, rice straw, corn stover, and Douglas fir bark,
5 respectively, while delignification was limited to 0-12% (Figures 2b-e). These results are in
6 agreement with other hydrothermal pretreatment studies (with/without CO₂ catalysis)
7 reporting that pretreatment can affect the hemicellulose the most while lignin, being the
8 most inert component, stays relatively intact or is slightly affected (Kaparaju and Felby,
9 2010; Relvas et al., 2015). When compared to other type of pretreatments, chemical
10 pretreatments combined with low temperatures for 3-4 h appear to be more effective in
11 delignification of lignocellulosic substrate than hydrothermal pretreatment. Thermo-
12 alkaline pretreatment of wheat straw (Ca(OH)₂, 85°C for 3 h) was reported to solubilize
13 lignin by 14% (Chang et al., 1998), while 77% of delignification, 95% cellulose yield and
14 44% of hemicellulose hydrolysis was reported for miscanthus pretreated with 12% NaOH,
15 70°C for 4 h (de Vrije et al., 2002). Similarly, ammonia recycle percolation (ARP)
16 pretreatment achieved 75-85% (total lignin), and 50-60% (hemicellulose) removal in corn
17 stover (Kim and Lee, 2005) and 65-85% delignification of switchgrass (Iyer et al., 1996).

18 In this study, it was difficult to differentiate the effects of temperature and pressure for
19 Stage I (wheat straw), as these two factors are not independent once the temperature
20 reaches elevated levels. When the pairs of non-pretreated wheat straw vs. the least
21 intensive pretreatment condition (25°C/50 bar/30 min) and two most intensive conditions
22 (175°C/25 bar/30 min vs. 175°C/66 bar/30 min) were compared in an attempt to
23 understand the pressure effect only, 12% and 18% decreases in hemicellulose were

1 observed for increases from atmospheric to 50 bars (at 25°C) and from 25 to 66 bars (at
2 175°C), respectively. Temperature effect, on the other hand, was more pronounced with
3 21% decrease in hemicellulose content when temperature increased from 80 to 175°C (at
4 60-66 bars) but with no hemicellulose reduction after the increase from 26 to 80°C (at 50-
5 60 bars) (i.e. 26.2 ± 1.1 versus $26.6 \pm 1.8\%$ hemicellulose in Figure 2a). When both
6 temperature and pressure effects were combined, up to 29% reduction was observed in
7 hemicellulose of non-pretreated wheat straw (Figure 2a).

8 **3.2. Impact of pretreatment on biomass biodegradability**

9 *3.2.1. Methane production*

10 The mesophilic BMP assays were monitored for 71-92 days for liquid fractions (Figures 3a
11 and c) and 123-125 days for solid fractions (Figures 3b and d) of substrates. Non-
12 pretreated substrates generated ultimate cumulative specific methane yields of 256 ± 18 ,
13 340 ± 2 , 311 ± 5 , 336 ± 11 , 98 ± 5 ml CH₄/g VS_{added} for wheat straw, sorghum, rice straw,
14 corn stover and Douglas fir bark, respectively. As expected, for raw lignocellulosic
15 substrates, low lignin and high hemicellulose/cellulose levels for sorghum and corn stover
16 (Figure 2) corresponded to higher methane yields than the other substrates with Douglas
17 fir bark being the most difficult to degrade. These results coincide with the literature values
18 of 204-285 ml CH₄/g VS_{added} for wheat straw (Menardo and Balsari, 2012; Sambusiti et al.,
19 2013a), 260-362 ml CH₄/g VS_{added} for sorghum (Bauer et al., 2010; Sambusiti et al., 2013a),
20 and 270-290 ml CH₄/g VS_{added} for rice straw (Lei et al., 2010), but higher than the yields of
21 280 ml CH₄/g VS_{added} (Yu, 2010) and 440 ml biogas/g VS_{added} (Qingming et al., 2005) for
22 corn stalk/stover. The methane yield obtained for Douglas fir bark (98 ± 5 ml CH₄/g
23 VS_{added}) was also higher than those reported in the literature for non-pretreated pine

1 residues (i.e. 5-39 ml CH₄/g VS_{added}) (Matsakas et al., 2015; Mirmohamadsadeghi et al.,
2 2014).

3 During Stage I, hydrothermal pretreatment with CO₂ decreased the specific methane yields
4 of solid fractions of wheat straw by 1-8% (Figure 3b) due to solubilization of biomass
5 organic matter into the liquid fraction (water), as evidenced by the liquid phase TS/VS,
6 COD, VFAs, and soluble sugars increasing with the intensity of pretreatment (Table 3).
7 During Stage II, after releasing of sugars from solid into the liquid phase, similar behavior
8 was observed for the sugar-rich substrates of sorghum and corn stover (Table 3) resulting
9 in a 11% decrease of specific methane yields after hydrothermal pretreatments over their
10 respective controls (Figure 3d). The sugars solubilized in the liquid phase led to the highest
11 specific methane yield (222 ± 14 ml CH₄/g COD_{added}) for wheat straw after exposure to the
12 most intensive pretreatment conditions (175°C/66 bars/30 min) of Stage I (Figure 3a).
13 For Stage II, pretreated (166°C/76 bars/30 min) sorghum achieved the highest yield (275 ±
14 14 ml CH₄/g COD_{added}) of the liquid hydrolysate, followed by the pretreated (175°C/102
15 bars/30 min) corn stover (260 ± 14 ml CH₄/g COD_{added}) (Figure 3c). Despite the low
16 methane yield obtained from the solid fraction of raw and pretreated Douglas fir (Figure
17 3d), the hydrothermally solubilized organics into the liquid phase achieved a similar
18 biodegradability level (253 ± 5 ml CH₄/g COD_{added}) as the other substrates. Although
19 pretreated hydrolyzates did not reach to the theoretical maximum methane yield of 350
20 ml/g COD_{added} based on the COD equivalence of methane (Droste, 1997), the pretreatment
21 conditions tested did not create any acute or chronic inhibition on the granular sludge
22 used. Although, pH of liquid fractions of Douglas fir, corn stover, and sorghum were quite

1 acidic (3.51-4.85; Table 3), the addition of a buffer solution prevented acidification in the
2 bottles and methane production started from Day 2.

3 3.2.2. Hydrogen production

4 The mesophilic BHP assays were monitored for 48 hours for the control (glucose), 68 hours
5 for liquid fractions of sorghum and corn stover, and 112-119 hours for wheat and rice
6 straws. The assay termination times were determined based on reaching the maximum
7 hydrogen yield and the first decrease in hydrogen percentage (consumption) in bottle
8 headspace. For the heat treated (90°C, 30 min) inoculum (activated sludge from Narbonne
9 WWTP), the lag phases of H₂ production were 15, 24, 39, and 42 hours for control,
10 sorghum, corn stover, and wheat/rice straws, respectively.

11 Among BHP assays, the ultimate specific hydrogen yield for the control (135 ± 25 ml H₂/g
12 COD_{added}; 1.2 ± 0.2 mol H₂/mol glucose_{added}) was the highest, followed by the hydrolyzates
13 of hydrothermally pretreated sorghum (55 ± 5 ml H₂/g COD_{added}), corn stover (52 ± 6 ml
14 H₂/g COD_{added}), wheat straw (32 ± 4 ml H₂/g COD_{added}), and rice straw (26 ± 2 ml H₂/g
15 COD_{added}). The maximum hydrogen yield of 1.2 ± 0.2 mol H₂/mol glucose from the control
16 BHP was comparable to previous studies. Kawagoshi et al. (2005) reported 1.4 mol H₂/mol
17 glucose (pH: 6.5-7, 20 g glucose/L) while Davila-Vazquez et al. (2008) observed 1.46 mol
18 H₂/mol glucose (pH: 7.5, 5 g glucose/L). In other studies, lower yields were obtained (0.96
19 to 1.17 mol H₂/mol glucose by Salerno et al., 2006, and 1.75 mol H₂/mol glucose at pH: 6.0,
20 10 g glucose/L by Zheng and Yu, 2005).

21 In this study, pretreated (175°C/66 bars/30 min) wheat straw hydrolyzate achieved 287 ±
22 32 ml H₂/g sugars_{added} at mesophilic (37°C) temperature, which is close to the maximum
23 yield of 318 ± 5 ml H₂/g sugars of wheat straw hydrolyzate (at 5% by vol.) obtained from a

1 three-step pilot-scale hydrothermal pretreatment (presoaking at 80°C, extraction of
2 hemicelluloses at 170-180°C, and improved enzymatic cellulose conversion at 195°C)
3 under extreme thermophilic conditions (70°C) (Kongian et al., 2010). This value
4 corresponds to 4.7 ± 0.3 ml H₂/g VS_{initial} (yield normalized based on initial straw VS in the
5 HTP reactor) and is close to the lower end of the range reported for untreated wheat straw
6 ($5.18-10.52$ ml H₂/g VS_{initial}) and lower than the values reported for wheat straw
7 fermentation with enzyme addition ($11.06-19.63$ ml H₂/g VS_{initial}) (Quemeneur et al.,
8 2012b). Similarly, the pretreated (165°C/76 bars/30 min) rice straw yield of 4.6 ± 0.5 ml
9 H₂/g TS_{initial} was lower than the literature value of un-pretreated rice straw of 25 ml H₂/g
10 TS_{initial} (Chen et al. 2012; Guo et al., 2014). In the literature, unpretreated corn stover/stalk
11 yield is low (3 ml H₂/g VS_{initial}), but can be increased up to 57, 64, and 150 ml H₂/g VS_{initial}
12 after pretreatments with 0.5% NaOH, high pressure steam at 1.6 MPa/5 min, and 0.2%
13 HCl/30 min boiling, respectively (Zhang et al., 2007; Lu et al., 2009). The HTP pretreated
14 (175°C/102 bars/30 min) corn stover yield of 17.1 ± 5.4 ml H₂/g TS_{initial} again falls into the
15 lower end of this range. Finally, a maximum yield of 10.4 ml H₂/g sorghum was reported for
16 sweet sorghum liquid extract (obtained by mixing milled sorghum with tap water at 30°C
17 for 1 h) (Antonopoulou et al., 2008), comparable to the hydrothermally pretreated
18 (166°C/90 bars/30 min) sorghum B140 (18.5 ± 1.7 ml H₂/g sorghum; 21.1 ± 1.9 ml H₂/g
19 TS_{initial}) in this study. Given the aforementioned variability with sorghum, literature has a
20 wider range of data ($9.7-64$ ml H₂/g TS_{initial}) from different types of sorghum (Monlau et al.,
21 2012a; Guo et al., 2014). Overall, when compared to literature, the results indicate that HTP
22 pretreatments (165-175°C/66-102 bar/30 min) applied to various substrates did not
23 achieve discernable improvements in the extent of hydrogen production. However,

1 observed yields are substrate, pretreatment and BHP assay condition specific, therefore,
2 direct comparisons are not easy to make.

3 The results also indicated that poly-phenols (0.18 – 0.86 g/l), and 5-HMF (0.01-0.05 g/l) in
4 BHP bottles were below the inhibitory levels (furans and phenolic compounds of 1 g/L)
5 previously observed (Quemeneur et al., 2012a) and did not create any acute (extensive lag
6 phase) or chronic inhibition to hydrogen formers in BHP assays at the S/I ratio of 8.7 g COD
7 degradable/g VS. Maximum pretreatment temperature reached (175°C) was also below the
8 levels (220-230°C) of furfural formation during steam explosion of lignocellulosic biomass
9 (Horn et al., 2011). In addition, dilute acid pretreatment of sunflower stovers combined
10 with heat (170°C+4% HCl for 1 h) yielded higher inhibitory levels of furfural (1.15 g/L), 5-
11 HFM (0.13 g/L) in hydrolyzate at lower temperatures than 220-230°C (Monlau et al.,
12 2013c). Some studies also mentioned a synergistic inhibition effect of co-existence of by-
13 products (furfural, 5-HMF, phenols), although individually compounds were lower than the
14 reported toxicity thresholds (Mussatto and Roberto, 2004).

15 After BHP assays were terminated at their highest point of cumulative hydrogen yield,
16 soluble metabolites were quantified in order to understand the fermentation pathways.
17 The results, presented in Figure 4, suggested that in all the bottles set up with pretreated
18 hydrolyzate, acetate and butyrate were the main metabolites indicating that hydrogen
19 production was mainly from the typical acetate-butyrate pathway for dark fermentation of
20 carbohydrates (Monlau et al., 2013c; Chandrasekhar et al., 2015). Furthermore, ethanol
21 was also detected in the control BHP with glucose (5 g COD/l) and BHP with sorghum at
22 higher levels (0.7-0.9 g/l) than the other assays (0.1-0.2 g/l), suggesting a more

1 pronounced population shift to solvent (non-hydrogen) production such as ethanol from
2 hydrogen production in these BHP assays than the others. Metabolite results in Figure 4
3 also suggest that readily biodegradable sugars quantified in hydrolyzate samples (Table 3)
4 were all consumed.

5 3.2.3. Biodegradation kinetics

6 Kinetic parameter estimation results are tabulated for raw and hydrothermally pretreated
7 substrates in Table 4 for BMP assays and in Tables 5 for hydrolyzate BHP assays. For
8 comparison with raw substrates, specific BMP results from liquid and solid phases of
9 pretreated substrates were added together (based on VS distribution between liquid and
10 solid fractions after pretreatment) prior to parameter estimation analysis. As it can be seen
11 in Table 4, the first-order kinetics was successful in predicting specific cumulative BMP's
12 with the squared correlation coefficient, R^2 , generally close to unity, being greater than
13 0.97. For visual observation, predicted BMPs were also plotted along with the observed
14 values (Supplementary data; Figure S1). It is important to emphasize that improvements by
15 hydrothermal pretreatment was in terms of hydrolysis rate rather than the extent of the
16 methane production for all the substrates except Douglas fir bark. For wheat/rice straws,
17 sorghum and corn stover, hydrothermal pretreatments (165-175°C/66-102 bars/30 min)
18 with CO₂ addition increased the hydrolysis constant by 20-30% (relative to controls).
19 However, for Douglas fir bark, both the rate as well as the extent of digestion was
20 significantly enhanced by the pretreatment with 172% faster hydrolysis rate compared to
21 its control (Table 4), as the control digester was challenged as a result of the highly
22 refractory nature of this biomass. In general, these increases in k constant represent lower
23 improvements compared to thermochemical pretreatments, which can be as high as 65%

1 and 163% for sorghum and wheat straw, respectively, at a pretreatment combination of
2 10% NaOH, 40°C for 24 h (Sambusiti et al., 2012b). Similarly, the modified Gompertz
3 equation represented the measured BHP data successfully with R^2 values higher than 0.92
4 (Table 5; Figure S2).

5 3.2.4. Energy yield from possible digestion scenarios

6 For the pretreatment conditions with available data on both CH₄ and H₂ yields, the total
7 produced energy from two possible configurations (one-stage CH₄ and two-stage H₂/CH₄)
8 are compared in Table 6. In the one-stage CH₄ option, both liquid and solid fractions
9 contribute to CH₄ generation, while in the two-stage H₂/CH₄, liquid fraction is sent to dark
10 fermentation first for H₂ generation and then metabolites of dark fermentation is treated
11 for CH₄ production along with the solid fraction. CH₄ potential from metabolites (Fig. 4)
12 was calculated based on their theoretical methane potential. As it can be seen from Table 6,
13 the rest of the pretreatment conditions achieved similar energy yields between the two
14 scenarios except for the sorghum with high H₂ potential from readily biodegradable sugars
15 and CH₄ potential from dark fermentation by-products giving an advantage to the two-
16 stage H₂/CH₄. Although the hydrogen yields from the first-stage were low compared to
17 literature, total energy obtained from both configurations are in the range reported for
18 similar substrates compiled in a review (Monlau et al., 2013c).

19 **Conclusions**

20 Hydrothermal pretreatment (26-175°C, 25-102 bars, with CO₂ as catalyst) of various
21 lignocellulosic substrates decreased the hemicellulose content by 23-42% while
22 delignification was limited to 0-12%. The pretreatment was able to accelerate the rate of
23 biodegradation by 20-172% without generating high levels of inhibitory compounds. There

1 was no discernable enhancement in the ultimate methane or hydrogen yield observed
2 except for the most refractory biomass (Douglas fir bark). Between two possible reactor
3 configurations after pretreatment (one-stage CH₄ and two-stage H₂/CH₄), straws and corn
4 stover achieved similar energy yields (9.5-11.7 MJ/kg) while sorghum with high sugars/H₂
5 in a two-stage H₂/CH₄ achieved 41% higher energy yield than the one-stage CH₄ process.
6 Compared to other lignocellulosic biomass pretreatment techniques, hydrothermal
7 pretreatment with CO₂ pressurization requires only heat energy and CO₂, which is easily
8 available on fermentation or biogas plants and is easily released by depressurization at the
9 end of the pretreatment. One of its considerable advantages is the low level of inhibitory
10 substances produced. Its industrial application may be relevant in the case of refractory
11 biomass such as Douglas fir bark, allowing the use of some substrates whose adaptation to
12 biogas plants would not have been possible without such pretreatment. Further work
13 should thus optimize these pretreatment conditions in the case of refractory biomass, and
14 carry out a life cycle analysis to assess environmental impacts in comparison to more
15 conventional pretreatment techniques.

16 **Acknowledgements**

17 The authors thank Gérard Lainé from VIVESCIA and Dr. David Pot from Cirad- UMR AGAP
18 for kindly providing wheat straw and sorghum samples, respectively.

19 **References**

- 20 Antonopoulou, G., Gavala, H.N., Skiadas, I.V., Angelopoulos, K., Lyberatos, G., 2008. Biofuels
21 generation from sweet sorghum: fermentative hydrogen production and anaerobic
22 digestion of the remaining biomass. *Bioresource Technology*, 99(1), 110-119.
- 23 Antonopoulou, G., Lyberatos, G., 2013. Effect of pretreatment sweet sorghum biomass on
24 methane generation. *Waste Biomass Valorization*, 4(3), 583-591.
- 25 APHA, A., WPCF, 2005. *Standard Methods for the Examination of Water and Wastewater*
26 (20th ed.). American Public Health Association, Washington, DC, USA.

- 1 Bauer, A., Leonhartsberger, C., Bosch, P., Amon, B., Friedl, A., Amon, T., 2010. Analysis of
2 methane yields from energy crops and agricultural by-products and estimation of
3 energy potential from sustainable crop rotation systems in EU-27. *Clean Technologies*
4 and Environmental Policy, 12(2), 153-161.
- 5 Baker, A.J., 1973. Effect of lignin on the in vitro digestibility of wood pulp. *Journal of Animal*
6 *Science*, 36(4), 768-771.
- 7 Bhatia, L., Johri, S., Ahmad, R., 2012. An economic and ecological perspective of ethanol
8 production from renewable agro waste: a review. *AMB Express*, 2(1):65, 19 pages.
- 9 Carrere, H., Antonopoulou, G., Affes, R., Passos, F., Battimelli, A., Lyberatos, G., Ferrer, I.,
10 2016. Review of feedstock pretreatment technologies for improved anaerobic digestion:
11 From lab-scale research to full-scale application. *Bioresource Technology*, 199, 386-397.
- 12 Chandra, R., Takeuchi, H., Hesagawa, T., 2012. Hydrothermal pretreatment of rice straw
13 biomass: A potential and promising method for enhanced methane production. *Applied*
14 *Energy*, 94(C), 129-140.
- 15 Chandrasekhar, K., Lee, Y-J., Lee, D-W., 2015. Biohydrogen production: Strategies to
16 improve process efficiency through microbial routes. *International Journal of Molecular*
17 *Sciences*, 16, 8266-8293.
- 18 Chang, V.S., Nagwani, M., Holtzapple, M.T., 1998. Lime pretreatment of crop residues
19 bagasse and wheat straw. *Applied Biochemistry and Biotechnology*, 74(3), 135-159.
- 20 Chen, C-C., Chauang, Y-S, Lin, C-Y., Lay, C-H., Sen, B., 2012. Thermophilic dark fermentation
21 of untreated rice straw using mixed cultures for hydrogen production. *International*
22 *Journal of Hydrogen Energy*, 37(20), 15540-15546.
- 23 Cherubini, F., 2010. The biorefinery concept: Using biomass instead of oil for producing
24 energy and chemicals. *Energy Conversion and Management*, 51(7), 1412-1421.
- 25 Cicco, N., Lanorte, M.T., Paraggio, M., Viggiano, M., Lattanzio, V.A., 2009. A reproducible,
26 rapid and inexpensive Folin-Ciocalteu micro-method in determining phenolics of plant
27 methanol extracts. *Microchemical Journal*, 91, 107-110.
- 28 Davila-Vazquez, G., Alatraste-Mondragon, F., de Leon-Rodriguez, A., Razo-Flores, E., 2008.
29 Fermentative hydrogen production in batch experiments using lactose, cheese whey and
30 glucose: Influence of initial substrate concentration and pH. *International Journal of*
31 *Hydrogen Energy*, 33, 4989-4997.
- 32 de Vrije, T., de Haas, G.G., Tan, G.B., Keijsers, E.R.P., Claassen, P.A.M., 2002. Pretreatment of
33 *Miscanthus* for hydrogen production by *Thermotoga elfii*. *International Journal of*
34 *Hydrogen Energy*, 27(11-12), 1381-1390.
- 35 Droste, R.L., 1997. Theory and practice of water and wastewater treatment. John Wiley &
36 Sons, Inc.
- 37 Guo, X.M., Trably, E., Latrille, E., Carrere, C., Steyer, J-P., 2014. Predictive and explicative
38 models of fermentative hydrogen production from solid organic waste: Role of butyrate
39 and lactate pathways. *International Journal of Hydrogen Energy*, 39, 7476-7485.
- 40 He, L., Huang, H., Zhang, Z., Lei, Z., 2016. A review of hydrothermal pretreatment of
41 lignocellulosic biomass for enhanced biogas production. *Current Organic Chemistry*,
42 19(5), 437-446.

- 1 Horn, S.J., Estevez, M.M., Nielsen, H.K., Linjordet, R., Eijsink, V.G.H., 2011. Biogas production
2 and saccharification of *Salix* pretreated at different steam explosion conditions.
3 *Bioresource Technology*, 102(17), 7932-7936.
- 4 Hosseini Koupaie, E., Eskicioglu, C., 2016. Conventional heating vs. microwave sludge
5 pretreatment comparison under identical heating/cooling profiles for thermophilic
6 advanced anaerobic digestion. *Waste Management*, 53, 182-195.
- 7 Iyer, P.V., Wu, Z.W., Kim, S.B., Lee, Y.Y., 1996. Ammonia recycled percolation process for
8 pretreatment of herbaceous biomass. *Applied Biochemistry and Biotechnology*, 57-58,
9 121-132.
- 10 Kaparaju, P., and Felby, C., 2010. Characterization of lignin during oxidative and
11 hydrothermal pre-treatment processes of wheat straw and corn stover. *Bioresource
12 Technology*, 101(9), 3175-3181.
- 13 Kawagoshi, Y., Hino, N., Fujimoto, A., Nakao, M., Fujita, Y., Sugimura, S., Furukawa, K., 2005.
14 Effect of inoculum conditioning on hydrogen fermentation and pH effect on bacterial
15 community relevant to hydrogen production. *Journal of Bioscience and Bioengineering*,
16 100(5), 524-530.
- 17 Kim, T.H., Lee, Y.Y., 2005. Pretreatment and fractionation of corn stover by ammonia
18 recycle percolation process. *Bioresource Technology*, 96(18), 2007-2013.
- 19 Kubikova, J., Zemann, A., Krkoska, P., Bobleter, O., 1996. Hydrothermal pretreatment of
20 wheat straw for the production of pulp and paper. *Tappi Journal*, 79, 163-169.
- 21 Kumar, P., Barrett, D.M., Delwiche, M.J., Stroeve, P., 2009. Methods for pretreatment of
22 lignocellulosic biomass for efficient hydrolysis and biofuel production. *Industrial &
23 Engineering Chemistry Research*, 48(8), 3713-3229.
- 24 Kongian, P., O-Thong, S., Kotay, M., Min, B., Angelidaki, I., 2010. Biohydrogen production
25 from wheat straw hydrolysate by dark fermentation using extreme thermophilic mixed
26 culture. *Biotechnology Bioengineering*, 105(5), 899-908.
- 27 Lei, Z., Chen, J., Zhang, Z., Sugiura, N., 2010. Methane production from rice straw with
28 acclimated anaerobic sludge: Effect of phosphate supplementation. *Bioresource
29 Technology*, 101(12), 4343-4348.
- 30 Li, M., Feng, S., Wu, L., Li, Y., Fan, C., Zhang, R., Zou, W., Tu, Y., Jing, H-C., Li, S., Peng, L., 2014.
31 Sugar-rich sweet sorghum is distinctively affected by wall polymer features for biomass
32 digestibility and ethanol fermentation in bagasse. *Bioresource Technology*, 167, 14-23.
- 33 Lu, Y., Lai, Q., Zhang, C., Zhao, H., Ma, K., Zhao, X., Chen, H., Liu, D., Xing, X.-H., 2009.
34 Characteristics of hydrogen and methane production from cornstalks by an augmented
35 two- or three-stage anaerobic fermentation process. *Bioresource Technology*, 100,
36 2889-2895.
- 37 Matsakas, L., Rova, U., Christakopoulos, P., 2015. Sequential parametric optimization of
38 methane production from different sources of forest raw material. *Frontiers in
39 Microbiology*, 6, 1163.
- 40 Matsushita, Y., Yamauchi, K., Takabe, K., Awano, T., Yoshinaga, A., Kato, M., Kobayashi, T.,
41 Asada, T., Furujo, A., Fukushima, K., 2010. Enzymatic saccharification of Eucalyptus bark
42 using hydrothermal pre-treatment with carbon dioxide. *Bioresource Technology*, 101,
43 4936-4939.

- 1 Menardo, S., Balsari, P., 2012. An analysis of the energy potential of anaerobic digestion of
2 agricultural by-products and organic waste. *BioEnergy Research*, 5(3), 759-767.
- 3 Mirmohamadsadeghi, S., Karimi, K., Zamani, A., Amiri, H., Horvath, S., 2014. Enhanced solid-
4 state biogas production from lignocellulosic biomass by orhagasolv pretreatment.
5 *BioMed Research International*, 2014, 6 pages.
- 6 Miyazawa, T., and Funazukuri, T., 2005. Polysaccharide hydrolysis accelerated by adding
7 carbon dioxide under hydrothermal conditions. *Biotechnology Progress*, 21, 1782-1785.
- 8 Monlau, F., Sambusiti, C., Barakat, A., Guo, X.M., Latrille, E., Trably, E., Steyer, J-P., Carrere, H.,
9 2012a. Predictive models of biohydrogen and biomethane production based on the
10 composition and structural features of lignocellulosic materials. *Environmental Science
11 and Technology*, 46(21), 12217-12225.
- 12 Monlau, F., Barakat, A., Steyer, J-P., Carrere, H., 2012b. Comparison of seven types of
13 thermo-chemical pretreatments on the structural features and anaerobic digestion of
14 sunflower stalks. *Bioresource Technology*, 120, 241-247.
- 15 Monlau, F., Barakat, A., Trably, E., Dumas, C., Steyer, J.P., Carrere, H., 2013a. Lignocellulosic
16 biohydrogen and biomethane: Impact of structural features and pretreatment. *Critical
17 Reviews in Environmental Science and Technology*, 43(3), 260-322.
- 18 Monlau, F., Aemig, Q., Barakat, A., Steyer, J.P., Carrere, H., 2013b. Application of optimized
19 alkaline pretreatment for enhancing the anaerobic digestion of different sunflower
20 stalks varieties. *Environmental Technology*, 34(13-14), 2155-2162.
- 21 Monlau, F., Aemig, Q., Trably, E., Hamelin, J., Steyer, J-P., Carrere, H., 2013c. Specific
22 inhibition of biohydrogen-producing *Clostridium* sp. after dilute-acid pretreatment of
23 sunflower stalks. *International Journal of Hydrogen Energy*, 38(28), 12273-12282.
- 24 Mussatto, S.I., Roberto, I.C., 2004. Alternatives for detoxification of diluted-acid
25 lignocellulosic hydrolyzates for use in fermentative process: a review. *Bioresource
26 Technology*, 93, 1-10.
- 27 Orozco, R.L., Redwood, M.D., Leeke, G.A., Bahari, A., Santos, R.C.D., Macaskie, L.E., 2012.
28 Hydrothermal hydrolysis of starch with CO₂ and detoxification of the hydrolysates with
29 activated carbon for bio-hydrogen fermentation. *International Journal of Hydrogen
30 Energy*, 37(8), 6545-6553.
- 31 Palacios-Orueta, A., Chuvieco, E., Parra, A., Carmona-Moreno, C., 2005. Biomass burning
32 emissions: A review of models using remote-sensing data. *Environmental Monitoring
33 and Assessment*, 104, 189-209.
- 34 Palmowski, L.M., and Muller, J.A., 2000. Influence of the size reduction of organic waste on
35 their anaerobic digestion. *Water Science and Technology*, 41, 155-162
- 36 Palmqvist, E., Hahn-Hagerdal, B., 2000. Fermentation of lignocellulosic hydrolysates. II:
37 inhibitors and mechanisms of inhibition. *Bioresource Technology*, 74(1), 25-33.
- 38 Qingming, L., Xiujin, L., Baoning, Z., Dongyang, Y., Laiqing, L., 2005. Anaerobic
39 biogasification of NaOH-treated corn stalk. *Transactions of the CSAE*, 21(2), 111-115.
- 40 Quemeneur, M., Hamelin, J., Barakat, A., Steyer, J.P., Carrere, H., Trably, E., 2012a. Inhibition
41 of fermentative hydrogen production by lignocellulose-derived compounds in mixed
42 cultures. *International Journal of Hydrogen Energy*, 37(4), 3150-3159.

- 1 Quemeneur, M., Bittel, M., Trably, E., Dumas, C., Fourage, L., Ravot, G., Steyer, J.P., Carrere,
2 H., Trably, E., 2012b. Effect of enzyme addition on fermentative hydrogen production
3 from wheat straw. *International Journal of Hydrogen Energy*, 37, 10639-10647.
- 4 Relvas, F.M., Morais, A.R., Bogel-Lukasik, R., 2015. Selective hydrolysis of wheat straw
5 hemicellulose using high-pressure CO₂ as catalyst. *RSC Advances*, 90(5), 73935-73944.
- 6 Rouches, E., Herpoel-Gimbert, I., Steyer, J.P., Carrere, H., 2016. Improvement of anaerobic
7 degradation by white-rot fungi pretreatment of lignocellulosic biomass: A review.
8 *Renewable and Sustainable Energy Reviews*, 59, 179-198.
- 9 Salerno, M.B., Park, W., Zuo, Y., Logan, B.E., 2006. Inhibition of biohydrogen production by
10 ammonia. *Water Research*, 40(6), 1167-1172.
- 11 Sambusiti, C., Ficara, E., Malpei, F., Steyer, J.P., Carrere, H., 2012a. Influence of alkaline pre-
12 treatment conditions on structural features and methane production from ensiled
13 sorghum forage. *Chemical Engineering Journal*, 211-212, 488-492.
- 14 Sambusiti, C., Ficara, E., Rollini, M., Manzoni, M., Malpei, F., 2012b. Sodium hydroxide
15 pretreatment of ensiled sorghum forage and wheat straw to increase methane
16 production. *Water Science and Technology*, 66(11), 2447-2452.
- 17 Sambusiti, C., Monlau, F., Ficara, E., Carrere, H., Malpei, F., 2013a. A comparison of different
18 pre-treatments to increase methane production from two agricultural substrates.
19 *Applied Energy*, 104, 62-70.
- 20 Sambusiti, C., Ficara, E., Malpei, F., Steyer, J.P., Carrere, H., 2013b. Effect of sodium
21 hydroxide pretreatment on physical, chemical characteristics and methane production
22 of five varieties of sorghum. *Energy*, 55, 449-456.
- 23 Sawatdeenarunat, C., Surendra, K.C., Takara, D., Oechsner, H., Khanal, S.K., 2015. Anaerobic
24 digestion of lignocellulosic biomass: Challenges and opportunities. *Bioresource
25 Technology*, 178, 178-186.
- 26 Sharma, S.K., Mishra, I.M., Sharma, M.P., Saini, J.S., 1988. Effect of particle size on biogas
27 generation from biomass residues. *Biomass*, 17(4), 251-263.
- 28 Singh, A., Sevda, S., Abu Reesh, I.M., Vanbroekhoven, K., Rathore, D., Pant, D., 2015.
29 Biohydrogen production from lignocellulosic biomass: Technology and Sustainability.
30 *Energies*, 8, 13062-13080.
- 31 Sluiter, A., Hames, B., Ruiz, R., Scarlata, C., Sluiter, J., Templeton, D., Crocker, D., 2008.
32 Determination of structural carbohydrates and lignin in biomass. Technical Report
33 NREL/TP-510-42618. National Renewable Energy Laboratory, Golden, Colorado.
- 34 Spooner, J., Taylor, T., Shaw, F., Asaadi, M., Shepherd, S., Rigden, C., 2007. Bug Buster: A new
35 pre-digestion process technology that increases biogas production from sewage sludge,
36 In: Lowe, P., and Horan, N. J. (Eds.) 12th European Biosolids and Organic Resources
37 Conference. Manchester, UK. Aqua Enviro.
- 38 Sun, Y., Cheng, J., 2002. Hydrolysis of lignocellulosic materials for ethanol production: A
39 review. *Bioresource Technology*, 83(1), 1-11.
- 40 Sun, R., Tomkinson, J., Mao, F.C., Sun, X.F., 2001. Physicochemical characterization of lignins
41 from rice straw by hydrogen peroxide treatment. *Journal of Applied Polymer Science*,
42 79(4), 719-732.

- 1 Taherzadeh, M.J., Karimi, K., 2007. Acid-based hydrolysis processes for ethanol from
2 lignocellulosic materials. A review. *BioResources*, 2(3), 472-499.
- 3 van Walsum, G.P., and Shi, H., 2004. Carbonic acid enhancement of hydrolysis in aqueous
4 pretreatment of corn stover. *Bioresource Technology*, 93(3), 217-226.
- 5 Yu, W., 2010. Pre-treatments of Chinese agricultural residues to increase biogas
6 production. Master's thesis, Linköping University.
- 7 Zhang, M-L., Fan, Y-T., Xing, Y., Pan, C-M., Zhang, G-S., Lay, J-J., 2007. Enhanced biohydrogen
8 production from cornstalk wastes with acidification pretreatment by mixed anaerobic
9 cultures. *Biomass and Bioenergy*, 31(4), 250-254.
- 10 Zheng, X.J., Yu, H.Q., 2005. Inhibitory effects of butyrate on biological hydrogen production
11 with mixed anaerobic cultures. *Journal of Environmental Management*, 74(1), 65-70.
- 12 Zhu, J., Wan, C., Li, Y., 2010. Enhanced solid-state anaerobic digestion of corn stover by
13 alkaline pretreatment. *Bioresource Technology*, 101(19), 7523-7528.
- 14

Table 1. Solid content of lignocellulosic substrates after milling

Substrate	Milling size (mm)	Total solids (TS) (% by wt.)	Volatile solids (VS)	VS/TS*100 (%)
Wheat straw	1	93.5 (0.1) ^a	89.4 (0.1)	95.6 (0.0)
Sorghum (B 140)	1	87.8 (0.3)	81.1 (1.1)	92.5 (1.4)
Rice straw	1	91.5 (0.4)	77.5 (0.1)	84.6 (0.5)
Corn stover	2	90.1 (0.5)	84.0 (0.6)	93.2 (0.3)
Douglas fir bark	2	91.13 (0.23)	91.07 (0.13)	99.9 (0.4)

^aData represent arithmetic mean and standard deviation of triplicates

ACCEPTED MANUSCRIPT

Table 2. Hydrothermal pretreatment conditions for lignocellulosic substrates

Substrate	Sample code	Maximum observed		Heating time (min) ^c	Initial CO ₂ pressure (bar) ^d
		T (°C) ^a	P (bar) ^b		
<i>Stage I</i>					
Wheat straw	WS (26C/50b)	26	50	30	50
Wheat straw	WS (80C/60b)	80	60	30	50
Wheat straw	WS (175C/25b)	175	25	30	10
Wheat straw	WS (175C/66b)	175	66	30	50
<i>Stage II</i>					
Sorghum (B 140)	S (166C/90b)	166	90	30	50
Rice straw	RS (165C/76b)	165	76	30	50
Corn stover	CS (175C/102b)	175	102	30	50
Douglas fir bark	DFB (171C/86b)	171	86	30	50

^aMaximum temperature reached during 30 minutes of pretreatment

^bMaximum pressure reached during 30 minutes of pretreatment

^cTotal exposure time to pretreatment

^dCO₂ gas was used to pressurize the pretreatment reactor initially, and was disconnected during the pretreatment .

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carrère, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI :

10.1016/i.watres.2017.04.068

Table 3. Characterization of liquid fraction of hydrothermally pretreated substrates^a

Parameter	WS (26C/50b)	WS (80C/60b)	WS (175C/25b)	WS (175C/66b)	S (166C/90b)	RS (165C/76b)	CS (175C/102b)	DFB (171C/86b)
Volume recovered after pretreatment (ml)	209	208	204	214	220	220	220	228
pH (-)	5.83	6.00	5.53	5.08	4.85	6.44	4.83	3.51
COD (g/l)	4.9 (0.1) ^b	5.5 (0.1)	10.3 (0.1)	14.7 (0.3)	24.0 (0.5)	10.4 (0.2)	20.0 (0.5)	10.2 (0.4)
COD _{sugars} (g/l) ^c	0.2 (0.0)	0.0 (0.0)	0.9 (0.1)	1.1 (0.0)	9.7 (0.0)	1.2 (0.1)	8.8 (0.0)	1.6 (0.2)
TS (g/l)	3.8 (0.0)	4.8 (0.0)	8.2 (0.0)	11.3 (0.0)	18.5 (0.3)	10.9 (0.1)	16.3 (0.2)	8.1 (0.2)
VS (g/l)	2.6 (0.0)	3.4 (0.0)	6.5 (0.0)	9.4 (0.1)	15.7 (0.0)	6.6 (0.0)	13.7 (0.2)	7.9 (0.3)
Poly-phenols (mg/l)	236 (3)	285 (2)	831 (4)	960 (6)	835 (31)	571 (8)	1029 (31)	538 (7)
5-HMF (g/l)	nd*	nd	nd	nd	0.11 (0.01)	0.06 (0.00)	0.06 (0.00)	nd
Furfural (g/l)	nd	nd	nd	nd	nd	nd	nd	nd
Total VFAs (mg/l) ^d	206 (8)	204 (4)	602 (3)	806 (13)	672 (0)	69 (1)	842 (14)	371 (6)
Cellobiose (g/l)	nd	nd	nd	nd	0.6 (0.0)	nd	0.5 (0.0)	0.4 (0.0)
Glucose (g/l)	nd	nd	nd	nd	3.4 (0.1)	0.4 (0.0)	3.1 (0.0)	0.1 (0.0)
Xylose (g/l)	0.1 (0.0)	nd	0.6 (0.0)	0.7 (0.0)	4.4 (1.1)	0.4 (0.0)	4.0 (0.0)	0.5 (0.0)
Arabinose (g/l)	0.1 (0.0)	nd	0.2 (0.0)	0.4 (0.0)	0.8 (0.0)	0.3 (0.0)	0.8 (0.0)	0.6 (0.1)
Acetate (g/l)	0.1 (0.0)	1.4 (0.0)	3.1 (0.3)	3.2 (0.1)	nd	nd	nd	nd
Lactate (g/l)	nd	0.6 (0.0)	nd	nd	nd	nd	nd	nd

^aWS: wheat straw; S: sorghum; RS: rice straw; CS: corn stover; DFB: Douglas fir bark; 5-HMF: 5-hydroxymethylfurfural

^bData represent arithmetic mean and standard deviation of triplicates for COD, poly-phenols, VFAs and duplicates for TS/VS and sugar analyses

^cCalculated from COD equivalency of sugars in the liquid phase

^dTotal volatile fatty acids (VFAs) as summation of acetic, propionic, butyric, iso-butyric, valeric, iso-valeric acids

*nd: not detected

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carrère, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI : 10.1016/j.watres.2017.04.068

10.1016/j.watres.2017.04.068

Table 4. Methane potential and first-order kinetics of raw and pretreated substrates (total fraction)^a

Conditions	BMP measured		BMP predicted (ml CH ₄ /g VS _{added})	<i>k</i> (1/d)	R ²	<i>k</i> increase (%)
	(ml CH ₄ /g VS _{added}) ^b	% from liquid fraction				
Raw WS	256 (18) ^b	-	252 (9)	0.067 (0.002)	0.99 (0.00)	-
WS (175C/66b)	269 (3)	20 (1)	259 (3)	0.082 (0.010)	0.99 (0.01)	22
Raw S	340 (2)	-	318 (2)	0.090 (0.002)	0.99 (0.00)	-
S (166C/90b)	338 (4)	36 (2)	321 (5)	0.114 (0.001)	0.99 (0.01)	27
Raw RS	311 (5)	-	304 (12)	0.071 (0.002)	0.99 (0.00)	-
RS (165C/76b)	319 (6)	13 (1)	300 (5)	0.093 (0.010)	0.99 (0.01)	30
Raw CS	336 (11)	-	336 (11)	0.090 (0.004)	0.99 (0.00)	-
CS (175C/102b)	318 (11)	28 (1)	300 (10)	0.108 (0.002)	0.99 (0.01)	20
Raw DFB	98 (5)	-	96 (9)	0.021 (0.001)	0.99 (0.00)	-
DFB (171C/86b)	136 (3)	32 (1)	124 (1)	0.056 (0.005)	0.97 (0.03)	172

^aWS: wheat straw; S: sorghum; RS: rice straw; CS: corn stover; DFB: Douglas fir bark,

^bData represent arithmetic mean and standard deviation of triplicate bottles

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carrère, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI :

10.1016/i.watres.2017.04.068

Table 5. Hydrogen potential and Modified Gompertz equation parameters of pretreated substrates (liquid fraction)^a

Conditions	BHP measured (ml H ₂ /g VS _{added})	BHP predicted (ml H ₂ /g VS _{added})	P (ml H ₂ /g VS _{added})	Rm (ml H ₂ /g VS _{added} /h)	λ (h)	R ²
WS (175C/66b)	55 (6) ^b	55 (6)	56 (5)	4.7 (1.3)	38 (3)	1.00 (0.00)
S (166C/90b)	94 (9)	84 (7)	84 (15)	42.5 (13.6)	29 (7)	0.95 (0.06)
RS (165C/76b)	39 (3)	40 (1)	45 (2)	1.3 (0.2)	27 (9)	0.98 (0.02)
CS (175C/102b)	84 (9)	74 (18)	94 (44)	23.0 (16.2)	35 (4)	0.92 (0.09)
Control (glucose)	143 (28) ^c	143 (27) ^c	143 (27) ^c	3.2 (4.7) ^d	14 (5)	1.00 (0.00)
Control (glucose)	1.2 (0.2) ^e	1.2 (0.2) ^e	1.2 (0.2) ^e	0.2 (0.1) ^f	14 (1)	1.00 (0.00)

^aWS: wheat straw; S: sorghum; RS: rice straw; CS: corn stover,

^bData represent arithmetic mean and standard deviation of 3-5 replicate bottles,

^cml H₂/g glucose added,

^dml H₂/g glucose/h,

^emol H₂/mol initial glucose,

^fmol H₂/mol initial glucose/h.

Table 6. Energy yield from possible two bioreactor options^a

Conditions	One-stage CH ₄		Two-stage H ₂ /CH ₄				
			Stage one (H ₂)		Stage two (CH ₄)		Total
	ml CH ₄ /g TS _{initial}	MJ/kg TS _{initial} ^c	ml H ₂ /g TS _{initial}	MJ/kg TS _{initial} ^d	ml CH ₄ /g TS _{initial}	MJ/kg TS _{initial} ^c	MJ/kg TS _{initial}
WS (175C/66b)	252 (3) ^b	10.1 (0.1)	4.4 (0.3)	0.05 (0.00)	234 (4)	9.3 (0.1)	9.4 (0.1)
S (166C/90b)	313 (5)	12.5 (0.2)	21.1 (11.9)	0.23 (0.02)	438 (8)	17.4 (0.3)	17.6 (0.3)
RS (165C/76b)	277 (6)	11.0 (0.2)	4.6 (0.5)	0.05 (0.01)	263 (5)	10.5 (0.2)	10.5 (0.2)
CS (175C/102b)	295 (9)	11.7 (0.4)	17.1 (5.4)	0.18 (0.06)	262 (6)	10.4 (0.2)	10.6 (0.2)

^aWS: wheat straw; S: sorghum; RS: rice straw; CS: corn stover,

^bData represent arithmetic mean and standard deviation of 3-5 replicate bottles,

^cEnergy yield: 1NI CH₄ = 39790 J

^dEnergy yield: 1NI H₂ = 10780 J

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carrère, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI :

10.1016/i.watres.2017.04.068



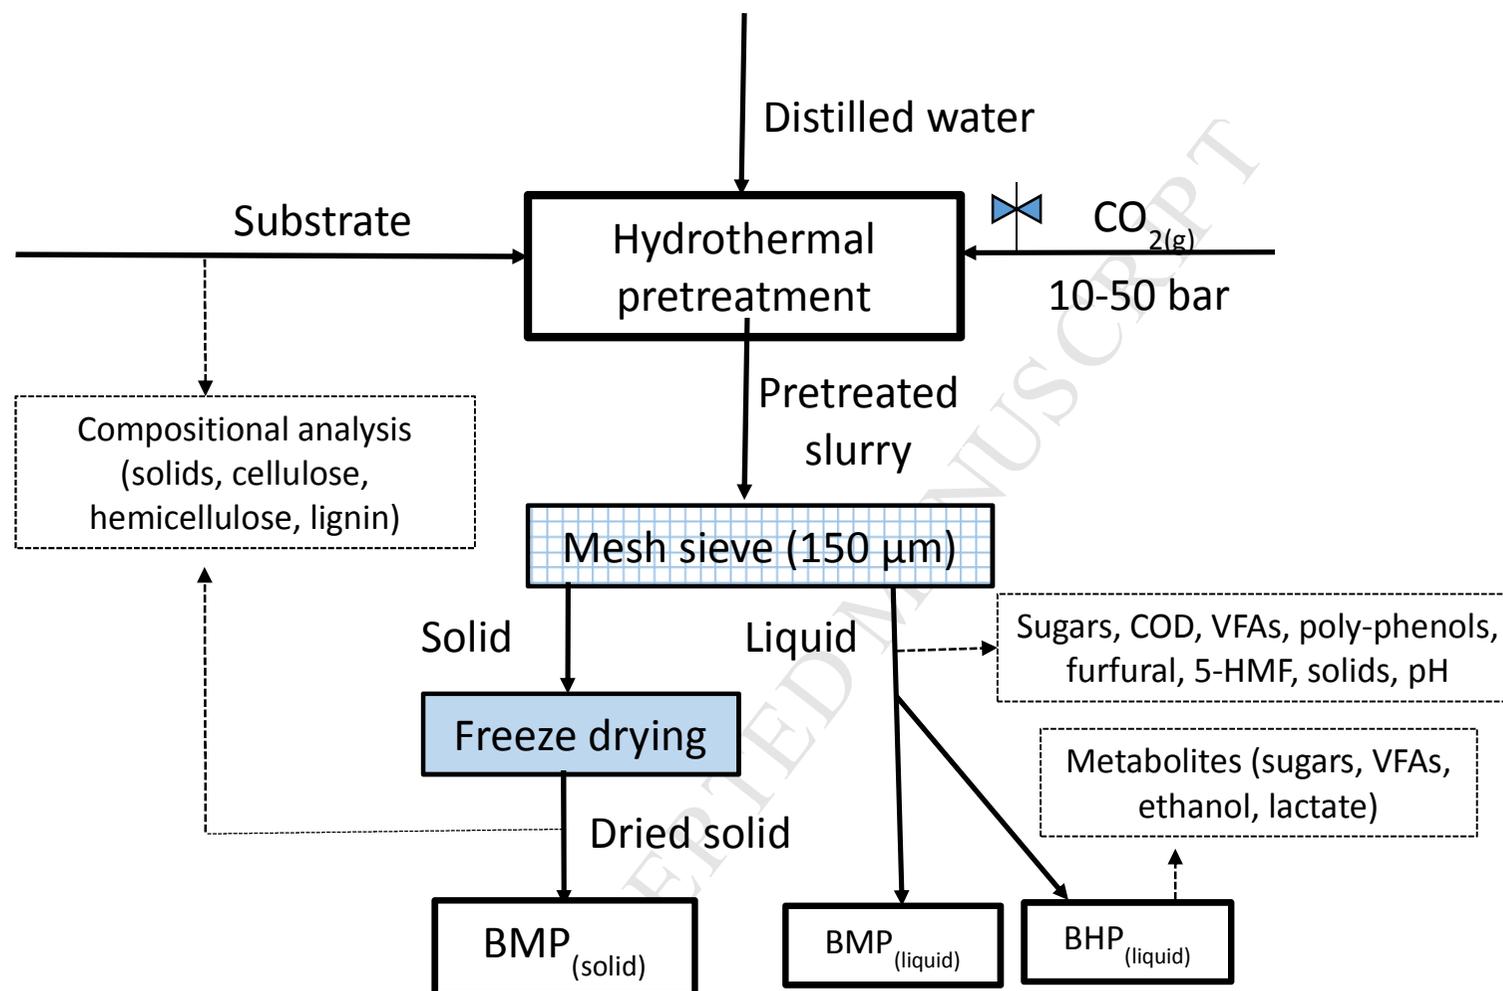




Figure 1. Schematic of experimental procedure

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carrère, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI : 10.1016/i.watres.2017.04.068

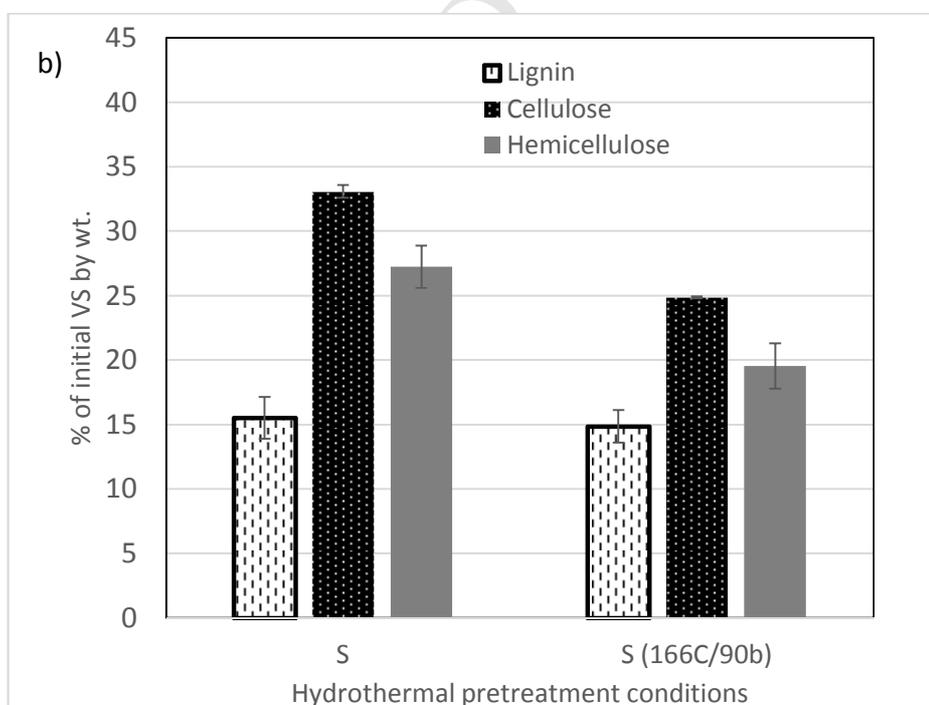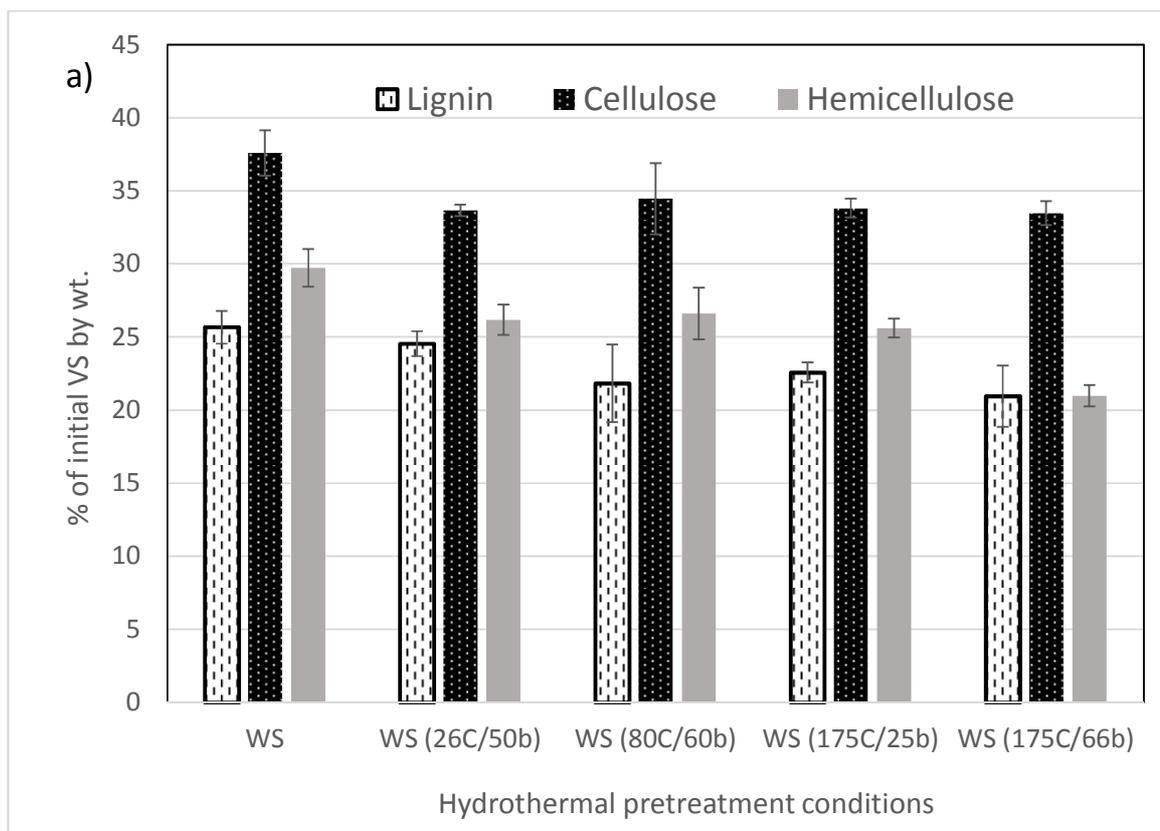

Comment citer ce document :

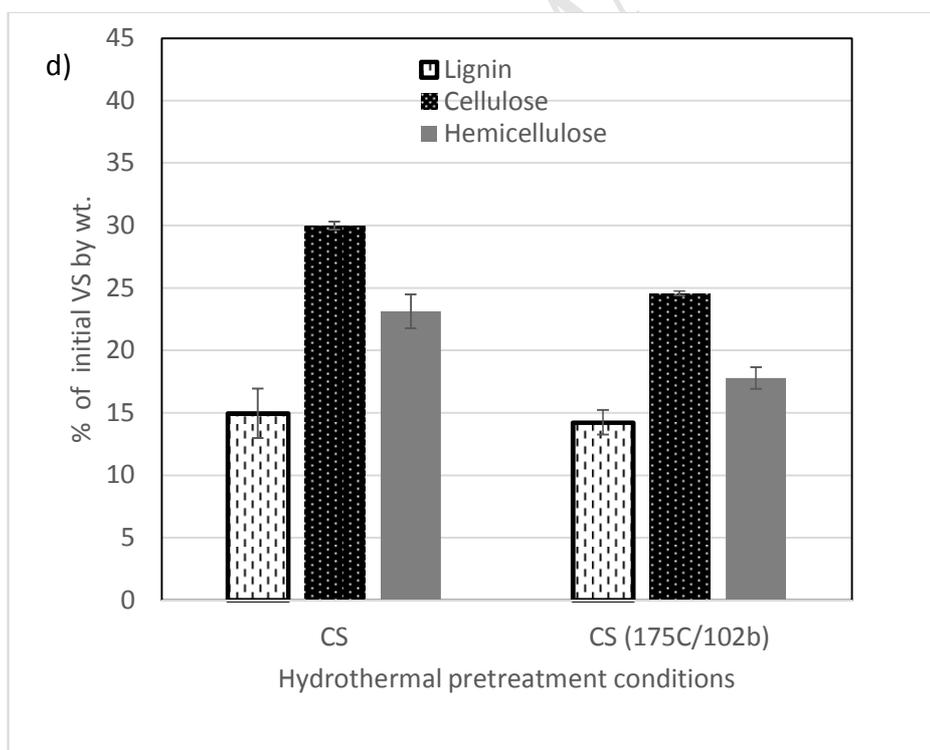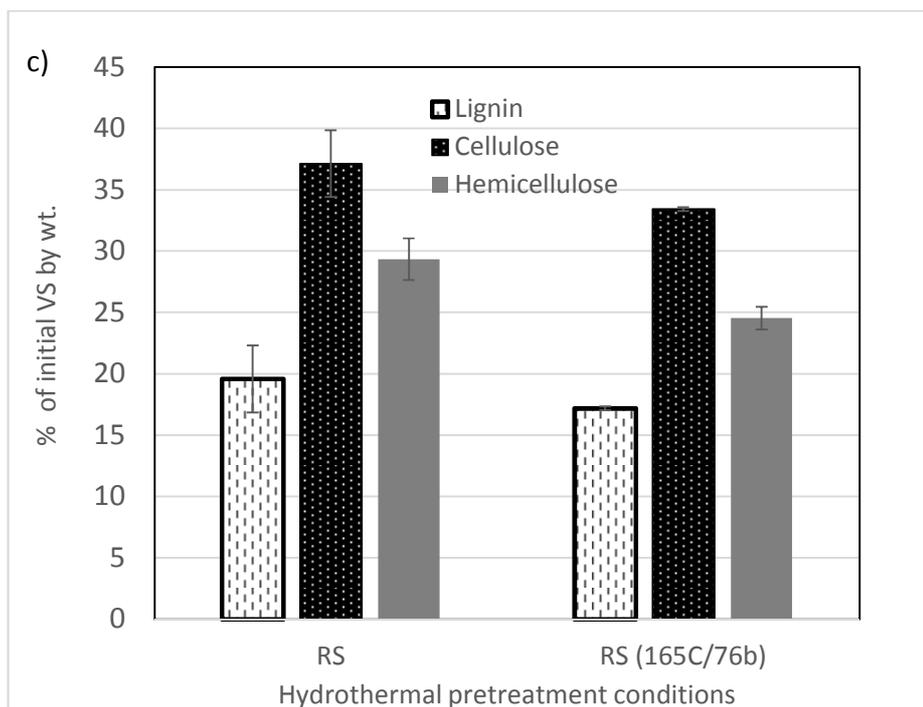

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carrère, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI : 10.1016/j.watres.2017.04.068





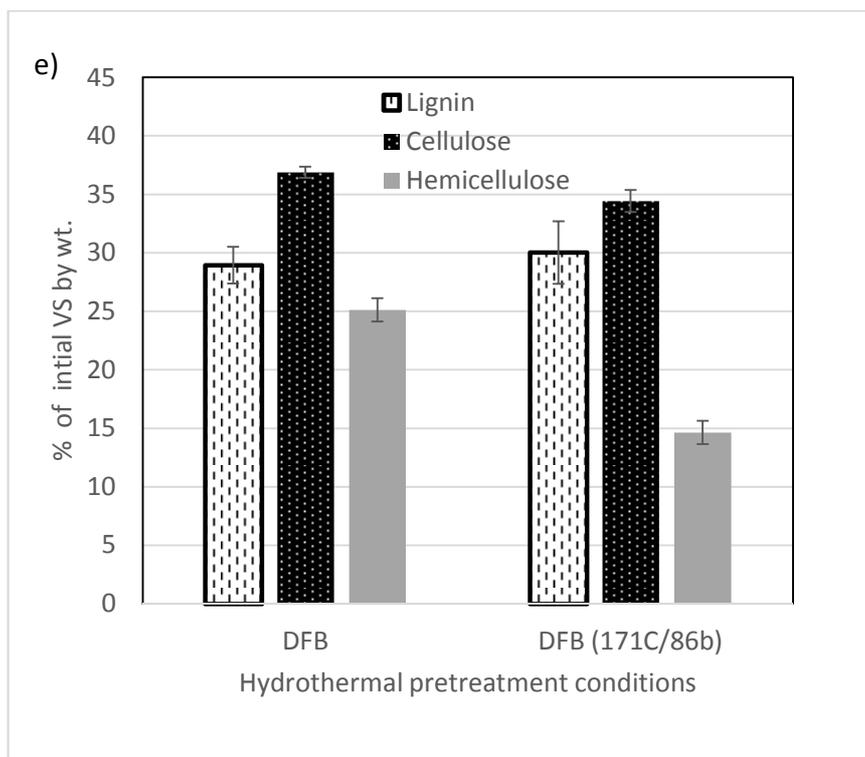


Figure 2. Biochemical composition of raw and hydrothermal pretreated; a) wheat straw (WS), b) sorghum (S), c) rice straw (RS), d) corn stover (CS), and e) Douglas fir bark (DFB). Values represent average and error bars represent standard deviation of triplicates.

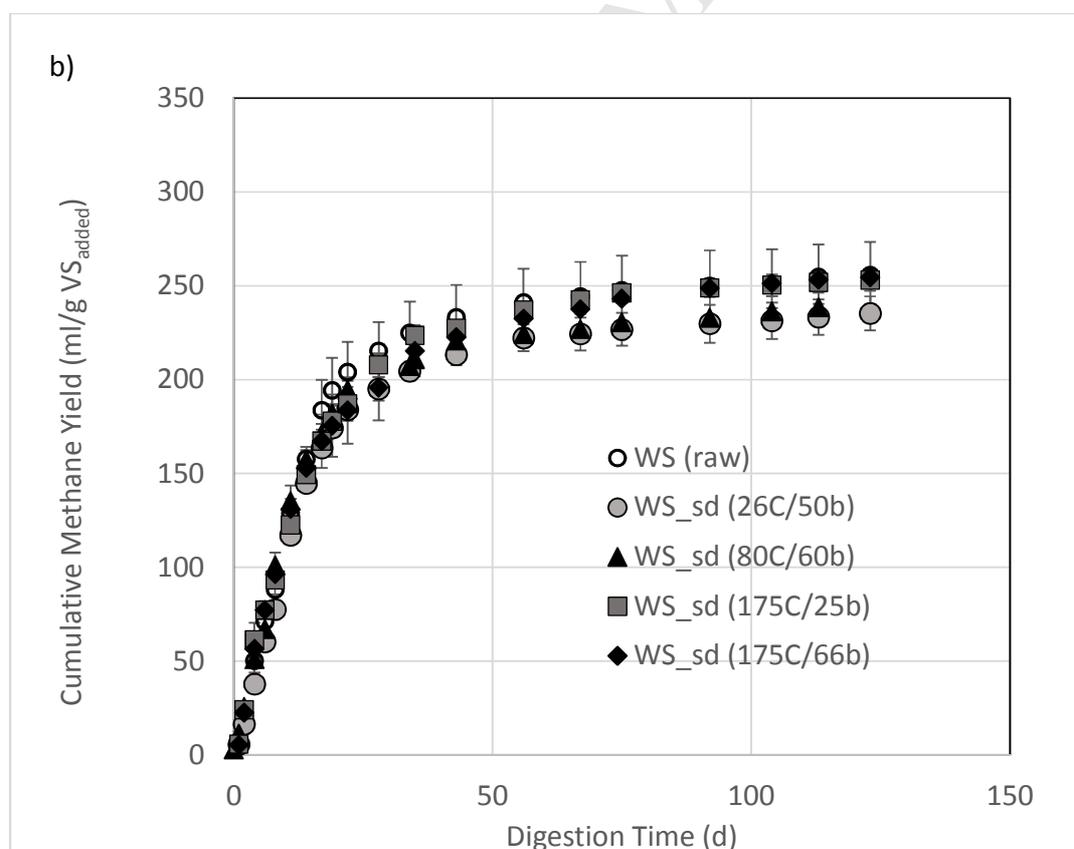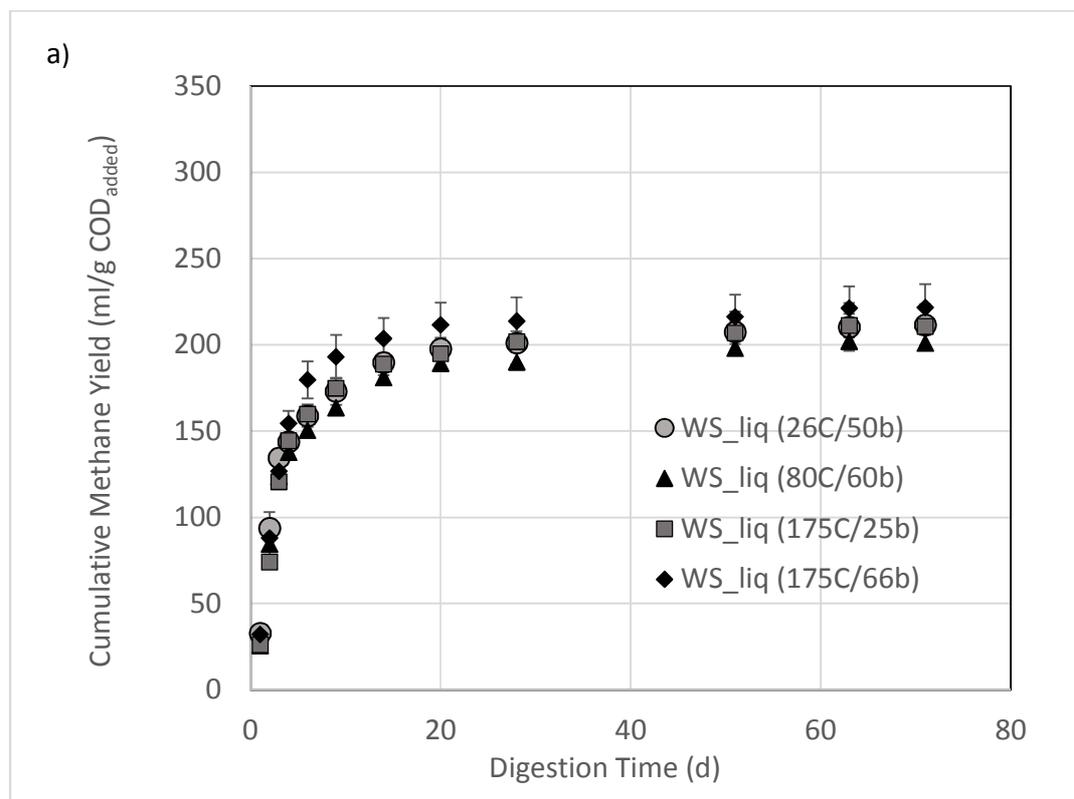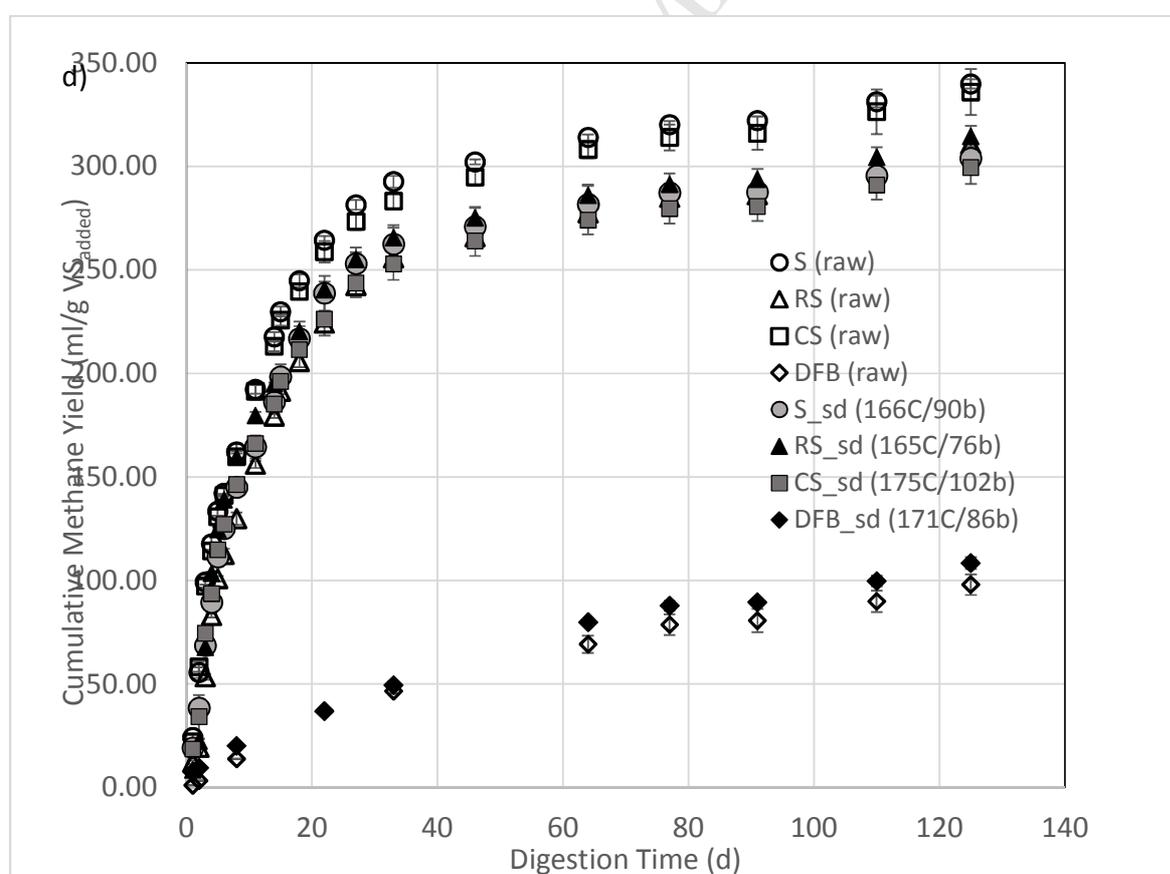

Comment citer ce document :

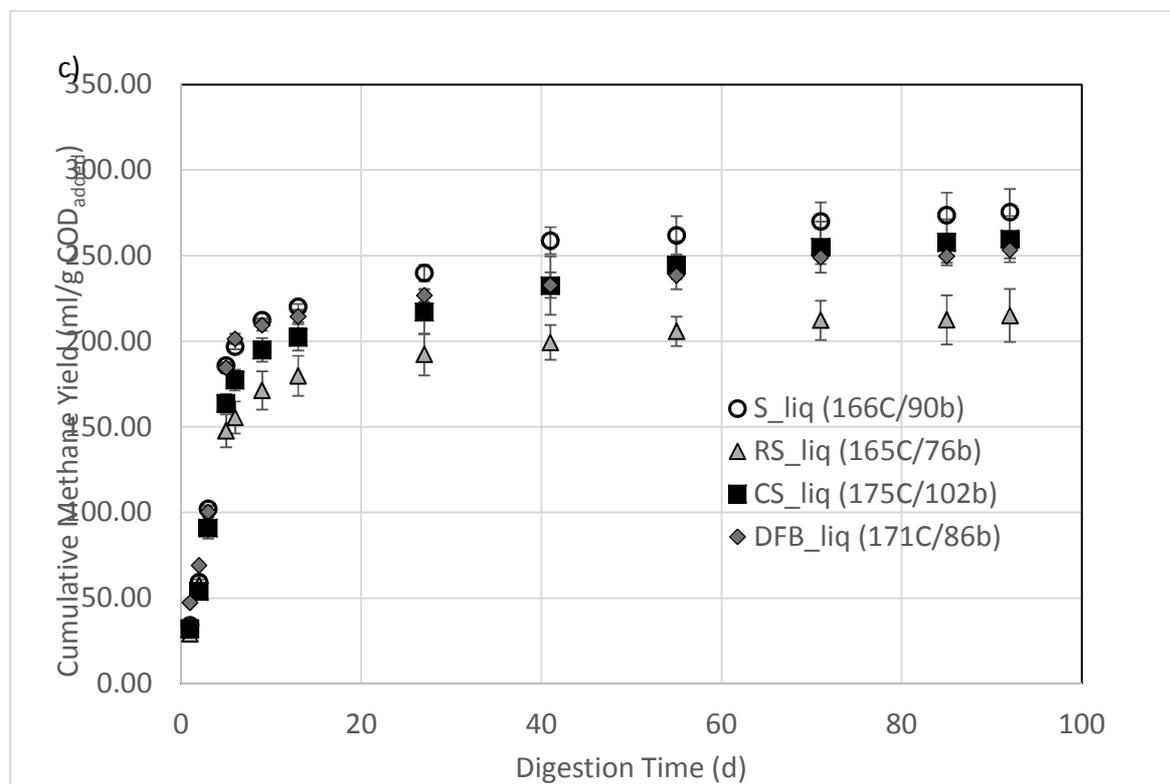

Comment citer ce document :

Figure 3. Specific cumulative methane production from (a) liquid (liq) fraction, (b) solid (sd) fraction of pretreated wheat straw, (c) liquid fraction, (d) solid fraction of pretreated sorghum (S), rice straw (RS), corn stalk (CS), and Douglas fir bark (DFB). Values represent average and error bars represent standard deviation of three replicates.

ACCEPTED MANUSCRIPT

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carrère, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI : 10.1016/j.watres.2017.04.068

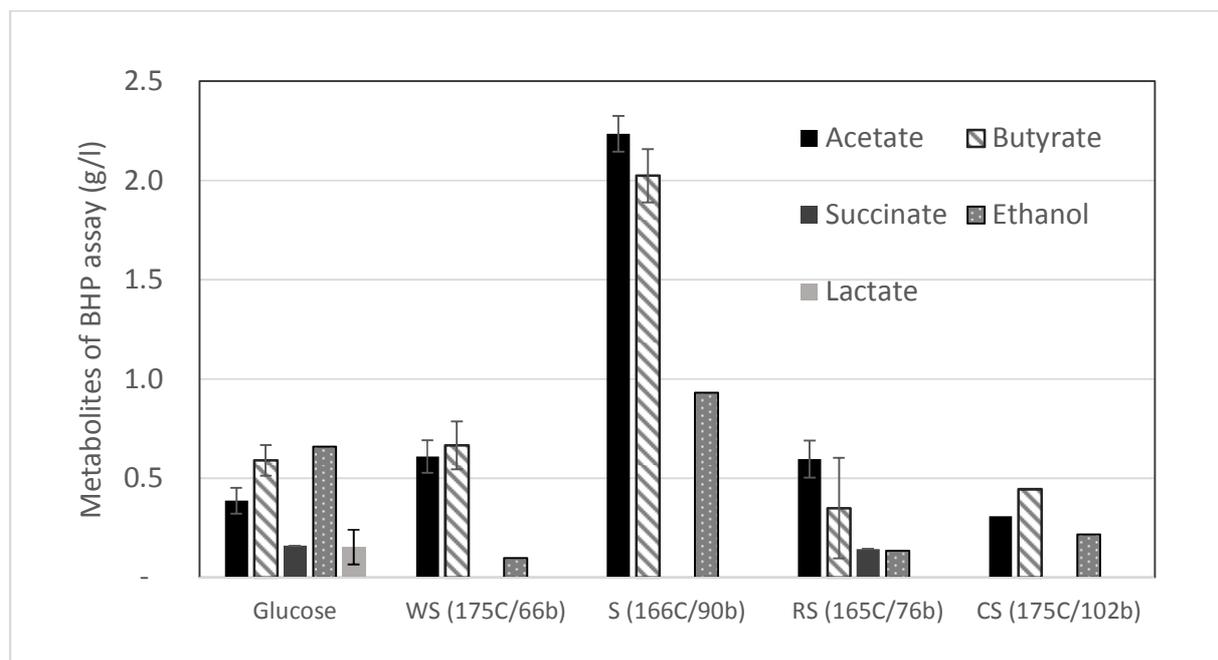


Figure 4. Metabolites determined at the end of BHP assays (point of maximum hydrogen yield). Values represent average and error bars represent standard deviation of 4-8 replicates.

ACCEPTED MANUSCRIPT

- Hydrothermal pretreatment of lignocellulosic biomass for CH₄/H₂ with CO₂ catalyst
- At 26-175°C/25-102 bars, hemicellulose and lignin were reduced up to 42 and 12%
- Rate of biomethane production was enhanced by 20-172% (substrate specific)
- Furans/phenolic by-products of pretreatment below the inhibitory levels for CH₄/H₂
- No discernable effect on extent of biodegradation for straws, sorghum, corn stover

ACCEPTED MANUSCRIPT

Comment citer ce document :

Eskicioglu, C., Monlau, F., Barakat, A., Ferrer, I., Kaparaju, P., Trably, E., Carrère, H. (2017). Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Research*, 120, 32-42. DOI : 10.1016/j.watres.2017.04.068