



Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived microbial consortium

Adèle Lazuka, Cécile Roland, Abdellatif Barakat, Fabienne Guillon, Michael O'Donohue, Guillermina Hernandez Raquet

► To cite this version:

Adèle Lazuka, Cécile Roland, Abdellatif Barakat, Fabienne Guillon, Michael O'Donohue, et al.. Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived microbial consortium. *Bioresource Technology*, 2017, 236, pp.225-233. <10.1016/j.biortech.2017.03.083>. <hal-01607636>

HAL Id: hal-01607636

<https://hal.science/hal-01607636v1>

Submitted on 25 May 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons CC BY 4.0 - Attribution - International License

Accepted Manuscript

Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived microbial consortium

Adèle Lazuka, Cécile Roland, Abdellatif Barakat, Fabienne Guillon, Michael O'Donohue, Guillermina Hernandez-Raquet

PII: S0960-8524(17)30355-3
DOI: <http://dx.doi.org/10.1016/j.biortech.2017.03.083>
Reference: BITE 17787

To appear in: *Bioresource Technology*

Received Date: 18 December 2016
Revised Date: 11 March 2017
Accepted Date: 13 March 2017



Please cite this article as: Lazuka, A., Roland, C., Barakat, A., Guillon, F., O'Donohue, M., Hernandez-Raquet, G., Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived microbial consortium, *Bioresource Technology* (2017), doi: <http://dx.doi.org/10.1016/j.biortech.2017.03.083>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Comment citer ce document :

Lazuka, A., Roland, C., Barakat, A., Guillon, F., O'Donohue, M., Hernandez Raquet, G. (2017). Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived microbial consortium. *Bioresource Technology*, 236, 225-233. DOI : 10.1016/j.biortech.2017.03.083

1 Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a
2 rumen-derived microbial consortium.

3 Adèle Lazuka^{1,2,3}, Cécile Roland^{1,2,3}, Abdellatif Barakat⁴, Fabienne Guillon⁵, Michael

4 O'Donohue^{1,2,3}, Guillermina Hernandez-Raquet^{1,2,3*}

5 ¹⁾ Université de Toulouse, INSA, UPS, LISBP, 135 Avenue de Rangueil, F-31077 Toulouse
 6 Cedex 4, France

7 ²⁾ INRA, UMR792 Ingénierie des Systèmes Biologiques et des Procédés, F-31400 Toulouse,
 8 France

9 ³⁾ CNRS, UMR5504, F-31400 Toulouse, France

10 ⁴⁾ UMR IATE, CIRAD, Montpellier SupAgro, INRA, Université de Montpellier, 34060,
 11 Montpellier, France.

12 ⁵⁾ Centre de Recherche Agro-alimentaire de Nantes, INRA, Rue de la Géraudière, 71627,
 13 44316, Nantes-03, France

14 "LAZUKA Adèle" lazuka@insa-toulouse.fr

15 "Cécile Roland" roland@insa-toulouse.fr

16 "BARAKAT Abdellatif" barakat@supagro.inra.fr

17 "GUILLON Fabienne" Fabienne.Guillon@nantes.inra.fr

18 "O'DONOHUE Michael" michael.odonohue@insa-toulouse.fr

19 * Corresponding author: Guillermina Hernandez-Raquet, Laboratoire d'Ingénierie des

20 Systèmes Biologiques et des Procédés UMR5504, UMR792, CNRS, INRA, INSA, 135

21 avenue de Rangueil, 31077 Toulouse Cedex 04, France. Tel: + 33 (0) 561 55 99 77. Fax: + 33

22 561 55 97 60. Email: hernandg@insa-toulouse.fr

23 **Abstract**

24 Innovative dry chemo- and chemo-mechanical pretreatments form an interesting approach for
25 modifying the native physico-chemical composition of lignocellulose facilitating its microbial
26 conversion to carboxylates. Here, the impact of four dry-pretreatment conditions on the
27 microbial transformation of wheat straw was assessed: milling to 2 mm and 100 μm , and
28 NaOH chemical impregnation at high substrate concentrations combined with milling at 2
29 mm and 100 μm . Pretreatment effect was assessed in the light of substrate structure and
30 composition, its impact on the acidogenic potential and the major enzyme activities of a
31 rumen-derived microbial consortium RWS. Chemo-mechanical pretreatment strongly
32 modified the substrate macroporosity. The highest carboxylate production rate was reached
33 after dry chemo-mechanical treatment with NaOH at 100 μm . A positive impact of the dry
34 chemo-mechanical treatment on xylanase activity was observed also. These results underline
35 that increasing substrate macroporosity by dry chemo-mechanical pretreatment had a positive
36 impact on the microbial acidogenic potential.

37 **Keywords:** lignocellulose bioconversion; anaerobic microbial consortium; carboxylate
38 production; enzymes; dry chemo-mechanical pretreatment.

39 Introduction

40 For over three decades intense R&D activity has focused on the development of industrial
41 processes to convert lignocellulosic (LC) biomass into fuels, energy and value added
42 chemicals, using various combinations of mechanical, chemical and bioconversion
43 technologies (Kim and Dale, 2004). Among the manufacturing routes that have been
44 investigated, the carboxylate platform is rather attractive (Agler et al., 2011). Operating under
45 non-sterilized, non-aerated conditions, the carboxylate platform exploits the robustness and
46 large enzymatic potential of mixed microbial communities for the transformation of LC
47 biomass into carboxylates (Agler et al., 2011). In this platform, microbial communities
48 hydrolyze the LC biomass producing soluble oligomeric and monomeric compounds that are
49 further transformed into short chain carboxylates (or volatile fatty acids – VFA) by acidogenic
50 and acetogenic microorganisms. In this respect, the carboxylate platform is related to the
51 biogas platform, a two-stage anaerobic digestion system that produces carboxylates as
52 intermediates that are then broken down by methanogenic archaea into methane. However, in
53 the carboxylate platform, the products are considered to be building blocks for the production
54 of added value chemicals and materials (e.g polyhydroxyalcanoate bioplastics), and liquid
55 biofuels (Agler et al, 2011; Torella et al, 2013), rather than intermediates for low value
56 renewable energy (i.e. bio-H₂, and bio-CH₄), which is inevitably in direct competition with
57 low-priced fossil resources, such as shale gas.

58 Despite its attractive features, the carboxylate platform is nonetheless limited by the ability to
59 extract fermentable components from LC biomass, which constitutes a highly recalcitrant raw
60 material. Indeed, LC biomass is a composite material composed mainly of cellulose,
61 hemicellulose and lignin. Together, these polymers and other minor components, form a
62 chemically- and structurally-complex, three dimensional matrix that is particularly resistant to
63 both abiotic and biotic aggression. The structural and protective role played by LC-based

structures in plants prevents their destruction by microorganisms and their enzymes (Mosier et al., 2005). To overcome LC biomass recalcitrance, various types of strategies involving a pretreatment step have been investigated (Alvira et al., 2010; Hendriks and Zeeman, 2009). In this case, chemical and/or physical processes are first used to increase the accessible surface area and porosity of LC biomass, thus rendering it more amenable to the subsequent action of biocatalytic agents (Hendriks and Zeeman, 2009; Mosier et al., 2005). Despite the development of numerous pretreatments, cost effectiveness still has to be achieved, notably by reducing non-specific effects and energy expenditure and maximizing beneficial effects for the subsequent biocatalytic processes.

The effect of different pretreatments on LC biomass has been extensively studied (Alvira et al., 2010; Hendriks & Zeeman, 2009; Mosier et al., 2005), revealing that each type of pretreatment is characterized by advantages and disadvantages. For example, chemical treatments often generate fermentation inhibitors while mechanical methods are usually associated with high energy expenditure (Barakat et al., 2013; Jönsson et al., 2013). However, the absolute need for pretreatment is cleverly illustrated by the truism “the only process more expensive than pretreatment is no pretreatment” (Wyman, 2007).

Among the vast array of LC biomass pretreatments that have been tested, alkaline pretreatment using sodium hydroxide is one of the most effective and attractive methods. It presents a high capacity for delignification, disrupts the biomass structure and increases porosity, thus making cellulose and hemicellulose more accessible, but with low sugar degradation (Kaar and Holtzapple, 2000; Mathew et al., 2011; Zhao et al., 2008). Some form of particle size reduction using mechanical methods also usually forms part of pretreatment technologies (Hendriks and Zeeman, 2009), because it is required to increase biomass surface area and can improve depolymerization and reduces residual waste (Barakat et al., 2014; Palmowski and Müller, 2000).

89 Recently, innovative procedures so-called ‘dry chemical’ (DC) and ‘dry chemo-mechanical’
90 (DCM) pretreatments have been developed to reduce energy consumption (Miao et al., 2011,
91 Barakat et al., 2013). DC pretreatment consists of moderate chemical treatment using alkali
92 impregnation of LC biomass at high solids loadings, while dry-chemo-mechanical
93 pretreatment describes a process in which dry chemical pretreatment is performed
94 simultaneously with mechanical particle size reduction (Barakat et al., 2014).
95 Advantageously, these pretreatments reduce the use of chemicals and energy demand,
96 enhance polysaccharide saccharification when using enzyme cocktails (Barakat et al., 2014)
97 and, thanks to high solids loadings, permit process intensification and reactor downsizing.
98 To investigate whether DC and DCM pretreatments can be beneficial for the carboxylate
99 platform, we have investigated the use of these technologies in combination with anaerobic
100 conversion of wheat straw using a lignocellulolytic cow rumen-derived microbial consortium
101 (RWS). The effect of the pretreatments on the subsequent microbial activity has been
102 investigated, monitoring the kinetics of LC biomass conversion, carboxylate production and
103 the dynamics of key enzymatic activities. Our findings reveal that DC pretreatment increased
104 the initial VFA production rate and that this increase was most pronounced when DCM
105 pretreatment was employed. This increase was accompanied by an increase in early phase
106 xylanase activity, but CMCase activity was unchanged. Finally, our results indicate a
107 correlation between lignocellulose macroporosity and its degradability by a hydrolytic
108 microbial consortium.

109 **Materials and methods**

110 **2.1. Wheat straw**

111 A 20 kg batch of wheat straw (Koreli variety grown on an INRA-owned experimental farm,
112 Boissy-le-Repos, France) was harvested (in August 2011), milled to 2 mm using a knife mill

(Retsch SM 100, Germany) and stored at room temperature (20-25°C) until use as the for all the experiments, hereafter referred to as 2 mm wheat straw (biomass A).

2.2. Dry chemical pretreatment

Sodium hydroxide (NaOH) was dissolved in distilled water (5g in 20 mL). Wheat straw at 2 mm (100g) was impregnated during 5h at ambient conditions (25 °C) with this alkaline solution using a pulverizing system (5 g of NaOH per 100 g of wheat straw) according to the procedure described previously (Barakat et al., 20014). The chemically treated wheat straw-2mm was dried at 105 °C (12h) resulting in a final moisture content of 8-10% (w/w) and designated biomass B.

2.3. Mechanical treatment

Biomass A and B were comminuted using an impact mill operating at ambient temperature and 18,000 rpm (Hosokawa-alpine, type UPZ, Augsburg, Germany). Fine particulate fractions were collected using a 100 µm mesh (the material was milled until it passed through the grid) and designated as biomass C and D, respectively.

2.4. Substrate characterization

2.4.1 Substrate composition

For compositional analysis wheat straw (40 mg) was submitted to the sulfuric acid hydrolysis method described by de Souza et al. (2013), analyzing monosaccharides (glucose, xylose and arabinose) by high-performance liquid chromatography (HPLC) using an Ultimate 3000 Dionex separation system equipped with a BioRad Aminex HPX 87H affinity column and a refractive index detector (Thermo Scientific). The protocol used for HPLC analysis was that described elsewhere (Monlau et al., 2012).

Lyophilized wheat straw samples were also analyzed by Fourier transform infrared spectroscopy (FT-IR) analysis using an attenuated total reflection (ATR) Nicolet 6700 FT-IR spectrometer (Thermo Fisher), equipped with a deuterated-triglycine- sulfate (DTGS)

detector, following the procedure described by Lazuka et al. (2015). For FT-IR spectral analysis, the peak ratio 1512:1375 cm⁻¹ was considered representative of the lignin:holocellulose ratio, while peaks at 1430 cm⁻¹ and 898 cm⁻¹ were attributed to crystalline and amorphous cellulose respectively (Monlau et al., 2012), and the ratio of these peaks was considered to be the lateral order index (LOI), which represents the ratio of crystalline:amorphous cellulose.

2.4.2 Determination of particle size and energy consumption

Particle size was analyzed by laser granulometry using a Mastersizer 2000 (Malvern Instruments, Orsay, France).

The energy consumed during milling was determined in triplicates using a watt meter following a previously described procedure (Barakat et al., 2014).

2.4.3 Determination of macroporosity by suction pressure

Macroporosity of the four treated wheat straw samples (A-D) was determined by measuring the water-absorption kinetics at different osmotic pressures (Robertson and Eastwood, 1981). The water retention capacity (macroporosity profile) was obtained by dialysis of hydrated wheat straw samples using three solutions of polyethylene glycol (PEG) (MW 10,000) at 10, 75 and 100 g.L⁻¹ inducing a known suction pressure (0.009, 0.112 and 0.206 MPa, respectively). The water retained by the fiber matrix was related to pore size through suction pressure and surface tension according to equation 1:

$$D = \frac{4S}{\Delta P} \text{ (Eq. 1)}$$

where D (mm) is the pore diameter, S the solute (water) surface tension, ΔP the suction pressure (MPa) used to measure the ratio water held:pore volume.

Water absorption at different suction pressures (used to explore different pore diameters) was determined by presoaking wheat straw samples overnight at 4°C, and transferring the equivalent of 0.2-0.3 g dry wheat straw as hydrated fibers into dialysis bags (6-8 kDa cutoff,

32 mm diameter, Visking R dialysis bag, PolyLabo, Strasbourg, France). The dialysis bags were then sealed and placed in a 100 mL PEG solution and shaken overnight at 37°C (100 cycles.min⁻¹). The content of the dialysis bags was weighed accurately then dried overnight (100°C) to determine dry weight and water content. Each wheat straw sample at each PEG concentration was tested in triplicate. Results (g water g⁻¹ dry sample) represented the difference between the total pore volume (estimated at 10 g/L PEG) and the volume of 1 µm-diameter pores (estimated at 100 g/L PEG), which constitute the pore volume with diameter >1µm likely to be accessible to bacteria. After presoaking, the liquid fraction was collected and the neutral sugar content was evaluated using a Skalar autoanalyzer (Skalar, Breda, Netherlands), employing the sulfuric orcinol method (Tollier and Robin, 1979).

2.4.4 Saccharification with commercial enzymes

Saccharification of the four treated wheat straw samples, A to D, was evaluated using a commercial enzymatic mixture (Celluclast 1.5L Novozyme). Dry wheat straw (1 %, w/w) was incubated for 72h at 50°C with 20 FPU.g⁻¹ dw cellulase supplemented with 81 U.mL⁻¹ β-glucosidase (Novozyme 188) in 50 mM sodium acetate buffer (pH 5.0) containing 0.5 g.L⁻¹ sodium azide. Following centrifugation (7197 g, 10 min at 4°C), the reducing sugar content in the supernatant was quantified using the di-nitro-salicylic acid method (DNS).

2.5. Lignocellulose bioconversion by RWS in anaerobic reactors

Microbial bioconversion of LC substrate by a cow-rumen derived consortium (RWS) that displays a good ability to degrade wheat straw was carried out in anaerobic batch reactors (2L BIOSTAT® A+, Sartorius, Germany). Bioreactors containing wheat straw samples (A to D) as the sole carbon source (20g.L⁻¹) suspended in mineral medium (Lazuka et al., 2015). The bioreactors were operated under agitation (300 rpm) at a mesophilic temperature (35°C) and pH (6.15), which was adjusted by the appropriate addition of H₃PO₄ at the beginning of the experiment (before inoculation) and thereafter regulated by the automated addition of 1 M

NaOH, according to the protocol established by Lazuka et al., (2015). Each microbial bioconversion reactor was performed in biological duplicates over a 15-day period. Wheat straw removal, residual substrate compositional analysis, total organic carbon (TOC), VFA production and enzymatic activities were monitored throughout the incubation period.

2.6. Chemical analyses

To quantify total solids (TS) 10 mL samples were removed, centrifuged (7197 x g, 10 min, 4°C), rinsed twice with distilled water and dried 24h at 105°C. For the mineral fraction (MF), mineralization was performed at 500°C for 2h, and volatile solids (VS) were estimated from the difference between TS and MF. VS degradation was expressed as weight/weight percentages.

The composition of the residual substrate in the reactor was characterized as described above for substrate characterization (section 2.4.1).

VFA production was monitored using a Varian 3900 gas chromatograph as described by Cavaillé et al. (2013). The total organic carbon (TOC) content of the liquid fraction was measured using a TOC analyzer (TOC-V_{CSN}, Shimadzu Co., Japan). Gas composition was analyzed using an HP 5890 gas chromatograph equipped with a conductivity detector and a HAYSEP D column. All chemical measurements were done in technical duplicates.

All the macro-kinetic parameters are expressed as average values obtained from duplicate biological reactors (biological duplicates). Smoothed data and derivatives were obtained after polynomial regression on the raw data. The statistical significance of differences between the types of pretreatment was evaluated by one-way ANOVA (P<0.05) for characterization parameters (LOI, macroporosity, saccharification, composition).

2.6. Enzyme activity assays

To measure enzyme activity, triplicate samples (5 mL) were withdrawn at regular intervals and centrifuged (7197 x g, 10 min, 4°C) yielding a supernatant and a sonicated solid pellet

fraction as described by Lazuka et al. (2015). These two fractions were considered to be representative of extracellular (supernatant), and sum of intracellular and cell-bound (sonicated pellet) localizations respectively. For each reactor and each sampling time, end-point enzymatic activities were measured in technical duplicates in both the extracellular and the intracellular and cell-bound fractions. All enzymatic activities were expressed as averages of the two values obtained from the duplicate reactors.

Xylanase and endoglucanase (CMCase) activity were measured using 1% w/v xylan beechwood (Sigma) and 1% w/v carboxymethyl cellulose (CMC) (Sigma) respectively according to the previously described protocol (Lazuka et al., 2015). One unit of CMCase or 1 unit of xylanase activity (UA, unit of activity) was defined as the amount of enzyme that produces 1 μmol of reducing sugars per minute.

Results and discussion

The impact of dry pretreatment on the kinetics of wheat straw degradation and carboxylate production by a microbial consortium RWS was assessed using four different pretreated wheat straws. Samples A and C were milled to 2 mm, B and D to 100 μm , and C and D were submitted to 5% (w/w) NaOH impregnation at high LC solids. These conditions facilitated the assessment of a possible synergy between dry milling and chemical pretreatment. Moreover, it is important to underline that D was first chemically pretreated and then milled, because this sequence is expected to reduce the energy demand associated with milling and increase biomass component extractability (Barakat et al., 2014).

3.1. Characterization of the pretreated wheat straw

The energy consumption associated with the production of A was 223.3 kJ.kg^{-1} , while the production of B required 2.8 times more energy (Table1). The energy demand associated with the production of C was the same as that for A, which is logical since chemical impregnation was carried out after milling. However, energy consumption associated with the production of

238 D (100 μm) was almost half that required to produce B, which clearly demonstrates that prior
239 chemical pretreatment was beneficial. It is likely that during NaOH impregnation, the
240 lignocellulosic matrix is weakened and disintegrated into finer components, thus increasing
241 overall energetic efficiency (Kaar and Holtzapple, 2000; Mathew et al., 2011; Zhao et al.,
242 2008; Barakat et al., 2014).

243 In order to identify the biomass features that affect microbial bioconversion, samples A to D
244 were characterized with regard to four parameters: (i) the LOI which gives insight into
245 substrate crystallinity; (ii) the 1 μm -pore volume or macroporosity, considered as the volume
246 accessible to bacteria (Guillon et al., 1998); (iii) biochemical composition in terms of
247 cellulose, hemicellulose and lignin (C, H, L) and (iv) the enzymatic saccharification under
248 standard conditions. Figure 1A shows that particle size had no significant impact on wheat
249 straw crystallinity (LOI), irrespective of the substrate pretreatment. However, chemical
250 pretreatment decreased LOI from 0.766 ± 0.079 (mean of A and B substrates, without
251 chemical pretreatment) to 0.572 ± 0.05 (mean of C and D substrates, with chemical
252 pretreatment), irrespective of particle size. Regarding the impact of NaOH pretreatment on
253 cellulose crystallinity, previous studies have provided contradictory results. For instance,
254 when applying DCM, soda pretreatment to wheat straw at a particle size below 60 μm ,
255 Barakat et al. (2014) obtained an 11% increase in crystallinity. This result was attributed to
256 the solubilization of amorphous polymers and not to an actual increase in crystallinity. In fact,
257 several parameters can impact cellulose crystallinity, notably the severity of a given
258 treatment. Bali et al. (2015) showed that the cellulose crystallinity of alkali-pretreated
259 *Populus* varied as function of severity. The authors showed that shorter pretreatments (lower
260 severity) reduced cellulose crystallinity, probably through the actual disruption of the
261 cellulose crystalline structure. However, in the same study, it was reported that crystallinity
262 increased when the pretreatment was prolonged, this observation being attributed to the

solubilization of the amorphous cellulose component. The results obtained in the present study are consistent with the hypothesis that NaOH pretreatment causes the cellulose to swell and decreases cellulose crystallinity, as described by Agbor et al. (2011), suggesting that the severity of the applied treatment did not induce any rise in crystallinity.

The comparison of the macroporosity of samples A to D (Fig. 1B) revealed a negative correlation between macroporosity with fine milling (100 μm) in the absence of chemical pretreatment. For sample B, macroporosity was $1.5 \pm 0.3 \text{ g.g}^{-1}$, which is lower than that measured for A, $2.9 \pm 0.4 \text{ g.g}^{-1}$. On the other hand, soda pretreatment had a positive effect on macroporosity, reaching $4.4 \pm 0.9 \text{ g.g}^{-1}$ and $4.6 \pm 0.6 \text{ g.g}^{-1}$ for samples C and D, respectively. These results suggest that milling to 100 μm (B) actually reduced accessibility to bacteria, whereas chemical pretreatment (i.e. samples C and D) increased it. In early studies on resistant starch dietary fiber, a correlation between macroporosity (generally in the range 1 and 10 g.g^{-1}) and substrate fermentability was described (Guillon et al., 1998; Robertson et al., 2000). Consistently, in the present study, macroporosity was shown to be correlated to the quantity of fermentable sugars formed by pretreatment, with samples C and D displaying the highest amounts of soluble neutral sugars ($1.705 \pm 0.003 \text{ mg.L}^{-1}$ and $2.394 \pm 0.003 \text{ mg.L}^{-1}$, respectively), while non-chemically treated substrates displayed lower levels ($0.948 \pm 0.004 \text{ mg.L}^{-1}$ and $0.682 \pm 0.003 \text{ mg.L}^{-1}$ for substrates A and B, respectively).

The biochemical analysis of the four wheat straw samples revealed no significant compositional changes after pretreatment, with the average composition being (in % w/w) $43.6 \pm 3.4 \%$ cellulose, $23.2 \pm 1.4 \%$ hemicellulose and $19.7 \pm 1.7 \%$ lignin (Fig. 1C), values that are similar to those measured in the raw substrate. This compositional stability can be explained by the fact that no extraction was performed, meaning that solubilized components remained in the sample, and also indicates that very little biomass loss occurred, consistent with the findings of Barakat et al. (2014). Carbon loss is often associated with alkaline

288 pretreatments and occurs in the form of carbon dioxide release associated with peeling
289 reactions. This phenomenon is highly correlated with the pretreatment severity factor and
290 substrate recalcitrance (Hendriks and Zeeman, 2009; Karp et al., 2015). Therefore, the results
291 obtained on the biochemical composition of LC before and after pretreatment indicate that the
292 pretreatments used in this study are relatively mild, ensuring good mass conservation.
293 Enzymatic saccharification of the four pretreated materials (Fig. 1D) did not reveal any clear
294 correlations between particle size and substrate accessibility to enzyme hydrolysis. However,
295 soda treatment clearly enhanced the enzymatic release of reducing sugars, since on the dry
296 chemo-mechanical pretreatment (D) the release of soluble reducing sugars was 2-fold higher
297 when compared to A and B (no soda treatment) and approximately 1.2-fold higher than that
298 obtained with C, consistent with previous findings (Barakat et al. 2014).

299 In conclusion, assuming that cellulose crystallinity, the aptitude towards enzymatic
300 saccharification and macroporosity are reliable indicators of pretreated substrate accessibility
301 for microbial bioconversion, it appears reasonable to suggest that samples C and D should be
302 readily amenable to bioconversion by suitable microbial consortia. In this regard, considering
303 samples A and B, which had not been submitted to soda treatment, the only clear difference
304 concerned their macroporosity (lower for B). This makes prediction more difficult, but
305 suggests that B (100 μm particle size) might be less amenable to microbial bioconversion.

306 3.2. Fermentation of the pretreated wheat straw by the microbial consortium RWS

307 3.2.1 Wheat straw degradation and VFA production by RWS

308 Wheat straw A to D were anaerobically fermented by the RWS consortium. The biochemical
309 analysis of residual wheat straw revealed that only the holocellulose fraction was degraded,
310 irrespective of the pretreatment applied, meaning that the lignin concentration was unchanged
311 throughout the experiment (average lignin concentration of $4.35 \pm 0.55 \text{ g.L}^{-1}$ for all reactors
312 and sampling times, representing $21.7 \pm 2.75 \%$ w/w of the initial substrates; data not show).

Therefore, subsequently wheat straw degradation was expressed more simply as the percentage of holocellulose-related carbon (in moles) removal (expressed as percentage of the initial holocellulose-related carbon content, % $iCmol_{Holo}$).

In this respect, the results obtained for holocellulose removal (% $iCmol_{Holo}$) on samples A, C and D at the end of the experiment were similar with removal values of 64.2 ± 1.0 , 68.8 ± 3.4 and 58.2 ± 5.4 %, respectively (Fig. 2A). As predicted by the macroporosity analysis, despite the larger surface area available in B, this sample was less apt for bioconversion by the RWS consortium (37.0 ± 1.1 % of holocellulose removed at the end of the experiment). Likewise, measurement of specific VFA production (expressed as moles of carbon of VFA produced per mole of carbon of the initial holocellulose, $Cmol_{VFA} \cdot iCmol^{-1}_{Holo}$) revealed a similar trend. Maximal VFA production levels (approximately $0.45 Cmol_{VFA} \cdot iCmol^{-1}_{Holo}$) were obtained with A, C and D at the end of the incubation, whereas significantly lower VFA production was recorded for B ($0.31 \pm 0.02 Cmol_{VFA} \cdot iCmol^{-1}_{Holo}$) (Fig. 2B). Accordingly, the holocellulose degradation and VFA production rates (Fig. 2C and D) displayed similar trend for each substrate but the maximal value and time needed to reach such maximum value varied importantly in function of the pretreatment applied. Comparing these specific rates for the different pretreated substrates, it is noteworthy that the highest rates for holocellulose degradation and VFA production were obtained after DCM pretreatment (sample D), DC pretreatment being the next best option (sample C). Indeed, with these samples, holocellulose degradation reached a maximum at an earlier stage in the experiment (i.e. 12 and 14.6 % $iCmol^{-1}_{Holo} \cdot day^{-1}$ after 3.5 and 2.8 days for C and D, respectively) whereas maximum degradation rate was lower and occurred later for A and even more for B (i.e. 7.6 and 4 % $iCmol^{-1}_{Holo} \cdot day^{-1}$ after 4.8 and 5.2 days for A and B, respectively). Likewise, the highest VFA production rates were also measured for C and D (0.066 and $0.094 Cmol_{VFA} \cdot iCmol^{-1}_{Holo} \cdot day^{-1}$, respectively), with maximum production being reached after 2.5 days. In contrast, with

samples A and B, VFA production peaked after 5 days, with rates reaching only 0.045 and
 0.028 $\text{Cmol}_{\text{VFA}}/\text{iCmol}^{-1}_{\text{Holo}}\cdot\text{day}^{-1}$, respectively. Overall, these results underline the beneficial
 effect of the soda treatment, particularly when it was coupled to mechanical milling to
 100 μm .
 Compared to the fermentation of 2mm wheat straw (sample A), the VFA, CO_2 and H_2 yields
 increased when chemically-pretreated substrates were used (Table 2). The highest yields were
 systematically obtained after DCM pretreatment (sample D), while the fermentation of
 samples B and C procured intermediate values.
 The composition of the carboxylates produced at the end of the experiment (Table 2), was for
 all samples mostly acetic, propionic and butyric acids, with minor quantities of valeric and
 hexanoic acids. Quantification of TOC level in the supernatant corresponded to the VFA
 concentration (data not shown) indicated that no other metabolites were produced. The main
 difference was observed for chemically-treated samples C and D. The fermentation of these
 substrates procured a higher amount of butyric acid, which was associated with a lower level
 of acetic acid. It is known that members of the *Clostridia* genus are able to ferment hexoses
 into acetate, and xylose into butyrate and dihydrogen (Jaros et al., 2013; Liu and Yang, 2006;
 Raganati et al., 2014). Furthermore, it is known that alkaline pretreatment efficiently removes
 hemicellulose from LC biomass (Hendriks and Zeeman, 2009). Since *Clostridia* is one of the
 main microbial groups found in RWS (Lazuka et al., 2015), it is possible that a metabolic shift
 from acetate (from glucose) to butyrate (from xylose) pathway in this microbial group
 induced a higher proportion of butyrate in soda treatment conditions. Nevertheless, to confirm
 such a hypothesis, further characterization of the microbial community's composition during
 incubation time will be needed.
 Regarding particle size, it is often assumed that size reduction facilitates substrate
 accessibility to enzymes and microorganisms. However, herein we show that extremely fine

363 milling (i.e. to 100 μ m) has an adverse effect on biodegradation and VFA production. This
364 result could be attributed to the liberation of inhibitory compounds or to an increase in
365 recalcitrance due to pretreatment severity. However, as discussed above, LOI results revealed
366 that crystallinity did not increase. Moreover, it is unlikely that mechanical milling would
367 generate inhibitors of the type associated with chemical pretreatments (Kumar et al., 2009). In
368 contrast, measurements showed that milling decreased macroporosity level, a phenomenon
369 that was no doubt responsible for the lowered fiber degradation and thus fermentability of
370 sample B.

371 Previous studies comparing the degradability of lignocellulosic substrates showed a positive
372 effect of pretreatment on the degradation performance of different microbial consortia. For
373 instance, Wongwilaiwalin et al. (2013) reported an increase in the degradation of alkali-
374 pretreated rice straw, sugarcane bagasse and corn stover by two selected thermophilic
375 consortia BGC-1 and CRC-1 (50°C). Compared to the raw substrate, Guo et al., (2011) also
376 reported a 3.3-fold increase in the degradation of NaOH-pretreated rice straw by the MC1
377 thermophilic consortium (50°C) and the production of 2.72 g.L⁻¹ organic acids after 3 days.
378 Similarly, Zhao et al. (2014) reported 75% degradation of alkali-pretreated rice straw by the
379 BMC-9 consortium, which accumulated a maximum of 3.3 mg VFA.L⁻¹ after 12 days
380 incubation at 60°C. Although it is difficult to compare the bioconversion efficiency reported
381 in studies applying different pretreatment protocols (different NaOH concentration, solids
382 loadings, incubation period) and culture conditions (inocula, culture media, incubation
383 temperature), it is clear that alkali-pretreatment enhances the accessibility of lignocellulose
384 towards bacteria. In this respect, the results reported herein are consistent with previous data,
385 although VFA production levels were much higher, probably because of the strict anaerobic
386 conditions that were applied (static or anoxic conditions were used in previous studies).
387 Indeed, strict anaerobic conditions prevent microbial VFA consumption.

388 3.2.2. Enzymatic activity profiles and biomass composition during wheat straw degradation
389 by RWS

390 Xylanase and CMCase activities were measured regularly over the 15-day incubation period
391 (Figure 3). For xylanase activity, two distinct profiles can be distinguished. Fermentation of
392 the dry milled samples, A and B, procured maximum activities of $0.61 \pm 0.14 \text{ UA.mL}^{-1}$ and
393 $0.81 \pm 0.11 \text{ UA.mL}^{-1}$, respectively, after 5 and 7 days of incubation. Thereafter, the activities
394 remained stable. In contrast, the dry milled, chemically-pretreated samples, C and D, procured
395 maximum enzyme activities after just 3 days of incubation, with the two activities attaining
396 approximately 1.2 UA.mL^{-1} . Thereafter, the activities decreased slightly (Figure 3A).

397 Correlating this data with the dynamics of hemicellulose degradation (Supplementary data
398 and Figure 3C) revealed that the highest hemicellulose degradation rates (Figure 3C)
399 coincided with increasing xylanase activity. For chemically-treated samples, measurements
400 performed at day 1 revealed that xylanase levels were quite low, although hemicellulose
401 degradation had already started, suggesting that the chemical pretreatment had already
402 degraded the xylans, producing xylo-oligosaccharides. This observation is consistent with the
403 release of free sugars observed after 24h presoaking during macroporosity measurements.

404 Comparing xylanase activity profiles and hemicellulose degradation with those of CMCase
405 and cellulose degradation revealed quite different trends (Figure 3B and 3D). CMCase
406 activity remained low (approximately 0.05 UA.mL^{-1}) in all of the experiments, irrespective of
407 pretreatment. Moreover, no reliable correlations between CMCase activity and cellulose
408 degradation rates were evidenced, CMCase activity did appear to reach maximum levels
409 earlier (around day 4) in the case of samples C and D, compared to A and B (peaking after
410 day 5). Correspondingly, cellulose degradation rates were also reached earlier (around day 3)
411 for samples C and D (12.7 and $16.0 \text{ \%mCmol.day}^{-1}$ respectively), whereas maximum rates in
412 the case of A and B (7.5 and $5 \text{ \%mCmol.day}^{-1}$ respectively) were achieved latter (about 5

days). Taken together, our results indicate that hemicellulose and cellulose were degraded simultaneously. However, in the case of the chemically-pretreated samples the hemicellulose was probably solubilized and partially degraded, meaning that xylose was more readily available at early stage for bioconversion. To understand whether the different CMCase activity profiles reflect differential attack of the amorphous and crystalline fractions of cellulose, the evolution of crystallinity was investigated throughout the bioconversion of the four wheat straw samples. Figure 4 shows that crystallinity (LOI) evolved differently for each substrate. Since LOI is the ratio of crystalline versus amorphous cellulose, increases in LOI correlate with increased degradation of amorphous cellulose relative to the crystalline fraction. The microbial bioconversion of sample A was characterized by increasing LOI (from 0.73 ± 0.04 to 0.98 ± 0.11), whereas bioconversion sample B produced an opposite trend (decreased LOI, Fig. 4). However, in the chemically-pretreated samples (C and D) LOI remained mostly unchanged, suggesting that amorphous cellulose was preferentially degraded during substrate A fermentation, while the attack of the crystalline fraction of substrate B appeared to be facilitated by milling pretreatment. It is known that endocellulases mainly act on amorphous cellulose regions, while exocellulases act on crystalline regions (Lynd et al., 2002). Hence, simply measuring CMCase did not provide a complete view of cellulose degradation during RWS-mediated bioconversion. Nevertheless, our results indicate that RWS did possess a full cellulose arsenal, allowing it to degrade both amorphous and crystalline cellulose. Caution should nonetheless apply, because determining LOI using FT-IR only procures surface-related information, thus it is unclear whether FT-IR provides information on intra-fiber crystallinity. Further analyses at the metaproteomics will no doubt be needed to demonstrate whether RWS can adapt its enzymatic pool to a substrate structure.

437 **Conclusion**

438 Dry milling combined with NaOH pretreatment enhanced wheat straw enzymatic hydrolysis
439 and bioconversion using a microbial consortium RWS, leading to increased xylanase activity
440 and VFA production rate. Compared to raw wheat straw, the optimal pretreatment was dry
441 milling to 100 μm , combined to alkaline impregnation, which procured a greater than two-
442 fold increase in VFA production rate. Acetic, propionic and butyric acids were the main VFA
443 produced by RWS, irrespective of the pretreatment method. An increase in butyric acid
444 production was observed with chemically-pretreated substrates. Macroporosity appeared as
445 the parameter that best predicts the biological acidogenic potential of RWS.

446 **Acknowledgments.** This research was supported by the French National Agency for Energy
447 and the Environment (ADEME), the CEPIA department of INRA and the PROBIOS project
448 funded by the Carnot Institute 3BCAR. We would like to acknowledge M. Abadie's important
449 contribution in enzymatic analysis. M. Bounouba and E. Mangelles are also thanked for their
450 technical support.

451

References

- 1) Agbor, V.B., Cicek, N., Sparling, R., Berlin, A., Levin, D.B., 2011. Biomass pretreatment: fundamentals toward application. *Biotechnol. Adv.* 29, 675–685.
- 2) Agler, M.T., Wrenn, B.A., Zinder, S.H., Angenent, L.T., 2011. Waste to bioproduct conversion with undefined mixed cultures: the carboxylate platform. *Trends Biotechnol.* 29, 70–78.
- 3) Alvira, P., Tomás-Pejó, E., Ballesteros, M., Negro, M.J., 2010. Pretreatment technologies for an efficient bioethanol production process based on enzymatic hydrolysis: A review. *Bioresour. Technol.*, Special Issue on Lignocellulosic Bioethanol: Current Status and Perspectives 101, 4851–4861.
- 4) Bali, G., Meng, X., Deneff, J.I., Sun, Q., Ragauskas, A.J., 2015. The effect of alkaline pretreatment methods on cellulose structure and accessibility. *Chem. Sus. Chem.* 8, 275–279.
- 5) Barakat, A., Chuetor, S., Monlau, F., Solhy, A., Rouau, X., 2014. Eco-friendly dry chemo-mechanical pretreatments of lignocellulosic biomass: Impact on energy and yield of the enzymatic hydrolysis. *Appl. Energy* 113, 97–105.
- 6) Barakat, A., de Vries, H., Rouau, X., 2013. Dry fractionation process as an important step in current and future lignocellulose biorefineries: a review. *Bioresour. Technol.* 134, 362–373.
- 7) Cavaillé, L., Grousseau, E., Pocquet, M., Lepeuple, A.-S., Uribelarrea, J.-L., Hernandez-Raquet, G., Paul, E., 2013. Polyhydroxybutyrate production by direct use of waste activated sludge in phosphorus-limited fed-batch culture. *Bioresour. Technol.* 149, 301–309.

Comment citer ce document :

Lazuka, A., Roland, C., Barakat, A., Guillon, F., O'Donohue, M., Hernandez Raquet, G. (2017). Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived microbial consortium. *Bioresource Technology*, 236, 225-233. DOI : 10.1016/j.biortech.2017.03.083

- 472 8) De Souza, A.C., Rietkerk, T., Selin, C.G.M., Lankhorst, P.P., 2013. A robust and universal
473 NMR method for the compositional analysis of polysaccharides. Carbohydr. Polym. 95, 657–
474 663.
- 475 9) Guillon, F., Auffret, A., Robertson, J.A., Thibault, J.-F., Barry, J.-L., 1998. Relationships
476 between physical characteristics of sugar-beet fibre and its fermentability by human faecal
477 flora. Carbohydr. Polym. 37, 185–197.
- 478 10) Guo, P., Mochidzuki, K., Cheng, W., Zhou, M., Gao, H., Zheng, D., Wang, X., Cui, Z.,
479 2011. Effects of different pretreatment strategies on corn stalk acidogenic fermentation using
480 a microbial consortium. Bioresour. Technol. 102, 7526–7531.
- 481 11) Hendriks, A.T.W.M., Zeeman, G., 2009. Pretreatments to enhance the digestibility of
482 lignocellulosic biomass. Bioresour. Technol. 100, 10–18.
- 483 12) Jaros, A.M., Rova, U., Berglund, K.A., 2013. Acetate adaptation of *Clostridia*
484 *tyrobutyricum* for improved fermentation production of butyrate. Springerplus. 2: 47.
- 485 13) Jönsson, L.J., Alriksson, B., Nilvebrant, N.-O., 2013. Bioconversion of lignocellulose:
486 inhibitors and detoxification. Biotechnol. Biofuels 6, 16.
- 487 14) Kaar, W.E., Holtzapple, M.T., 2000. Using lime pretreatment to facilitate the enzymic
488 hydrolysis of corn stover. Biomass Bioenergy 18, 189–199.
- 489 15) Karp, E.M., Resch, M.G., Donohoe, B.S., Ciesielski, P.N., O'Brien, M.H., Nill, J.E.,
490 Mittal, A., Biddy, M.J., Beckham, G.T., 2015. Alkaline pretreatment of switchgrass. ACS
491 Sustain. Chem. Eng. 3: 1479–1491.
- 492 16) Kim, S., Dale, B.E., 2004. Global potential bioethanol production from wasted crops and
493 crop residues. Biomass Bioenergy 26, 361–375.

- 494 17) Kumar, P., Barrett, D.M., Delwiche, M.J., Stroeve, P., 2009. Methods for pretreatment of
495 lignocellulosic biomass for efficient hydrolysis and biofuel production. Ind. Eng. Chem. Res.
496 48, 3713–3729.
- 497 18) Lazuka, A., Auer, L., Bozonnet, S., Morgavi, D.P., O'Donohue, M., Hernandez-Raquet,
498 G., 2015. Efficient anaerobic transformation of raw wheat straw by a robust cow rumen-
499 derived microbial consortium. Bioresour. Technol. 196, 241–249.
- 500 19) Liu, X., Yang, S.-T., 2006. Kinetics of butyric acid fermentation of glucose and xylose by
501 *Clostridium tyrobutyricum* wild type and mutant. Process Biochem. 41, 801–808.
- 502 20) Lynd, L.R., Weimer, P.J., van Zyl, W.H., Pretorius, I.S., 2002. Microbial cellulose
503 utilization: fundamentals and biotechnology. Microbiol. Mol. Biol. Rev. 66, 506–577.
- 504 21) Mathew, A.K., Chaney, K., Crook, M., Humphries, A.C., 2011. Alkaline pre-treatment of
505 oilseed rape straw for bioethanol production: evaluation of glucose yield and pre-treatment
506 energy consumption. Bioresour. Technol. 102, 6547–6553.
- 507 22) Miao, Z., Grift, T.E., Hansen, A.C., Ting, K.C., 2011. Energy requirement for
508 comminution of biomass in relation to particle physical properties. Ind. Crops Prod. 33, 504–
509 513.
- 510 23) Monlau, F., Barakat, A., Steyer, J.P., Carrere, H., 2012. Comparison of seven types of
511 thermo-chemical pretreatments on the structural features and anaerobic digestion of sunflower
512 stalks. Bioresour. Technol. 120, 241–247.
- 513 24) Mosier, N., Wyman, C., Dale, B., Elander, R., Lee, Y.Y., Holtzapple, M., Ladisch, M.,
514 2005. Features of promising technologies for pretreatment of lignocellulosic biomass.
515 Bioresour. Technol. 96, 673–686.

- 516 25) Palmowski, L.M., Müller, J.A., 2000. Influence of the size reduction of organic waste on
517 their anaerobic digestion. *Water Sci. Technol.* 41, 155–162.
- 518 26) Raganati, F., Procentese, A., Olivieri, G., Russo, M.E., Salatino, P., Marzocchella, A.,
519 2014. MFA of *clostridium acetobutylicum* pathway: The role of glucose and xylose on the
520 acid formation/uptake. *Chem. Eng. Trans.* 38, 337–342.
- 521 27) Robertson, J.A., de Monredon, F.D., Dyssele, P., Guillon, F., Amado, R., Thibault, J.-F.,
522 2000. Hydration properties of dietary fibre and resistant starch: a European collaborative
523 study. *LWT - Food Sci. Technol.* 33, 72–79.
- 524 28) Robertson, J.A., Eastwood, M.A., 1981. A method to measure the water-holding
525 properties of dietary fibre using suction pressure. *Br. J. Nutr.* 46, 247–255.
- 526 29) Tollier, M.T., Robin, J.P. (1979) Adaptation de la méthode à l'orcinol sulfurique au
527 dosage automatique des oses neutres et totaux. *Ann. Technol. Agric.* 28, 1-15
- 528 30) Torella, J.P., Ford, T.J., Kim, S.N., Chen, A.M., Way, J.C., Silver, P.A. 2013. Tailored
529 fatty acid synthesis via dynamic control of fatty acid elongation. *PNAS*, 110:11290-5.
- 530 31) Wyman C.E. 2007 What is (and is not) vital to advancing cellulosic ethanol. *Trends*
531 *Biotechnol.* 25: 153-157
- 532 32) Wongwilaiwalin, S., Laothanachareon, T., Mhuantong, W., Tangphatsornruang, S.,
533 Eurwilaichitr, L., Igarashi, Y., Champreda, V., 2013. Comparative metagenomic analysis of
534 microcosm structures and lignocellulolytic enzyme systems of symbiotic biomass-degrading
535 consortia. *Appl. Microbiol. Biotechnol.* 97, 8941–8954.

536 33) Zhao, H., Yu, H., Yuan, X., Piao, R., Li, H., Wang, X., Cui, Z., 2014. Degradation of
537 lignocelluloses in rice straw by BMC-9, a composite microbial system. J. Microbiol.
538 Biotechnol. 24, 585–724.

539 34) Zhao, Y., Wang, Y., Zhu, J.Y., Ragauskas, A., Deng, Y., 2008. Enhanced enzymatic
540 hydrolysis of spruce by alkaline pretreatment at low temperature. Biotechnol. Bioeng. 99,
541 1320–1328.

542

Comment citer ce document :

Lazuka, A., Roland, C., Barakat, A., Guillon, F., O'Donohue, M., Hernandez Raquet, G. (2017).
Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived
microbial consortium. Bioresource Technology, 236, 225-233. DOI : 10.1016/j.biortech.2017.03.083

543 **Figure captions**


544 **Figure 1.** Characterization of the pretreated wheat straw substrates. (A) Lateral order index
545 (LOI). (B) Macroporosity estimated at 1 μm -pore volume determined as the difference
546 between total and inferior-to-1 μm pore volume. (C) Biochemical composition of wheat straw
547 (Cellulose -C, hemicellulose -H and lignin -L). The types of pretreatment are indicated by the
548 bar colors as in A. (D) Reducing sugars liberated from wheat straw by the saccharification test
549 performed under standard conditions (Cellulase, 20 FPU.L⁻¹, β -glucosidase 81U.mL⁻¹, 72h,
550 50°C, pH 5). Error bars indicate the standard deviation of the mean of three technical
551 replicates. Different lowercase letters indicate differences within a treatment (one-way
552 ANOVA, P<0.05).

553 **Figure 2.** Wheat straw transformation kinetics by RWS incubated with the four pretreated
554 wheat straws. (A) Holocellulose degradation and (C) Holocellulose degradation rate. (B)
555 Specific VFA production and (D) Specific VFA production rate. Experimental points and
556 smoothed curves are presented with error bars corresponding to the standard deviation of the
557 mean of two biological replicates.

558 **Figure 3.** Kinetics of enzymatic activity and polysaccharide degradation throughout the
559 fermentation of pretreated-wheat straw by a RWS consortium. Xylanase (A) and CMCase (B)
560 activity and cellulose (C) and hemicellulose (D) degradation rates. Experimental points and
561 smoothed curves are presented with error bars corresponding to the standard deviation of two
562 biological replicates.

563 **Figure. 4.** Lateral order index (LOI) profiles during fermentation of pretreated wheat straw by
564 a RWS consortium. Error bars correspond to the standard deviation of 2 biological duplicates.

565 **Figure 1**

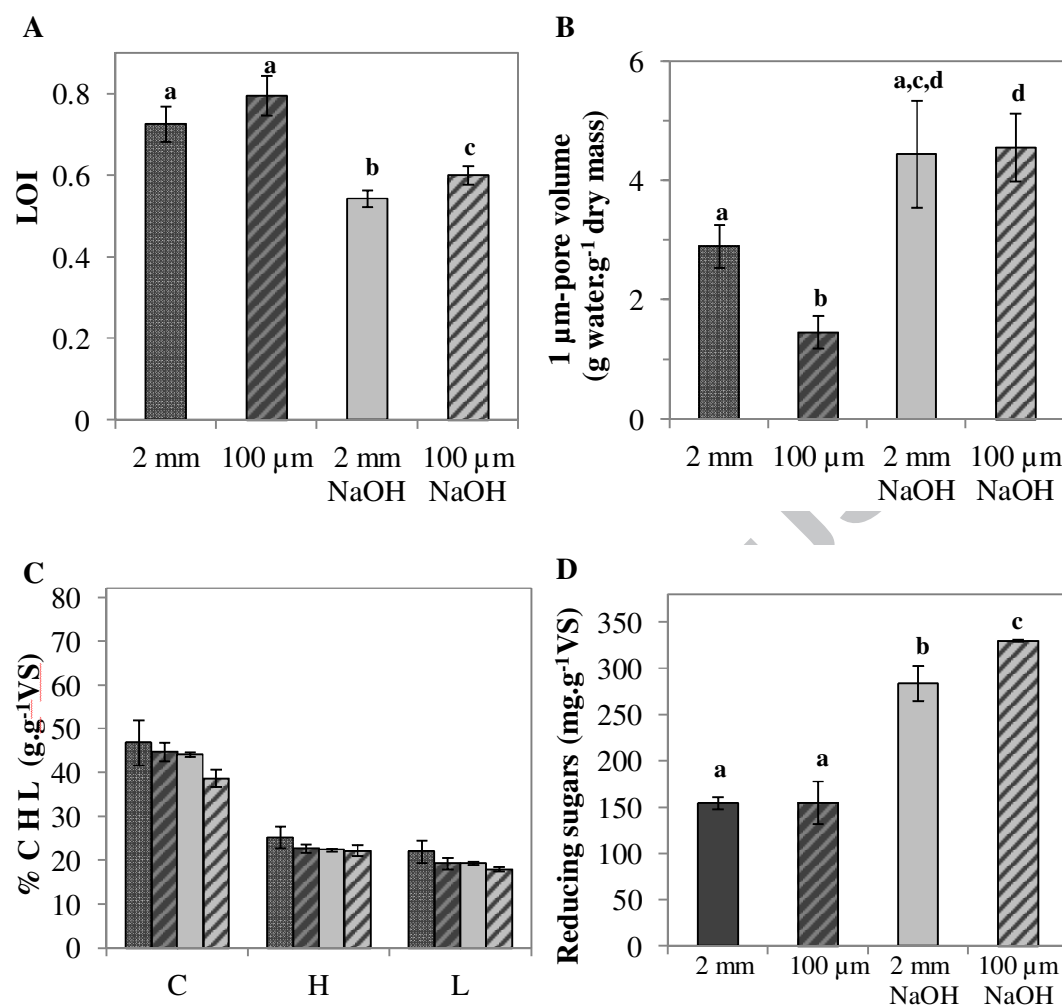

567

568

Figure 2.



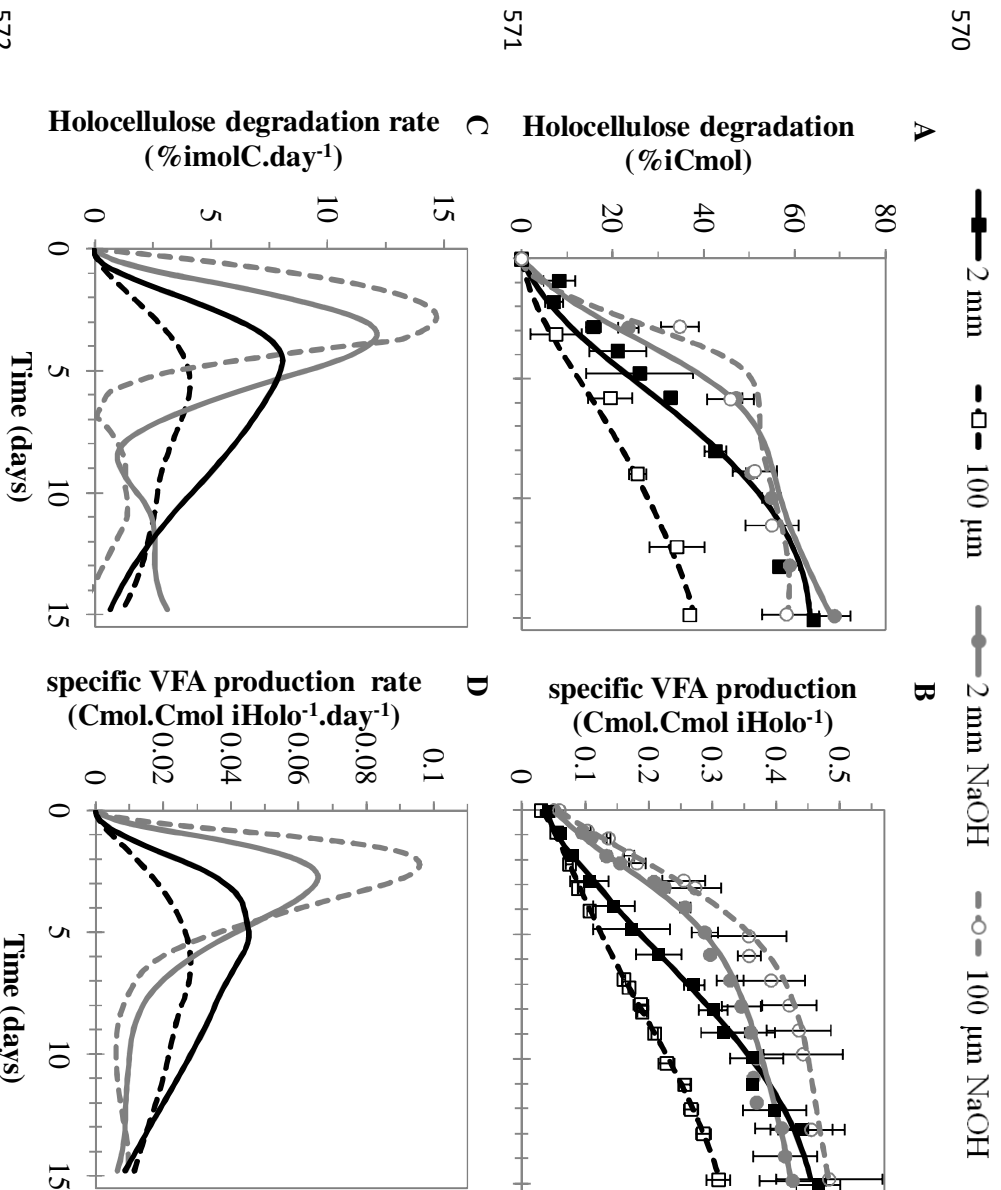


Figure 3.

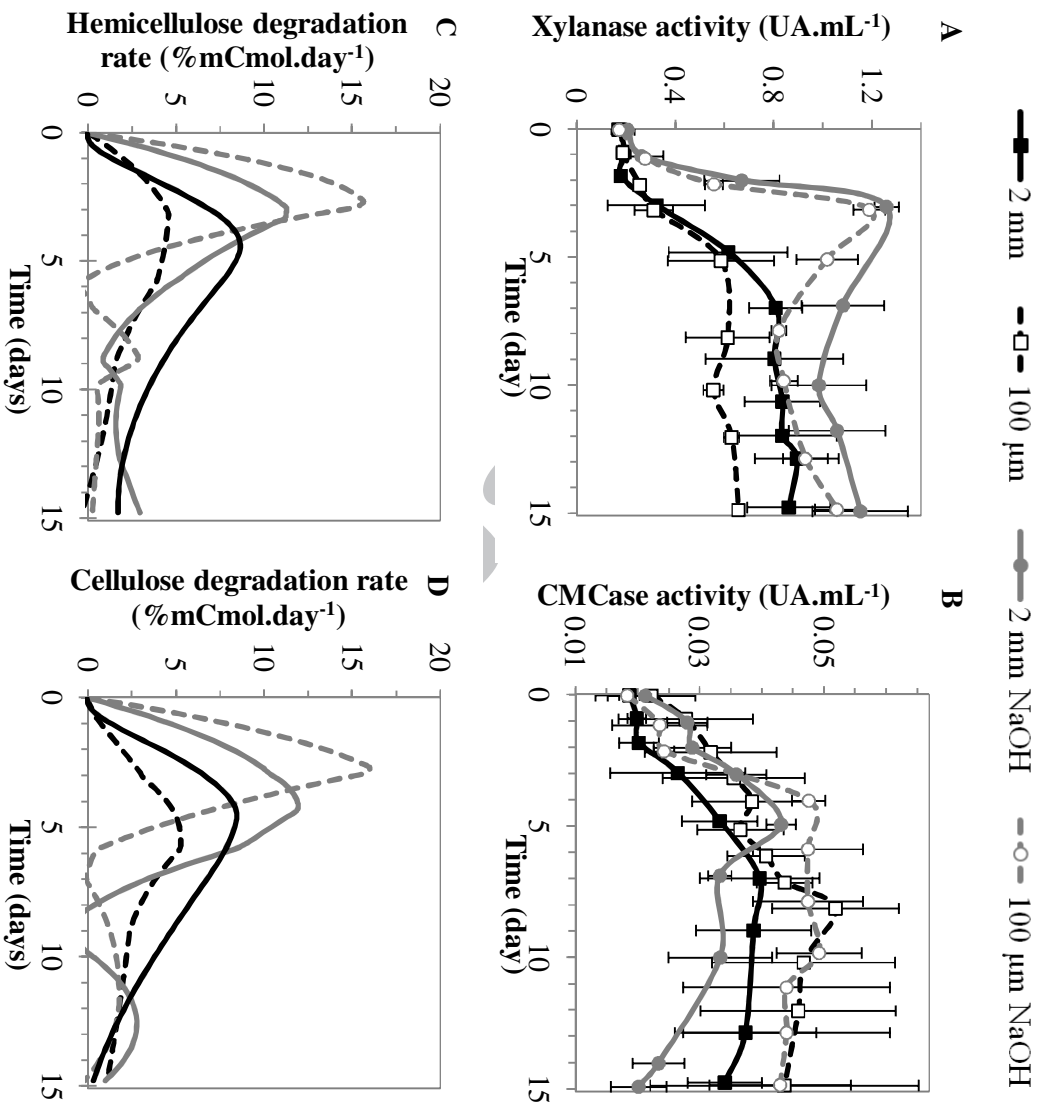

577 **Figure 4.**

578

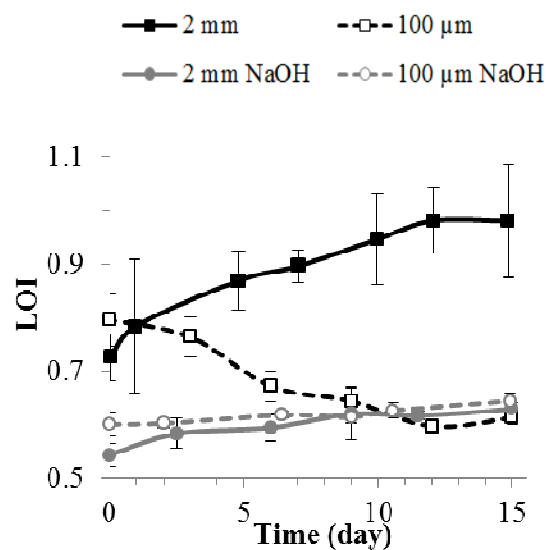

579

580

581 **Tables**582 **Table 1:** Size and energy consumption of the four types of wheat straw pretreatment.

| | Pretreatment | Size (μm), D50 | Energy (kJ.kg^{-1}) |
|---|--------------------------|-----------------------------|--------------------------------|
| A | 2 mm | - | 223.34 |
| B | 100 μm | 115.87 \pm 3.24 | 635.23 |
| C | 2 mm - NaOH | - | 223.34 |
| D | 100 μm - NaOH | 91.54 \pm 2.24 | 327.45 |

583

584

Comment citer ce document :

Lazuka, A., Roland, C., Barakat, A., Guillon, F., O'Donohue, M., Hernandez Raquet, G. (2017).
 Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived
 microbial consortium. Bioresource Technology, 236, 225-233. DOI : 10.1016/j.biortech.2017.03.083

Table 2: Product concentrations and metabolic yields after a 15-day fermentation of the pretreated wheat straw substrates by a RWS microbial consortium.

| | (A) 2 mm | (B) 100 μ m | (C) 2 mm NaOH | (D) 100 μ m NaOH |
|--|------------------|-----------------|------------------|----------------------|
| VFA yield* (g eq AA.g ⁻¹) | 0.61 \pm 0.07 | 0.77 \pm 0.03 | 0.70 \pm 0.07 | 0.83 \pm 0.14 |
| CO ₂ yield* (g CO ₂ .g ⁻¹) | 0.26 \pm 0.03 | 0.47 \pm 0.02 | 0.41 \pm 0.07 | 0.58 \pm 0.15 |
| H ₂ yield* (mg H ₂ .g ⁻¹) | 0.55 \pm 0.19 | 1.52 \pm 0.20 | 2.70 \pm 0.47 | 3.25 \pm 0.31 |
| Time at maximum VFA prod. rate (days) | 5.2 | 6.0 | 2.9 | 2.2 |
| Max VFA prod. rate (mCmol.L ⁻¹ .day ⁻¹) | 25.6 \pm 1.0 | 13.4 \pm 0.14 | 35.6 \pm 6.0 | 43.4 \pm 4.1 |
| VFA concentration at max VFA prod. rate (mCmol.L ⁻¹) | 109.0 \pm 20.8 | 72.2 \pm 7.4 | 100.1 \pm 4.2 | 94.2 \pm 4.4 |
| Final VFA prod. (mCmol.L ⁻¹) | 226.5 \pm 21.1 | 149.0 \pm 3.5 | 228.3 \pm 22.1 | 217.1 \pm 20.9 |
| % AA (%Cmol) | 65.6 \pm 3.9 | 50.8 \pm 2.6 | 38.6 \pm 3.6 | 34.3 \pm 1.2 |
| % PA (%Cmol) | 20.5 \pm 3.4 | 24.7 \pm 0.4 | 24.0 \pm 7.6 | 22.3 \pm 6.1 |
| % BA (%Cmol) | 10.0 \pm 2.9 | 17.8 \pm 2.3 | 28.0 \pm 2.1 | 33.1 \pm 6.5 |
| % VA (%Cmol) | 3.8 \pm 3.1 | 4.9 \pm 0.3 | 5.5 \pm 0.2 | 6.0 \pm 0.6 |

* Metabolic yield, against consumed substrate

590 **Highlights**

- 591 • Dry chemo-mechanical pretreatments impact biomass crystallinity and macroporosity.
- 592 • Dry chemo-mechanical pretreatment increased the carboxylate production rate by
- 593 RWS.
- 594 • Dry chemo-mechanical pretreated biomass enhances the microbial xylanase activity.
- 595 • Initial biomass macroporosity correlated with the biological acidogenic potential.
- 596

Comment citer ce document :

Lazuka, A., Roland, C., Barakat, A., Guillon, F., O'Donohue, M., Hernandez Raquet, G. (2017).
Ecofriendly lignocellulose pretreatment to enhance the carboxylate production of a rumen-derived
microbial consortium. Bioresource Technology, 236, 225-233. DOI : 10.1016/j.biortech.2017.03.083