

# Bi-objective optimization of a reentrant flow shop scheduling with exact time lag considering energy cost

Ming Liu, Xin Liu, Feifeng Zheng, Feng Chu

# ▶ To cite this version:

Ming Liu, Xin Liu, Feifeng Zheng, Feng Chu. Bi-objective optimization of a reentrant flow shop scheduling with exact time lag considering energy cost. 7th International Conference on Industrial Engineering and Systems Management (IESM 2017), Oct 2017, Saarbrücken, Germany. hal-01689755

# HAL Id: hal-01689755 https://hal.science/hal-01689755v1

Submitted on 23 Jan 2018

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Bi-objective optimization of a reentrant flow shop scheduling with exact time lag considering energy cost

Ming Liu<sup>1</sup>, Xin Liu<sup>2</sup>, FeiFeng Zheng<sup>3</sup> and Feng Chu<sup>4</sup>

Abstract—In this paper, we study a bi-objective optimization of the two-machine reentrant flow shop scheduling problem with an exact time lag considering energy consumption cost. This problem is proposed by Amrouche et al. (2016), in which each job must be operated from the first machine  $M_1$  to the second machine  $M_2$  and then back to the first machine  $M_1$  with an exact time lag  $l_j$  between the two operations on the first machine. The two objectives are: (1) minimization of the total energy consumption cost and (2) makespan. To describe the problem precisely, we propose a bi-objective mixed integer programming formulation. An  $\epsilon$ -constraint method and NSGA-II approach are proposed to obtain the optimal Pareto front and approximate Pareto solutions for the problem. The frameworks of the proposed methods are presented in this paper.

#### I. INTRODUCTION

With the development of technology and industry, new research issues keep emerging in the field of flow shop scheduling. The usual flow shop scheduling problem assumes that jobs are operated on all machines following a preset sequence, and a job visit each machine only once (c.f. Yang and Chern (2000), Yang et al. (2008), Wu and Lee (2009), Wang et al. (2015)). However, this assumption may be inconsistent with some production conditions in reality. Reentrant flow shop scheduling problem has been attracting more and more attention with the assumption that a job can visit a certain machine more than once since it was first proposed by Graves (1983).

Generally, the objective of reentrant flow shop scheduling problem is to minimize customer dissatisfaction and related cost, such as the number of tardy jobs, makespan and total tardiness etc. Environmental effects and energy consumption cost are seldomly considered in the previous relevant studies. As people become more and more concerned about the environmental problems and energy wast nowadays, it is necessary to take energy consumption cost into consideration.

In this paper, we study a bi-objective optimization of the two-machine reentrant flow shop scheduling problem with an exact time lag. The problem is proposed by Amrouche et al. (2016), where each job must be operated from the first machine  $M_1$  to the second machine  $M_2$  and then back to

<sup>1</sup>Ming Liu is with Faculty of Economics and Management, Tongji

Val d'Essonne, 91020, France, and is with Management Engineering Research Center Xihua University, Chengdu 610039, China feng.chu@ibisc.univ-evry.fr

the first machine  $M_1$  with an exact time lag  $l_j$  between the two operations on the first machine. Amrouche et al. (2016) prove the NP-hardness of the problem and propose heuristics for the problem. We extended their work by establishing a biobjective mathematical formulation and considering energy consumption cost. The main contributions of this paper are presented as follows.

- (1) We consider two objectives optimization of minimizing the total energy consumption cost and the makspan simultaneously;
- (2) A mixed integer programming formulation is established:
- (3) An  $\epsilon$ -constraint method and NSGA-II approach are proposed to obtain the optimal and approximate Pareto solutions for the problem.

The rest of this paper is structured as follows. Section 2 reviews the literature on reentrant flow shop scheduling problem and shop scheduling problem with an exact time lag and energy consumption. Section 3 describes the problem, and a mixed integer programming formulation is proposed. In Section 4, we propose solution methods to obtain the Pareto solutions for the problem. Section 6 concludes the work and indicate further research directions.

# II. LITERATURE REVIEW

There has been a limited number of researches on reentrant flow shop scheduling problem (c.f. Hwang and Sun (1998), Jing et al. (2009), Chu et al. (2010), Huang et al. (2014), Sangsawang et al. (2015), Zhou et al. (2016), Amrouche et al. (2016)). Moreover, the number of previous relevent researches focusing on reentrant flow shop with exact time lags is relatively few.

# A. reentrant flow shop

The reentrant flow shop scheduling problem is first proposed by Graves (1983), and the author proposes a heuristic algorithm for the problem. Lev and Adiri (1984) investigate the V-shop problem, in which jobs are operated on m machines in a preset sequence  $M_1, M_2, ..., M_{m-1}, M_m, M_{m-1}, ..., M_2, M_1$ . They prove that this problem is NP-hard, and also propose polynomial algorithms for some special cases. Wang et al. (1997) study a chain-reentrant shop scheduling problem, where each job is operated in the preset sequence  $M_1, M_2, M_3, ..., M_m$ , and then back to the primary machine  $M_1$ . The authors prove some properties of optimal solutions for the two-machine case.

University, Shanghai 200092, China mingliu@tongji.edu.cn <sup>2</sup>Xin Liu is with the Department of Economics and Management, Tongji University, Shanghai 200092, China liuxin9735@126.com

<sup>&</sup>lt;sup>3</sup>FeiFeng Zheng is with Glorious Sun School of Business & Management, Donghua University, Shanghai 200051, China ffzheng@dhu.edu.cn <sup>4</sup>Feng Chu is with the Laboratory IBISC, University of Evry-

Chen (2006) study a reentrant permutation flow shop scheduling problem, in which each job is planned to be operated on all machines in the following sequence,  $M_1, M_2, ..., M_m, M_1, M_2, ..., M_m$ , and  $M_1, M_2, ..., M_m$ . The objective is to minimize the makespan. They propose a branch and bound algorithm for the problem. Based on that, Chen et al. (2008) develop a tabu search algorithm and a hybrid genetic algorithm for this problem.

Kim (2005) investigates the reentrant hybrid flow shop scheduling problem with the aim of minimizing the total tardiness. The author develops a heuristic algorithm for the problem and evaluates it by conducting numerical experiments. Based on that, Choi and Kim (2009) study the two-machine reentrant flow shop scheduling problem with the objective of minimizing the total tardiness. They propose a branch and cut algorithm for the problem.

Desprez et al. (2009) address a industrial production scheduling problem in reality, which is a hybrid reentrant flow shop scheduling problem with the objective of minimizing the total weighted number of tardy jobs. The authors develop a genetic algorithm according to the characteristics of the studied problem.

Chu et al. (2010) study a reentrant flow shop scheduling problem, which can be regarded as a special case of the problem investigated by Wang et al. (1997). The authors propose an optimal schedule for the problem with the aim of minimizing the makespan. For the problem that minimize the total flow time, they divide the problem into many subproblems according to the relationship between the processing time in different procedure, and propose algorithms and some dominant properties for the different subproblems.

Huang et al. (2014) propose a farness particle swarm optimization algorithm for the reentrant shop problem, which is a hybrid flow shop scheduling problem considering due dates and time windows. The objective of the studied problem is minimizing the total earliness and tardiness. Xu et al. (2014) develop a memetic algorithm for the reentrant permutation flow shop scheduling problem with the objective of minimizing the makespan.

Sangsawang et al. (2015) address a reentrant two-stage hybrid flow shop scheduling problem considering the blocking constraint. The objective of the problem is minimizing the makespan. They proposed a hybrid particle swarm optimization and an adaptive auto-tuning hybrid genetic algorithm, which is based on the idea of relaxation and modification.

Zhou et al. (2016) investigate the reentrant hybrid flow shop scheduling problem with the objective of minimizing the total weighted completion time. They take inspection and repair operation into consideration, and these operations are conducted at the end of each cycle of processing. The authors propose a mathematical formulation for the problem and a differential evolution algorithm for the problem.

Other studies on reentrant shop scheduling may include Pan and Chen (2005), Dugardin et al. (2010), Jing et al. (2011), Ying et al. (2014), Shen et al. (2016), Rifai et al. (2016), etc.

#### B. shop scheduling with time lags

The idea of time lags has been studied in various scheduling problems, in particular in the two-machine flow shop and the single machine case with the name of coupled-task problem. In the two-machine flow shop problem, the notation of time lag of a job represents that the time difference between the start time of the job on the second machine and the completion time of it on the first machine. Yu et al. (2004) prove the NP-hardness in the strong sense of the two-machine flow shop scheduling problem. For the single machine case with the name of couple-task problem, the process of each job contains two individual operations with required delay time between them. Ahr et al. (2004) present an exact algorithm based on dynamic programming for this problem.

Amrouche and Boudhar (2013) introduce the notion of time lags to the two-machine reentrant shop scheduling problem with the objective of minimizing the total completion time. In the problem, each job must be processed following the sequence  $M_1, M_2$  and then back to  $M_1$  with an identical exact time lag between the completion time of the first operation and the start time of the third operation. Based on that, Amrouche and Boudhar (2016) prove the NP-hardness of a special case and given some special subproblems that can be solved in polynomial time.

Amrouche et al. (2016) thoroughly study a chain-reentrant shop scheduling problem with an exact time lag in order to minimize the makespan. They propose heuristic algorithms for the problem with identical time lags, and establish a new NP-hardness result and some polynomial cases. However, the authors have not given the mathematical formulation for the problem. Based on this work, we extend the problem by considering energy consumption cost as one of the objectives.

#### C. Sustainability considerations in shop scheduling

Sustainability considerations in shop scheduling have been attracting more and more attention. Moreover, electricity is the main form of energy consumption in manufacturing industry (Sun and Li, 2013). Mouzon et al. (2007) develop operational methods for the minimization of the energy consumption of manufacturing equipment by turning machines off at idle times. Mouzon and Yildirim (2008) propose a metaheuristic to decide the timing and length of turn off operation and turn on operation to minimize total tardiness and total energy consumption simultaneously. Che et al. (2016) address an energy-conscious single machine scheduling problem under time-of-use (TOU) electricity tariffs, where the prices of electricity are various in different moment of a day. They propose a MILP formulation and a greedy insertion heuristic algorithm for the problem.

Demir et al. (2014) study a bi-objective Pollution-Routing problem, and the two objectives are minimizing the fuel consumption and the driving time of vehicles. Ding et al. (2015) consider a permutation flow shop scheduling problem with the objective of minimizing the carbon emissions and the makespan simultaneously. Mansouri et al. (2016)

investigate a two-machine flowshop scheduling problem by analyzing the trade-off between minimizing the makespan and total energy consumption. They propose a mixed integer bi-objective optimization formulation and a heuristic. Wang et al. (2016) investigate a single machine batch scheduling problem considering energy cost with the objective of minimizing the makespan and total energy cost simultaneously. A bi-objective discrete-time mathematical formulation and two heuristic algorithms are proposed.

Other studies on shop scheduling problem considering energy consumption may include Luo et al. (2013), Shrouf et al. (2014), Sharma et al. (2015), etc.

The framework presented in this paper extends the literature on two-machine reentrant flow shop scheduling by considering two objectives of minimizing the total energy consumption cost and the makespan.

# III. PROBLEM DESCRIPTION AND FORMULATION

In the problem we discussed here, there are n jobs planed to be processed on two machines. Every job is operated on the machines following a preset sequence. A job j should be processed in the order  $M_1$ ,  $M_2$  and then back to machine  $M_1$ , and there is an exact time lag  $l_j$  between the two operations on the first machine.

The aim of this problem is to find a set of sequences of the jobs and determine the starting time for each job in different procedure. The two objectives are minimizing the total energy consumption and minimizing the makespan. We study the problem by considering non-identical job sizes and the time-of-use (TOU) electricity prices. Besides, we consider the reentrance by transforming the second procedure on the primary machine into a virtual machine, as shown in Fig. 1.

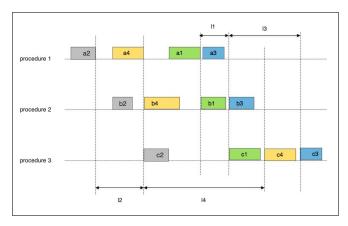


Fig. 1. Framework of initial solution generation

To illustrate the problem, a mixed integer programming formulation is established below.

### A. Notation

# Indices:

- i, j: indices of jobs,  $i \neq j$ .
- h: index of procedures.

- t: index of time.
- k: index of machines.

#### **Parameters:**

- N: set of jobs, i.e.  $N = \{1, ..., n\}$ .
- M: set of machines, i.e.  $M = \{1, ..., m\}$ .
- H: set of procedures.
- $P_k$ : set of procedures on machine k.
- $l_i$ : the exact time lag of job i.
- $p_{hi}$ : the processing time of job i in procedure h.
- $c_t$ : the unit price of energy consumption at time t.
- L: a large enough number.

#### Variables:

- $x_{ij}^h$ : equal to 1 if job i is processed before job j in procedure h, 0 otherwise.
- z<sub>hi</sub><sup>t</sup>: equal to 1 if job i is being processed in procedure
   h at time t, 0 otherwise.
- $S_{hi}$ : positive integer, the start time of job i in procedure h.
- $C_{hi}$ : positive integer, the completion time of job i in procedure h.
- $C_{max}$ : positive integer, the makespan.

# B. A mathematical formulation

We describe the two objective functions and the main constraints below. The first objective  $f_1$  is to minimize the makespan, and the second one  $f_2$  represents the total energy cost.

$$\min f_1 = C_{max} \tag{1}$$

In the minimization of item  $f_2$ , as the total energy cost is the function of the time of energy consumption and the price of electricity, we calculate it based on cumulative energy cost.

$$\min f_2 = \sum_{i \in N} \sum_{t \in T} \sum_{h \in H} z_{hi}^t c_t \tag{2}$$

In the problem of reentrant flow shop scheduling with exact time lag, some constraints must be satisfied and we describe them below. For two jobs i and j processed in a certain procedure h, job i is either processed before job j or after it.

s.t. 
$$x_{ij}^h + x_{ji}^h = 1$$
,  $h \in H, i, j \in N, i \neq j$  (3)

Each job must be processed in a procedure without interruption, which means that there is no preemption allowed in the problem.

$$C_{hi} = S_{hi} + p_{hi}, \quad h \in H, i \in N \tag{4}$$

The start time of a job i in procedure h must be after the its completion time in the previous procedure h-1.

$$S_{hi} \ge C_{h-1,i}, \quad h \in H, i \in N \tag{5}$$

Each job is planned to be processed in the order  $M_1, M_2$  and then return back to  $M_1$  after an exact time lag  $l_i$ .

$$S_{3i} = C_{1i} + l_i, \quad i \in N$$
 (6)

The start time of a job i must be ensured to be after the completion time of jobs prior to it in procedure h.

$$S_{hj} + (1 - x_{ij}^h)L \ge C_{hi}, \quad h \in H, i, j \in N, i \ne j$$
 (7)

Item  $z_{hi}^t$  represents whether job i is being processed in procedure h at time t.

$$C_{hi} \ge (1 - z_{hi}^t)L + t, \quad h \in H, i \in N, t \in T$$
 (8)

$$S_{hi} \le (1 - z_{hi}^t)L + t - 1, \quad h \in H, i \in N, t \in T$$
 (9)

$$\sum_{t \in T} z_{hi}^t = p_{hi}, \quad h \in H, i \in N$$
 (10)

Since that procedure 1 and procedure 3 are operated on the machine  $M_1$ , constraint below ensures that there cannot be more than one job being processed on the machine  $M_1$ at a certain time t.

$$\sum_{i \in N} z_{1i}^t + \sum_{i \in N} z_{3i}^t \le 1, \quad t \in T$$
 (11)

The ranges of decision variables are given below.

$$x_{ij}^h \in \{0,1\}, \quad h \in H, i, j \in N, i \neq j$$
 (12)

$$z_{hi}^t \in \{0, 1\}, \quad h \in P, i \in N, t \in T$$
 (13)

$$S_{hi}, C_{hi} \ge 0, \quad i \in N, h \in H$$
 (14)

## IV. SOLUTION APPROACH

For bi-objective optimization problems, the relationship between the two objectives is usually negative correlation. There is no single optimal solution, and the desired output is a solution set (i.e. Pareto front) instead. In this section, to solve the two-machine reentrant flow shop scheduling problem with an exact time lag, we attempt to obtain the Pareto solutions with  $\epsilon$ -constraint method and NSGA-II approach. In the following, we present the frameworks of the proposed methods.

#### A. $\epsilon$ -constraint method

The  $\epsilon$ -constraint method is widely used to obtain the optimal Pareto solutions. It is based on the the idea of focusing on a single objective with restricting remaining objectives. We solve a multi-objective solution with  $\epsilon$ -constraint method by setting one of the objectives, i.e.  $f_1$ , as a single objective and transforming the other objective into a constraint with a gradual reduction value  $\epsilon$  in each iteration. The upper bound and lower bound of the two objectives need to be obtained and considered as a constraint. For the bi-objective twomachine reentrant flow shop problem with an exact time lag, the following concepts are needed (Bérubé et al. (2009)).

- Ideal point: let f<sup>I</sup> = (f<sub>1</sub><sup>I</sup>, f<sub>2</sub><sup>I</sup>) with f<sub>1</sub><sup>I</sup> = min{f<sub>1</sub>(X)} and f<sub>2</sub><sup>I</sup> = min{f<sub>2</sub>(X)}, X ∈ Z<sup>V</sup>;
   Nadir point: let f<sup>N</sup> = (f<sub>1</sub><sup>N</sup>, f<sub>2</sub><sup>N</sup>) with f<sub>1</sub><sup>N</sup> = min{f<sub>1</sub>(X) : f<sub>2</sub>(X) = f<sub>2</sub><sup>I</sup>} and f<sub>2</sub><sup>N</sup> = min{f<sub>2</sub>(X) : f<sub>1</sub>(X) = f<sub>1</sub><sup>I</sup>}, X ∈ Z<sup>V</sup>;
   Fyteners point: f<sup>E</sup> = (f<sup>I</sup>, f<sup>N</sup>) and f<sup>E</sup> = (f<sup>I</sup>, f<sup>N</sup>) are
- **Extreme point:**  $\mathbf{f}^E = (f_1^I, f_2^N)$  and  $\mathbf{f}^E = (f_1^I, f_2^N)$  are two extreme points on the Pareto front.

In this paper, the two objectives are the total energy consumption cost and makespan. The makespan is regarded as a constraint in the method. The  $\epsilon$ -constraint method is detailed below:

# **Algorithm 1** Framework of $\epsilon$ -constraint method

```
Require: Parameters for proposed problem
     \begin{split} f_1^I &= \min\{f_1(\mathbf{X})\}; \\ f_2^I &= \min\{f_2(\mathbf{X})\}; \\ f_1^N &= \min\{f_1(\mathbf{X}): f_2(\mathbf{X}) = f_2^I\}; \\ f_2^N &= \min\{f_2(\mathbf{X}): f_1(\mathbf{X}) = f_1^I\}; \\ F_{apo} &= [f_1^I, f_2^N]; \\ \Delta &= 1; \\ \epsilon &= f_2^N - \Delta; \\ \mathbf{while} \; \epsilon \geq f_2^I \; \mathbf{do} \\ f_1 &= \min\{f_1(\mathbf{X}): f_2(\mathbf{X}) \leq \epsilon\}; \end{split}
                     = min\{f_1(\mathbf{X})\};
                  f_1 = \min\{f_1(\mathbf{X}) : f_2(\mathbf{X}) \le \epsilon\}; 
f_2 = \min\{f_2(\mathbf{X}) : f_1(\mathbf{X}) = f_1\}; 
F_{apo}; f_1, f_2];
         F = non\_dominated\_sort(F_{ano});
```

# B. Optimal solutions by CPLEX

We adopt  $\epsilon$ -constraint method to obtain optimal solutions for the proposed mathematical model. The parameters are generated randomly, as shown below.

- Number of jobs, N = 4;
- Number of machines, M = 2;
- Number of procedures, H = 3;
- Planning time horizon, T = 80;
- Processing time of jobs in different procedure:

$$\left(\begin{array}{ccccc}
3 & 4 & 5 & 2 \\
2 & 3 & 4 & 3 \\
3 & 2 & 4 & 5
\end{array}\right)$$

- Time lags.  $l_i = [5, 5, 6, 7];$
- The prices of electricity in different time of a day, which is randomly generated from 1 to 4.

We use  $\epsilon$ -constraint method to obtain the optimal Pareto solutions for the instance above, as shown in the Fig.2. The computational time is 300 seconds. Table 1 represents the solution combinations of the results obtained.

# C. NSGA-II approach

In this section, we present NSGA-II method in order to solve the large scale cases efficiently. NSGA-II has been widely used to solve the multi-objective problems, which is first proposed by Deb et al. (2002). Details of NSGA-II




Fig. 2. Framework of initial solution generation

TABLE I RESULTS OF  $\epsilon$ -CONSTRAINT METHOD

Pareto frontier	total energy cost	makespan
1	68	63
2	69	59
3	71	57
4	74	54
5	76	38
6	79	33
7	81	32
8	85	31

are presented as follows, the  $initialize\_variables()$  procedure generates a set of feasible solutions for the problem, the initial solutions are sorted by  $non\_domination\_sort()$ . For each iteration, the offspring solutions are generated by  $genetic\_operator()$  procedure. Then the solutions are sorted by  $non\_domination\_sort()$  procedure. K members from the next non\\_selected level  $F_i$  are needed to meet the requirement of pop.

#### **Algorithm 2** Framework of NSGA-II method

```
Data: Parameters for proposed problem.
Result: Pareto front solution set.
  pop (% Population size);
  gen (% Generation number);
  chromosome = initialize_variables();
  P = non_domination_sort(chromosome);
  for i = 1: gen do
     pool = gen/ 2 (% Matching pool size);
     tour = 2 (% Tournament size);
     parent_P = tournament_selection(P, pool, tour);
     offspring_P = genetic_operator(parent_P);
     intermediate_P = parent_P \cup offspring_P;
     F_i = \text{non\_domination\_sort(intermediate\_P)};
     P = \emptyset:
     i = 1 (%non_domination level index);
     while |P| + |F_i| \le pop do
        P = P \cup F_i;
        i = i + 1;
     end while
     K = pop - |P| (% Number of individuals to be further added);
     P = P \cup selection(P, F_i, K)
  end for
```

1) Solution representation: A solution S is composed of four parts: (i) the sequence of jobs processed in the first procedure on the primary machine, (ii) the starting time of jobs in the first procedure, (iii) the starting time of jobs in

the second procedure, and (iv) the starting time of jobs in the third procedure. The above four sets of decision variables are all integral.

Observe that once the sequence of jobs and the starting time and completion time of jobs in different procedures are determined, the total energy consumption cost and makespan can be calculated, and the feasibility of the solution can be checked.

2) Population initialization: To ensure the effectiveness of the NSGA-II approach, the quality of initial solutions should be as high as possible, i.e. the initial solutions are all feasible. The framework of initial solutions generation is illustrated below.

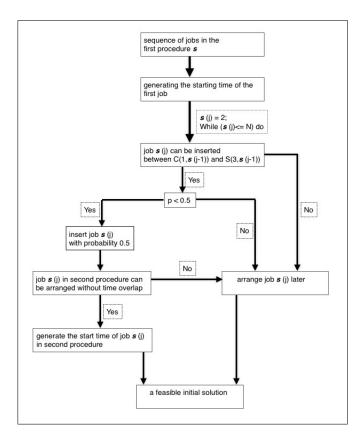


Fig. 3. Framework of initial solution generation

# V. CONCLUSIONS

This paper investigates a bi-objective two-machine reentrant flow shop scheduling problem with an exact time lag, which aims to minimize the total energy consumption cost and makespan simultaneously. A bi-objective methematical formulation is established to illustrate the problem. To obtain Pareto solutions of the problem, an exact  $\epsilon$ -constraint method and NSGA-II approach are proposed.

In future research, we should pay more attention on (i) more efficient bi-objective algorithm and (ii) some other factors that may affect the objectives, such as the speed of machines and the salary of operators.

#### **ACKNOWLEDGMENT**

This work was supported by the National Science Foundation of China (NSFC) under Grants 71428002, 71432007, 71531011, 71571134 and 71571135. The work was supported by "the Fundamental Research Funds for the Central Universities".

#### REFERENCES

- [1] A. Che, Y. Zeng, L. Ke, An efficient greedy insertion heuristic for energy-conscious single machine scheduling problem under time-ofuse electricity tariffs. Journal of Cleaner Production, 2016, vol. 129, pp. 565-577.
- [2] A. P. Rifai, H. T. Nguyen, S. Z. M. Dawal, Multi-objective adaptive large neighborhood search for distributed reentrant permutation flow shop scheduling. Applied Soft Computing, 2016, vol. 40, pp. 42-57.
- [3] A. Sharma, F. Zhao, J. W. Sutherland, Econological scheduling of a manufacturing enterprise operating under a time-of-use electricity tariff. Journal of Cleaner Production, 2015, vol. 108, pp. 256-270.
- [4] B. H. Zhou, L. M. Hu, Z. Y. Zhong, A hybrid differential evolution algorithm with estimation of distribution algorithm for reentrant hybrid flow shop scheduling problem. Neural Computing & Applications, 2016, pp.1-17.
- [5] C. C. Wu, W. C. Lee, Single-machine and flowshop scheduling with a general learning effect model. Computers & Industrial Engineering, 2009, vol. 56, pp. 1553-1558.
- [6] C. Desprez, F. Chu, C. Chu. Minimising the weighted number of tardy jobs in a hybrid flow shop with genetic algorithm. International Journal of Computer Integrated Manufacturing, 2009, vol. 22, pp. 745-757.
- [7] C. H. Pan, J. S. Chen, Mixed binary integer programming formulations for the reentrant job shop scheduling problem. Computers & Operations Research, 2005, vol. 32, pp. 1197-1212.
- [8] C. Jing, W. Huang, G. Tang, Minimizing total completion time for reentrant flow shop scheduling problems. Theoretical Computer Science, 2011, vol. 412, pp. 6712-6719.
- [9] C. Sangsawang, K. Sethanan, T. Fujimoto, M. Gen, Metaheuristics optimization approaches for two-stage reentrant flexible flow shop with blocking constraint. Expert Systems with Applications An International Journal, 2015, vol. 42, pp. 2395-2410.
- [10] C. Jing, W. Huang, G. Tang. Minimizing total completion time for reentrant flow shop scheduling problems. Theoretical Computer Science, 2011, vol. 412, pp. 6712-6719.
- [11] D. Ahr, J. Békési, G. Galambos, M. Oswald, G. Reinelt. An exact algorithm for scheduling identical coupled tasks. Mathematical Methods of Operations Research, 2004, vol. 59, pp. 193-203.
- [12] D. L. Yang, M. S. Chern, Two-machine flowshop group scheduling problem. Computers & Operations Research, 2000, vol. 27, pp. 975-985
- [13] D. L. Yang, C. J. Hsu, W. H. Kuo, A two-machine flowshop scheduling problem with a separated maintenance constraint. Computers & Operations Research, 2008, vol. 35, pp. 876-883.
- [14] E. Demir, T. Bektaş, G. Laporte, *The bi-objective pollution-routing problem*. European Journal of Operational Research, 2014, vol. 232, pp. 464-478.
- [15] F. Chu, C. Chu, C Desprez. Series production in a basic re-entrant shop to minimize makespan or total flow time. Computers & Industrial Engineering, 2010, vol. 58, pp. 257-268.
- [16] F. Dugardin, F. Yalaoui F, L. Amodeo, New multi-objective method to solve reentrant hybrid flow shop scheduling problem. European Journal of Operational Research, 2010, vol. 203, pp. 22-31.
- [17] F. Chu, C. Chu, C Desprez, Series production in a basic re-entrant shop to minimize makespan or total flow time. Computers & Industrial Engineering, 2010, vol. 58, pp. 257-268.
- [18] F. Shrouf, J. Ordieres-Meré, A. García-Sánchez, M. Ortega-Mier, Optimizing the production scheduling of a single machine to minimize total energy consumption costs. Journal of Cleaner Production, 2014, vol. 67, pp. 197-207.
- [19] Gilles Mouzon, Mehmet B. Yildirim, Janet Twomey. Operational methods for minimization of energy consumption of manufacturing equipment. International Journal of Production Research, 2007, vol. 45, pp. 4247-4271.
- [20] Gilles Mouzon, Mehmet B. Yildirim. A framework to minimise total energy consumption and total tardiness on a single machine. International Journal of Sustainable Engineering, 2008, vol. 1, pp. 105-116.

- [21] H. Hwang, J. U. Sun, Production sequencing problem with re-entrant work flows and sequence dependent setup times. International Journal of Production Research, 1998, vol. 33, pp. 2435-2450.
- [22] H. Luo, B. Du, G. Q. Huang, H. Chen, X. Li, Hybrid flow shop scheduling considering machine electricity consumption cost. International Journal of Production Economics, 2013, vol. 146, pp. 423-439.
- [23] J. F. Bérubé, M. Gendreau, J. Y. Potvin, An exact ε-constraint method for bi-objective combinatorial optimization problems: Application to the Traveling Salesman Problem with Profits. European Journal of Operational Research, 2011, vol. 194, pp. 39-50.
- [24] J. Shen, L. Wang, J. Deng J, X. Zheng, A Pareto-Based Discrete Harmony Search Algorithm for Bi-objective Reentrant Hybrid Flowshop Scheduling Problem. Harmony Search Algorithm, 2016, vol. 382, pp. 435-445.
- [25] J. Xu, Y. Yin, T. C. E. Cheng, C. C. Wu, S. Gu. A memetic algorithm for the re-entrant permutation flowshop scheduling problem to minimize the makespan. Applied Soft Computing, 2014, vol. 24, pp. 277-283.
- [26] J. Y. Ding, S. Song, C. Wu, Carbon-efficient scheduling of flow shops by multi-objective optimization. European Journal of Operational Research, 2015, vol. 248, pp. 758-771.
- [27] J. Zoghby, J. W. Barnes, J. J. Hasenbein, Modeling the reentrant job shop scheduling problem with setups for metaheuristic searches. European Journal of Operational Research, 2005, vol. 167, pp. 336-348
- [28] K. Amrouche, M. Boudhar, M. Bendraouche, F. Yalaoui, Chainreentrant shop with an exact time lag: new results. International Journal of Production Research, 2016, vol. 55, pp. 1-11.
- [29] K. C. Ying, S. W. Lin, S. Y. Wan, Bi-objective reentrant hybrid flowshop scheduling: an iterated Pareto greedy algorithm. International Journal of Production Research, 2014, vol. 52, pp. 5735-5747.
- [30] K. Deb, A. Pratap, S. Agarwal, T. Meyarivan, A fast and elitist multiobjective genetic algorithm: NSGA-II. IEEE Transactions on Evolutionary Computation, 2002, vol. 6, pp. 182-197.
- [31] M. Boudhar, K. Amrouche, Two machines flow shop with reentrance and exact time lag. Multidisciplinary International Scheduling Conference, 2013, vol. 50, pp. 223-232.
- [32] R. H. Huang, S. C. Yu, C. W. Kuo. Reentrant two-stage multiprocessor flow shop scheduling with due windows. The International Journal of Advanced Manufacturing Technology, 2014, vol. 71, pp. 1263-1276.
- [33] S. A. Mansouri, E. Aktas, U. Besikci, Green scheduling of a two-machine flowshop: trade-off between makespan and energy consumption. European Journal of Operational Research, 2016, vol. 248, pp. 772-788
- [34] S. C. Graves, H. C. Meal, D. Stefek, A. H. Zeghmi, Scheduling of re-entrant flow shops. Journal of Operations Management. 1983, vol. 3, pp. 197-207.
- [35] S. Wang, M. Liu, C. Chu, A branch-and-bound algorithm for twostage no-wait hybrid flow-shop scheduling. International Journal of Production Research, 2015, vol. 53, pp. 1143-1167.
- [36] S. Wang, M. Liu, C. Chu, A branch-and-bound algorithm for twostage no-wait hybrid flow-shop scheduling. International Journal of Production Research, 2015, vol. 53, pp. 1143-1167.
- [37] S. Wang, M. Liu, F. Chu, C. Chu, Bi-objective optimization of a single machine batch scheduling problem with energy cost consideration. Journal of Cleaner Production, 2016, vol. 137, pp. 1205-1215.
- [38] S. W. Choi, Y. D. Kim, Minimizing total tardiness on a two-machine re-entrant flowshop. European Journal of Operational Research, 2009, vol. 199, pp. 375-384.
- [39] V. Lev, I. Adiri, V-shop scheduling. European Journal of Operational Research, 1984, vol. 18, pp. 51-56.
- [40] Y. D. Kim, Minimizing total tardiness of orders with reentrant lots in a hybrid flowshop. International Journal of Production Research, 2005, vol. 43, pp. 2149-2167.
- [41] Z. Sun, L. Li, Opportunity estimation for real-time energy control of sustainable manufacturing systems. IEEE Transactions on Automation Science & Engineering, 2013, vol. 10, pp. 38-44.