



**HAL**  
open science

## The spontaneous puncture of thick liquid films

B. Neel, E. Villiermaux

► **To cite this version:**

B. Neel, E. Villiermaux. The spontaneous puncture of thick liquid films. *Journal of Fluid Mechanics*, 2018, 838, pp.192-221. 10.1017/jfm.2017.877 . hal-01760521

**HAL Id: hal-01760521**

**<https://hal.science/hal-01760521v1>**

Submitted on 18 Jan 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# The spontaneous puncture of thick liquid films

B. Néel<sup>1</sup> and E. Villermaux<sup>1,2</sup>

<sup>1</sup>Aix Marseille Université, CNRS, Centrale Marseille, IRPHE, Marseille, France

<sup>2</sup>Institut Universitaire de France, Paris, France

(Received xx; revised xx; accepted xx)

We call thick those films for which the disjoining pressure and thermal fluctuations are ineffective. Water films with thickness  $h$  in the 1–100  $\mu\text{m}$  range are thick, but are also known, paradoxically, to nucleate holes spontaneously. We have uncovered a mechanism solving the paradox, relying on the extreme sensitivity of the film to surface tension inhomogeneities. The surface tension of a free liquid film is lowered by an amount  $\Delta\sigma$  over a size  $a$  by chemical or thermal contamination. At the same time this spot diffuses (within a time  $a^2/D$ , with  $D$  the diffusion coefficient of the pollutant in the substrate), the Marangoni stress  $\Delta\sigma/a$  induces an inhomogeneous outward interstitial flow which digs the film within a time  $\tau_0 \sim \sqrt{\rho h a^2 / \Delta\sigma}$ , with  $\rho$  the density of the liquid. When the Péclet number  $Pe = a^2 / D \tau_0$  is larger than unity, the liquid substrate motion reinforces the surface tension gradient, triggering a self-sustained instability insensitive to diffusional regularization. Several experimental illustrations of the phenomenon are given, both qualitative, and quantitative including a precise study of the first instants of the unstable dynamics made by controlled perturbations of a Savart sheet at large  $Pe$ .

## 1. Introduction

Free liquid films –by *free*, we mean not confined between surfactants layers– are formed in various instances: they arise as a result of various jet impact (Savart 1833) or splashes in the form of ejecta sheets (Worthington 1908), they constitute the shell bounding surface bubbles (Blanchard 1963), they can also be made on purpose through the extrusion of a liquid stream through a slit or annular thin jet in some spreading applications, in liquid propulsion devices, or ornament fountains (Dombrowski & Fraser 1954). Liquid films are of course also involved in various flows of effluents down inclined plates and coating processes (Craster & Matar 2009; Kalliadasis *et al.* 2012).

Suspended liquid films, that is those not lying on a solid surface, usually breakup through their boundary. There, surface tension forces are unbalanced, pulling the liquid of the film into a receding rim, which undergoes a capillary instability, before forming ligaments, and isolated drops (Ranz 1959; Huang 1970; Lhuissier & Villermaux 2011). The receding motion can in some special instances be so fast that it triggers a shear instability with the surrounding environment (Lhuissier & Villermaux 2009*b*).

Liquid films also happen to puncture far from their boundaries, nucleating a hole, or a collection of adjacent holes on the plane of the film. These holes, if large enough in radius compared to the film thickness (Taylor & Michael 1973), may open irreversibly for the same reason mentioned above: at a hole edge, surface tension is no more balanced. The criterion is identical for polymeric membranes (Ilton *et al.* 2016) and is somewhat different for charged liquids (Betterton & Brenner 1999). In a film of simple liquid, a hole radius, when initially large enough, grows in size at the constant Taylor-Culick speed  $\sqrt{2\sigma/\rho h}$  where  $\rho$  is the liquid density,  $\sigma$  its surface tension, and  $h$  the thickness of the film (Taylor 1959*b*; Culick 1960). If a hole has a too small radius, it heals (Courbin & Stone 2006).

While the sequence of phenomena occurring after a hole has been formed and opens in the plane of a film is well described and relatively well understood, the fundamental question of the hole nucleation process itself has been less explored. There are in fact many answers to this question, because there are many ways a film may puncture. We review them below, along with their domain of application, in order to motivate the need for a new study.

### 1.1. *Extremely thin films: thermal fluctuations*

Extremely small, thin objects are sensitive to thermal fluctuations. The minimal energy input to open a hole irreversibly is the surface energy  $\sigma h^2$  (the hole radius must be of the order of the film thickness  $h$ , or more), if  $\sigma$  is the surface tension of the liquid. That energy can, provided a scenario leading to film rupture exists, be supplied by the quantum  $k_B T$  from the liquid thermal bath, leading to  $h \sim \sqrt{k_B T / \sigma} \approx 10^{-10}$  m in water at ambient temperature, a critical film thickness of the order of the inter-atomic distances. This thermally activated puncture scenario may thus at most apply to extremely thin films, like Newton black films (Casteletto *et al.* 2003).

### 1.2. *Very thin films: van der Waals forces*

Intermolecular forces have different origins depending on if the molecules are charged, permanently dipolar, or dipolar by induction. These forces, called generically van der Waals forces (Israelachvili 1991), are attractive over a range of distances which compares to the size of the molecules itself, namely a few nanometers. The corresponding disjoining pressure  $-A/h^3$  where  $A$  is a Hamaker constant (Derjaguin *et al.* 1987), is responsible for puncturing very thin films up to a few tens of nanometers (Vrij 1966; Reiter 1992; Sharma & Reiter 1996; Erneux & Davis 1993; Champougny *et al.* 2017), but does not operate with much thicker films, despite the fact that appreciably thicker films, of the order of 200 nm (Thoroddsen *et al.* 2012), and even more (Nierstrasz & Frens 1998) have been claimed to be sensitive to this effect.

### 1.3. *External solicitations*

A liquid film can be transpierced by a sharp (with a radius of curvature smaller than the film thickness) solid object, a projectile (Courbin & Stone 2006), a concentrated air jet (Berendsen *et al.* 2012; Lhuissier *et al.* 2016), a focused laser beam (Wedershoven *et al.* 2015) or a spark (McEntee & Mysels 1969; Lhuissier & Villermaux 2009*a*), whose action is applied for a sufficiently long time. Like all fragile objects, liquid films are also sensitive to the unsteadiness of their environment. The application of a pressure gradient, or pressure difference across a film sets it in motion, and the corresponding acceleration may, because the film is a density interface when surrounded by a gas, lead to destabilization through a Rayleigh-Taylor mechanism. An impulsive pressure wave (Bremond & Villermaux 2005), or a violent explosion (Vledouts *et al.* 2016) cause the film, accelerated perpendicular to its plane, to grow thickness modulations which ultimately cause its puncture with a well prescribed wavelength. The same phenomenon is responsible for the crumpling of liquid bells, and the formation of transverse indentations at the edge of flapping liquid sheets (Lhuissier & Villermaux 2012*b*); it may affect films of arbitrary thicknesses, the studies just mentioned had microns, to tens of microns thick films.

### 1.4. *Internal flaws and defects*

Solid hydrophobic particles introduced into a film can, when their size compares with the film thickness, lead to its rupture as they force the two interfaces of the film to pinch

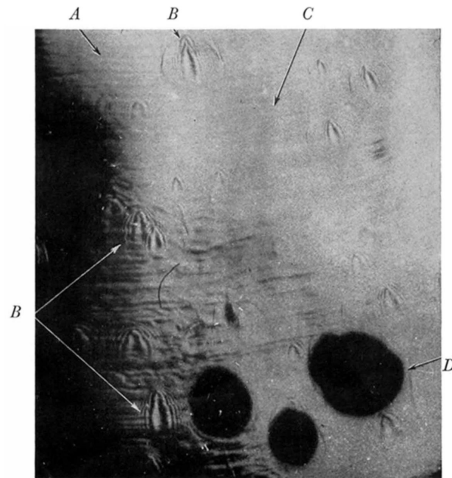


FIGURE 1. A free mercury film puncturing spontaneously, adapted from Dombrowski & Fraser (1954). Waves (A), precursors (B), folds (C) of unknown origin are seen on the film, causing the opening of holes (D).

at the surface of the particle. Anti-foaming agents have taken advantage of this effect for a long time (Garrett 1992; de Gennes 1998). However flaws, impurities or defects in the liquid may not be solid. Immiscible oil droplets (Dombrowski & Fraser 1954), or bubbles (Lhuissier & Villerraux 2013) also act as efficient holes nucleation sites in water films for precise reasons that remain largely elusive. Denkov (2004) notes that, when by chance an oil droplet reaches an aqueous interface, the resulting surface tension contrast (oils have usually a weaker surface tension than water) drives a well-defined outward superficial flow. Vernay *et al.* (2015), adapting this result to a radially expanding liquid sheet loaded with partially miscible oil droplets argue that it is responsible for the film piercing, which they do observe experimentally. We will come back on this point.

### 1.5. *Surface inhomogeneities and Marangoni stresses*

Chemical and temperature inhomogeneities at the surface of a liquid translate into inhomogeneities of surface tension. The corresponding Marangoni surface stress (Marangoni 1878) is communicated to the bulk of the liquid by viscosity in a way, when the liquid is shallow like in films, which can be dramatic (Scriven & Sternling 1960). In the Bénard problem of a liquid layer heated from below for instance, the mean temperature decays from the hot plate to the liquid free surface. Since surface tension of a liquid typically decreases with temperature, this gradient yields a surface shear stress when the interface is distorted, setting the liquid into motion towards the cooler areas, where the surface tension is higher (Levich & Krylov 1969). There, the film thickens when at the same time, the flow away from the hotter regions results in film thinning. Any initial disturbance of the film thickness or of the interface temperature is thus amplified. This instability may lead to film rupture, and local drying of the heating plate (Kabova *et al.* 2006; Vanhook *et al.* 1997; Boos & Thess 1999), namely the analogue of holes formation. This effect, which may also be due to differential evaporation in mixtures (Guéna *et al.* 2007) is, for this reason, used as an efficient cleaning process (Leenaars *et al.* 1990; Matar & Craster 2001). Other experiments of Marangoni stress induced spreading flows include those of Roché *et al.* (2014) and Hernández-Sánchez *et al.* (2015) suggesting that this kind of mechanisms can affect films up to a millimeter thick.

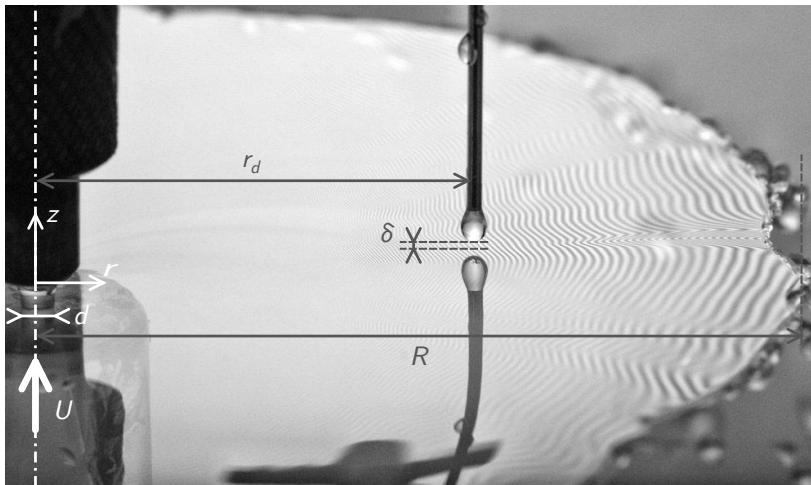


FIGURE 2. Clean films production: a radially expanding film with extension  $R$  is produced by the impact of a liquid jet of velocity  $U$  and diameter  $d$  on a solid surface. A disturbance for the film surface tension is made at radius  $r_d$  by approaching a drop of volatile liquid at a distance  $\delta$  from the film.

### 1.6. *The enigma of thick, spontaneously puncturing films*

Yet, if the case of extremely, or very thin films (sections 1.1 and 1.2) is satisfactorily understood, the case of *thick films* being neither sensitive to thermal fluctuations, nor to a disjoining pressure remains, in the absence of sustained temperature, or pollutant concentration gradient (section 1.5), an enigma. Even the precise role of defects (section 1.4), when they are temperature or soluble chemical agent spots localised in space in, or at the surface of the film, needs to be clarified. A fundamental issue is to know whether a localised surface inhomogeneity spontaneously leads to film rupture in a finite time (Bowen & Tilley 2013), besides the possible role of surfactants (Jensen & Grotberg 1992, 1993). The problem is particularly acute for liquid films with high superficial energy like water (Lhuissier & Villermaux 2012a) or mercury (Dombrowski & Fraser 1954) whose surface is easily contaminated by ambient pollutants, those films being known to puncture spontaneously, for yet unknown reasons (see figure 1), even if *thick* in the sense of the above classification.

We present regarding this issue new facts interpreted by an original analysis suggesting that a sufficiently large, and strong chemical or thermal inhomogeneity deposited on a thick film can lead to its catastrophic puncture.

The method to prepare thick, stationary clean liquid films is first presented in section 2. In this section also, the way we perturb the films surface properties is explained, as well as the imaging tools we use to document the piercing phenomenon, which we illustrate qualitatively. A possible mechanism explaining the self-amplification of surface defects is presented in section 3. In order to examine its relevance, we come back to precise experiments in section 4 which we analyse thoroughly, before we conclude in section 5.

## 2. Experiments and Observations

### 2.1. *Liquid films production*

We produce stationary, clean water films freely expanding in ambient air using a method initiated by Savart (1833), which is a convenient setup to study a wealth of

	Diffusivity in water $D$ ( $\times 10^{-9}$ m <sup>2</sup> s <sup>-1</sup> )		Liquid volatility $p_V$ (kPa)	Solubility in water $k_H$ (mol kg <sup>-1</sup> bar <sup>-1</sup> )
		$Sc = \nu/D$		
Acetone	1.3	$3.1 \times 10^3$	30	30
Ethanol	1.2	$1.1 \times 10^3$	7.8	200
IPA	1	$2.6 \times 10^3$	5.3	100
Water	–	–	3.2	–
Heat	140	7	–	–

TABLE 1. Properties of the substances used for the  $\sigma$ -perturbation, given at 25°C: diffusion coefficient in water  $D$ , Schmidt number, vapor pressure  $p_V$  and Henry’s law constant  $k_H$ . Data from Pratt & Wakeham (1975); Vargaftik *et al.* (1996); Lide (2010); Linstrom & Mallard (2017).

phenomena associated with the cohesion of liquids (see Villiermaux & Almarcha (2016) and references therein). It consists of a liquid jet impacting normally onto a solid disk, thus producing a stationary, radially expanding sheet thinning with the distance from the impact point (figure 2). The only control parameters defining the extension of the sheet are the impacting jet diameter  $d$  and the Weber number

$$We = \frac{\rho U^2 d}{\sigma} \quad (2.1)$$

where  $U$  is the jet velocity,  $\rho$  the liquid density, and  $\sigma$  its surface tension (for water,  $\rho = 10^3$  kg m<sup>-3</sup> and  $\sigma \approx 70$  mN m<sup>-1</sup>). As long as the interaction with the ambient air is negligible (Villiermaux & Clanet 2002), and so are the viscous losses at the impacting disc (Villiermaux *et al.* 2013), the sheet is continuous up to a radius  $R$  typically given by the radial location of the so-called *nodes* at its rim (Gordillo *et al.* 2014), written as

$$R = \frac{4}{5} R_{TC}, \quad \text{with} \quad \frac{R_{TC}}{d} = \frac{We}{16} \quad (2.2)$$

where  $R_{TC}$  denotes the Taylor (1959*b*)–Culick (1960) radius. With  $d = 3$  mm and  $U = 3$  m s<sup>-1</sup> typically, we have  $We = \mathcal{O}(10^2)$ , and  $R \approx 5$  cm. The film formed that way has a thickness  $h(r)$  decreasing as the inverse of the distance to the impact point  $r$  as

$$h(r) = \frac{d^2}{8r}, \quad (2.3)$$

ranging from 200  $\mu$ m close to the impact point, to 10  $\mu$ m close to the sheet rim. The velocity  $U$  is conserved along a radial trajectory, a feature enabling to study in space  $r$  a phenomenon which would have occurred in time  $t$  on a film at rest by a simple transform  $\Delta r = U \Delta t$ . The films thus produced are insensitive to gravity since the Froude number  $U^2/(gR)$  is much larger than unity. They are, in addition thanks to the large interfacial area generated by the radial expansion of the sheet in a relatively short time ( $R/U = \mathcal{O}(10$  ms)), self-cleaned (Marmottant *et al.* 2000).

## 2.2. Methods of perturbation

We alter the film surface properties from the outside in different ways, the objective being to perturb its surface tension locally in a controlled manner. This is achieved either by:

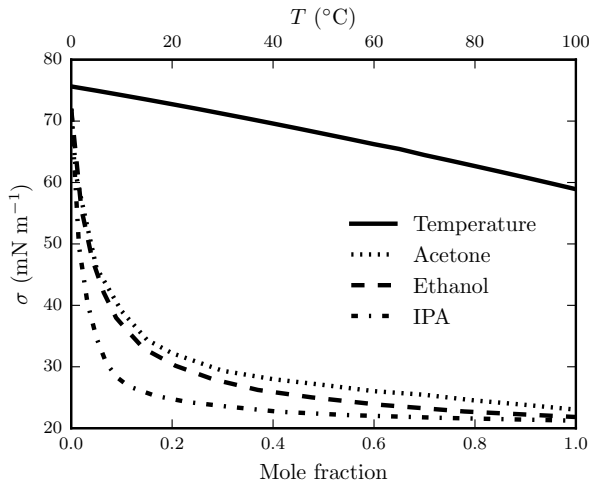


FIGURE 3. Surface tension dependences of isopropyl alcohol (IPA), ethanol (Vazquez *et al.* 1995) and acetone (Enders *et al.* 2007) solutions on their mole fraction in water. Dependence of water surface tension on temperature  $T$  (Vargaftik *et al.* 1983).

(i) projecting droplets of chemical substances different from water, but soluble in it like acetone, ethanol, or isopropyl alcohol (IPA),

(ii) suspending at a controlled distance  $\delta$  from the film a drop of known size  $2a$ , evaporating in the surrounding air and incorporating as dissolved gas in the film (see figure 2), a method initially mentioned by Maxwell (1875),

(iii) suspending a paper strip of known width, imbibed with the same volatile liquids,

(iv) approaching the tip of a soldering iron (typically  $T = 300^\circ\text{C}$ ), warming up the air around it, and the film.

The perturbing chemical substances were chosen to be volatile and their vapor soluble into water (see their properties in Table 1).

The distance  $\delta$  separating the perturbation from the film, carefully measured, is varied from a centimeter, down to a fraction of millimeter. The film is moving with velocity  $U$  in a quiescent atmosphere: there forms an inevitable Blasius boundary layer around it. The latter sets a critical distance that grows with the distance  $r$  to the jet impact as  $\sqrt{\nu_a r / U} \sim 1$  mm, with  $\nu_a$  the air viscosity, and above which no effect could be seen and hardly measured: most of the observations were done with drops of pure substances evaporating in air, or the hot tip warming up the air, *inside* this boundary layer. Transfers across the boundary layer made the actual size of the perturbation  $2a$  on the film slightly different from the typical size of the drop (typically 1 mm) or iron pan (typically 0.3 mm).

In all cases, the surface tension of the water film is lowered locally by a small amount  $\Delta\sigma$ , compared to its base value  $\sigma \approx 70$  mN m<sup>-1</sup>. For instance, as can be seen from figure 3 collecting data of surface tension for different mixtures and temperatures (Vargaftik *et al.* 1983; Vazquez *et al.* 1995; Enders *et al.* 2007), decreasing by 1 mN m<sup>-1</sup> the surface tension of water implies warming up the liquid by 5°C, or diluting it with traces of ethanol. It will be seen that, as small as they may seem to be, these local changes of the water composition have dramatic consequences on the film stability. Occasionally, we produced an ethanol film by the same method as the one described in section 2.1, which we perturbed by approaching a water droplet. In that case, the surface tension of the film was locally increased.

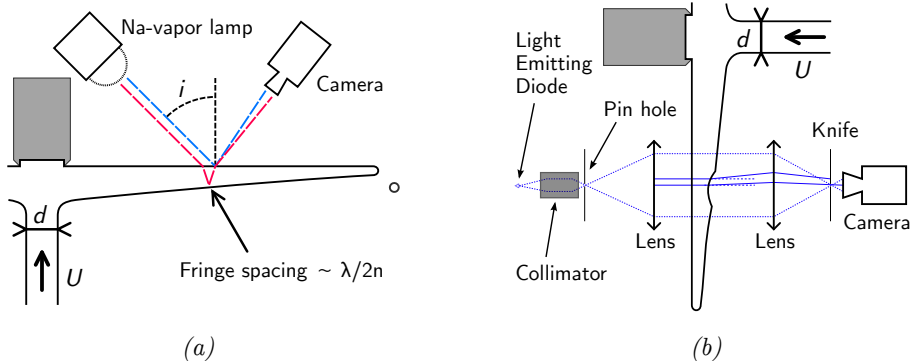


FIGURE 4. Visualisation techniques. (a) Interferometry: a sodium-vapor lamp inprints stripes on the sheet. Two consecutive fringes are separated by a constant thickness jump  $\Delta h = \lambda/2n \cos i_r$ , with  $i_r$  the refracted angle inside the sheet. (b) Schlieren: modulations of the thickness of the sheet, located in the plane of observation, deviate parallel light as would do optical lenses.

### 2.3. Imaging

The liquid film is stationary; it is perturbed either in a stationary fashion by altering locally its environment through the vapor composition (temperature) field introduced by a steady evaporating drop (hot source), or the perturbation is itself transient when a droplet is projected on the film. Still pictures were used to measure the perturbed film thickness fields, and high speed imaging was useful at documenting the transients. Two main visualisation techniques were used:

#### 2.3.1. Interferometry

In a first configuration, the liquid film is horizontal and lit by a monochromatic ( $\lambda = 589 \text{ nm}$ ) low-pressure sodium lamp placed above, with an inclination angle of approximately  $i \approx 45^\circ$  (figure 4a). The reflected interferences pattern is a series of stripes, each tracing a given film thickness (figure 5a). The film thickness increment  $\Delta h$  between two adjacent bright, or dark fringes is  $\Delta h = \lambda/(2n \cos i_r)$  with  $n$  the refractive index of the liquid and  $i_r$  the refracted angle in the liquid (Isenberg 1992). The slow  $1/r$  film thickness decrease in equation (2.3) can be measured that way (Clanet & Villiermaux 2002). Here, it is used to set an absolute reference from which the relative thickness is computed sequentially from one fringe to another (figure 5b). That way, following distorted fringes, the whole film thickness field may be interpolated. With water, we have  $\Delta h \approx 0.25 \mu\text{m}$  so that this quantitative technique, of which we will make extensive use in section 4, is very sensitive. With a typical image resolution of a few tens of pixels per millimeter, the maximal measurable thickness gradient between two distinguishable consecutive fringes is of the order of  $\partial_x h \sim 10^{-3}$ .

#### 2.3.2. Schlieren

In a second configuration, the liquid film is formed in the vertical plane, and observed through a Schlieren apparatus consisting of an arrangement of collimating lenses and pinholes (figure 4b). Like the Interferometry imaging technique described above, that one does not give a direct access to absolute measurements of the film thickness. It is, however, extremely sensitive to thickness modulations, since any curvature on the film plane acts as a lens, deflecting the light rays and thus producing either darker, or brighter regions through the visualisation pinhole. The method singles-out thickness



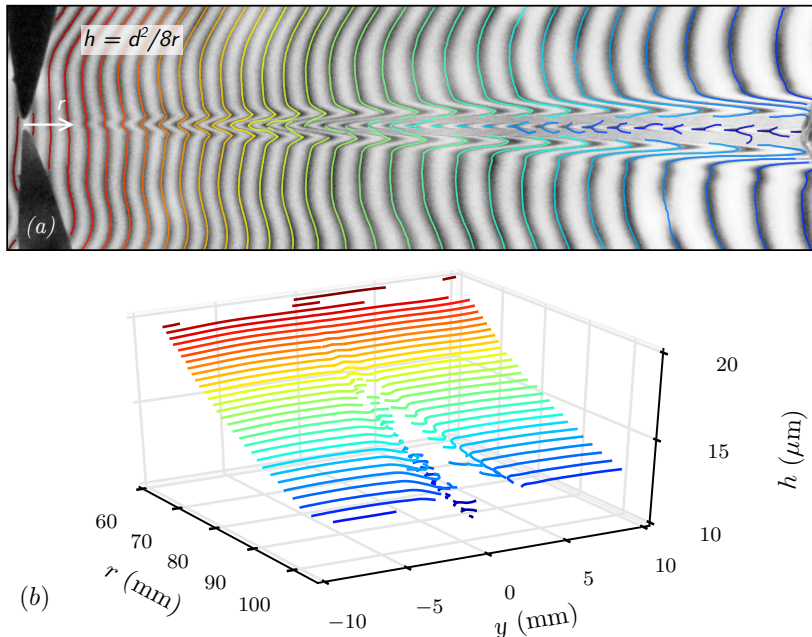


FIGURE 5. Thickness measurement technique. a) Typical interferometric picture. Each dark fringe is a line of iso-thickness, separating from the following by a constant  $\Delta h \approx 0.25 \mu\text{m}$ . A reference is made where the film is unperturbed. b) Iso-thickness ridges are plotted in 3D.

gradients (Settles 2001), and is useful at documenting, qualitatively, the dynamics of the transients (figures 7 and 8).

#### 2.4. Qualitative observations

We illustrate the extreme sensitivity of liquid films to a variation of the chemical composition of their immediate surface environment.

When a  $200 \mu\text{m}$  in diameter water droplet is slowly deposited on a water film  $18 \mu\text{m}$  thick running at a few meters per second, it rebounds on it, slightly perturbing the film thickness field in a wake of capillary waves, which will soon damp, leaving the film intact (figure 6a). On the other hand, if the exact same experiment is made using an ethanol droplet instead, then the fate of the film changes drastically (figure 6b). Before the droplet has hit the film, the film thickness just below the droplet and its wake thins rapidly, leading to its irreversible puncture.

The same kind of observation is made using a Schlieren type of visualisation (figure 7). While a water drop on a water film produces an impulse response type of capillary waves pattern before coalescing in it with no other consequence, an ethanol droplet moves the interstitial liquid in the film violently outward, digging it down to puncture. When the film is armored with surfactants molecules (a commercial mixture of non-ionic and anionic molecules, by Dreft, Procter & Gamble) however, an ethanol droplet impacting on it rebounds (figure 6c), with no puncture. The surfactants layer has prevented the onset of an irreversible outward flow and subsequent film rupture observed in figures 6b and 7b.

These observations, which are reminiscent of those made by Thoroddsen *et al.* (2006) in a different, but related context, also reveal that the ethanol droplet and the liquid film are in interaction, through the ethanol vapor field surrounding the volatile droplet before

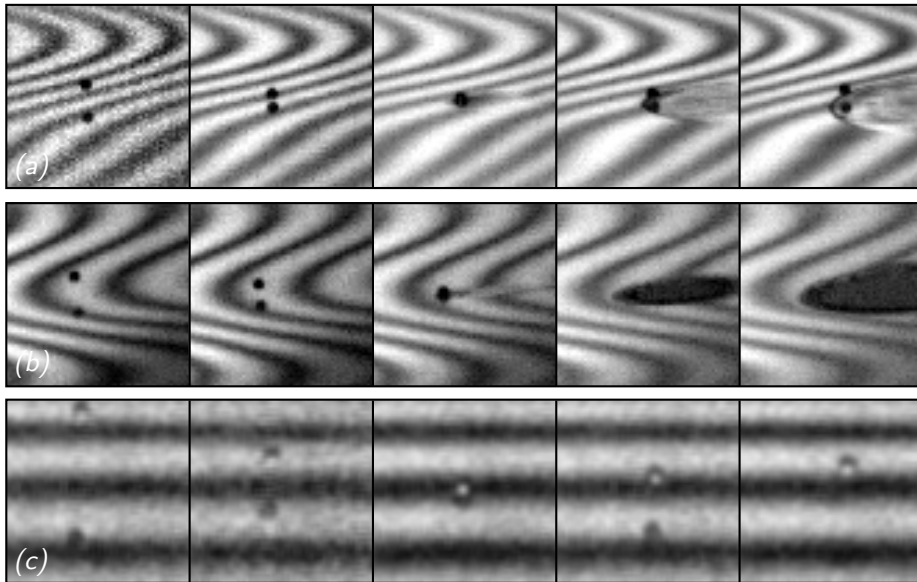


FIGURE 6. a) Water or b) ethanol droplet ( $200\ \mu\text{m}$  in diameter) falling on a moving water film ( $U = 3.5\ \text{m}\cdot\text{s}^{-1}$ ) with thickness  $h = 18\ \mu\text{m}$ . Pictures are  $3.3\ \text{mm}$  wide, recorded every  $\Delta t = 250\ \mu\text{s}$ . a) The water droplet rebounds, when b) the ethanol droplet pierces the film. c) Ethanol droplet ( $150\ \mu\text{m}$  in diameter) falling on a static soap film with thickness  $h = 5\ \mu\text{m}$ , and rebounding. Pictures are  $1.1\ \text{mm}$  wide, recorded every  $\Delta t = 1\ \text{ms}$ .

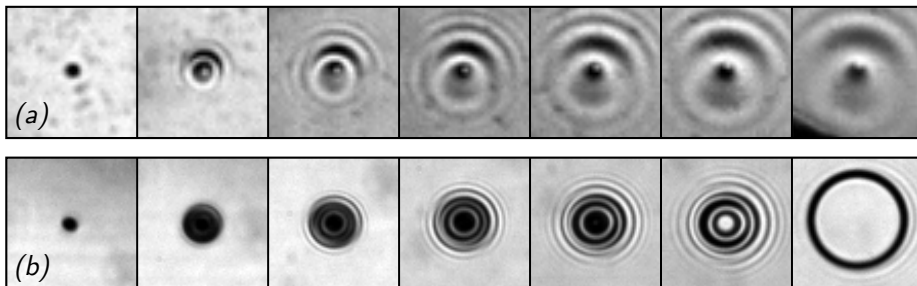


FIGURE 7. a) Water droplet falling on a moving water film ( $U = 3.8\ \text{m}\cdot\text{s}^{-1}$ ) with thickness  $h = 14\ \mu\text{m}$ , and generating capillary waves. Pictures are  $3.6\ \text{mm}$  wide, recorded every  $700\ \mu\text{s}$ . b) Ethanol droplet falling on a moving water film ( $U = 3.9\ \text{m}\cdot\text{s}^{-1}$ ) with thickness  $h = 13\ \mu\text{m}$ , and piercing it. Pictures are  $5.8\ \text{mm}$  wide, recorded every  $500\ \mu\text{s}$ .

the droplet has contacted the film (figure 8a). The strongly dissymmetrical shape of the opened hole after puncture demonstrates *a posteriori* that the film had already been dug in the wake of the droplet (the thinner the film, the faster the rim velocity). Thus, the minute quantities of ethanol which have evaporated from the droplet, have been mixed in the boundary layer at the surface of the running film, and have finally been incorporated at the surface of the liquid, are enough to produce a major, and catastrophic change of the film thickness field. This suggests that a strong amplification mechanism is at play to move the interstitial liquid once its surface has been contaminated.

That mechanism has, nevertheless, a threshold. Figure 8b shows that the interaction of an ethanol droplet rebounding on a water film may not lead to film puncture if the droplet is too small, and the rebound time too short. The film thickness field is perturbed in the wake of the droplet, but it restores to flat after rebound. This fact also suggests

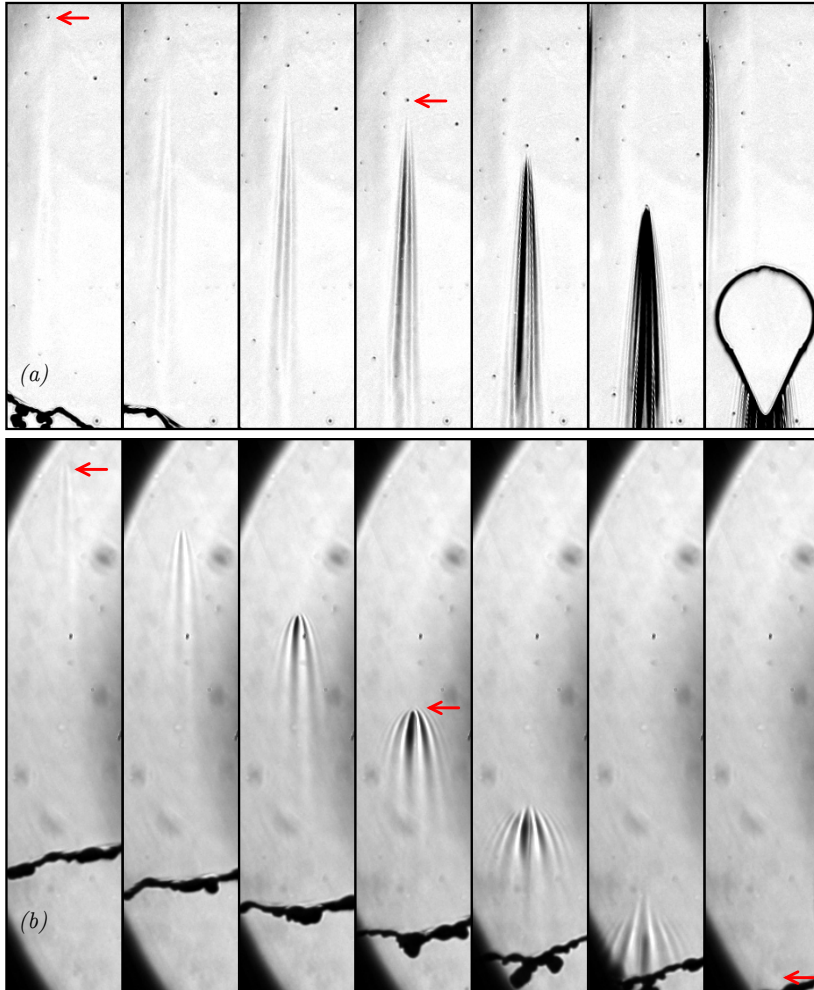


FIGURE 8. Ethanol droplets approaching a  $10\ \mu\text{m}$  thick film falling downwards ( $U = 4.7\ \text{m s}^{-1}$ ). a) Pictures are  $12\ \text{mm}$  wide, recorded every  $\Delta t = 4\ \text{ms}$ . Note the uneven hole opening shape after the droplet pierces the film. b) Pictures are  $9.3\ \text{mm}$  wide,  $\Delta t = 2\ \text{ms}$ . The tiny droplet rebounds on the film and modifies the thickness field, but does not puncture it (see also figure 1).

that a minimal quantity of ethanol should be incorporated in the liquid and/or that it should be deposited on a sufficiently large spot to trigger the amplification mechanism.

### 3. A mechanism

In order to make sense of the observations above, we first examine a simple argument, whose relevance will be investigated more closely on hand of precise experiments in section 4. We study a one-dimensional model of film dynamics whose driving force is a gradient of concentration  $c(x, t)$  of pollutant, translating in a gradient of surface tension by a linear transformation which suits to diluted traces of pollution (see figure 3)

$$\sigma(c) = \sigma - c \left. \frac{\partial \sigma}{\partial c} \right|_{c \rightarrow 0} \quad (3.1)$$

with  $\sigma$  the surface tension of the clean film. The interstitial liquid with velocity  $\mathbf{u} = \{u_x, u_z\}$  is set into a motion triggered by the Marangoni stress communicated across the film depth  $h$  by liquid viscosity  $\eta$  as  $\partial_x \sigma = \eta \partial_z u_x$ , giving rise to a depth averaged velocity  $v(x, t) = \int_0^h u_x dz / h$  describing a plug-flow along the film provided  $|v/h| \gg |\partial_x \sigma / \eta|$ .

A one dimensional model disregarding the phenomena occurring in the depth of the film will hold for times larger than the diffusion time of mass across the film  $h^2/D$  for the two interfaces of the film to be equally affected by the concentration of pollutants, and larger than the diffusion time of vorticity  $h^2/\nu$  for the superficial stress to be communicated to the entire film depth ( $\nu = \eta/\rho$ , with  $\rho$  the liquid density). Given the Schmidt number of ethanol in water  $Sc = \nu/D = \mathcal{O}(10^3)$ , the second condition is met by far when the first is (figure 9a).

In that idealized limit, the transport of the pollutant concentration along the film results from both substrate motion, and molecular diffusion with flux  $j = -D\partial_x c$ . A detailed balance provides

$$\partial_t c + v \partial_x c = -\partial_x j - j \frac{\partial_x h}{h} \quad (3.2)$$

$$j = -D\partial_x c, \quad (3.3)$$

while mass conservation of the substrate writes, in the same one-dimensional approximation

$$\partial_t h + \partial_x(hv) = 0. \quad (3.4)$$

The flow will result from the contamination of the film interface over a size  $2a$ , typically larger than the film thickness  $h$ . We anticipate an induced flow with velocity  $|v|$  such that  $|v|a/\nu \gg 1$ . In other words, if viscosity dominates the transfer of momentum across the film, it is negligible for the motion along the film. The momentum balance thus writes

$$\partial_t v + v \partial_x v = \frac{2}{\rho h} \partial_x \sigma - \frac{1}{\rho} \partial_x \{\sigma \mathcal{K}\} \quad (3.5)$$

where the factor 2 stands for the two sides of the film, and  $\mathcal{K}$  is the film thickness curvature.

In order to reach a meaningful solution to this model through a tractable analysis, we make further simplifications. We study the dynamics of the film from its initial immobility, and therefore  $|v \partial_x v| \ll |\partial_t v|$ . The film is initially smooth so that  $|\partial_x h| \rightarrow 0$ , and we concentrate on films which are planar but dirty so that the Laplace term  $h \partial_x \{\sigma \mathcal{K}\}$  is subdominant in front of the Marangoni stress  $\partial_x \sigma$  in (3.5). This being posed, making use of (3.1), (3.2) and (3.5) provides

$$\partial_t v = \frac{2}{\rho h} \partial_x \sigma \quad (3.6)$$

$$\partial_t \sigma + v \partial_x \sigma = D \partial_x^2 \sigma \quad (3.7)$$

describing, together with (3.4), how the film dynamics is coupled to the pollutant concentration field (of which the  $\sigma$ -field is an inverted image, from (3.1)). Surface tension (concentration) diffuses along the film on a substrate whose velocity  $v$  varies according to its gradient. If it happens that the induced flow reinforces the surface tension gradient, a dramatic dynamics may result.

### 3.1. A spot of dirt

The examples we have listed in sections 2.2 and 2.4 all involve a perturbation introduced locally on the surface of the film which is made ‘dirty’ over a given size  $2a$  where

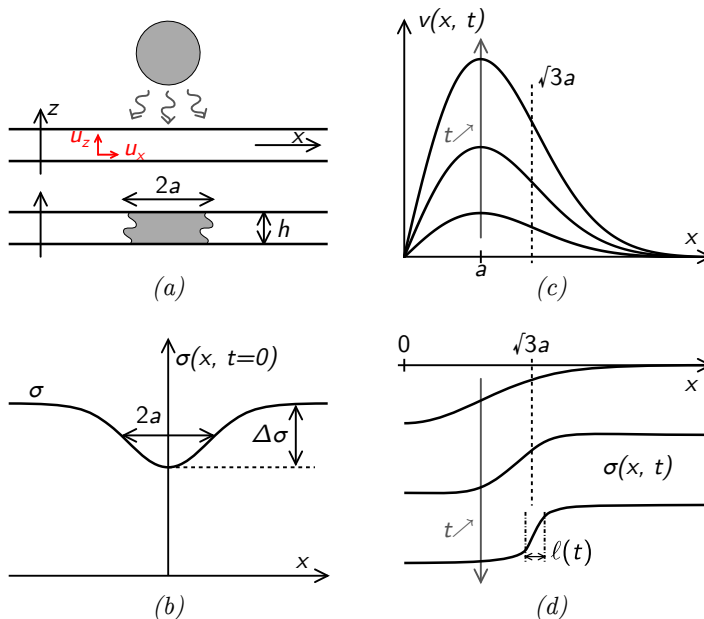


FIGURE 9. Sketch of the mechanism. a) A liquid film with thickness  $h$  being contaminated over a size  $2a$ . b) Initial profile of the liquid surface tension. c) Induced displacement field  $v(x, t)$  along the film for increasing times  $t$ . d) Surface tension profiles for increasing times illustrating the existence of a plateau at  $\sigma - \Delta\sigma$  around  $x = 0$ , and an steepening front around  $x = a\sqrt{3}$  of decreasing width  $\ell(t)$ .

the liquid surface tension is lowered. We thus represent the initial spot of dirt by a smooth bell-shaped deficit of surface tension with intensity  $\Delta\sigma$  and width  $a$  by (figure 9b)

$$\sigma(x, t = 0) = \sigma - \Delta\sigma e^{-\frac{x^2}{2a^2}} \quad (3.8)$$

$$\text{so that } \partial_x \sigma|_{t=0} = \frac{\Delta\sigma}{a^2} x e^{-\frac{x^2}{2a^2}}. \quad (3.9)$$

This initial surface tension gradient accelerates the interstitial fluid according to (3.6) so that the initial motion of the film has velocity (on the  $x > 0$  side, see figure 9c)

$$v(x, t) \sim \frac{tx}{\tau_0^2} e^{-\frac{x^2}{2a^2}} \quad (3.10)$$

where  $\tau_0$  is the characteristic time of the motion

$$\tau_0 = \sqrt{\frac{\rho h a^2}{\Delta\sigma}}. \quad (3.11)$$

with  $h$  the initial film thickness. The velocity (3.10) increases from  $x = 0$ , then reaches a maximum, and decays far from the spot for  $x \gg a$ . Fluid particles at the center of the spot are stretched and moved towards the spot periphery where they are stuck and compressed in the region where the velocity gradient is negative. The analysis of the  $\sigma$ -field dynamics in that region is worth of interest since it explains why and when the initial rearrangements along the film in (3.10) may amplify, or relax.

An obvious candidate for relaxation is the diffusive smearing of the contaminant. The typical time it takes for the dirty spot to diffuse over its initial size is  $a^2/D$ , and if it does so within less than  $\tau_0$ , the rearrangements described above will not have time to

occur before the film has come back to surface homogeneity. Another way of expressing the same condition is to write it in terms of velocities, comparing the diffusion velocity  $D/a$  with the Taylor-Culick speed based on the surface tension deficit  $\sqrt{\Delta\sigma/\rho h}$ . When the latter is larger than the former, that is when the Péclet number

$$Pe = \frac{a^2}{D\tau_0} \quad (3.12)$$

is larger than unity, rearrangements can occur. We thus examine below the interplay between dirt diffusion along the film, and the displacement field induced by its initial inhomogeneity.

### 3.2. *Mixing analogy*

We call  $\gamma$  the maximal rate of compression along the film obtained in  $x = a\sqrt{3}$

$$\gamma = \max(-\partial_x v) \sim \frac{t}{\tau_0^2} \quad (3.13)$$

and expand the negatively sloped velocity  $v(x, t) = v(a\sqrt{3}, t) - \gamma \tilde{x}$  about this point, with  $\tilde{x} = x - a\sqrt{3}$ . In that shifted frame, the transport equation of surface tension (3.7) has the characteristic form of a diffusion problem on a deformed substrate well known in the scalar mixing context (Ranz 1979; Villiermaux & Duplat 2003; Villiermaux 2012)

$$\partial_t \sigma - \gamma \tilde{x} \partial_{\tilde{x}} \sigma = D \partial_{\tilde{x}}^2 \sigma, \quad (3.14)$$

expressing how substrate compression and diffusive broadening compete. A suitable transformation of space and time maps (3.14) onto a pure diffusion equation. Let  $s(t)$  be the distance between two material points initially distant from  $a$  in that region of the substrate, then

$$\frac{\dot{s}}{s} = -\gamma, \quad \text{or} \quad s(t) = a e^{-\frac{\gamma t^2}{2\tau_0^2}}, \quad (3.15)$$

and further defining (Ranz 1979)

$$\xi = \frac{\tilde{x}}{s(t)} \quad \text{and} \quad \tau = D \int_0^t \frac{dt'}{s(t')^2} \quad (3.16)$$

$$= \frac{1}{2Pe} \int_0^{(t/\tau_0)^2} \frac{e^z}{\sqrt{z}} dz, \quad (3.17)$$

we have

$$\partial_\tau \sigma = \partial_\xi^2 \sigma \quad (3.18)$$

whose solutions are known for any initial spatial profile of  $\sigma$ . In particular, molecular diffusion alters the distribution of the  $\sigma$  levels for times  $\tau$  larger than unity (Villiermaux & Duplat 2003). If the Péclet number is small, that condition will be reached while  $\tau$  essentially behaves like the normal time  $t$  as in a pure diffusion process

$$\tau \xrightarrow{Pe \ll 1} \frac{Dt}{a^2} \quad (3.19)$$

On the contrary, if the Péclet number is large, integrating  $\tau$  in (3.17) by part shows that it varies extremely fast with time as

$$\tau \xrightarrow{Pe \gg 1} \frac{1}{2Pe} \frac{e^{(t/\tau_0)^2}}{t/\tau_0} \quad (3.20)$$

in its route towards the condition  $\tau(t_s) = \mathcal{O}(1)$  which defines the mixing time  $t_s$ . That time is simply the diffusion time  $a^2/D$  for  $Pe \ll 1$ , and is

$$t_s \sim \tau_0 \sqrt{\ln Pe}, \quad (3.21)$$

essentially given by the kinematic time  $\tau_0$ , very weakly dependent on molecular diffusion for  $Pe \gg 1$ .

### 3.3. Consequences

The schematic scenario depicted above has an interesting consistency with some of the observations reported in section 2.4, and provides additional predictions.

First, this mechanism accounts for the existence of a threshold. If the spot is too small (small  $a$ ), or too faint (weak  $\Delta\sigma$  and hence large  $\tau_0$ ), the Péclet number will be smaller than one, and the perturbation of surface tension will simply vanish by molecular diffusion before the film has appreciably moved. This is consistent with the comparison made in figure 8 showing that a tiny droplet of ethanol rebounding at the film surface does not alter it much, while a similar droplet coalescing with the film (thus producing a stronger  $\Delta\sigma$ , hence a smaller  $\tau_0$  and therefore a larger  $Pe$ ) leads to rupture.

Second, this mechanism describes the morphology of the depleted region of the film before rupture. For  $Pe \gg 1$ , the motion along the film caused by an initial surface tension gradient reinforces that gradient in a self-amplified fashion. The amplification is so strong (the distance between kinematic markers in equation (3.15) shrinks faster than exponentially) that even after the mixing time, molecular diffusion does not damp it. The width of the surface tension gradient in the compression zone  $\ell(t)$ , a generalized Batchelor scale (Batchelor 1959; de Rivas & Villermaux 2016), is such that (see (3.15) and (3.20))

$$\ell(t) \sim s(t)\sqrt{\tau} \quad (3.22)$$

$$\sim \frac{a}{\sqrt{Pe}} \sqrt{\frac{\tau_0}{t}} = \tau_0 \sqrt{\frac{D}{t}} \quad \text{for } Pe \gg 1, \quad (3.23)$$

thus building a steepening front at the periphery of the spot (figure 9d), with gradient of the order of  $\Delta\sigma/\ell(t)$ .

At the center of the spot close to  $x = 0$ , the situation is exactly opposite. There, the velocity gradient  $\partial_x v$  in (3.10) is positive, with the same intensity  $t/\tau_0^2$  in absolute value than in the compressive region, but is now smoothing the surface tension gradient (the equation describing the phenomenon is identical to (3.14), with a plus sign in front of the convection term). Similar lines as above show that  $\tau$  now saturates as  $\tau \rightarrow 1/Pe$  for  $Pe \gg 1$ , and that the surface tension profile is a plateau with height  $\sigma - \Delta\sigma$ . The surface tension gradient is expelled at the periphery of the blob by a flow pushing the fluid particles outwards up to the periphery of the spot, where they accumulate in a bump. That accumulation causes the radiation of waves in the rest of the film ( $x > a$ ), which are convincingly of the varicose type (Taylor 1959a). The wave (with pulsation  $\omega$  and wavenumber  $k$ ) crests displacement  $x_{\text{crests}}$  in time  $t$  in the growing bump have a self-similar pattern in  $x^2/t$ , consistent with their dispersion equation  $\omega^2 = (\sigma h/\rho)k^4$  in the long wave limit  $kh \ll 1$  (see figure 10, and Duchemin *et al.* (2015)).

Finally, the spot concomitantly depletes at its center, digging the film down to the cancelling of its thickness. Close to the spot center where  $\partial_x h = 0$  by symmetry, equations

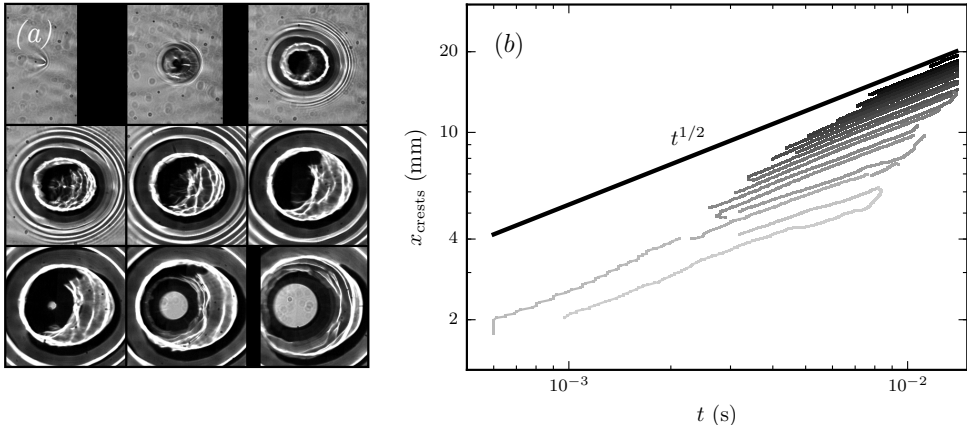


FIGURE 10. a) Wave pattern (and film rupture) generated by a droplet of ethanol ( $a = 100 \mu\text{m}$ ) landing on a thick water film  $h = 250 \mu\text{m}$ . Pictures are 8.6 mm wide, recorded every 800  $\mu\text{s}$ , reading from left to right, top to bottom. b) Wave crests are tracked along time and their location  $x_{\text{crests}}$  is plotted in logarithmic scale.

(3.4) and (3.10) provide

$$\frac{\dot{h}}{h} = -\partial_x v|_{x=0} \sim -\frac{t}{\tau_0(h)^2}. \quad (3.24)$$

If one retains naively the current value of  $h$  in  $\tau_0(h)$  in order to extend the prediction of this short-time mechanism to subsequent instants of time, one anticipates from (3.24) that the film thickness goes to zero in a finite time, of the order of  $\tau_0$  based on the initial film thickness given in (3.11): the film ruptures.

However, the present mechanism predicts only an amplification of the gradient of  $\sigma$  through the action of a displacement field caused by its initial spatial inhomogeneity. We have not described the retroaction of the modified  $\sigma$ -field on the displacement field itself which, since the effect reinforces the cause (the steepness of the  $\sigma$ -field), will unavoidably lead to rapid film thinning. It is in that sense that the mechanism we have described is ‘self-sustained’ (see also the related discussion in Burton & Taborek (2007)).

#### 3.4. In two dimensions

Films in nature are planar, and one may wonder how the scenario analyzed above is altered when the perturbation is no more along a segment, but has a radius  $a$ , producing a radial flow expanding in two dimensions, as for all the examples we have shown in section 2.4. Within the same approximation as in (3.7), the two-dimensional transport equation for surface tension is

$$\partial_t \sigma + v \partial_r \sigma = \frac{D}{r} \partial_r (r \partial_r \sigma) \quad (3.25)$$

for an axi-symmetrical spot  $\sigma(r, t)$  evolving through a radial flow  $v(r, t)$  depending on the radial coordinate  $r$ . The phenomenology is qualitatively identical to the one-dimensional case, and presents a compressive region at the periphery of the spot in  $r_c = a\sqrt{3}$  where we expand the velocity as  $v(r, t) = v(r_c, t) - \gamma \tilde{r}$  with  $\tilde{r} = r - r_c$ . The equivalent of (3.14)



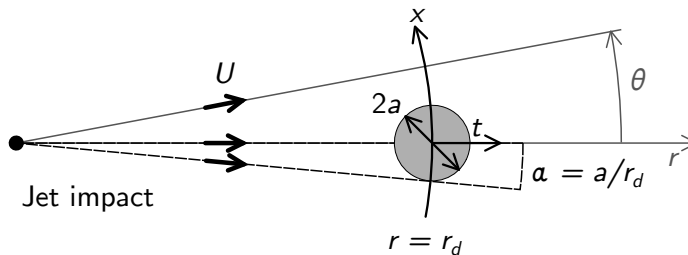


FIGURE 11. Geometrical transform of the natural  $(\theta, r)$  coordinates of the circular Savart sheet into  $(x, t)$  the coordinates of the mechanism.

now reads

$$\partial_t \sigma - \gamma \tilde{r} \partial_{\tilde{r}} \sigma = \frac{D}{\tilde{r} + r_c} \partial_{\tilde{r}} \{(\tilde{r} + r_c) \partial_{\tilde{r}} \sigma\} \quad (3.26)$$

The width of the compression region shrinks, and the  $\sigma$ -field varies essentially over a lengthscale  $\ell(t)$  decreasing in time. The expansion leading to (3.26) is thus valid for excursions  $r$  about  $r_c$  small compared to  $\ell(t)$ . Therefore,  $|\tilde{r}| = \mathcal{O}(\ell(t))$  at most and as soon as  $\ell(t)/r_c < 1$ , the two-dimensional problem (3.26) amounts to its one-dimensional version (3.14). Because the flow builds a thinning compressing front, the one-dimensional approximation is soon valid.

## 4. Detailed measurements

Having discussed a possible mechanism for the spontaneous dramatic thinning and puncture of dirty liquid films, we now investigate its relevance on hand of a controlled experiment, where all the transients can be measured and quantified.

### 4.1. Experiments on a Savart sheet

We use stationary, self-cleaned water films produced by a Savart sheet as described in section 2.1. The mechanism in section 3 relies on two physical quantities of interest, namely the timescale  $\tau_0$  and the Péclet number  $Pe$  based on this time. For example, a spot of size  $a = 100 \mu\text{m}$  made of dissolved ethanol ( $D \sim 10^{-9} \text{ m}^2 \text{ s}^{-1}$ ) inducing an arbitrary surface tension deficit of  $0.1 \text{ mN m}^{-1}$  on a water (density  $\rho = 10^3 \text{ kg m}^{-3}$ ) film with thickness  $h = 10 \mu\text{m}$ , will result in an instability time of order  $\tau_0 \sim 1 \text{ ms}$  (3.11) — a timescale comfortably larger than the time of vorticity transfer across the film  $h^2/\nu \sim 10^{-1} \text{ ms}$ . The Péclet number will then be estimated around  $Pe \sim 10^4 \gg 1$ : clearly, molecular diffusion will not regularize this spot, and the self-amplified scenario in section 3 is likely to hold.

In a Savart sheet, advection of the fluid particles at constant radial velocity  $U$  (typically  $U = 3 \text{ m s}^{-1}$ ) conveniently maps time onto a measurable distance since the surface tension perturbation is fixed in the laboratory frame. The disturbance with size  $2a$  is introduced at the distance  $r_d$  from the impact point, and because of the circular expansion of the sheet, an ingredient which does not modify the physical content of the problem, we will need a divergence angle  $\alpha = a/r_d$  (see figures 2 and 11). The spatial and temporal coordinates  $(x, t)$  defined previously in section 3 are recovered from the ortho-radial and

radial coordinates  $(\theta, r)$  used in the Savart sheet (figure 11) as

$$x = r\theta \simeq r_d\theta \quad (4.1)$$

$$t = \frac{r - r_d}{U} . \quad (4.2)$$

In the frame of the laboratory, the flow in the sheet, may it be disturbed, or not, is stationary. The equations describing the motion of the film are thus adapted from section 3 in this particular diverging geometry. Under the same assumptions, substrate mass conservation must account for the undisturbed radial film thickness decrease in equation (2.3), a consequence of the base flow divergence, and we have

$$U\partial_r(hr) + \partial_\theta(hv) = 0 \quad (4.3)$$

with  $v$  the ortho-radial, depth averaged velocity, defined as in section 3. (4.3) amounts to equation (3.4) at short distance (times)  $\delta r = U\delta t$  after  $r_d$ . The dynamics equation along the ortho-radial coordinate  $\theta$  reads

$$U\partial_r(rv) = \frac{2}{\rho h}\partial_\theta\sigma \quad (4.4)$$

which, again, restores (3.6) for small distances  $\delta r$  after  $r_d$ . Similarly to equation (3.7), the pollutant concentration (surface tension) transport along the sheet is described by

$$U\partial_r\sigma + \frac{v}{r}\partial_\theta\sigma = \frac{D}{r^2}\partial_\theta^2\sigma \quad (4.5)$$

which, as well, reduces to (3.7) for small  $\delta r$  after  $r_d$ . Therefore, close to the  $\sigma$ -disturbance in  $r = r_d$ , the one-dimensional description holds, whereas at larger distances (times), the transverse coordinate  $x = r\theta$  cannot be approximated by  $r_d\theta$  anymore. We thus formalize the problem in terms of angles, rather than distances, *i.e.* in terms of  $\theta$ , whose reference scale is  $\alpha = a/r_d$ .

#### 4.2. The spot of dirt, and initial response

A disturbance of surface tension is applied to the clean film, according to the methods described in section 2.2. It behaves like a dirty spot of size  $2a$ , modelled by a bell-shaped curve as in equation (3.9) at  $r = r_d$  (that is  $t = 0$ ). The short time velocity field corresponds to the one in equation (3.10), written in terms of  $\theta$

$$v(\theta, t) \sim \frac{t r_d}{\tau_0^2} \theta e^{-\frac{\theta^2}{2\alpha^2}} \quad (4.6)$$

with  $\tau_0$  given by (3.11). Figure 12 shows the velocity measurements obtained from particles ( $d_p = 10 \mu\text{m}$  in diameter) introduced inside the water bulk prior to the formation of the sheet. Their displacement is observed by backlighting using a high-speed camera (figure 12a). Particles were chosen so that their Stokes number  $St = (d_p^2/\nu)/\tau_0$ , is at most about  $10^{-1}$  so that they behave as passive tracers. Tracking a few hundreds of tracers along their trajectories gives access to time averaged velocity profiles, as a function of the angle  $\theta$  (figure 12b). The profiles shape, shown for positive angles, indicates the presence of an interstitial velocity  $v$ , removing the liquid out the central zone where surface tension has been lowered. The outwards velocity is of the order of a few  $\text{cm s}^{-1}$ , much smaller than the radial velocity  $U$ , of the order of a  $\text{m s}^{-1}$ . Fitting expression (4.6) to the experimental profiles shows fair agreement. Then, plotting the velocity amplitude versus time reveals the expected linear dependency, predicted in section 3. The slope  $r_d/\tau_0^2$  gives a direct measurement for  $\tau_0 = 5.1 \text{ ms}$ . From equation (3.11), we estimate the

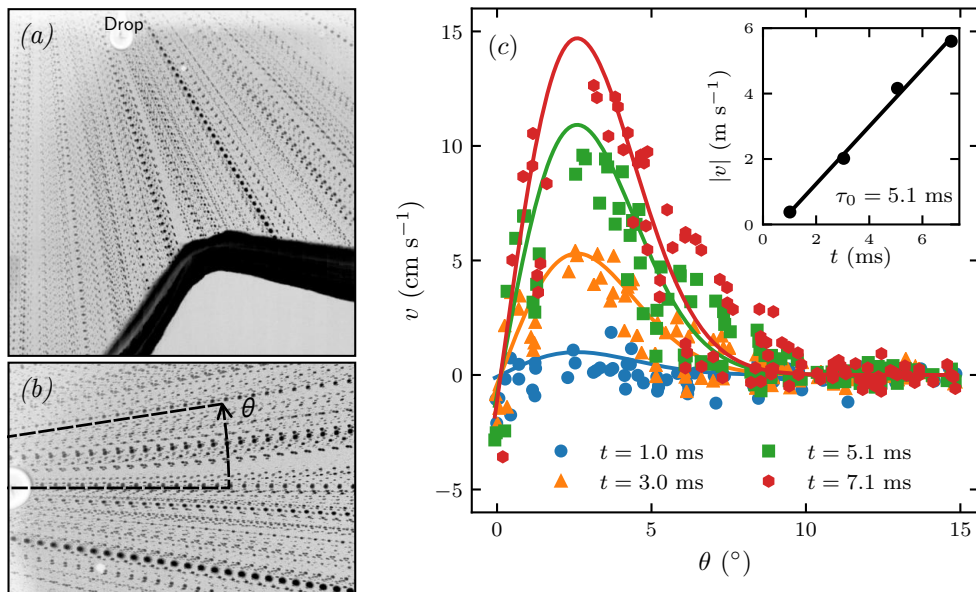


FIGURE 12. Velocity measurements of the interstitial flow. a) Superposition of 500 images grabbed at 3 kHz. b) Close-up view of the tracked particles in the correct coordinates system. Picture is 19 mm wide. c) Transverse velocity  $v$  as a function of the angle  $\theta$  to the drop, averaged around four successive times (*i.e.* radii) from the drop location (for clarity, only positive angles are plotted). Acetone drop, water film ( $U = 2.2 \text{ m s}^{-1}$ ,  $Fr = 50$ ,  $h = 88 \text{ }\mu\text{m}$ ),  $r_d = 23 \text{ mm}$ ,  $\alpha = 2.5^\circ$ ,  $\tau_0 = 5.1 \text{ ms}$ ,  $\Delta\sigma \simeq 3 \text{ mN m}^{-1}$ ,  $Pe = 1.5 \times 10^5$ . Inset: the amplitude  $|v|$  in the expression  $v = |v|\theta \exp(-\theta^2/2\alpha^2)$  (see equation (4.6)) is fitted to the experimental data and plotted versus time  $t$  for the corresponding successive times. The timescale  $\tau_0$  reads directly from the slope  $r_d/\tau_0^2$ .

initial surface tension gap  $\Delta\sigma \simeq 3 \text{ mN m}^{-1}$ , a small surface tension deficit relative to the surface tension of the water liquid film ( $\sigma \approx 70 \text{ mN m}^{-1}$ ).

The short time behavior of the surface thickness is derived from equation (3.4) as

$$\frac{h(\theta, t)}{h} = 1 - \frac{t^2}{2\tau_0^2} \left( 1 - \frac{\theta^2}{\alpha^2} \right) e^{-\frac{\theta^2}{2\alpha^2}} \quad (4.7)$$

and is compared to the interferometric measurements of section 2 in figure 13, with  $\alpha$  and  $\tau_0$  as fitting parameters. Because of the mean radial divergence of the sheet, the thickness profiles are shifted, in the mean, towards lower values for larger distances (times) from the pollutant source (figure 13b), while concomitantly a central depletion bordered by bumps grows in amplitude, digging the film. From the fitted time  $\tau_0 = 6.5 \text{ ms}$  and  $a = 0.5 \text{ mm}$  and the measured film thickness at the location of the perturbation  $h = 34 \text{ }\mu\text{m}$  corresponding to the perturbation shown in figure 13, we anticipate that  $\Delta\sigma \approx 0.1 \text{ mN m}^{-1}$ , an even smaller fraction indeed of the bare liquid film surface tension, than with the perturbation corresponding to figure 12.

The transverse flow (figure 12) and consecutive local film thinning (figure 13) evidenced here and successfully comparing to the theoretical predictions at short times thus support the early dynamics mechanism of section 3.1. Given the experimental Péclet numbers used here, of the order of  $10^4$  and larger, diffusion has no chance to regularize the initial dirt.

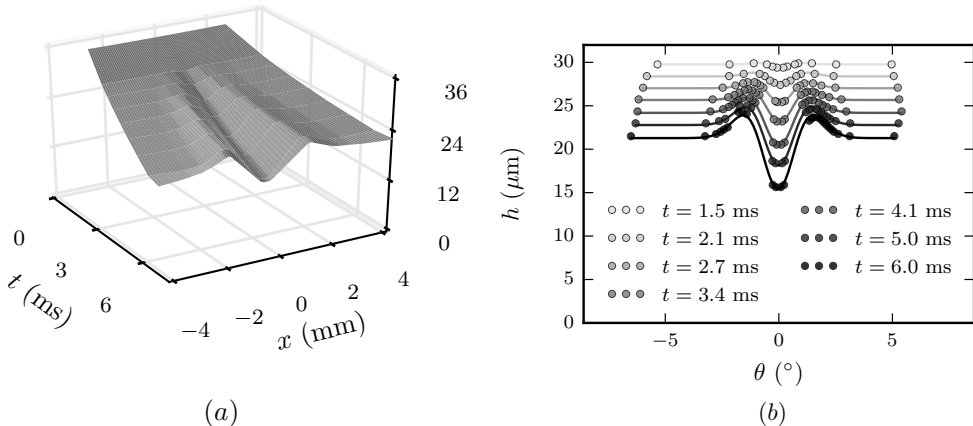


FIGURE 13. Film thickness. a) Interpolated thickness field. b) Transverse thickness profiles for different times (distances) after the perturbation. Experimental data (points) are plotted along with a the prediction in equation (4.7) (solid line) with  $r_d = 3.3$  cm, with  $\alpha = 0.8 \pm 0.1^\circ$  and  $\tau_0 = 6.5$  ms giving  $Pe = 3 \times 10^4$ . Ethanol drop, water film,  $U = 3.2$  m s $^{-1}$ ,  $h = 34$   $\mu$ m.

#### 4.3. Later times

The short time response of the film to a local surface tension deficit predicts a catastrophic thinning through the Marangoni mechanism in section 3, a mechanism which, when closely inspected, is seen to be indeed at play, as just shown, for initial times. However, film digging operates on a substrate which, by construction of the Savart sheet, thins, in the mean. We now incorporate this ingredient in the quantitative analysis for the evolution of the film minimal thickness  $h(0, t)$ , at the center of the depleted zone in  $\theta = 0$ . There, by symmetry,  $\partial_\theta h = 0$  at any time  $t$  and the mass conservation equation (4.3), together with the time-distance relation in equation (4.2) provides

$$\partial_t \{h(0, t)(r_d + Ut)\} + h(0, t)\partial_\theta v|_{\theta=0} = 0 \quad (4.8)$$

which solves, using the initial velocity profile (4.6), into

$$\frac{h(0, t)}{h} \left(1 + \frac{Ut}{r_d}\right) = \exp \left\{ - \left( \frac{r_d}{U\tau_0} \right)^2 \left( \frac{Ut}{r_d} - \log \left( 1 + \frac{Ut}{r_d} \right) \right) \right\}. \quad (4.9)$$

In the absence of perturbation ( $\tau_0 = \infty$ ), equation (4.9) expresses the natural thinning of the radially expanding Savart sheet (equations (2.3) and (4.2)). For a non-zero perturbation, that is a finite  $\tau_0$ , the film digs faster than naturally. A short time expansion of (4.9) restores (3.24), but its validity is now expected to hold for later times.

For given film velocity  $U$  and radial location of the perturbation  $r_d$ , the only tunable parameter is  $\tau_0$ , which is varied by changing the evaporating droplet-liquid sheet distance (see section 4.4). Figure 14a shows the film minimal thickness  $h(0, t)$ , rescaled by the substrate decreasing thickness  $h/(1 + Ut/r_d)$ , as a function of time  $t$ , for different  $\tau_0$ , measured by fitting expression (4.9) on the experimental data. The film thickness decrease is faster and deeper when  $\tau_0$  is shorter and consistently, all curves collapse on the same master curve, well represented by the expected trend, although the film seems to thin even faster than expected from equation (4.9).

These experiments on the Savart sheet produce a modest, though dramatically evolving, relative thickness decrease, but do not exhibit film puncture *per se*, because the sheet is naturally bounded. Instead of puncturing a hole, film thinning results in a

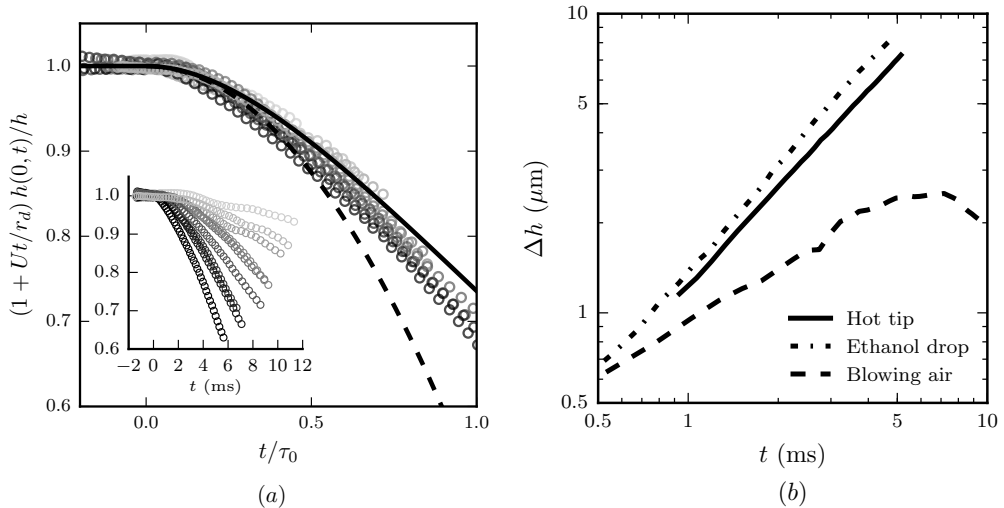


FIGURE 14. a) Film minimal thickness  $h(0, t)$  as a function of time  $t$ : time is rescaled by  $\tau_0$  in the main graph, original time dependences are in the insert. From lightgray to black,  $\tau_0$  equals successively 24.9; 16.9; 14.3; 10.9; 10.7; 8.7; 6.9; 6.7 and 5.1 ms. The solid line is expression 4.9 and the dashed line its short time expansion. b) Thickness difference  $\Delta h$  between film thinnest and thickest points as a function of time, for 3 different local perturbations: hot tip ( $\tau_0 = 5.6$  ms), ethanol drop ( $\tau_0 = 6.5$  ms) and blowing air on the film.

reduction of the sheet radius (see equation (2.2)), the location where incoming radial momentum is equilibrated by surface tension retraction: since the film is thinner, it carries less momentum, and therefore the equilibrium is reached sooner i.e. at a shorter radial distance, as seen in figure 15. Note that even the structure of the sheet rim is altered with respect to the natural case (figure 15a). Contrary to the cusped nodes running along the rim of free sheets (Gordillo *et al.* (2014); Villermaux & Almarcha (2016)), the rim now features a stationary cusp that does not collect any liquid (figure 15b). The reason is, presumably, that since surface tension is minimal in  $x = 0$ , a Marangoni stress helps evacuating the liquid in the rim along which surface tension is gradually increasing, and prevents accumulation in a node, thus smoothing its contour (figure 15c). Away from the disturbed zone, the rim has the usual modified cardioid shape (Taylor 1959b; Clanet & Villermaux 2002).

Finally, the nature of the phenomenon discussed here is best illustrated by comparing with a perturbation of the film which does not incorporate the main ingredient of the self-amplification mechanism, that is the Marangoni stress. Figure 14b shows the gradual increase of the maximal film thickness difference  $\Delta h$  between the film thinnest and thickest points as a function of time following an injection of ethanol, and heat in film, compared to an inertial perturbation made by blowing air perpendicular to the film at  $3 \text{ ms}^{-1}$  with a 0.6 mm in diameter tube. Although both kinds of perturbations grow at short time (at a different rate, however), the inertial air jet perturbation soon saturates, and decays, while the active perturbations amplify a self-sustained growth in the sense explained in section 3.3.

#### 4.4. The penetration of the dirt: varying $\tau_0$

We have not, yet, addressed the way the perturbative agents released by the sources (either vapors of chemicals, or heat) penetrate into the liquid. The sources (drops of pure

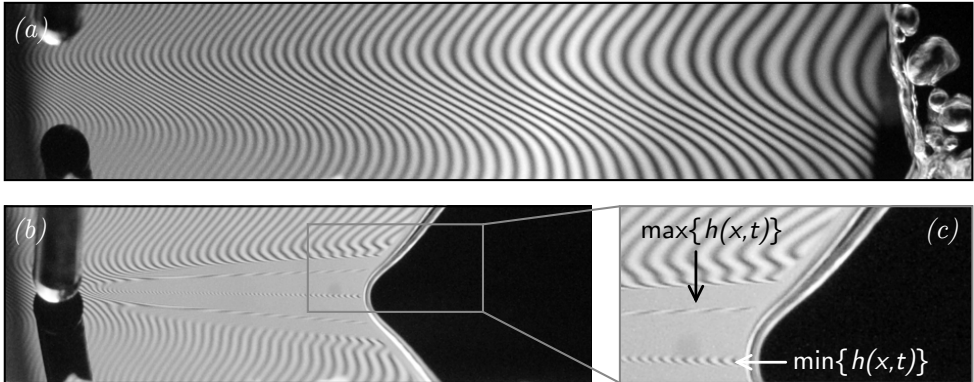


FIGURE 15. Sheet rim retraction. a) Unperturbed sheet, flowing from left to right. The sheet ends up in a corrugated rim. Picture is 48 mm wide. b) Sheet perturbed by an alcohol drop decreasing locally its surface tension: the rim retracts and gets smooth. c) Close-up view of the smooth rim.

chemical substance, or the tip of a hot pan) are suspended above the sheet, which is running at velocity  $U$ . Obviously, the substance diffusing away from the source has to cross the air boundary layer at the surface of the liquid in order to dissolve in it. If the source is close enough from the film so that it is sheared by the flow in the boundary layer, the net vapor flux directed toward the film is enhanced accordingly.

The vapor pressure  $p_V$  of the chemical substance is a measure of the concentration of vapor in air close to the source, and its ability to dissolve in the liquid is measured by Henry's law constant  $k_H$ . Since the liquid surface tension is lowered in proportion of the pollutant concentration dissolved in it (equation 3.1), and since the overall transfer process from the source to the film involves linear relationships in concentration, it is clear that the surface tension deficit will be such that

$$\Delta\sigma \sim p_V k_H \times f(\delta/a) \quad (4.10)$$

where  $f(\delta/a)$  is a decreasing function of the distance  $\delta$  of the source to the film, and  $a$  is the source size, provided  $\delta$  is smaller than the air (viscosity  $\nu_a$ ) boundary layer thickness  $\sqrt{\nu_a r_d / U}$  at the radial location  $r_d$  of the perturbation above the film.

Figure 16 shows how  $\tau_0$  is large when the source stands above the air boundary layer, that it decays rapidly (indicating an increase in  $\Delta\sigma$  or a decrease in the apparent dirt size  $a$  and film thickness  $h$ ), see equation (3.11) as the source approaches the film, and that  $\delta/a$  is indeed the relevant scaling variable (insert). Despite their respective different  $p_V$  and  $k_H$ , acetone, ethanol and isopropyl alcohol (IPA) behave close to identically, precisely because their respective products  $p_V k_H$  are very similar, as can be seen from Table 1. Moreover, since molecular and heat transfer from the sources (drop or hot pan tip) to the film occurs by diffusion in the air, with thus similar diffusivities (the Lewis number in gases is of order unity), the data for heat contamination align accordingly.

The graph in figure 16 refers to the particular method we have chosen to introduce the 'dirt' on the film. It underlines that even weak fluctuations of composition in the air around it can trigger the spontaneous instability of the film. Of course, if any aerosol of pure substance coalesces with the film, the consequence is immediately dramatic, as illustrated in section 2.4. Similarly, any immiscible droplet or micro-bubble in the liquid, smearing the film with traces of pollutants, may trigger film rupture.

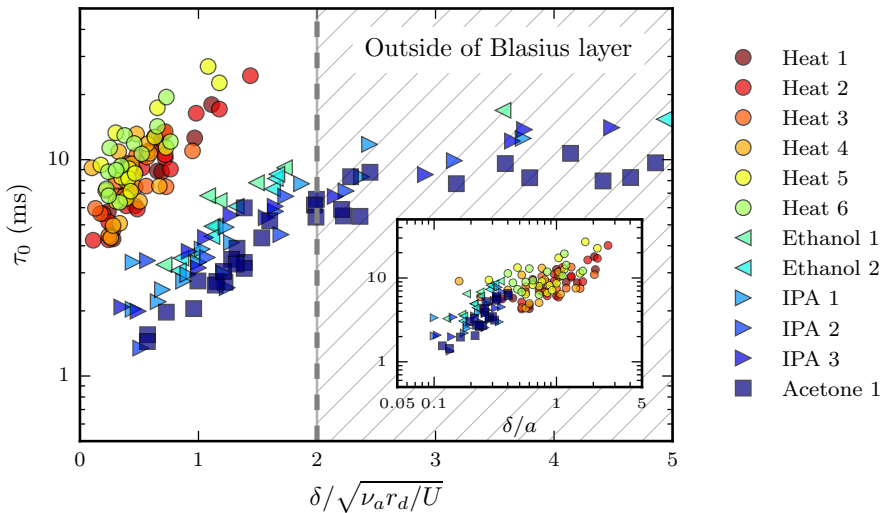


FIGURE 16. Instability timescale  $\tau_0$  measured for different solicitations, plotted versus the distance from the perturbation to the sheet  $\delta$ , scaled by the thickness of the Blasius boundary layer. The diverse runs correspond to different film velocities when the perturbation is chemical, or decreasing the temperature of the tip from  $450^\circ\text{C}$  (Heat 1) to  $200^\circ\text{C}$  (Heat 6) by steps of  $50^\circ\text{C}$ , with no noticeable influence. In insert,  $\tau_0$  is plotted against  $\delta/a$ , with  $a$  the size of the perturbation, for data inside the boundary layer ( $\delta/\sqrt{\nu_a r_d/U} < 2$ ).

## 5. Conclusion

Often, the reasons invoked to explain the puncture of liquid films are either the existence of attractive van de Waals forces, or thermal fluctuations. These ingredients are usually considered as sufficient, while we know that they are likely to operate on films at most a few tens of nanometers thick only. However, it has also been known for at least 60 years that much thicker liquid films nucleate holes spontaneously, in a variety of different situations. It is this paradox which has prompted the present work.

The paradigm is that liquid surfaces are always somewhat dirty, to some extent, and that even a minute amount of dirt is enough to initiate puncture.

The precise meaning of ‘dirt’ refers to any agent diluted in the liquid, which is liable to lower its surface tension and therefore, through a Marangoni mechanism which we have shown to be self-sustained, to dig the film down to rupture. If a deficit of surface tension  $\Delta\sigma$  is applied on a dirty spot of size  $a$  on a liquid film of density  $\rho$  and thickness  $h$ , an interstitial flow depletes the spot within a time  $\tau_0 = \sqrt{\rho h a^2 / \Delta\sigma}$ , emptying and puncturing the film provided molecular diffusion of the dirt along the film has not regularized it in the meantime. Self-amplification thus occurs as soon as the Péclet number  $Pe = a^2 / D\tau_0$  is larger than unity. For instance, a  $100\ \mu\text{m}$  spot of ethanol dissolved into a  $10\ \mu\text{m}$  thick liquid film with typical deficit of  $\Delta\sigma \sim 0.1\ \text{mN m}^{-1}$  ruptures in  $\tau_0 \sim 1\ \text{ms}$  with  $Pe = 10^4$ . We have explained that one way to understand the condition

$$Pe > 1 \quad (5.1)$$

is to note that it is equivalent to

$$\sqrt{\Delta\sigma / \rho h} > D/a, \quad (5.2)$$

stating that the film Taylor-Culick velocity constructed with the surface tension deficit  $\Delta\sigma$  should be larger than the diffusion spreading velocity of the initial spot. For a film

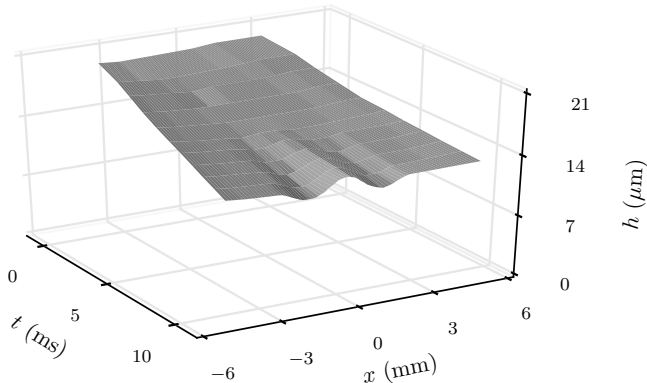


FIGURE 17. Measured thickness field for an excess of surface tension in the dirty spot (water drop close to an ethanol sheet,  $a = 1.5$  mm,  $r_d = 56$  mm giving  $\alpha = 1.5^\circ$ ). The interstitial liquid is now concentrated at the center of the spot, instead of being expelled at its periphery (see figure 13 for comparison).

with typical thickness  $h = 10$   $\mu\text{m}$  contaminated with a surface tension deficit  $\Delta\sigma = 0.1$   $\text{mN m}^{-1}$ , the crossover size  $a$  is about 10 nm, much smaller than all the perturbation sizes shown here, which consistently puncture the film provided they have the chance to penetrate in it (with no rebound, nor evaporation if the perturbation is a drop projected over the film as in figure 8b).

The corresponding scenario was suggested by contemplating precise experiments in different ways, either by spraying water films with droplets of soluble chemicals such as ethanol, or by perturbing the vapor, or temperature field at the surface of a stationary water Savart sheet. In the latter configuration, precise measurements of the instability early dynamics were obtained, including the direct proof of the existence of an interstitial flow, the shape of the resulting film thickness profile, the rate of depletion at the perturbed spot center, and the intensification of the film thickness gradients at the periphery of the spot. These were all interpreted as evidences of a self-amplified mechanism digging the film, irrespective of the nature of the perturbing agents (chemical, or heat) provided they induce a surface tension deficit at sufficiently large  $Pe$  which was always the case in these experiments. The corresponding timescale  $\tau_0$  was measured, even if the precise nature of the singularity, if any, leading to film thickness cancellation, remains an opened issue.

Besides, when the roles in the experiment are inverted, namely when one considers the perturbation of an ethanol sheet by the vapor coming from a water droplet, the effect subsists, but with an opposite sign, the interstitial flow now concentrating the peripheral liquid at the center of the spot (figure 17, to be compared with figure 13).

Dirtiness is a feature of nature (Jacob 1987); the mechanism discussed here is therefore likely to be generic: minute fluctuations of composition of the atmosphere around a liquid film, any floating aerosol coalescing with it can trigger this spontaneous mechanism ending with rupture as will do any immiscible droplet or micro-bubble in the liquid, smearing the film with traces of pollutants.

Films in nature are sometimes armored with surfactants and we have shown in figure 6 how a layer of surfactant prevents an approaching ethanol droplet from puncturing the film, puncture which otherwise occurs before the droplet has touched a clean film. The surface, or ‘spreading’ pressure (Fowler & Guggenheim 1952) of a layer of mobile molecules with surface concentration  $\Gamma$  is, in the diluted limit  $\phi = \Gamma k_B T$ . The work spent at opening a spot of radius  $a$  depleted in surfactant by an amount  $\Delta\Gamma$  is proportional to



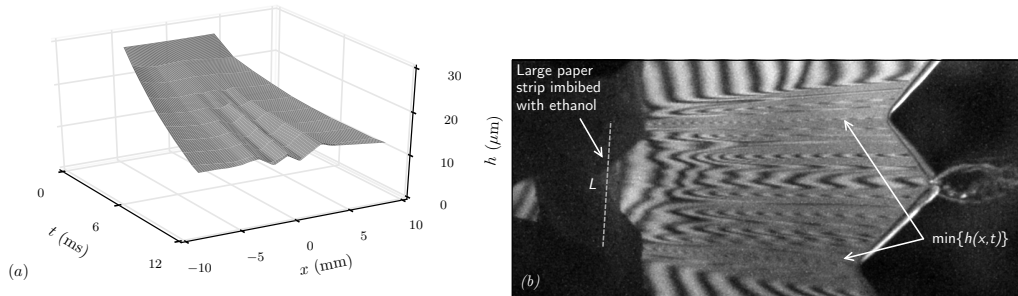


FIGURE 18. Broad support of surface tension deficit. a) Measured thickness field for an ethanol source of size  $L = 4.6$  mm. The thickness decreases at the edges of the source. b) Sheet rim double retraction, with an even larger perturbation  $L = 10$  mm. Two cusps appear, signatures of the two decoupled thickness decreases.

$a^2 \Delta \phi$ , so that in place of equation (3.6), we have in that case

$$\partial_t v = \frac{2}{\rho h} \partial_x (\sigma - \phi), \quad (5.3)$$

making it clear that a surfactant coated film is shielded against the Marangoni surface contamination mechanism studied here.

The present observations are consistent with those of Vernay *et al.* (2015) who were using oil droplets loaded with surfactants partially miscible in water as perturbation agents, introduced in the bulk of the liquid. They, too, observed film digging and thickness gradient steepening prior to puncture. Our findings provide a mechanistic interpretation of these facts, relying on the onset of a local interstitial flow depleting the film, rather than the growth of a viscous boundary layer across the film, which would result in film thickening, rather than thinning. In fact, momentum transfer across the film occurs very early in the process. It is completed within a time  $h^2/\nu$  while puncture takes  $\tau_0$ . As long as  $h^2/\nu \ll \tau_0$ , than is for films thinner than

$$h_* \sim \left( \frac{\eta \nu a^2}{\Delta \sigma} \right)^{1/3}, \quad (5.4)$$

the plug flow description we have opted for holds, even if contamination time  $h^2/D$  is much larger for species with  $Sc \gg 1$ . With  $a = 100$   $\mu\text{m}$  and  $\Delta \sigma = 0.1$   $\text{mN m}^{-1}$  on a water film, we have  $h_* \approx 50$   $\mu\text{m}$ , and we have seen in figure 10 that even films as thick as 250  $\mu\text{m}$  are sensitive to the effect we have described.

Finally, we would like to mention the profound analogy existing between the mechanism for hole nucleation in a locally dirty liquid film, and the phenomenon of flame ignition in the combustion of premixed reactants undergoing an exothermic reaction (Frank-Kamenetskii 1969; Zeldovich *et al.* 1985). Combustion refers to this class of reactions which are exothermic, and whose reaction kinetics is strongly activated by temperature. Let  $k$  be the (temperature dependent) reaction rate, and  $a$  the size of a spot in the mixture where some thermal energy has been released, thus elevating locally the temperature. Ignition of the mixture will occur provided the temperature in the spot remains high enough during a time of the order of  $k^{-1}$  at least for the reaction, which is exothermic thus sustaining flame propagation, to proceed. If  $D$  is the heat diffusivity, the condition above reads  $ka^2/D \gg 1$ , which is the precise equivalent of our large Péclet number (3.12)–(5.1) condition for hole nucleation.

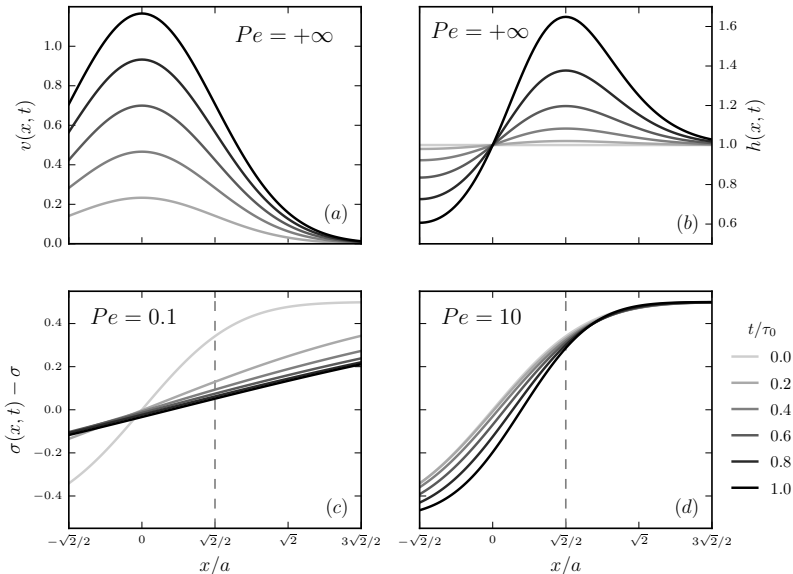


FIGURE 19. Time evolution of an initial step of surface tension of width  $a$ , for different Péclet numbers. Graphs are centered around  $x = a/\sqrt{2}$ , where compression is maximal. a) Interstitial velocity and b) film thickness for  $Pe = +\infty$  (or equivalently short times  $t/\tau_0 \ll 1$ ). c-d) Surface tension profiles at successive times, for two finite Péclet numbers.

## Appendix A. Dynamics of a front

We have up to now considered a spot of dirt with a single length-scale, namely its radius  $a$ . It may happen that the dirt is deposited on the film over a broader support, say of size  $L \gg a$ , with smooth crossovers of the pollutant concentration at the periphery of the spot over a width, say,  $a$ . In that case, illustrated in figure 18, a dynamics very similar to the one described in section 3 distorts an initially flat film. We consider an initially smooth crossover of the surface tension as

$$\sigma(x, t = 0) = \sigma + \frac{\Delta\sigma}{2} \operatorname{erf}\left(\frac{x}{a}\right) \quad (\text{A1})$$

$$\text{so that } \partial_x \sigma|_{t=0} \sim \frac{\Delta\sigma}{a} e^{-\frac{x^2}{a^2}} \quad (\text{A2})$$

From equation (3.7), the interstitial fluid velocity is

$$v(x, t) \sim \frac{ta}{\tau_0^2} e^{-\frac{x^2}{a^2}} \quad (\text{A3})$$

where  $\tau_0$  is given by (3.11). The symmetry being broken in the initial condition, when compared to a bell-shaped initial  $\sigma$ -deficit, the velocity is positive everywhere (see figure 19a). Solved in the slender slope limit  $\partial_x h \ll 1$ , mass conservation in (3.4) provides the thickness field  $h(x, t)$  as

$$\frac{h(x, t)}{h} = \exp\left\{\left(\frac{t}{\tau_0}\right)^2 \frac{x}{a} e^{-\frac{x^2}{a^2}}\right\}, \quad (\text{A4})$$

with  $h$  the initial film thickness. Liquid is flowing towards positive  $x$ , collecting into a bump located in  $x = a/\sqrt{2}$ , and digging in  $x = -a\sqrt{2}$  (figure 19b).

The maximal rate of compression  $\gamma$  along the film is now obtained in  $x = a/\sqrt{2}$ , and

increases linearly with time  $t$  as in (3.13). The negatively sloped velocity expands about that point as  $v(x, t) = v(a/\sqrt{2}, t) - \gamma\tilde{x}$ , with  $\tilde{x} = x - a/\sqrt{2}$ . The mixing analogy maps the problem onto a pure diffusion equation, as in section 3, with the same conclusions. The diffusion equation (3.18) is solved in this particular case to give an explicit expression for  $\sigma(x, t)$

$$\sigma(x, t) = \sigma + \frac{\Delta\sigma}{2} \operatorname{erf} \left( \frac{\xi(x, t) + \frac{\sqrt{2}}{2}}{\sqrt{1 + 4\tau(t)}} \right) \quad (\text{A } 5)$$

$$\text{with } \xi(x, t) = \frac{x - \frac{\sqrt{2}}{2}}{s(t)}, \quad \tau(t) = D \int_0^t \frac{dt'}{s(t')^2}, \quad \text{and } s(t) = ae^{-\frac{t^2}{2\tau_0^2}} \quad (\text{A } 6)$$

Figures 19c-d illustrate how the  $\sigma$ -fields relaxes for  $Pe < 1$ , and steepens for  $Pe > 1$  in the self-sustained amplification regime.

**Acknowledgements:** The Agence Nationale de la Recherche (ANR) is acknowledged for funding of the grant ANR ‘FISICS’ ANR-15-CE30-0015-03.

#### REFERENCES

- BATCHELOR, G. K. 1959 Small-scale variation of convected quantities like temperature in turbulent fluid. part 1. general discussion and the case of small conductivity. *J. Fluid Mech.* **5**, 113–133.
- BERENDSEN, C. W. J., ZEEGERS, J. C. H., KRUIS, G. C. F. L., RIEPEN, M. & DARHUBER, A. A. 2012 Rupture of thin liquid films induced by impinging air-jets. *Langmuir* **28** (26), 9977–9985.
- BETTERTON, M. D. & BRENNER, M. P. 1999 Electrostatic edge instability of lipid membranes. *Phys. Rev. Lett.* **82** (7), 1598–1601.
- BLANCHARD, D. C 1963 The electrification of the atmosphere by particles from bubbles in the sea. *Progress in Oceanography* **1**, 73–202.
- BOOS, W. & THESS, A. 1999 Cascade of structures in long-wavelength marangoni instability. *Phys. Fluids* **11** (6), 1484–1494.
- BOWEN, M. & TILLEY, B. S. 2013 On self-similar thermal rupture of thin liquid sheets. *Phys. Fluids* **25** (102105).
- BREMOND, N. & VILLERMAUX, E. 2005 Bursting thin liquid films. *J. Fluid Mech.* **524**, 121–130.
- BURTON, J. C. & TABOREK, P. 2007 Two-dimensional inviscid pinch-off: An example of self-similarity of the second kind. *Phys. Fluids* **19**, 102109.
- CASTELETTO, V., CANTAT, I., SARKER, D., BAUSCH, R., BONN, D. & MEUNIER, J. 2003 Stability of soap films: Hysteresis and nucleation of black films. *Phys. Rev. Lett.* **90** (048302).
- CHAMPOUGNY, L., RIO, E., RESTAGNO, F. & SCHEID, B. 2017 The break-up of free films pulled out of a pure liquid bath. *J. Fluid Mech.* **811**, 499–524.
- CLANET, C. & VILLERMAUX, E. 2002 Life of a smooth liquid sheet. *J. Fluid Mech.* **462**.
- COURBIN, L. & STONE, H. A. 2006 Impact, puncturing, and the self-healing of soap films. *Phys. Fluids* **18** (091105).
- CRASTER, R. V. & MATAR, O. K. 2009 Dynamics and stability of thin liquid films. *Rev. Mod. Phys.* **81** (3), 1131–1198.
- CULICK, F. E. C. 1960 Comments on a ruptured soap film. *J. Appl. Phys.* **31**, 1128–1129.
- DENKOV, N. D. 2004 Mechanisms of foam destruction by oil-based antifoams. *Langmuir* **20** (22), 9463–9505.
- DERJAGUIN, B. V., CHURAEV, N. V. & MULLER, V. M. 1987 *Surface Forces*. Plenum.
- DOMBROWSKI, N. & FRASER, R. P. 1954 A photographic investigation into the disintegration of liquid sheets. *Phil. Trans. R. Soc. Lond. A* **247**, 101–130.
- DUCHEMIN, L., LE DIZÈS, S., VINCENT, L. & VILLERMAUX, E. 2015 Self-similar impulsive capillary waves on a ligament. *Phys. Fluids* **27**, 051704.

- ENDERS, S., KAHL, H. & WINKELMANN, J. 2007 Surface tension of the ternary system water + acetone + toluene. *J. Chem. Eng. Data* **52** (3), 1072–1079.
- ERNEUX, T. & DAVIS, S. H. 1993 Nonlinear rupture of free films. *Phys. Fluids A* **5** (5), 1117–1122.
- FOWLER, R. & GUGGENHEIM, E. A. 1952 *Statistical Thermodynamics*. Cambridge University Press, UK.
- FRANK-KAMENETSKII, D. A. 1969 *Diffusion and heat transfer in chemical kinetics*. Plenum Press.
- GARRETT, P. R. 1992 *Defoaming: Theory and Industrial Applications*. *Surfactant Science Series* 45. Taylor & Francis.
- DE GENNES, P.-G. 1998 Progression d'un agent de coalescence dans une emulsion. *C. R. Acad. Sci. Paris Série Iib* **326**, 331–335.
- GORDILLO, J. M., LHUISSIER, H. & VILLERMAUX, E. 2014 On the cusps bordering liquid sheets. *J. Fluid Mech.* **754**.
- GUÉNA, G., POULARD, C. & CAZABAT, A.-M. 2007 Evaporating drops of alkane mixtures. *Colloids Surf. Physicochem. Eng. Asp.* **298** (1-2), 2–11.
- HERNÁNDEZ-SÁNCHEZ, J. F., EDDI, A. & SNOELJER, J. H. 2015 Marangoni spreading due to a localized alcohol supply on a thin water film. *Phys. Fluids* **27** (032003).
- HUANG, J. C. P. 1970 The break-up of axisymmetric liquid sheets. *J. Fluid Mech.* **43**, 305–319.
- ILTON, M., DiMARIA, C. & DALNOKI-VERESS, K. 2016 Direct measurement of the critical pore size in a model membrane. *Phys. Rev. Lett.* **117** (257801).
- ISENBERG, C. 1992 *The Science of Soap Films and Soap Bubbles*. Dover.
- ISRAELACHVILI, J. N. 1991 *Intermolecular and Surface Forces*, 2nd edn. Academic Press.
- JACOB, F. 1987 *La statue intérieure*. Editions Odile Jacob, Seuil.
- JENSEN, O. E. & GROTBORG, J. B. 1992 Insoluble surfactant spreading on a thin viscous film: Shock evolution and film rupture. *J. Fluid Mech.* **240**, 259–288.
- JENSEN, O. E. & GROTBORG, J. B. 1993 The spreading of heat or soluble surfactant along a thin liquid film. *Phys. Fluids A* **5** (1), 58–68.
- KABOVA, Y. O., ALEXEEV, A., GAMBARYAN-ROISMAN, T. & STEPHAN, P. 2006 Marangoni-induced deformation and rupture of a liquid film on a heated microstructured wall. *Phys. Fluids* **18** (012104).
- KALLIADASIS, S., RUYER-QUIL, C., SCHEID, B. & VELARDE, M. G. 2012 *Falling Liquid Films*. Springer.
- LEENAARS, A. F. M., HUETHORST, J. A. M. & VAN OEKEL, J. J. 1990 Marangoni drying: A new extremely clean drying process. *Langmuir* **6** (11), 1701–1703.
- LEVICH, V. G. & KRYLOV, V. S. 1969 Surface-tension-driven phenomena. *Annu. Rev. Fluid Mech.* **1**, 293–316.
- LHUISSIER, H., BRUNET, P. & DORBOLO, S. 2016 Blowing a liquid curtain. *J. Fluid Mech.* **795**, 784–807.
- LHUISSIER, H. & VILLERMAUX, E. 2009a Destabilization of flapping sheets: The surprising analogue of soap films. *Comptes Rendus Mécanique* **337**, 469–480.
- LHUISSIER, H. & VILLERMAUX, E. 2009b Soap films burst like flapping flags. *Phys. Rev. Lett.* **103** (054501).
- LHUISSIER, H. & VILLERMAUX, E. 2011 The destabilization of an initially thick liquid sheet edge. *Phys. Fluids* **23** (091705).
- LHUISSIER, H. & VILLERMAUX, E. 2012a Bursting bubble aerosols. *J. Fluid Mech.* **696**, 5–44.
- LHUISSIER, H. & VILLERMAUX, E. 2012b Crumpled water bells. *J. Fluid Mech.* **693**, 508–540.
- LHUISSIER, H. & VILLERMAUX, E. 2013 'effervescent' atomization in two dimensions. *J. Fluid Mech.* **714**, 361–392.
- LIDE, D. R., ed. 2010 *CRC Handbook of Chemistry and Physics*, 90th edn. CRC Press/Taylor & Francis.
- LINSTROM, P. J. & MALLARD, W. G., ed. 2017 *NIST Chemistry WebBook*. *NIST Standard Reference Database* 69. Gaithersburg MD: National Institute of Standards and Technology.
- MARANGONI, C. 1878 Difesa della teoria dell'elasticità superficiale dei liquidi. plasticità superficiale. *Il Nuovo Cimento Ser. 3* **III** (3), 193–211.

- MARMOTTANT, P., VILLERMAUX, E. & CLANET, C. 2000 Transient surface tension of an expanding liquid sheet. *Journal of Colloid and Interface Science* **230** (1), 29–40.
- MATAR, O. K. & CRASTER, R. V. 2001 Models for marangoni drying. *Phys. Fluids* **13** (7), 1869–1883.
- MAXWELL, J. C. 1875 *Capillary Action*, 9th edn. Encyclopedia Britannica.
- MCENTEE, W. R. & MYSELS, K. J. 1969 The bursting of soap films. i. an experimental study. *J. Phys. Chem.* **73** (9), 3018–3028.
- NIERSTRASZ, V. A. & FRENS, G. 1998 Marginal regeneration in thin vertical liquid films. *J. Colloid Interface Sci.* **207** (2), 209–217.
- PRATT, K. C. & WAKEHAM, W. A. 1975 The mutual diffusion coefficient for binary mixtures of water and the isomers of propanol. *Proc. R. Soc. Lond. Math. Phys. Eng. Sci.* **342** (1630), 401–419.
- RANZ, W. E. 1959 Some experiments on the dynamics of liquid films. *J. Appl. Phys.* **30** (12), 1950–1955.
- RANZ, W. E. 1979 Applications of a stretch model to mixing, diffusion, and reaction in laminar and turbulent flows. *AIChE J.* **25** (1), 41–47.
- REITER, G. 1992 Dewetting of thin polymer films. *Phys. Rev. Lett.* **68** (1), 75–78.
- DE RIVAS, A. & VILLERMAUX, E. 2016 Dense spray evaporation as a mixing process. *Phys. Rev. Fluids* **1** (014201).
- ROCHÉ, M., LI, Z., GRIFFITHS, I. M., LE ROUX, S., CANTAT, I., SAINT-JALMES, A. & STONE, H. A. 2014 Marangoni flow of soluble amphiphiles. *Phys. Rev. Lett.* **112** (208302).
- SAVART, F. 1833 Mémoire sur le choc d’une veine liquide lancée contre un plan circulaire. *Ann. Chim. Phys.* **54**, 55–87.
- SCRIVEN, L. E. & STERNLING, C. V. 1960 The marangoni effects. *Nature* **187** (4733), 186–188.
- SETTLES, G. S. 2001 *Schlieren and Shadowgraph Techniques*. Springer.
- SHARMA, A. & REITER, G. 1996 Instability of thin polymer films on coated substrates: Rupture, dewetting, and drop formation. *J. Colloid Interface Sci.* **178** (2), 383–399.
- TAYLOR, G. I. 1959*a* The dynamics of thin sheets of fluid. ii. waves on fluid sheets. *Proc. R. Soc. Lond. A* **253**, 296–312.
- TAYLOR, G. I. 1959*b* The dynamics of thin sheets of fluid. iii. disintegration of fluid sheets. *Proc. R. Soc. Lond. A* **253**, 313–321.
- TAYLOR, G. I. & MICHAEL, D. H. 1973 On making holes in a sheet of fluid. *J. Fluid Mech.* **58**, 625–639.
- THORODDSEN, S. T., ETOH, T. G. & TAKEHARA, K. 2006 Crown breakup by marangoni instability. *J. Fluid Mech.* **557**, 63.
- THORODDSEN, S. T., THORAVAL, M.-J., TAKEHARA, K. & ETOH, T. G. 2012 Micro-bubble morphologies following drop impacts onto a pool surface. *J. Fluid Mech.* **708**, 469–479.
- VANHOOK, S. J., SCHATZ, M. F., SWIFT, J. B., MCCORMICK, W. D. & SWINNEY, H. L. 1997 Long-wavelength surface-tension-driven Bénard convection: Experiment and theory. *J. Fluid Mech.* **345**, 45–78.
- VARGAFTIK, NATAN B., VINOGRADOV, YURIH K. & YARGIN, VADIM S. 1996 *Handbook of Physical Properties of Liquids and Gases: New Augmented and Revised Edition of the Classic Reference*. Begell House.
- VARGAFTIK, N. B., VOLKOV, B. N. & VOLJAK, L. D. 1983 International tables of the surface tension of water. *J. Phys. Chem. Ref. Data* **12** (3), 817–820.
- VAZQUEZ, G., ALVAREZ, E. & NAVAZA, J. M. 1995 Surface tension of alcohol water + water from 20 to 50 oc. *J. Chem. Eng. Data* **40** (3), 611–614.
- VERNAY, C., RAMOS, L. & LIGOURE, C. 2015 Bursting of dilute emulsion-based liquid sheets driven by a marangoni effect. *Phys. Rev. Lett.* **115** (198302).
- VILLERMAUX, E. 2012 On dissipation in stirred mixtures. *Advances in Applied Mechanics* **45**, 91–107.
- VILLERMAUX, E. & ALMARCHA, C. 2016 Node dynamics and cusps size distribution at the border of liquid sheets. *Phys. Rev. Fluids* **1** (041902).
- VILLERMAUX, E. & CLANET, C. 2002 Life of a flapping liquid sheet. *J. Fluid Mech.* **462**.
- VILLERMAUX, E. & DUPLAT, J. 2003 Mixing as an aggregation process. *Phys. Rev. Lett.* **91** (184501).

- VILLERMAUX, E., PISTRE, V. & LHUISSIER, H. 2013 The viscous savart sheet. *J. Fluid Mech.* **730**, 607–625.
- VLEDOUTS, A., QUINARD, J., VANDENBERGHE, N. & VILLERMAUX, E. 2016 Explosive fragmentation of liquid shells. *J. Fluid Mech.* **788**, 246–273.
- VRIJ, A. 1966 Possible mechanism for the spontaneous rupture of thin, free liquid films. *Discuss. Faraday Soc.* **42**, 23–33.
- WEDERSHOVEN, H. M. J. M., BERENDSEN, C. W. J., ZEEGERS, J. C. H. & DARHUBER, A. A. 2015 Infrared-laser-induced thermocapillary deformation and destabilization of thin liquid films on moving substrates. *Phys. Rev. Appl.* **3** (024005).
- WORTHINGTON, A. M. 1908 *A Study of Splashes*. Longmans, Green & Co.
- ZELDOVICH, Y. B., BARENBLATT, G. I., LIBROVICH, V. B. & MAKHVILADZE, G. M. 1985 *The mathematical theory of combustion and explosions*. Consultants bureau, New York and London.