



HAL
open science

Validation of a low inertia mold with rectangular heating channels for injection process

Jean Collomb, Pascale Balland, Pascal Francescato, Yves Gardet, David Leh,
Philippe Saffré

► **To cite this version:**

Jean Collomb, Pascale Balland, Pascal Francescato, Yves Gardet, David Leh, et al.. Validation of a low inertia mold with rectangular heating channels for injection process. 14th International Conference on Flow Processes in Composite Materials,, May 2018, Lulea, Sweden. hal-01808378

HAL Id: hal-01808378

<https://hal.science/hal-01808378>

Submitted on 5 Jun 2018

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

VALIDATION OF A LOW INERTIA MOLD WITH RECTANGULAR HEATING CHANNELS FOR INJECTION PROCESS

J. Collomb^{1*}, P. Balland^{1*}, P. Francescato^{1*}, Y. Gardet², D. Leh², P. Saffré¹

¹ Univ. Savoie Mont Blanc, SYMME, FR 74000 Annecy, France.

² CTI company, Compose Group, 8 bis avenue de la Gare, 01100 Bellignat, France.

*Corresponding author (jean.collomb@univ-smb.fr)

Keywords: Heat transfer; Profiled channels; Conformal channels; Rapid Heat Cycle Molding (RHCM); Rapid molding; Injection molding.

Abstract

Current molding processes for high performance composite materials do not meet future expectations of composite manufacturers in terms of cadence, particularly for aeronautics and automotive [1]. Researches are currently being carried out on resin, reinforcements and process automation, with the aim of increasing composite production line productivity for being competitive in terms of cost-quality-cadence. However, current molds are designed according to rules from the field of plastic injection, which leads to massive structures and low thermal performances [2]. For efficiency on the complete production line, it is essential to conduct research on molds to increase their thermomechanical responses. In a previous study [3], it was demonstrated that the transition from circular to rectangular heating channels, with consideration of technological aspects (pump and pressure drops) could significantly increase heating rates of the structure. The main purpose of this study is to experimentally validate thermal performances of an innovative low inertia mold with rectangular channels compared to a massive reference RTM mold as presented in Figure 1.

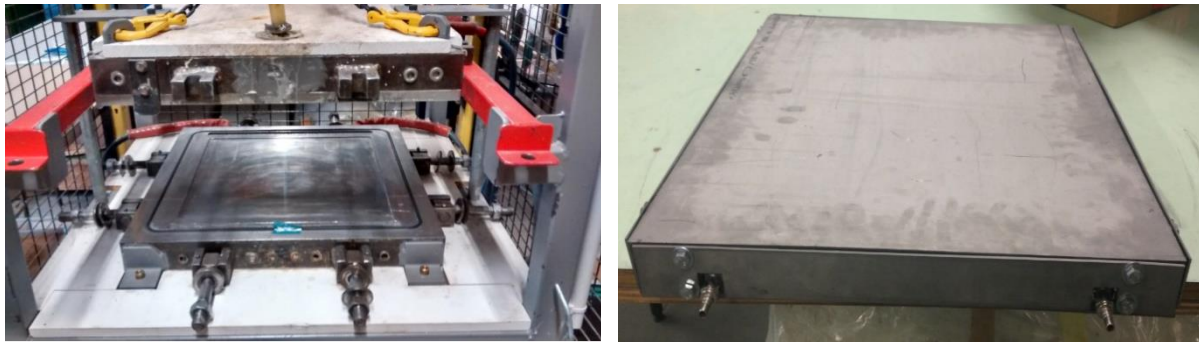


Figure 1: Massive reference RTM mold (left) and innovative low inertia mold with rectangular heating channels (right).

First experimental results are presented Table 1 and Figure 2. For these experiments, the heating of the mold is carried out with a thermal power of 12kW and a circulation of water. The temperature setpoint is set at 80°C. The improvement of thermal performances, thanks to rectangular heating channels and low inertia mold design, is confirmed with a heating rate more than 4 times greater and a temperature difference on the cavity mold 2 times lower.

Table 1: Experimental comparison of thermal performances

	Heating rate ($^{\circ}\text{C}\cdot\text{min}^{-1}$)	$\Delta T_{\text{max}}^{\text{cavity mold}}$ ($^{\circ}\text{C}$)
Reference massive mold	1.9	11.5
Low inertia mold with rectangular heating channels	8.1	5.0

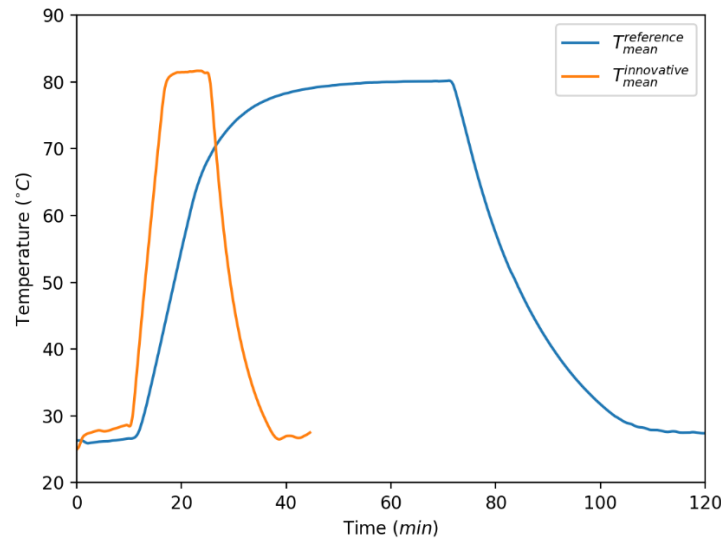


Figure 2: Thermal gain of innovative mold for a production cycle compared to the reference mold.

Moreover, a finite element model of the innovative mold, presented Figure 3, is defined with consideration of technological aspects: heating power, regulation and pressure drop. A numerical-experimental confrontation is also presented in Figure 3 and highlights the good prediction of the numerical model.

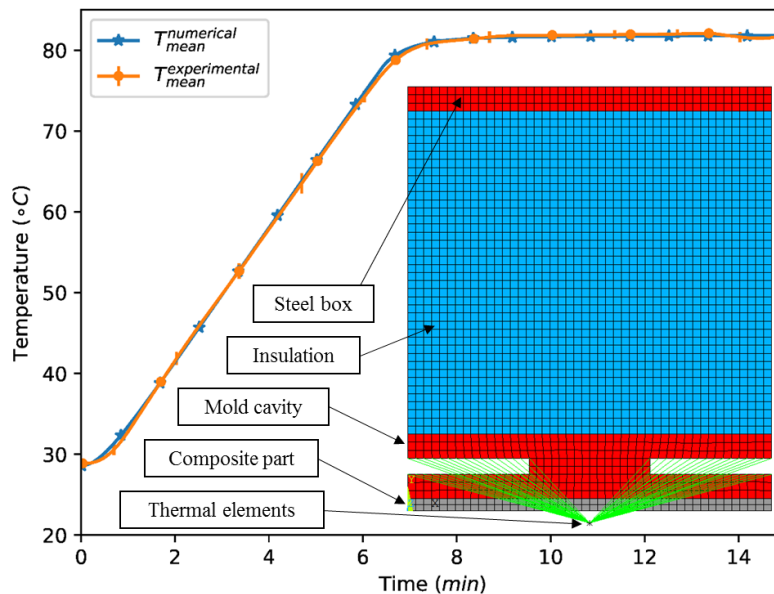


Figure 3: Numerical and experimental temperature comparison on the cavity surface for the innovative mold.

This comparison of a conventional massive mold and an innovative low inertia mold with rectangular heating channels clearly confirms the improvement of thermal performances and the interest of this concept. With the numerical model, a thermomechanical multiparameter geometric optimization of this mold concept will be conducted in a future study.

References

- [1] J. Leahy, Growing Horizons-Global market forecast, 2017.
- [2] D.V. Rosato, M.G. Rosato, Injection Molding Handbook, 3rd ed., Springer US, 2000. doi:10.1007/978-1-4615-4597-2.
- [3] J. Collomb, P. Balland, P. Francescato, Y. Gardet, D. Leh, P. Saffré, Thermo-mechanical simulations for the comparison of heating channels geometries for composite material injection tools, Appl. Therm. Eng. 126 (2017) 204–211. doi:10.1016/j.applthermaleng.2017.07.125.