



HAL
open science

Reliability-based sensitivity estimators of rare event probability in the presence of distribution parameter uncertainty

Vincent Chabridon, Mathieu Balesdent, Jean-Marc Bourinet, Jérôme Morio, Nicolas Gayton

► To cite this version:

Vincent Chabridon, Mathieu Balesdent, Jean-Marc Bourinet, Jérôme Morio, Nicolas Gayton. Reliability-based sensitivity estimators of rare event probability in the presence of distribution parameter uncertainty. Reliability Engineering and System Safety, 2018, 178, pp.164-178. 10.1016/j.ress.2018.06.008 . hal-01850651

HAL Id: hal-01850651

<https://hal.science/hal-01850651>

Submitted on 27 Jul 2018

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Reliability-based sensitivity estimators of rare event probability in the presence of distribution parameter uncertainty

Vincent Chabridon^{a,c,*}, Mathieu Balesdent^a, Jean-Marc Bourinet^c, Jérôme Morio^b, Nicolas Gayton^c

^aONERA/DTIS, Université Paris Saclay, F-91123 Palaiseau Cedex, France

^bONERA/DTIS, Université de Toulouse, F-31055 Toulouse, France

^cUniversité Clermont Auvergne, CNRS, SIGMA Clermont, Institut Pascal, F-63000 Clermont-Ferrand, France

Abstract

This paper aims at presenting sensitivity estimators of a rare event probability in the context of uncertain distribution parameters (which are often not known precisely or poorly estimated due to limited data). Since the distribution parameters are also affected by uncertainties, a possible solution consists in considering a second probabilistic uncertainty level. Then, by propagating this bi-level uncertainty, the failure probability becomes a random variable and one can use the mean estimator of the distribution of the failure probabilities (i.e. the “predictive failure probability”, PFP) as a new measure of safety. In this paper, the use of an augmented framework (composed of both basic variables and their probability distribution parameters) coupled with an Adaptive Importance Sampling strategy is proposed to get an efficient estimation strategy of the PFP. Consequently, double-loop procedure is avoided and the computational cost is decreased. Thus, sensitivity estimators of the PFP are derived with respect to some deterministic hyper-parameters parametrizing a priori modeling choice. Two cases are treated: either the uncertain distribution parameters follow an unbounded probability law, or a bounded one. The method efficiency is assessed on two different academic test-cases and a real space system computer code (launch vehicle stage fallback zone estimation).

Keywords: Distribution parameter uncertainty, Rare event simulation, Adaptive importance sampling, Reliability sensitivity analysis, Score functions

1. Introduction

Reliability analysis and sensitivity analysis are two major steps in uncertainty quantification of complex systems. For a large variety of applications, assessing the reliability of complex engineering systems (such as aerospace ones) implies, first, to build a dedicated computer code whose aim is to mimick the behavior of the real system. This code can be high-fidelity and consequently, costly-to-evaluate. In uncertainty quantification, it is often considered as an input-output black-box. Then, one needs to track down and quantify the uncertainties affecting the basic input variables (i.e. physical variables) or those arising in the model itself. Finally, one can propagate these uncertainties through the simulation code and estimate, with some dedicated methods, a so-called failure probability associated to an unsafe and undesired state of the system [1]. In a context of highly safe systems (e.g., systems implying potential risks in terms of human security, environmental impact and/or huge financial loss), the low failure probability requires a huge computational cost to be estimated by crude Monte Carlo (CMC) [2] which can make these calculations intractable, especially for time-demanding simulation models.

*Corresponding author. Tel.: +33 1 80 38 66 96.

Email address: vincent.chabridon@onera.fr (Vincent Chabridon)

12 For these reasons, several methods are available to handle this problem of rareness: approximation methods of the failure
13 region [3], simulation methods based on Monte Carlo simulations or on quasi-random sampling [4], and, finally, surrogate-
14 based methods [5].

15 After the uncertainty propagation phase, it is often relevant to examine how sensitive some output quantities are with
16 respect to (w.r.t.) the variability affecting input quantities. On the one hand, one can apply *sensitivity analysis of model*
17 *output* (SAMO) whose aim is to study how the model output of the computer code varies regarding the input uncertainty
18 [6, 7, 8, 9, 10, 11]. On the other hand, *reliability-based sensitivity analysis* (RbSA) aims at quantifying the impact of the
19 variability affecting any input quantity on the estimated measure of safety. In this second type of sensitivity analysis, the
20 quantity of interest (QoI) is no longer the model output but a reliability measure. Differences appearing between SAMO and
21 RbSA are due, not only to the different QoIs under consideration, but also to the potential numerical issues appearing in the
22 rare event probability estimation procedure (definition of the limit-state function, isoprobabilistic transformation, estimation
23 strategy, global estimation cost) which can make the overall numerical procedure more complicated compared to SAMO. In
24 the reliability framework, several methods have been developed to quantify the sensitivity of the failure probability w.r.t.
25 deterministic distribution parameters of the basic variables. On the one hand, several *global sensitivity* methods have been
26 developed: for instance, variance-decomposition-based methods (through the use of Sobol' indices) in [12], methods based
27 on density perturbation in [13, 14] or, more recently, quantile-oriented sensitivity estimators based on contrast functions in
28 [15]. On the other hand, *local sensitivity* methods (often based on partial derivatives of the QoI) are also available. However,
29 their formulation and implementation procedure mostly depend on the method used to estimate the failure probability.
30 One can cite the so-called "sensitivity factors" [16, 17, 18] and "omission factors" [19] which can be seen as by-products
31 of applying the First-Order Reliability Method (FORM). Other measures specifically dedicated for sampling-based methods
32 are available: for instance, one can cite [20, 21] for Adaptive Importance Sampling (AIS), [22] for Line Sampling, [23] for
33 the Method of Moments and [24] for Subset Simulations. Among these local measures for RbSA, some of them rely on the
34 mathematical concept of *score function* (SF) [2] (also known as *kernel function* [25]). From a general point of view, the SF
35 method relies on using the derivatives of the probability density function (pdf) in an integral equation (e.g., an expected
36 value equation) and enables to estimate simultaneously (i.e. using the same samples) the performance function and all its
37 derivatives w.r.t. distribution parameters. In the reliability context, this approach has been used, considering deterministic
38 distribution parameters, in [20, 26, 27]. Finally, in the two papers [28, 29], the problem of estimating the sensitivities
39 of a failure probability regarding deterministic distribution parameters which are bounds of truncated distributions (e.g.,
40 uniform or truncated Gaussian) is described.

41 To sum up, the previous methods appear to be dedicated to problems where distribution parameters (e.g., mean or
42 standard deviation of a Gaussian distribution) are assumed to be deterministic (they are set to a certain value). However,
43 in the case where distribution parameters are affected by uncertainties (due to lack of knowledge or because of limited
44 data), one needs to consider both uncertainty sources (i.e. the one affecting the basic variables and the one affecting
45 the distribution parameters) in the probability estimation, especially for "high-consequence" systems, as stressed in [30,
46 31, 32]. Bayesian framework has been used and recommended in [33, 34, 35] for assessing reliability under distribution
47 parameter uncertainty. The effect of parameter uncertainty in reliability assessment has also been studied within some
48 extra-probabilistic frameworks, also known as "imprecise probabilities" [36, 37]. Several papers [38, 39, 40, 41, 42] propose
49 notional examples illustrating and comparing the use of several different frameworks (probabilistic and extra-probabilistic
50 such as evidence theory and possibility theory) in the characterization of epistemic uncertainty affecting distributions of
51 input aleatory uncertainty. Among these contributions, one can cite for instance [43] in which reliability assessment under

52 interval-based analysis of distribution parameters is treated, [44] in which the propagation of parameter uncertainty through
 53 probability-boxes is achieved, [45] for the derivation of probability bounds and [46] for integrating either probabilistic and
 54 non-probabilistic variables in an hybrid framework. If the topic of reliability under parameter uncertainty is now studied
 55 with probabilistic and non-probabilistic approaches, it appears that the works can hardly be compared and contrasted
 56 because of two main characteristics: first, the initial assumptions are different and the information sources for modeling
 57 input uncertainties are treated in different ways; second, the output QoI of the reliability analysis is also very different
 58 quantitatively (single vs. multiple measures of safety) and qualitatively (point measure, bounds, full distributions, truncated
 59 distributions, etc.). Consequently, in this work, the Bayesian view is adopted [35] and the following measure of safety
 60 incorporating this *bi-level* uncertainty can be considered: the *predictive failure probability*, as described in [47]. Thus,
 61 dedicated RbSA methods have to be developed to examine sensitivities of this measure of safety w.r.t. the deterministic
 62 distribution hyper-parameters which parametrize the a priori distribution on the parameters of the basic variables. In this
 63 paper, local sensitivity estimators of the predictive failure probability w.r.t. these hyper-parameters are derived. In a context
 64 of low failure probability estimation, since the calculations are performed in the joint space of stochastic basic variables
 65 and stochastic distribution parameters (i.e. the “augmented space”), an augmented formulation of Adaptive Importance
 66 Sampling can be used so as to estimate jointly the predictive failure probability and the sensitivities at a reduced cost
 67 compared to CMC.

68 This paper is organized as follows. Section 2 adresses the problem of reliability assessment under distribution parameter
 69 uncertainty and aims at introducing the formal concepts and notations. Section 3 describes both the derived sensitivity
 70 estimators and their implementation within an augmented Adaptive Importance Sampling strategy. Section 4 illustrates the
 71 benefits of such a methodology on different test-cases (two academic test-cases and one black-box computer code issued
 72 from aerospace research) and a synthesis gathering the key aspects and issues of the proposed approach is provided at the
 73 end of this section. Finally, a conclusion gathering the most important outcomes of this paper is given in Section 5.

74 2. Reliability assessment under probability distribution law parameter uncertainty via an augmented sampling

75 2.1. Usual formulation of a time-invariant reliability problem

76 Let us consider a complex system represented by a static input-output black-box simulation model $\mathcal{M}(\cdot)$ whose numerical
 77 evaluation can be achieved pointwise. Thus, it can be seen as a real-valued function defined on $\mathcal{D}_X \subseteq \mathbb{R}^d$ such that $\mathcal{M} : \mathcal{D}_X \rightarrow \mathbb{R}$. In this paper, for the sake of simplicity, the model output is assumed to be reduced to a scalar $y = \mathcal{M}(\mathbf{x}) \in \mathcal{D}_Y \subseteq \mathbb{R}$.
 78 Moreover, the model is assumed to be deterministic. Assessing reliability to such a system traditionally relies on setting a
 79 probabilistic framework in which one assumes that the input basic variables (i.e. variables that are directly observable or
 80 which can be directly linked to empirical data [33]) can be modeled by a set of random variables X_1, X_2, \dots, X_d , where d
 81 is the input dimension. Under a perfect state of knowledge about the distribution family and the distribution parameters,
 82 and provided a perfect knowledge about the dependence between input variables (which can be set up through the copula
 83 framework [48]), a parametrized probabilistic model can be assumed for the d -dimensional random input vector \mathbf{X} through
 84 the cumulative distribution function (cdf) $F_X(\cdot)$ and corresponding joint pdf $f_X(\cdot)$. By propagating the uncertainties through
 85 the model via the equation $Y = \mathcal{M}(\mathbf{X})$, the output is also a random variable which can be characterized by the distribution
 86 $F_Y(\cdot)$. For reliability assessment, the behavior of the system can be characterized by a so-called limit-state function (lsf) (note
 87 that the common “limit-state” analysis performed in reliability is also known as “margin analysis” in nuclear engineering
 88 [42]) $g : \mathcal{D}_X \rightarrow \mathbb{R}$. A common formulation for the lsf can be $g(\mathbf{X}) \stackrel{\text{def}}{=} y_{\text{th}} - Y = y_{\text{th}} - \mathcal{M}(\mathbf{X})$ with $y_{\text{th}} \in \mathbb{R}$ a given scalar threshold
 89

90 beyond which the system falls into a failure state. The aim of $g(\cdot)$ is to split the space of realizations of the random vector \mathbf{X}
 91 into a failure domain $\mathcal{F}_x = \{\mathbf{x} \in \mathcal{D}_x : g(\mathbf{x}) \leq 0\}$ and a safe domain $\mathcal{S}_x = \{\mathbf{x} \in \mathcal{D}_x : g(\mathbf{x}) > 0\}$. Hence, the failure probability
 92 p_f is given by:

$$p_f = \mathbb{P}[g(\mathbf{X}) \leq 0] = \int_{\mathcal{F}_x} f_{\mathbf{X}}(\mathbf{x})d\mathbf{x} = \int_{\mathcal{D}_x} \mathbb{1}_{\mathcal{F}_x}(\mathbf{x})f_{\mathbf{X}}(\mathbf{x})d\mathbf{x} = \mathbb{E}_{f_{\mathbf{X}}}[\mathbb{1}_{\mathcal{F}_x}(\mathbf{X})] \quad (1)$$

93 where $d\mathbf{x} = dx_1 \dots dx_d$ and $\mathbb{1}_{\mathcal{F}_x}(\cdot)$, the indicator function of the failure domain, is defined by: $\mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) = 1$ if $\mathbf{x} \in \mathcal{F}_x$
 94 and $\mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) = 0$ otherwise. Estimating this probability can be achieved by a large variety of methods [3]. Among these
 95 techniques, some require to reformulate the reliability problem in the standard normal space where all the basic variables
 96 are independent and standard-Gaussian distributed (e.g., FORM, SORM, Line Sampling or Subset Simulations in the original
 97 version by [49]). This reformulation is achieved by means of a transformation which can be, in general, either the Nataf
 98 one [50] or the Rosenblatt one [51], depending on the available probabilistic information (i.e. marginals and potentially
 99 the copula) [48].

100 2.2. Bayesian framework for reliability assessment under parameter uncertainty

101 Among information available to construct a parametrized probabilistic model for the input basic variables, one often has
 102 only access to limited data, possibly unadapted literature-based recommendations and finally subjective expert opinions
 103 [52]. Thus, an imperfect state of knowledge [53, 54] may lead to a misestimation of the failure probability and lead
 104 to dramatic consequences in terms of risk mitigation. Statistical uncertainty arises in the estimation procedure of the
 105 probability distribution parameters when one can only deal with insufficient measures or data. In some cases, it may
 106 also happen that neither data nor expert judgment are available, which imposes to the engineer yet to make a choice for
 107 the values of parameters. This is often encountered in the field of complex systems for which data acquisition is difficult.
 108 To take distribution parameter uncertainty into account in the reliability assessment, the previous framework set up in
 109 subsection 2.1 needs to be reinterpreted.

In this paper, two levels of uncertainty are considered: the first one represents the variability in the basic input variables
 and thus affects the input random vector \mathbf{X} when the second one represents the lack of knowledge affecting the distribution
 parameters Θ . To do so, we consider the following Bayesian hierarchical model [55]:

$$\mathbf{X} \sim f_{\mathbf{X}|\Theta}(\mathbf{x}|\Theta) : \mathcal{D}_x \subseteq \mathbb{R}^d \rightarrow \mathbb{R}_+ \quad (\text{first layer}) \quad (2a)$$

$$\Theta \sim f_{\Theta|\xi}(\Theta|\xi) : \mathcal{D}_\Theta \subseteq \mathbb{R}^k \rightarrow \mathbb{R}_+ \quad (\text{second layer}) \quad (2b)$$

$$\xi = (\xi_1, \xi_2, \dots, \xi_q)^\top \in \mathcal{D}_\xi \subseteq \mathbb{R}^q \quad (\text{third layer}). \quad (2c)$$

110 In this hierarchical representation, one can distinguish three layers of inputs:

- 111 • the first layer is constituted by the random vector \mathbf{X} gathering the stochastic basic variables. Based on prior knowledge,
 112 a probability distribution can be assumed through the choice of a parametric model. This random vector can be
 113 possibly of great dimension and may involve a complex dependence structure [48];
- 114 • the second layer is constituted by uncertain and deterministic (i.e. supposed to be known accurately enough) distri-
 115 bution parameters. Adding such a layer is coherent with the Bayesian point of view of modeling either “uncertain” (in
 116 the sense of stochastic) or “unknown but fixed” parameters [55]. If one can theoretically consider a possible depen-
 117 dence structure for the vector Θ , it is often, from a pragmatic point of view (if we do not care about the deterministic

118 parameters in it), of rather small dimension compared to the basic random vector and structured such that quadrature
 119 schemes or quasi-random sampling can be easily used to sample over the space \mathcal{D}_Θ [47]. Other techniques, such as
 120 the association of a rank correlation procedure developed in [56] and quasi-random sampling have been successfully
 121 used in literature [57]. In the present paper, the prior distribution is mostly assumed to be derived from expert judg-
 122 ment or from a limited set of data. Thus, despite the fact that Bayes' theorem is not used as an updating procedure
 123 (but could be, if more data or a better characterization was available), one can consider that this prior distribution
 124 characterizes epistemic uncertainty affecting the distribution parameters. As a remark, no deep investigation about
 125 the type of prior distributions (neither in terms of the choice of a parametric family, nor in terms of informativeness
 126 of the prior) is claimed in this study. This topic is beyond the scope of the paper and the interested reader is invited
 127 to refer to [55] and [58] for any further information;

- 128 • the third layer is composed of deterministic hyper-parameters gathered in ξ (which can be some moments or bounds)
 129 of prior distributions of stochastic parameters.

130 Following the paradigm proposed in [33], the distinction between aleatory and epistemic uncertainties in a given set of
 131 modeling, is achieved here by considering that the probabilistic modeling of \mathbf{X} could represent aleatory uncertainty whereas
 132 the probabilistic prior modeling of Θ could represent epistemic uncertainty. As an example, let us consider a problem
 133 involving some aleatory uncertainty defined as a single random variable X following a normal distribution $f_{X|\Theta}$ (first layer).
 134 One of the distribution parameters (e.g., the mean value denoted by Θ) can also be affected by epistemic uncertainty (second
 135 layer). Thus one can add a probability distribution $f_{\Theta|\xi}$ on Θ indexed by its own distribution hyper-parameters ξ (third
 136 layer).

137 Under this bi-level uncertainty (because of the first two layers), the failure probability p_f as written in Eq. (1) only
 138 represents a realization of the random variable P_f for a given realization θ of the distribution parameters. One can express
 139 this conditional failure probability $P_f(\theta)$ such that:

$$P_f(\theta) = \mathbb{P}[g(\mathbf{X}) \leq 0 \mid \Theta = \theta] = \int_{\mathcal{D}_X} \mathbb{1}_{\mathcal{F}_X}(\mathbf{x}) f_{X|\Theta}(\mathbf{x}|\theta) d\mathbf{x} = \mathbb{E}_{f_{X|\Theta}} [\mathbb{1}_{\mathcal{F}_X}(\mathbf{X}) \mid \Theta = \theta]. \quad (3)$$

140 Then, considering the mathematical expectation of the previous random variable w.r.t. the prior density $f_{\Theta|\xi}$ allows to get
 141 the so-called “predictive failure probability” \tilde{P}_f , as introduced in [54], which is a measure of reliability taking into account
 142 the effect of the lack of knowledge about distribution parameters:

$$\tilde{P}_f(\xi) \stackrel{\text{def}}{=} \mathbb{E}_{f_{\Theta|\xi}} [P_f(\Theta)] = \mathbb{E}_{f_{\Theta|\xi}} [\mathbb{E}_{f_{X|\Theta}} [\mathbb{1}_{\mathcal{F}_X}(\mathbf{X}) \mid \Theta = \theta]] = \int_{\mathcal{D}_\Theta} P_f(\theta) f_{\Theta|\xi}(\theta|\xi) d\theta. \quad (4)$$

143 This predictive failure probability is thus the mean of all the conditional failure probabilities over the prior distribution on
 144 uncertain parameters. This quantity can be estimated by two different approaches [47]. This indicator allows to have a
 145 single aggregated measure of uncertainty gathered in both Θ and \mathbf{X} . Following the discussion in [47], to have disaggregated
 146 effects, one should reconstruct the full distribution of $P_f(\theta)$ and use a more conservative measure (e.g., a quantile) than
 147 the mean estimator. Other formalisms (e.g., p-boxes, p-bounds) could provide such an information [44]. However, the
 148 estimation of such indicators is not the scope of this paper.

149 *2.3. Nested vs. augmented approaches for estimating the predictive failure probability*

150 On the one hand, the double expectation in Eq. (4) can be estimated via a double-loop estimation procedure over both
 151 integration domains. This strategy is called here “nested reliability approach” (NRA). The outer sampling loop over \mathcal{D}_Θ
 152 can be achieved, depending on the structure of the vector Θ , either by deterministic sampling methods such as quadrature
 153 schemes [59], or by CMC or any other advanced methods for design of experiments (DOE) [60]. For the inner loop (i.e.
 154 the nested loop), the conditional failure probability can be estimated by any approximation or simulation method such as
 155 those cited in subsection 2.1. Various applications of NRA for rare event probability estimation and safety assessment under
 156 parameter uncertainty can be found in [32, 61, 62].

157 On the other hand, a different strategy can be adopted by considering an “augmented” random vector $\mathbf{Z} \stackrel{\text{def}}{=} (\mathbf{X}, \Theta)^\top$
 158 defined on $\mathcal{D}_Z = \mathcal{D}_X \times \mathcal{D}_\Theta$ (where \times is the Cartesian product) with joint pdf $f_{Z|\xi}(\mathbf{z}|\xi) \stackrel{\text{def}}{=} f_{(\mathbf{X}, \Theta)|\xi}(\mathbf{x}, \boldsymbol{\theta}|\xi) = f_{\mathbf{X}|\Theta}(\mathbf{x}|\boldsymbol{\theta})f_{\Theta|\xi}(\boldsymbol{\theta}|\xi)$
 159 such that the expression in Eq. (4) can be rewritten as follows:

$$\tilde{P}_f(\xi) = \int_{\mathcal{D}_\Theta} \int_{\mathcal{D}_X} \mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) f_{\mathbf{X}|\Theta}(\mathbf{x}|\boldsymbol{\theta}) f_{\Theta|\xi}(\boldsymbol{\theta}|\xi) d\mathbf{x} d\boldsymbol{\theta} = \int_{\mathcal{D}_Z} \mathbb{1}_{\mathcal{F}_z}(\mathbf{z}) f_{Z|\xi}(\mathbf{z}|\xi) d\mathbf{z} = \mathbb{E}_{f_{Z|\xi}} [\mathbb{1}_{\mathcal{F}_z}(\mathbf{Z})|\xi] \quad (5)$$

160 where $\mathcal{F}_z = \{\mathbf{z} \in \mathcal{D}_Z : g(\mathbf{z}) \leq 0\}$. This augmented formulation numerically implies to estimate the expected value in Eq (5).
 161 This is called here the “augmented reliability approach” (ARA) or in a wider Bayesian context the “predictive approach”
 162 since it relies on the use of predictive distributions [63, 64]. From a practical point of view, this approach has been used in
 163 the context of FORM analysis in [65, 66].

164 Recently, in [47], a numerical comparison between NRA and ARA has been achieved and the coupling between both
 165 approaches and advanced simulation-based method such as the Subset Simulations has been investigated. Possibilities
 166 offered by ARA in terms of simulation cost reduction, estimation accuracy and robustness w.r.t. several numerical challenges
 167 concerning real aerospace test-cases have been illustrated in this work. The interested reader may refer to [47] and [35]
 168 for any further details.

169 Among technical steps involved in ARA, the transformation between the physical space and the standard normal space
 170 is an issue that needs to be addressed by adapting the traditional Rosenblatt transformation to an “augmented” version
 171 of it, i.e. by applying the transformation on the vector \mathbf{Z} . One needs to apply first the transformation to the stochastic
 172 distribution parameters and then to the stochastic basic variables, conditioned by the distribution parameters [47]. In the
 173 following sections, the use of the prefix “ARA” in front of any name implies that the sampling strategy is set in the augmented
 174 framework.

175 **3. Sensitivity analysis of predictive failure probability with respect to distribution hyper-parameters**

176 The use of local sensitivities in this study is motivated mainly by two reasons. The first one corresponds to the way the
 177 problem is set as explained above (i.e. one wants to measure the sensitivity w.r.t. a local choice of ξ). Finally, the second
 178 reason, which is a key constraint in this work, remains the limited allowable extra simulation budget one can afford to get
 179 sensitivities while the rare event probability estimation can be very expensive too (without any consideration here of any
 180 use of a metamodel).

181 3.1. Derivation of sensitivity estimators in the augmented framework

182 The gradient of the predictive failure probability \tilde{P}_f w.r.t. the vector of the hyper-parameters ξ is defined as follows:

$$\nabla \tilde{P}_f(\xi) = \left(\frac{\partial \tilde{P}_f(\xi)}{\partial \xi_j}, j = 1, \dots, q \right)^\top. \quad (6)$$

183 Depending on the nature of the hyper-parameter ξ_j , two cases are considered:

- 184 • Case #1: ξ_j is an hyper-parameter of a prior distribution with an unbounded support;
- 185 • Case #2: ξ_j is an hyper-parameter of a prior distribution with a bounded/truncated support.

186 3.1.1. Derivations for Case #1

187 The partial derivative of the predictive failure probability w.r.t. the j -th component of ξ is given by:

$$\frac{\partial \tilde{P}_f(\xi)}{\partial \xi_j} = \frac{\partial}{\partial \xi_j} \left[\int_{\mathcal{D}_\theta} P_f(\theta) f_{\theta|\xi}(\theta|\xi) d\theta \right] = \int_{\mathcal{D}_\theta} P_f(\theta) \frac{\partial f_{\theta|\xi}(\theta|\xi)}{\partial \xi_j} d\theta. \quad (7)$$

Note that, in the previous derivations, the differential and integral operators are switched due to Lebesgue's dominated convergence theorem [67]. Following the idea given in [68], one can use the so-called *importance sampling trick* so as to get an expectation w.r.t. the same probability measure as the one used for the failure probability estimation. It thus comes:

$$\frac{\partial \tilde{P}_f(\xi)}{\partial \xi_j} = \int_{\mathcal{D}_\theta} P_f(\theta) \frac{\frac{\partial}{\partial \xi_j} f_{\theta|\xi}(\theta|\xi)}{f_{\theta|\xi}(\theta|\xi)} f_{\theta|\xi}(\theta|\xi) d\theta \quad (8a)$$

$$= \int_{\mathcal{D}_\theta} \left(\int_{\mathcal{D}_x} \mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) f_{\mathbf{x}|\theta}(\mathbf{x}|\theta) d\mathbf{x} \right) \frac{\partial \ln f_{\theta|\xi}(\theta|\xi)}{\partial \xi_j} f_{\theta|\xi}(\theta|\xi) d\theta \quad (8b)$$

$$= \int_{\mathcal{D}_\theta} \left(\int_{\mathcal{D}_x} \mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) s_j(\theta, \xi) f_{\mathbf{x}|\theta}(\mathbf{x}|\theta) d\mathbf{x} \right) f_{\theta|\xi}(\theta|\xi) d\theta \quad (8c)$$

$$= \mathbb{E}_{f_{\mathbf{Z}|\xi}} [\mathbb{1}_{\mathcal{F}_z}(\mathbf{Z}) s_j(\Theta, \xi)] \quad (8d)$$

188 where $s_j(\theta, \xi) \stackrel{\text{def}}{=} \frac{\partial \ln f_{\theta|\xi}(\theta|\xi)}{\partial \xi_j}$ is called the “score function” (SF). As recalled in Introduction, the SF approach has been widely
 189 used in the RbSA literature under *single-level* uncertainty [20, 26, 27, 28, 29]. It is used here, in the context of bi-level
 190 uncertainty, for three main reasons: first, it enables to provide the targeted local sensitivity in Eq. (7) as a simple derivation
 191 (assuming rather simple cases for prior distribution); then, it fits naturally to an importance-sampling-based estimation
 192 framework; and finally, it provides an efficient sampling-based estimator which allows to avoid finite difference schemes.
 193 One should notice that, to avoid any confusion, in the above equations and in the rest of the paper, the vector Θ is explicitly
 194 written instead of $\mathbf{Z} = (\mathbf{X}, \Theta)^\top$ since the dependence w.r.t. ξ is through Θ . An example of a SF associated to an unbounded
 195 normal prior for an uncertain distribution parameter Θ_j is given in Table 1. Then, considering a sample $\{\mathbf{Z}^{(i)}\}_{i=1}^N$ of N
 196 independent and identically distributed (i.i.d.) copies of the augmented vector \mathbf{Z} , one can derive the following Monte Carlo
 197 estimator:

$$\frac{\partial \tilde{P}_f(\xi)}{\partial \xi_j} \underset{\text{MC}}{\approx} \frac{1}{N} \sum_{i=1}^N \mathbb{1}_{\mathcal{F}_z}(\mathbf{Z}^{(i)}) s_j(\Theta^{(i)}, \xi). \quad (9)$$

198 As a remark, if the probability is estimated with ARA, its gradient in Eq. (9) may be estimated at a reduced cost. However,
 199 due to central limit theorem, one can show that the predictive failure probability and its sensitivities may have different
 200 convergence rates. Thus, the variance associated to the two asymptotic distributions will necessarily differ.

Table 1: Score functions for normal (Case #1) and uniform (Case #2) prior distributions on an uncertain parameter θ_j .

Distribution	pdf $f_{\theta_j \xi}(\theta_j \xi_1, \xi_2)$	Hyper-parameters	Score function $s_1(\theta_j, \xi_1)$	Score function $s_2(\theta_j, \xi_2)$
Normal (Case #1)	$\frac{1}{\xi_2\sqrt{2\pi}} \exp\left[-\frac{1}{2}\left(\frac{\theta_j-\xi_1}{\xi_2}\right)^2\right]$	$\xi_1 = \mu_{\theta_j}, \xi_2 = \sigma_{\theta_j}$	$\frac{1}{\xi_2}\left(\frac{\theta_j-\xi_1}{\xi_2}\right)$	$\frac{1}{\xi_2}\left[\left(\frac{\theta_j-\xi_1}{\xi_2}\right)^2 - 1\right]$
Uniform (Case #2)	$\frac{1}{\xi_2-\xi_1}$	$[\xi_1, \xi_2]$	$\frac{1}{\xi_2-\xi_1}$	$-\frac{1}{\xi_2-\xi_1}$

201

3.1.2. Derivations for Case #2

202

Here, at least, one of the basic variables X_j follows a parametrized distribution whose one parameter θ_j follows a bounded or truncated distribution denoted by $f_{\theta_j|\xi}(\theta_j|\xi)$, with $\xi = (\xi_1, \xi_2, \dots, \xi_q)^\top$ the vector of the hyper-parameters. Here, $\xi_j \in \xi$ could be either a bound or a moment. In the next derivations, one considers that the distribution parameters $\theta_i, i = 1, \dots, k$ are independent, which leads to $f_{\theta|\xi}(\theta|\xi) = \prod_{i=1}^k f_{\theta_i|\xi}(\theta_i|\xi)$. Before deriving the sensitivities, one should notice that, in this case, the support \mathcal{D}_θ is a function of ξ_j as the support of θ_j is either bounded or truncated (note that, without any loss of generality, the bounds are denoted by $a(\xi_j)$ and $b(\xi_j)$ in Eq. (10b)). In the following, the notation θ^{-j} (respectively θ^{-j}) denotes the vector without the j -th component θ_j (repectively θ_j) which depends on the hyper-parameter ξ_j . Thus, the derivations start as follows:

$$\frac{\partial \tilde{P}_f(\xi)}{\partial \xi_j} = \frac{\partial}{\partial \xi_j} \left[\int_{\mathcal{D}_\theta(\xi_j)} P_f(\theta) f_{\theta|\xi}(\theta|\xi) d\theta \right] \quad (10a)$$

$$= \frac{\partial}{\partial \xi_j} \left[\int_{\mathbb{R}^{k-1}} \int_{a(\xi_j)}^{b(\xi_j)} P_f(\theta) f_{\theta_j|\xi}(\theta_j|\xi) f_{\theta^{-j}|\xi}(\theta^{-j}|\xi) d\theta_j d\theta^{-j} \right] \quad (10b)$$

$$= \int_{\mathbb{R}^{k-1}} \frac{\partial}{\partial \xi_j} \left[\int_{a(\xi_j)}^{b(\xi_j)} P_f(\theta) f_{\theta_j|\xi}(\theta_j|\xi) d\theta_j \right] f_{\theta^{-j}|\xi}(\theta^{-j}|\xi) d\theta^{-j} \quad (10c)$$

$$= \int_{\mathbb{R}^{k-1}} \frac{\partial}{\partial \xi_j} [\mathcal{I}(P_f(\theta), \xi)] f_{\theta^{-j}|\xi}(\theta^{-j}|\xi) d\theta^{-j} \quad (10d)$$

where $\mathcal{I}(P_f(\theta), \xi)$ is an integral whose bounds (denoted by a and b) depend on the parameter ξ_j . Indeed, using the Leibniz integral rule for differentiation of a definite integral whose limits are functions of the differential variables, one gets:

$$\frac{\partial}{\partial \xi_j} [\mathcal{I}(P_f(\theta), \xi)] = \frac{\partial}{\partial \xi_j} \left[\int_{a(\xi_j)}^{b(\xi_j)} P_f(\theta) f_{\theta_j|\xi}(\theta_j|\xi) d\theta_j \right] \quad (11a)$$

$$\begin{aligned} &= \int_{a(\xi_j)}^{b(\xi_j)} P_f(\theta) \frac{\partial f_{\theta_j|\xi}(\theta_j|\xi)}{\partial \xi_j} d\theta_j \\ &\quad + P_f(\theta^{-j}, \theta_j = b(\xi_j)) f_{\theta_j|\xi}(b(\xi_j)|\xi) \frac{\partial b(\xi_j)}{\partial \xi_j} \\ &\quad - P_f(\theta^{-j}, \theta_j = a(\xi_j)) f_{\theta_j|\xi}(a(\xi_j)|\xi) \frac{\partial a(\xi_j)}{\partial \xi_j} \end{aligned} \quad (11b)$$

203 where $P_f(\theta^{-j}, \theta_j = \bullet(\xi_j))$ represents the failure probability estimated with θ_j fixed to one of the integration bounds (i.e.
204 $\bullet(\xi_j) = a(\xi_j)$ or $b(\xi_j)$).

To illustrate the previous reasoning, one can apply these derivations to a test-case involving a distribution parameter θ_j following a continuous uniform distribution such that $\theta_j \sim \mathcal{U}([a, b])$. In this example, ξ_j can be either a bound (a or b) or

even a moment (e.g., $\mu_{\theta_j} = \frac{a+b}{2}$ or $\sigma_{\theta_j} = \frac{b-a}{\sqrt{12}}$). Let us first assume that $\xi_j = a$:

$$\frac{\partial}{\partial a} [\mathcal{I}(P_f(\boldsymbol{\theta}), \xi)] = \int_a^b P_f(\boldsymbol{\theta}) \frac{\partial f_{\theta_j|\xi}(\theta_j|\xi)}{\partial a} d\theta_j + 0 - P_f(\boldsymbol{\theta}^{-j}, \theta_j = a) f_{\theta_j|\xi}(a|\xi) \times 1 \quad (12a)$$

$$= \int_a^b P_f(\boldsymbol{\theta}) \frac{\partial f_{\theta_j|\xi}(\theta_j|\xi)}{\partial a} d\theta_j - \frac{1}{b-a} P_f(\boldsymbol{\theta}^{-j}, \theta_j = a). \quad (12b)$$

Hence, using the same trick as in paragraph 3.1.1, one gets:

$$\begin{aligned} \frac{\partial \tilde{P}_f(\xi)}{\partial a} &= \int_{\mathbb{R}^k} P_f(\boldsymbol{\theta}) \frac{\frac{\partial}{\partial a} f_{\theta_j|\xi}(\theta_j|\xi)}{f_{\theta_j|\xi}(\theta_j|\xi)} f_{\theta_j|\xi}(\theta_j|\xi) f_{\boldsymbol{\theta}^{-j}|\xi}(\boldsymbol{\theta}^{-j}|\xi) d\theta_j d\boldsymbol{\theta}^{-j} \\ &\quad - \frac{1}{b-a} \int_{\mathbb{R}^{k-1}} P_f(\boldsymbol{\theta}^{-j}, \theta_j = a) f_{\boldsymbol{\theta}^{-j}|\xi}(\boldsymbol{\theta}^{-j}|\xi) d\boldsymbol{\theta}^{-j} \end{aligned} \quad (13a)$$

$$= \int_{\mathbb{R}^k} \left(\int_{\mathbb{R}^d} \mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) f_{\mathbf{x}|\boldsymbol{\theta}}(\mathbf{x}|\boldsymbol{\theta}) d\mathbf{x} \right) \frac{\partial \ln f_{\theta_j|\xi}(\theta_j|\xi)}{\partial a} f_{\boldsymbol{\theta}|\xi}(\boldsymbol{\theta}|\xi) d\boldsymbol{\theta} \\ - \frac{1}{b-a} \int_{\mathbb{R}^{k-1}} \left(\int_{\mathbb{R}^d} \mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) f_{\mathbf{x}|\boldsymbol{\theta}}(\mathbf{x}|\boldsymbol{\theta}^{-j}, \theta_j = a) d\mathbf{x} \right) f_{\boldsymbol{\theta}^{-j}|\xi}(\boldsymbol{\theta}^{-j}|\xi) d\boldsymbol{\theta}^{-j} \quad (13b)$$

$$= \int_{\mathbb{R}^k} \left(\int_{\mathbb{R}^d} \mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) s_j(\theta_j, a) f_{\mathbf{x}|\boldsymbol{\theta}}(\mathbf{x}|\boldsymbol{\theta}) d\mathbf{x} \right) f_{\boldsymbol{\theta}|\xi}(\boldsymbol{\theta}|\xi) d\boldsymbol{\theta} \\ - \frac{1}{b-a} \int_{\mathbb{R}^{k-1}} \left(\int_{\mathbb{R}^d} \mathbb{1}_{\mathcal{F}_x}(\mathbf{x}) f_{\mathbf{x}|\boldsymbol{\theta}}(\mathbf{x}|\boldsymbol{\theta}^{-j}, \theta_j = a) d\mathbf{x} \right) f_{\boldsymbol{\theta}^{-j}|\xi}(\boldsymbol{\theta}^{-j}|\xi) d\boldsymbol{\theta}^{-j} \quad (13c)$$

$$= \mathbb{E}_{f_{Z|\xi}} [\mathbb{1}_{\mathcal{F}_z}(\mathbf{Z}) s_j(\Theta_j, \xi)] - \frac{1}{b-a} \mathbb{E}_{f_{Z|\Theta_j=a,\xi}} [\mathbb{1}_{\mathcal{F}_z}(\mathbf{Z}^{-j}) | \Theta_j = a] \quad (13d)$$

where \mathbf{Z}^{-j} stands for $(\mathbf{X}, \boldsymbol{\theta}^{-j})^\top$, which means that the integration is achieved over a $(n_{aug}-1)$ -dimensional hypersurface with $n_{aug} = k \times d$. Using formulas given in Table 1 and the linearity of expectation, one obtains the following two sensitivities:

$$\frac{\partial \tilde{P}_f(\xi)}{\partial a} = \frac{1}{b-a} \left[\mathbb{E}_{f_{Z|\xi}} [\mathbb{1}_{\mathcal{F}_z}(\mathbf{Z})] - \mathbb{E}_{f_{Z|\Theta_j=a,\xi}} [\mathbb{1}_{\mathcal{F}_z}(\mathbf{Z}^{-j}) | \Theta_j = a] \right] = \frac{1}{b-a} (\tilde{P}_f(\xi) - P_{f,aux}^a); \quad (14a)$$

$$\frac{\partial \tilde{P}_f(\xi)}{\partial b} = -\frac{1}{b-a} \left[\mathbb{E}_{f_{Z|\xi}} [\mathbb{1}_{\mathcal{F}_z}(\mathbf{Z})] - \mathbb{E}_{f_{Z|\Theta_j=b,\xi}} [\mathbb{1}_{\mathcal{F}_z}(\mathbf{Z}^{-j}) | \Theta_j = b] \right] = \frac{1}{b-a} (P_{f,aux}^b - \tilde{P}_f(\xi)). \quad (14b)$$

where $P_{f,aux}^a$ and $P_{f,aux}^b$ are two ‘‘auxiliary’’ failure probabilities which have to be estimated over the $(n_{aug}-1)$ -dimensional hypersurface. These derivations are consistent with those provided in [28] and [29] in the context of RbSA under single-level uncertainty (i.e. deterministic distribution parameters and traditional failure probability as a QoI). As for the interpretation, the sensitivity estimators obtained in Eqs. (14a) and (14b) are close to those derived in [28] and similarly involve flux integrals, here $P_{f,aux}^a$ and $P_{f,aux}^b$, over a $(n_{aug}-1)$ -dimensional space. As a final remark, one should highlight the fact that for uniform prior distributions, one can calculate the sensitivities of the predictive failure probability w.r.t. the moments $\mu_{\theta_j} = \frac{a+b}{2}$ or $\sigma_{\theta_j} = \frac{b-a}{\sqrt{12}}$ by combining the previous sensitivities w.r.t. the bounds such that:

$$\frac{\partial \tilde{P}_f(\xi)}{\partial \mu_{\theta_j}} = \frac{\partial \tilde{P}_f(\xi)}{\partial a} \frac{\partial a(\mu_{\theta_j})}{\partial \mu_{\theta_j}} + \frac{\partial \tilde{P}_f(\xi)}{\partial b} \frac{\partial b(\mu_{\theta_j})}{\partial \mu_{\theta_j}} = 2 \left(\frac{\partial \tilde{P}_f(\xi)}{\partial a} + \frac{\partial \tilde{P}_f(\xi)}{\partial b} \right); \quad (15a)$$

$$\frac{\partial \tilde{P}_f(\xi)}{\partial \sigma_{\theta_j}} = \frac{\partial \tilde{P}_f(\xi)}{\partial a} \frac{\partial a(\sigma_{\theta_j})}{\partial \sigma_{\theta_j}} + \frac{\partial \tilde{P}_f(\xi)}{\partial b} \frac{\partial b(\sigma_{\theta_j})}{\partial \sigma_{\theta_j}} = \sqrt{12} \left(\frac{\partial \tilde{P}_f(\xi)}{\partial b} - \frac{\partial \tilde{P}_f(\xi)}{\partial a} \right). \quad (15b)$$

205 As a remark, one could notice that for Case #2, the computational cost (i.e. estimating two probabilities) is similar to
206 the one required by applying a finite difference method (FDM). However, using FDM can be difficult for several reasons:

207 firstly, FDM is an approximation method to compute the gradient; secondly, the type of finite difference scheme (forward,
 208 backward or centered) may influence the results; thirdly, choosing an optimal perturbation step can be problematic. The
 209 proposed method allows to overcome these difficulties by providing (assuming the SF is available for the prior distribution)
 210 an exact formulation to get the gradient of the predictive failure probability and estimate it independently of any choice for
 211 perturbation step.

212 Up to now, the previous framework allows to estimate jointly, within the same sampling phase and with limited ex-
 213 tra computational effort, a predictive failure probability and its derivatives w.r.t. a priori deterministic hyper-parameters.
 214 However, even with the ARA strategy, ARA/CMC is not able to handle rare event probability estimation regarding real
 215 engineering system safety assessment. The idea of the next subsection is to propose a dedicated numerical methodology
 216 combining efficient sampling strategy in the augmented space and the above sensitivity estimators.

217 3.2. Proposed methodology (ARA/AIS) for reliability-based sensitivity analysis in a context of rare event probability estimation

218 Estimating a rare event probability with CMC can be cumbersome and can even become intractable for costly-to-evaluate
 219 computer codes. Importance Sampling (IS) is now a well-known variance-reduction technique [2]. The idea is to use a
 220 so-called “auxiliary density” $h(\cdot)$ to generate samples such that, if this density is the optimal one, one gets a zero variance of
 221 the IS estimator of the rare event probability. To introduce it, one can start from the observation that the following equality
 222 holds:

$$\int_{\mathcal{D}_z} \mathbb{1}_{\mathcal{F}_z}(\mathbf{z}) f_{z|\xi}(\mathbf{z}|\xi) d\mathbf{z} = \int_{\mathcal{D}_z} \mathbb{1}_{\mathcal{F}_z}(\mathbf{z}) \frac{f_{z|\xi}(\mathbf{z}|\xi)}{h(\mathbf{z})} h(\mathbf{z}) d\mathbf{z} = \int_{\mathcal{D}_z} \mathbb{1}_{\mathcal{F}_z}(\mathbf{z}) w(\mathbf{z}) h(\mathbf{z}) d\mathbf{z} \quad (16)$$

where $w(\mathbf{z}) \stackrel{\text{def}}{=} \frac{f_{z|\xi}(\mathbf{z}|\xi)}{h(\mathbf{z})}$ is called the *likelihood ratio* [2]. This weight is introduced in the probability estimator and takes
 into account the change in the pdf to generate samples. Thus, considering $\{\mathbf{Z}^{(i)}\}_{i=1}^N$ as an i.i.d. sample drawn according to
 $f_{z|\xi}(\mathbf{z}|\xi)$, the IS estimators for both the probability and its sensitivities can be derived such that:

$$\tilde{P}_f(\xi) \underset{\text{IS}}{\approx} \frac{1}{N} \sum_{i=1}^N \mathbb{1}_{\mathcal{F}_z}(\mathbf{Z}^{(i)}) w(\mathbf{Z}^{(i)}) \quad (17a)$$

$$\frac{\partial \tilde{P}_f(\xi)}{\partial \xi_j} \underset{\text{IS}}{\approx} \frac{1}{N} \sum_{i=1}^N \mathbb{1}_{\mathcal{F}_z}(\mathbf{Z}^{(i)}) w(\mathbf{Z}^{(i)}) s_j(\boldsymbol{\Theta}^{(i)}, \xi). \quad (17b)$$

223 The estimator \hat{P}_f of \tilde{P}_f given in the right hand side in Eq. (17a) is unbiased (i.e. $\mathbb{E}_h[\hat{P}_f] = \tilde{P}_f$) and its variance $\mathbb{V}[\hat{P}_f]$ reduces
 224 to zero as the density $h(\cdot)$ equals the optimal auxiliary density $h^*(\cdot)$ which is given by:

$$h^*(\mathbf{z}) = \frac{\mathbb{1}_{\mathcal{F}_z}(\mathbf{z}) f_{z|\xi}(\mathbf{z}|\xi)}{\tilde{P}_f}. \quad (18)$$

225 Since this quantity depends on the predictive probability \tilde{P}_f one would like to estimate, this intricate problem can be solved
 226 by using *Adaptive Importance Sampling* (AIS) techniques [69]. These techniques aim at, using different adaptive strategies,
 227 to sequentially approximate the optimal auxiliary density.

228 In this paper, we propose to adapt two existing AIS techniques, namely the *Nonparametric Adaptive Importance Sampling*
 229 (NAIS) [70] and the *Adaptive Importance Sampling by Cross-Entropy* (AIS-CE) [71] to estimate, within the augmented
 230 framework, both the predictive failure probability and its sensitivities w.r.t. deterministic hyper-parameters at a reduced
 231 cost compared to CMC. Thus, one presents in this paper two different methods which are called respectively “ARA/NAIS”
 232 and “ARA/AIS-CE”. Two generic algorithms are given in Algorithm 1 (for ARA/NAIS) and Algorithm 2 (for ARA/AIS-CE).

233 Since these algorithms are already existing but adapted to the augmented framework, a complete description of the details
 234 is not given in this paper for the sake of conciseness. The interested reader can refer to [1] for any further detail about
 235 practical implementation of the original version of these AIS algorithms. However, one should insist on the fact that these
 236 two rare event estimation algorithms rely on some assumptions and imply some parameters (e.g., the choice of a given
 237 kernel $K(\cdot)$ for ARA/NAIS, the choice of an initial parametric family for the auxiliary pdf $h_{\lambda}(\cdot)$ with $\lambda \in \Lambda$ for ARA/AIS-
 238 CE, the choice of the ρ -quantiles for both methods) whose tuning and performance optimization is not treated in the core
 239 discussion of the present paper (interested reader may refer to [1] for more information about it). Note that the algorithms'
 240 parameters used in this paper are given as footnotes of, respectively Algorithms 1 and 2 .

241 The global methodology is able to handle both Case #1 and Case #2 as detailed in subsection 3.1. However, in Case #2,
 242 estimating the predictive failure probability is not enough to get the sensitivities w.r.t. the bounds. An estimation of the
 243 auxiliary failure probability, as shown in Eqs. (14a) and (14b) for the uniform case, is required. To do so, one needs to
 244 apply a second time the ARA/AIS algorithm (with either NAIS or AIS-CE as the core algorithm) to estimate this quantity
 245 and allow an accurate estimation of the sensitivity.

246 As an illustration of the ARA/AIS sampling strategy, one can consider a simple test case involving two basic random
 247 variables, similar to a so-called ‘‘Resistance – Sollicitation’’ problem (similar to the one presented further in numerical
 248 applications in subsection 4.2). Assuming these variables are Gaussian, one can imagine that, due to limited data, their
 249 distribution parameters are affected by epistemic uncertainty: for instance, the standard deviation of the resistance variable
 250 and the mean value of the sollicitation one are not perfectly known. Some prior distributions are considered to model the a
 251 priori knowledge about these parameters. The propagation of this bi-level uncertainty (to get an estimate of the predictive
 252 failure probability and its sensitivities) using the ARA/AIS strategy is presented only with the ARA/NAIS method in Figure 1
 253 for the sake of conciseness.

254 In Figure 1a, one can see two sets of $N = 10^3$ realizations in the original space (denoted as ‘‘X-space’’) of the vector
 255 $\Theta = (\theta_1, \theta_2)^T$. The first set of samples corresponds to the first iteration of the ARA/NAIS algorithm. The second set
 256 corresponds to the final iteration of the algorithm. By comparing them, one can notice the modification between the initial
 257 sampling density and the final one. Such a modification is also noticeable in Figure 1b which represents the same samples
 258 in the standard normal space (denoted as ‘‘U-space’’). One can see the shrinkage of the initial standard normal density to
 259 the optimal one. Based on these realizations, one can observe the corresponding realizations of the basic variables gathered
 260 in \mathbf{X} . Figure 1c and Figure 1d shows the corresponding samples plotted respectively in X-space and in U-space. Again, from
 261 the first iteration to the final one, convergence of the density towards the optimal one is noticeable. One can also highlight
 262 that considering a second level of uncertainty does affect the realizations of the basic variables by changing the shape of
 263 the distribution of \mathbf{X} .

264 In the following section, the numerical efficiency of the ARA/AIS method is demonstrated on two academic test-cases
 265 and on a real aerospace test-case.

266 4. Application examples

267 The following numerical applications have been implemented in Matlab[®] and performed using a rare event simulation
 268 toolbox developed at ONERA – The French Aerospace Lab.

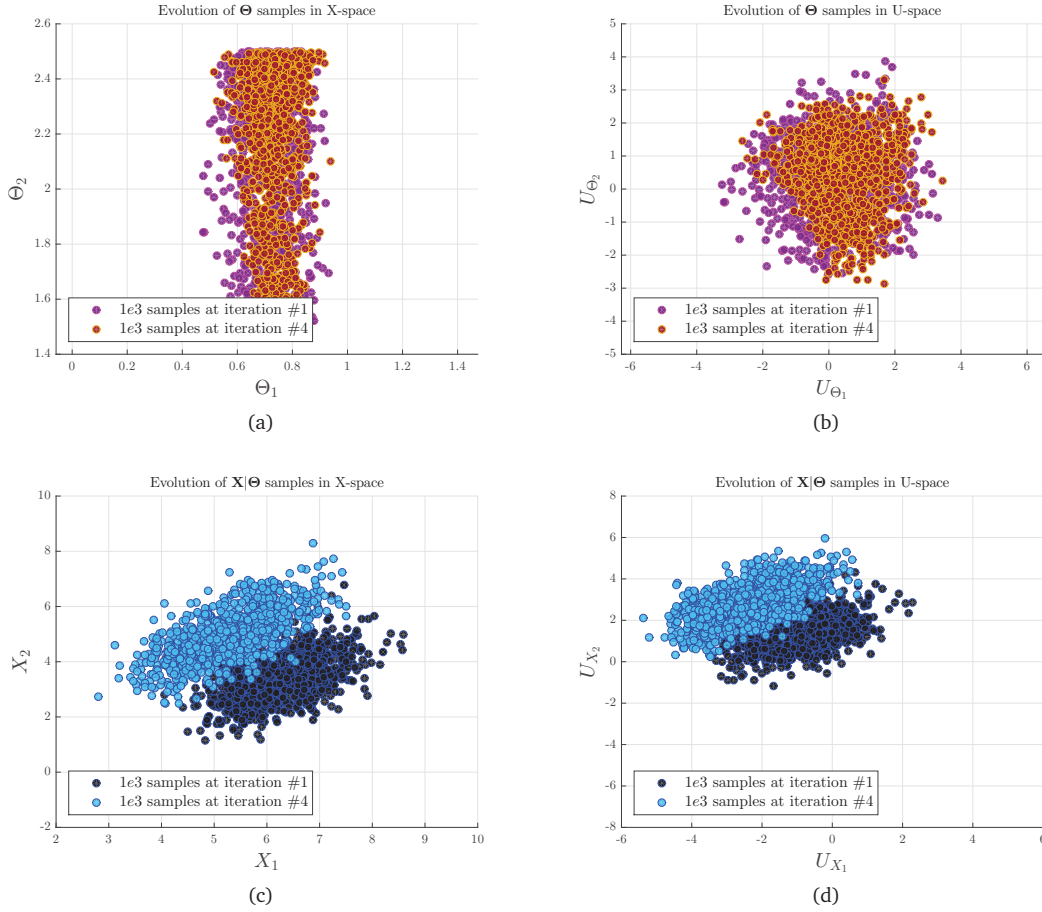


Figure 1: Illustration of the ARA/NAIS method on a Resistance – Solicitation test-case (similar to the one described in Example #1 (cf. 4.2)). In this example, two different sets of samples, drawn at iterations #1 and #4 of the ARA/NAIS method (Algorithm 1) are presented. One can see the evolution of the samples reflecting the adaptive evolution of the augmented sampling density towards a near optimal one.

269 **4.1. Methodology and comparison metrics**

270 The overall methodology developed in this paper, as summed up in Table 2, relies on four blocks detailed below:

- 271 • firstly, the ARA/AIS method has been implemented and tested on three different test-cases (two academic and one
272 industrial) of increasing difficulty (see the first column and the footnotes below Table 2 for the specifications of each
273 test-case);
- 274 • secondly, reference results for the estimation of the predictive failure probability and its sensitivities are obtained
275 using a CMC with large sample size performed by ARA (see the second column denoted ARA/CMC, see [47] for
276 details about the coupling between ARA and sampling methods);
- 277 • thirdly, as shown in the third column of Table 2, the two different methods, namely ARA/AIS-CE and ARA/NAIS are
278 applied on the three test-cases for the sake of comparison, but also to illustrate the modular aspect of the methodology
279 (the black squares ■ stand for the performed calculations). Finally, after validation of the method, the impact of the
280 increasing rareness of the failure event (regarding a limited simulation budget available) is studied as an extension
281 of the last two test-cases (see the four black stars ★). This last extension is called “rare event context” in the rest of
282 the paper. One should notice that, for these specific cases, the reference calculation by ARA/CMC is considered as
283 computationally “intractable” (see the corresponding crosses ×).

Algorithm 1 – Generic algorithm for ARA/AIS
(with an **ARA/NAIS** plug-in box in this example).

Start
Define: pdf $f_{\mathbf{z}|\xi}$, budget N , model $\mathcal{M}(\cdot)$, threshold y_{th} ,
quantile $\rho \in [0, 1]^a$, kernel $K(\cdot)^b$
Set: $k = 1$ and $h_0 = f_{\mathbf{z}|\xi}$
Generate: i.i.d. samples $\mathbf{z}_1^{(i)}$ of $\{\mathbf{z}_1^{(i)}\}_{i=1}^N \sim h_0$
Evaluate: $Y_1^{(1)} = \mathcal{M}(\mathbf{z}_1^{(1)}), \dots, Y_1^{(N)} = \mathcal{M}(\mathbf{z}_1^{(N)})$
Compute: empirical ρ -quantile γ_1 of the samples $\{Y_1^{(i)}\}_{i=1}^N$
While $\gamma_k < y_{\text{th}}$ **do**

Estimate: $l_k = \frac{1}{kN} \sum_{j=1}^k \sum_{i=1}^N \mathbb{1}_{\{\mathcal{M}(\mathbf{z}_j^{(i)}) \geq \gamma_k\}} (\mathbf{z}_j^{(i)}) \frac{f_{\mathbf{z}|\xi}(\mathbf{z}_j^{(i)})}{h_{j-1}(\mathbf{z}_j^{(i)})}$
and set $w_j(\mathbf{z}_j^{(i)}) = \mathbb{1}_{\{\mathcal{M}(\mathbf{z}_j^{(i)}) \geq \gamma_k\}} (\mathbf{z}_j^{(i)}) \frac{f_{\mathbf{z}|\xi}(\mathbf{z}_j^{(i)})}{h_{j-1}(\mathbf{z}_j^{(i)})}$
Update^c:
 $h_{k+1}(\mathbf{z}) = \frac{1}{kN l_k \det(\mathbf{B}_k^{1/2})} \sum_{j=1}^k \sum_{i=1}^N w_j(\mathbf{z}_j^{(i)}) K(\mathbf{B}_k^{1/2}(\mathbf{z} - \mathbf{z}_j^{(i)}))$
Set: $k = k + 1$
Generate: i.i.d. samples $\mathbf{z}_k^{(i)}$ of $\{\mathbf{z}_k^{(i)}\}_{i=1}^N \sim h_k$
Evaluate: $Y_k^{(1)} = \mathcal{M}(\mathbf{z}_k^{(1)}), \dots, Y_k^{(N)} = \mathcal{M}(\mathbf{z}_k^{(N)})$
Compute:
empirical ρ -quantile γ_k of the samples $\{Y_k^{(i)}\}_{i=1}^N$

Estimate:
 $\widehat{P}_f = \frac{1}{N} \sum_{i=1}^N \mathbb{1}_{\{\mathcal{M}(\mathbf{z}_k^{(i)}) > y_{\text{th}}\}} (\mathbf{z}_k^{(i)}) \frac{f_{\mathbf{z}|\xi}(\mathbf{z}_k^{(i)})}{h_k(\mathbf{z}_k^{(i)})}$
 $\widehat{\partial \widehat{P}_f / \partial \xi_j} = \frac{1}{N} \sum_{i=1}^N \mathbb{1}_{\{\mathcal{M}(\mathbf{z}_k^{(i)}) > y_{\text{th}}\}} (\mathbf{z}_k^{(i)}) \frac{f_{\mathbf{z}|\xi}(\mathbf{z}_k^{(i)})}{h_k(\mathbf{z}_k^{(i)})} s_j(\boldsymbol{\theta}_k^{(i)}, \boldsymbol{\xi})$
End

^aIn this paper: $\rho = 0.9$.
^bIn this paper: the Gaussian kernel is used.
^c \mathbf{B}_k is a symmetric positive definite bandwidth matrix optimized with asymptotic integrated square error (AMISE) criterion, see [1].

Table 2: Overall methodology.

	Test-case	Reference	ARA/AIS		
			ARA/CMC	ARA/AIS-CE	ARA/NAIS
284	Example #1: Resistance – Sollicitation ^a	(cf. 4.2)	■	■	■
	Example #2: Nonlinear oscillator ^b	(cf. 4.3)	■ ×	■ ★	■ ★
	Example #3: Launch vehicle fallback zone estimation ^c	(cf. 4.4)	■ ×	■ ★	■ ★

^a2 basic variables, 2 uncertain parameters (1 unbounded & 1 bounded), $g(\cdot)$ linear.

^b8 basic variables, 2 uncertain parameters (1 unbounded & 1 bounded), $g(\cdot)$ nonlinear.

^c6 basic variables, 2 uncertain parameters (2 unbounded), $g(\cdot)$ nonlinear.

285 Finally, for a comparison in terms of numerical efficiency of the method w.r.t. CMC estimation, the following standard
286 coefficient $\nu^{\text{ARA/AIS}}$ is used:

$$\nu^{\text{ARA/AIS}} = \frac{N_{\text{sim}}^{\text{ARA/CMC}}}{N_{\text{sim}}^{\text{ARA/AIS}}} \quad (19)$$

287 where $N_{\text{sim}}^{\text{ARA/CMC}}$ is the required number of CMC samples to reach the same coefficient of variation δ on the probability

Algorithm 2 – Generic **ARA/AIS-CE** plug-in box.

<p>Define: ..., parametric family of pdfs $h_\lambda(\cdot)$ with $\lambda \in \Lambda^a$</p> <p>...</p> <p>Set: $k = 1$</p> <p>Generate: i.i.d. samples $\mathbf{z}^{(i)}$ of $\{\mathbf{Z}^{(i)}\}_{i=1}^N \sim h_{\lambda_0}$</p> <p>...</p> <p>While $\gamma_k < y_{\text{th}}$ do</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <p>Optimize^b: the parameters of the auxiliary pdf family</p> $\lambda_k = \operatorname{argmax}_{\lambda \in \Lambda} \left\{ \frac{1}{N} \sum_{i=1}^N \left[\mathbb{1}_{\{\mathcal{M}(\mathbf{z}_j^{(i)}) \geq \gamma_k\}}(\mathbf{z}_j^{(i)}) \frac{f_{Z \xi}(\mathbf{z}^{(i)})}{h_{\lambda_{k-1}}(\mathbf{z}^{(i)})} \ln[h_\lambda(\mathbf{Z}^{(i)})] \right] \right\}$ <p>Set: $k = k + 1$</p> <p>Generate: i.i.d. samples $\mathbf{z}^{(i)}$ of $\{\mathbf{Z}^{(i)}\}_{i=1}^N \sim h_{\lambda_{k-1}}$</p> <p>Evaluate: $Y^{(1)} = \mathcal{M}(\mathbf{z}^{(1)}), \dots, Y^{(N)} = \mathcal{M}(\mathbf{z}^{(N)})$</p> <p>Compute: empirical ρ-quantile γ_k of the samples $\{Y^{(i)}\}_{i=1}^N$</p> </div> <p>...</p> <p>^aIn this paper: the Gaussian parametric family is used.</p> <p>^bFor particular density families (e.g. Gaussian), the pdf optimal parameters have analytical formulas, see [1]. In this paper: both mean and standard deviation are optimized.</p>
--

288 estimate for both methods. Thus, it leads to the following expression:

$$\nu^{\text{ARA/AIS}} = \frac{\left(1 - \widehat{P}_f^{\text{ARA/AIS}}\right)}{N_{\text{sim}}^{\text{ARA/AIS}} \times \widehat{P}_f^{\text{ARA/AIS}} \times \delta^2}. \quad (20)$$

289 A value of $\nu^{\text{ARA/AIS}} > 1$ indicates that the method ARA/AIS is more efficient than CMC for the given test-case. In other words,
 290 $\nu^{\text{ARA/AIS}}$ indicates the quantity by which we can divide the initial CMC simulation budget for a same level of accuracy.

291 **4.2. Example #1: a resistance-sollicitation toy-case**

292 *Description.* The goal of this first academic test-case is to validate the method regarding the estimation accuracy of both
 293 the predictive failure probability and its sensitivities w.r.t. the hyper-parameters. Table 3 gives the input data. The lsf
 294 $g_1(\mathbf{X}) = R - S = X_1 - X_2$ is linear and involves two independent Gaussian random variables. One assumes that both the
 295 standard deviation of the first variable and the mean of the second one are affected by epistemic uncertainty. Thus, two prior
 296 distributions (one unbounded and one bounded) are assumed for the uncertain parameters (e.g., based either on limited
 297 data, literature-based information or expert opinion). As a remark, one could argue that the choice of a normal prior for
 298 Θ_1 may be inappropriate regarding physical constraints, conjugacy and informativeness. In this paper, common priors (i.e.
 299 normal and uniform) are set for the sake of illustration to characterize epistemic uncertainty and for a certain convenience
 300 in sampling, without loss of generality. For a pure Bayesian approach (involving possible updating), the reader should refer
 301 to [55, 72, 73].

Table 3: Input probabilistic model for Example #1.

Variable	Distribution	Parameter #1	Parameter #2
$X_1 = R$	Normal	$\mu_{X_1} = 7$	σ_{X_1} <i>uncertain</i>
$X_2 = S$	Normal	μ_{X_2} <i>uncertain</i> ^a	$\sigma_{X_2} = 1$
$\Theta_1 = \sigma_{X_1}$	Normal	$\xi_1 = \mu_{\sigma_{X_1}} = 0.7$	$\xi_2 = \sigma_{\sigma_{X_1}} = 0.07$
$\Theta_2 = \mu_{X_2}$	Uniform	$\xi_3 = a_{\mu_{X_2}} = 1.5$	$\xi_4 = b_{\mu_{X_2}} = 2.5$

^aFor fixed values $\sigma_{X_1} = 0.7$ and $\mu_{X_2} = 2$, $p_f = 2.50 \times 10^{-5}$.

Table 4: Results for Example #1.

	ARA/CMC		ARA/AIS-CE		ARA/NAIS	
	$(N_{x,\theta} = 10^8 \text{ samples})$		$(N_{x,\theta} = 10^4 \text{ samples/step})$		$(N_{x,\theta} = 10^4 \text{ samples/step})$	
	Estimate	cv	Estimate	cv	Estimate	cv
\widehat{P}_f	3.72×10^{-5}	(1.60 %)	3.73×10^{-5}	(4.39 %)	3.71×10^{-5}	(3.62 %)
$\widehat{\partial P}_f / \partial \xi_1$	2.77×10^{-4}	(3.50 %)	2.81×10^{-4}	(14.2 %)	2.75×10^{-4}	(13.7 %)
$\widehat{\partial P}_f / \partial \xi_2$	1.37×10^{-4}	(10.8 %)	1.45×10^{-4}	(62.9 %)	1.35×10^{-4}	(59.1 %)
$\widehat{\partial P}_f / \partial \xi_3$	3.30×10^{-5}	(1.91 %)	3.32×10^{-5}	(4.91 %)	3.30×10^{-5}	(4.06 %)
$\widehat{\partial P}_f / \partial \xi_4$	8.91×10^{-5}	(1.41 %)	8.87×10^{-5}	(5.99 %)	8.89×10^{-5}	(4.74 %)
$\widehat{\partial P}_f / \partial \mu_{\Theta_2}$ ^a	2.44×10^{-4}	—	2.44×10^{-4}	—	2.44×10^{-4}	—
$\widehat{\partial P}_f / \partial \sigma_{\Theta_2}$	1.94×10^{-4}	—	1.92×10^{-4}	—	1.94×10^{-4}	—
$\nu^{\text{ARA/AIS}}$	—	—	103	—	158	—

^acf. Eqs. (15a) and (15b) for the uniform case.

304 *Results.* Table 4 gathers numerical values for probability estimates, sensitivities and efficiencies. For comparison purpose, a
305 CMC with $N_{x,\theta} = 10^8$ samples is performed. The coefficient of variation (cv) for any estimate is calculated using a hundred
306 replicates of each algorithm. However, for the sake of conciseness, only the results associated to the highest numerical
307 efficiency $\nu^{\text{ARA/AIS}}$ are presented in Table 4 for the two proposed methods (here, $N_{x,\theta} = 10^4$ samples/step). As a remark,
308 one can see that both the predictive failure probability and its sensitivities are well estimated with both methods compared
309 to ARA/CMC. Concerning the estimation of the predictive failure probability, one can see that $\widehat{P}_f = 3.72 \times 10^{-5}$ which
310 shows that taking a second uncertainty level into account implies a slight increase compared to the failure probability under
311 single-level uncertainty $p_f = 2.50 \times 10^{-5}$ (see below Table 3). From these results, one can notice that the sensitivities
312 w.r.t. bounds (i.e. $\widehat{\partial P}_f / \partial \xi_3$ and $\widehat{\partial P}_f / \partial \xi_4$) show a reduced coefficient of variation compared to those for the unbounded
313 distribution (i.e. $\widehat{\partial P}_f / \partial \xi_1$ and $\widehat{\partial P}_f / \partial \xi_2$). This could be due to the fact that they are estimated as a difference of two
314 probabilities estimated both by the method which lead to a reduced variance. In terms of comparison, since the problem
315 involves two uncertain distribution parameters (Θ_1 unbounded and Θ_2 bounded), one can use Eqs. (15a) and (15b) to get
316 sensitivities w.r.t. moments of Θ_2 instead of its bounds. Finally, in this case, the predictive failure probability seems to be
317 slightly more sensitive to the a priori choice of the mean values of both distribution parameters than to the choice of the
318 standard deviations. As for the $\nu^{\text{ARA/AIS}}$ coefficients, they are very high compared unity for both methods. This implies that,
319 for the same level of accuracy, one can reduce the CMC simulation budget by 103 times if one uses ARA/AIS-CE and by 158
320 times if one uses ARA/NAIS. This gain can be of practical importance for applications involving rare event probabilities.

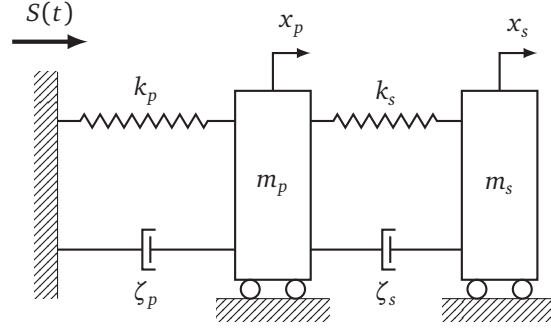


Figure 2: Two-degree-of-freedom damped oscillator with primary and secondary systems.

321 4.3. Example #2: a two d.o.f. primary/secondary damped oscillator

322 *Description.* This nonlinear oscillator is based on a two-degree-of-freedom primary-secondary system, as shown in Figure 2,
 323 excited by a white noise base acceleration [74]. The system's behavior is characterized by the masses m_p and m_s , the spring
 324 stiffnesses k_p and k_s , the natural frequencies $\omega_p = (k_p/m_p)^{1/2}$ and $\omega_s = (k_s/m_s)^{1/2}$ and the damping ratios ζ_p and ζ_s , where
 325 the subscripts p and s respectively refer to the primary and secondary oscillators. As for F_s , it denotes the force capacity of
 326 the secondary spring. Thus, the reliability of the system can be evaluated using the following Isf:

$$g_2(\mathbf{X}) = F_s - 3k_s \sqrt{\frac{\pi S_0}{4\zeta_s \omega_s^3} \left[\frac{\zeta_a \zeta_s}{\zeta_p \zeta_s (4\zeta_a^2 + r^2) + \gamma \zeta_a^2} \frac{(\zeta_p \omega_p^3 + \zeta_s \omega_s^3) \omega_p}{4\zeta \omega_a^4} \right]} = F_s - F_{acc}. \quad (21)$$

327 This equation defines the potential failure event $\{F_s \leq F_{acc}\}$ occurring if the force induced by the white noise base acceleration
 328 overcomes the force capacity in the secondary spring. Table 5 gives the input data (the set of parameters here for the basic
 329 variables are mean values and coefficients of variation). The Isf $g_2(\cdot)$ is highly nonlinear and involves eight independent
 330 lognormal random variables. One assumes that both the mean of the second mass is not precisely known due to measure
 331 uncertainty and the mean of the force capacity of the secondary spring is also affected by epistemic uncertainty. Thus, two
 332 prior distributions (Gaussian and uniform) are assumed for the uncertain parameters based on expert judgment.

Table 5: Input probabilistic model for Example #2.

Variable ^a	Distribution	Parameter #1	Parameter #2
$X_1 = m_p$ (kg)	Lognormal	$\mu_{X_1} = 1.5$	$\delta_{X_1} = 10\%$
$X_2 = m_s$ (kg)	Lognormal	μ_{X_2} <i>uncertain</i> ^b	$\delta_{X_2} = 10\%$
$X_3 = k_p$ (N.m ⁻¹)	Lognormal	$\mu_{X_3} = 1$	$\delta_{X_3} = 20\%$
$X_4 = k_s$ (N.m ⁻¹)	Lognormal	$\mu_{X_4} = 0.01$	$\delta_{X_4} = 20\%$
$X_5 = \zeta_p$ (1)	Lognormal	$\mu_{X_5} = 0.05$	$\delta_{X_5} = 40\%$
$X_6 = \zeta_s$ (1)	Lognormal	$\mu_{X_6} = 0.02$	$\delta_{X_6} = 50\%$
$X_7 = F_s$ (N)	Lognormal	μ_{X_7} <i>uncertain</i>	$\delta_{X_7} = 10\%$
$X_8 = S_0$ (m.s ⁻²)	Lognormal	$\mu_{X_8} = 100$	$\delta_{X_8} = 10\%$
$\Theta_1 = \mu_{X_7}$ (N)	Normal	$\xi_1 = \mu_{\mu_{X_7}} = 21.5 / 27.5$ (★) ^c	$\xi_2 = \sigma_{\mu_{X_7}} = 2.15 / 2.75$ (★)
$\Theta_2 = \mu_{X_2}$ (kg)	Uniform	$\xi_3 = a_{\mu_{X_2}} = 0.008$	$\xi_4 = b_{\mu_{X_2}} = 0.012$

^aThe basic variables are independent.

^bFor fixed values $\mu_{X_2} = 0.01$ and $\mu_{X_7} = 21.5 / 27.5$, $p_f = 4.78 \times 10^{-5} / 3.78 \times 10^{-7}$.

^cThe second value is for the rare event case, cf. Table 2.

334 *Results.* Numerical results summarized in Table 6 show that, for a moderately rare failure event, both ARA/AIS-CE and
335 ARA/NAIS give accurate results in the predictive failure probability estimation compared to ARA/CMC. Again, the coefficient
336 of variation (cv) for any estimate is calculated using a hundred replicates of each algorithm. It first reveals the variations
337 between the failure probability under single-level uncertainty p_f and the predictive one \tilde{P}_f (here, it increases from 4.78×10^{-5}
338 to 2.35×10^{-4}) due to the bi-level uncertainty. In this case, considering uncertainty on a distribution parameter makes the
339 system less safe, which can be an important indicator for design or re-design purposes. Concerning sensitivities, most of them
340 are correctly estimated, except for $\widehat{\partial \tilde{P}_f} / \partial \xi_2$ for which one can observe a tiny relative bias between the proposed methods
341 and reference results. In terms of comparison, once again, since the problem involves two uncertain distribution parameters
342 (Θ_1 unbounded and Θ_2 bounded), one can use Eqs. (15a) and (15b) to get sensitivities w.r.t. moments of Θ_2 instead of its
343 bounds. Finally, in this case, the predictive failure probability seems to be slightly more sensitive to the a priori choice
344 modelling the uncertain mean of the secondary mass. Thus, the lack of knowledge about the mean value of the mass plays
345 a key role in terms of system safety. As for the convergence of the results, Figure 3a compares the estimated sensitivities
346 (to avoid any redundancy, only the ARA/NAIS plots are presented) to the reference results obtained by ARA/CMC. One can
347 notice the convergence w.r.t. the increasing number of samples per step and a low variability of the two last sensitivities
348 as mentioned previously. Finally, for a moderate rareness of the failure event, the efficiency of the method is promising:
349 $\nu^{\text{ARA/AIS}}$ is equals to 14 for ARA/AIS-CE and 17 for ARA/NAIS, meaning the equivalent ARA/CMC simulation budget can
350 be still divided while ensuring a given target accuracy in the estimation.

351 In the rare event context (★) (see Table 7), reference results are supposed to be intractable. Again, a hundred replicates
352 were used to get samples' statistics. One can first observe a slight increase for the predictive failure probability (around
353 7×10^{-6}) compared to the failure probability under single-level uncertainty (equals to 3.78×10^{-7} as given below Table 5).
354 With the proposed method, one can notice that the estimated values show relatively low coefficient of variation. Comparing
355 sensitivities leads to notice that the rareness of the failure event (i.e. between Table 6 and Table 7) does not impact the
356 relative order in terms of influence. The moments of Θ_2 are still the most influent hyper-parameters of the predictive failure
357 probability. The method ensures a higher efficiency than as the rareness of the probability increases ($\nu^{\text{ARA/AIS}}$ from 231 for
358 ARA/AIS-CE to 276 for ARA/NAIS). Finally, the global convergence is observed on Figure 3b (for ARA/NAIS only).

Table 6: Results for Example #2.


	ARA/CMC		ARA/AIS-CE		ARA/NAIS	
	$(N_{x,\theta} = 10^8 \text{ samples})$		$(N_{x,\theta} = 10^4 \text{ samples/step})$		$(N_{x,\theta} = 10^4 \text{ samples/step})$	
	Estimate	cv	Estimate	cv	Estimate	cv
\widehat{P}_f	2.35×10^{-4}	(0.603 %)	2.36×10^{-4}	(4.69 %)	2.38×10^{-4}	(4.57 %)
$\widehat{\partial \tilde{P}_f} / \partial \xi_1$	-1.61×10^{-4}	(0.661 %)	-1.60×10^{-4}	(4.80 %)	-1.61×10^{-4}	(5.32 %)
$\widehat{\partial \tilde{P}_f} / \partial \xi_2$	9.04×10^{-3}	(0.602 %)	1.08×10^{-2}	(4.69 %)	1.09×10^{-2}	(4.57 %)
$\widehat{\partial \tilde{P}_f} / \partial \xi_3$	5.57×10^{-2}	(0.650 %)	5.58×10^{-2}	(4.89 %)	5.63×10^{-2}	(4.81 %)
$\widehat{\partial \tilde{P}_f} / \partial \xi_4$	1.36×10^{-1}	(0.525 %)	1.35×10^{-1}	(6.45 %)	1.34×10^{-1}	(6.22 %)
$\widehat{\partial \tilde{P}_f} / \partial \mu_{\Theta_2}^a$	3.82×10^{-1}	—	3.82×10^{-1}	—	3.82×10^{-1}	—
$\widehat{\partial \tilde{P}_f} / \partial \sigma_{\Theta_2}$	2.77×10^{-1}	—	2.75×10^{-1}	—	2.71×10^{-1}	—
$\nu^{\text{ARA/AIS}}$	—	—	14	—	17	—

^acf. Eqs. (15a) and (15b) for the uniform case.

Table 7: Results for Example #2 considering the influence of the failure event rareness.

	ARA/AIS-CE (★)		ARA/NAIS (★)	
	$(N_{x,\theta} = 10^4 \text{ samples/step})$		$(N_{x,\theta} = 10^4 \text{ samples/step})$	
	Estimate	cv	Estimate	cv
\widehat{P}_f	6.71×10^{-6}	(6.25 %)	6.82×10^{-6}	(5.97 %)
$\widehat{\partial \widetilde{P}_f} / \partial \xi_1$	-4.95×10^{-6}	(6.58 %)	-4.98×10^{-6}	(5.56 %)
$\widehat{\partial \widetilde{P}_f} / \partial \xi_2$	2.41×10^{-4}	(6.25 %)	2.45×10^{-4}	(5.97 %)
$\widehat{\partial \widetilde{P}_f} / \partial \xi_3$	1.62×10^{-3}	(6.51 %)	1.65×10^{-3}	(6.14 %)
$\widehat{\partial \widetilde{P}_f} / \partial \xi_4$	4.63×10^{-3}	(6.74 %)	4.59×10^{-3}	(9.01 %)
$\widehat{\partial \widetilde{P}_f} / \partial \mu_{\theta_2}^a$	1.25×10^{-2}	—	1.25×10^{-2}	—
$\widehat{\partial \widetilde{P}_f} / \partial \sigma_{\theta_2}$	1.04×10^{-2}	—	1.02×10^{-2}	—
$\gamma^{\text{ARA/AIS}}$	231	—	276	—

^acf. Eqs. (15a) and (15b) for the uniform case.

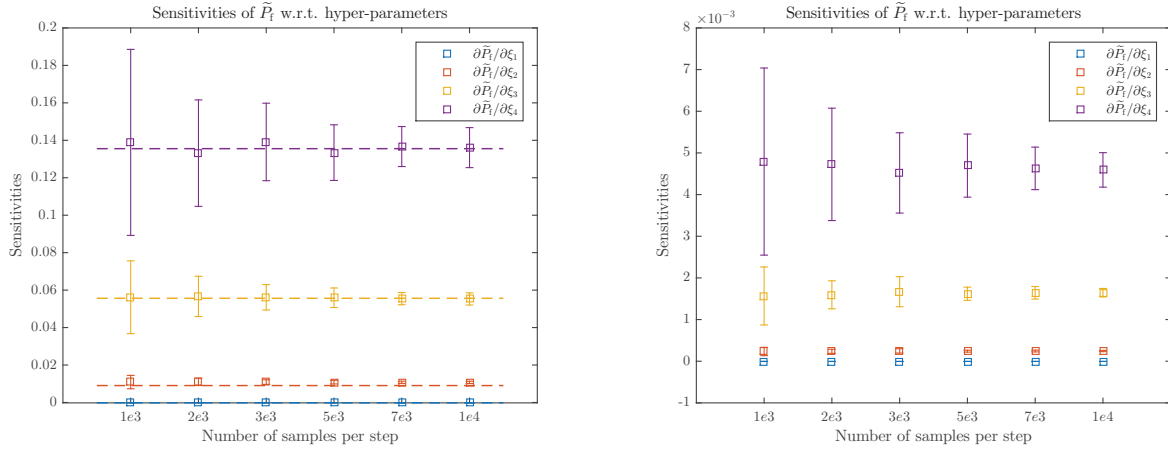

(a) Estimated sensitivities (error bars) vs. reference results obtained by ARA/CMC (dashed lines). (b) Estimated sensitivities (error bars) in a context of rare event (★).

Figure 3: Convergence plots obtained by ARA/NAIS for Example #2.

361 4.4. Example #3: application to a launch vehicle stage fallback zone estimation

362 *Description.* The role of a launch vehicle is to carry a payload (e.g., a satellite) from the Earth's surface to a given orbit.
363 A traditional expendable space launcher is composed of multiple stages, equipped with their propulsion systems. An ex-
364 ample of such a launch vehicle is given in Figure 4. During the flight, uncertainties can affect several variables in multiple
365 disciplines (e.g., on the dynamics perturbations or stage combustion). For instance, focusing on the optimal trajectory as-
366 sessment leads to consider the separation point (see "stage separation" in Figure 4) as a key point in terms of uncertainty
367 analysis. Dynamic perturbations, varying unburned propellant left mass, error measurements due to sensors, are all types
368 of uncertainties that are of prime importance to estimate and predict the fallback zone into the ocean. A misestimation
369 can have dramatic consequences in terms of launcher safety and in terms of human security and environmental impact. To
370 assess reliability of such a system, the black-box model $\mathcal{M}(\cdot)$ considered here is a trajectory simulation code of the dynamic
371 fallback phase of a generic launcher first stage [75]. As input, the state vector gathers six independent random variables
372 representing some perturbations of the initial conditions and launcher stage characteristics at separation point:

- 373 • X_1 : stage altitude perturbation at separation (Δh (m));
- 374 • X_2 : velocity perturbation at separation (Δv (m.s⁻¹));
- 375 • X_3 : flight path angle perturbation at separation ($\Delta \gamma$ (rad));
- 376 • X_4 : azimuth angle perturbation at separation ($\Delta \psi$ (rad));
- 377 • X_5 : propellant mass perturbation at separation (Δm (kg));
- 378 • X_6 : drag force error perturbation (ΔC_d dimensionless).

379 The input probabilistic model is given in Table 8. The code output is the distance D_{code} between the theoretical fallback
 380 position into the ocean and the estimated one. The lsf $g_3(\cdot)$ can be written as follows:

$$g_3(\mathbf{X}) = d_{\text{safe}} - \mathcal{M}(\mathbf{X}) = d_{\text{safe}} - D_{\text{code}} \quad (22)$$

381 for which the rareness of the failure event depends on the safety threshold distance d_{safe} . To get a moderate target failure
 382 probability, one can set the safety distance to $d_{\text{safe}} = 15,000$ meters while to increase the rareness, one can set it to 20,000
 383 meters (★).

Table 8: Input probabilistic model for Example #3.

Variable ^a	Distribution	Parameter #1	Parameter #2
$X_1 = \Delta h$ (m)	Normal	$\mu_{X_1} = 0$	$\sigma_{X_1} = 1650$
$X_2 = \Delta v$ (m.s ⁻¹)	Normal	μ_{X_2} <i>uncertain</i> ^b	$\sigma_{X_2} = 3.7$
$X_3 = \Delta \gamma$ (rad)	Normal	μ_{X_3} <i>uncertain</i>	$\sigma_{X_3} = 0.001$
$X_4 = \Delta \psi$ (rad)	Normal	$\mu_{X_4} = 0$	$\sigma_{X_4} = 0.0018$
$X_5 = \Delta m$ (kg)	Normal	$\mu_{X_5} = 0$	$\sigma_{X_5} = 70$
$X_6 = \Delta C_d$ (1)	Normal	$\mu_{X_6} = 0$	$\sigma_{X_6} = 0.1$
$\Theta_2 = \mu_{X_2}$ (m.s ⁻¹)	Normal	$\xi_1 = \mu_{\mu_{X_2}} = 0$	$\xi_2 = \sigma_{\mu_{X_2}} = 3.7$
$\Theta_3 = \mu_{X_3}$ (rad)	Normal	$\xi_3 = \mu_{\mu_{X_3}} = 0$	$\xi_4 = \sigma_{\mu_{X_3}} = 0.001$

^aThe basic variables are independent.

^bFor fixed values $\mu_{X_2} = 0$ and $\mu_{X_3} = 0$: for $d_{\text{safe}} = 15$ (km), $p_f = 1.36 \times 10^{-4}$ while for $d_{\text{safe}} = 20$ (km), $p_f = 2.31 \times 10^{-7}$.

385 In addition to this first level of uncertainty, one assumes that epistemic uncertainty is affecting two mean values, re-
 386 spectively μ_{X_2} and μ_{X_3} , i.e. the mean values of the perturbations affecting the velocity at separation and the perturbations
 387 affecting the flight path angle at separation as shown in Table 8. These physical quantities are difficult to measure and to con-
 388 trol in real conditions. For the sake of demonstration, the numerical values (distribution parameters and hyper-parameters)
 389 used in this example are hypothetical. The analysis results for the proposed method are averaged over a hundred replications
 390 of the algorithm (this code is a simplified version of a real trajectory code with a reasonable computational cost).

391 *Results.* Numerical results gathered in Table 9 show that both methods manage to correctly estimate the predictive failure
 392 probability. As a first remark, this predictive failure probability is slightly greater than the failure probability under single-
 393 level uncertainty p_f recalled below Table 8. This shows again that, in this case, the distribution parameter makes the system

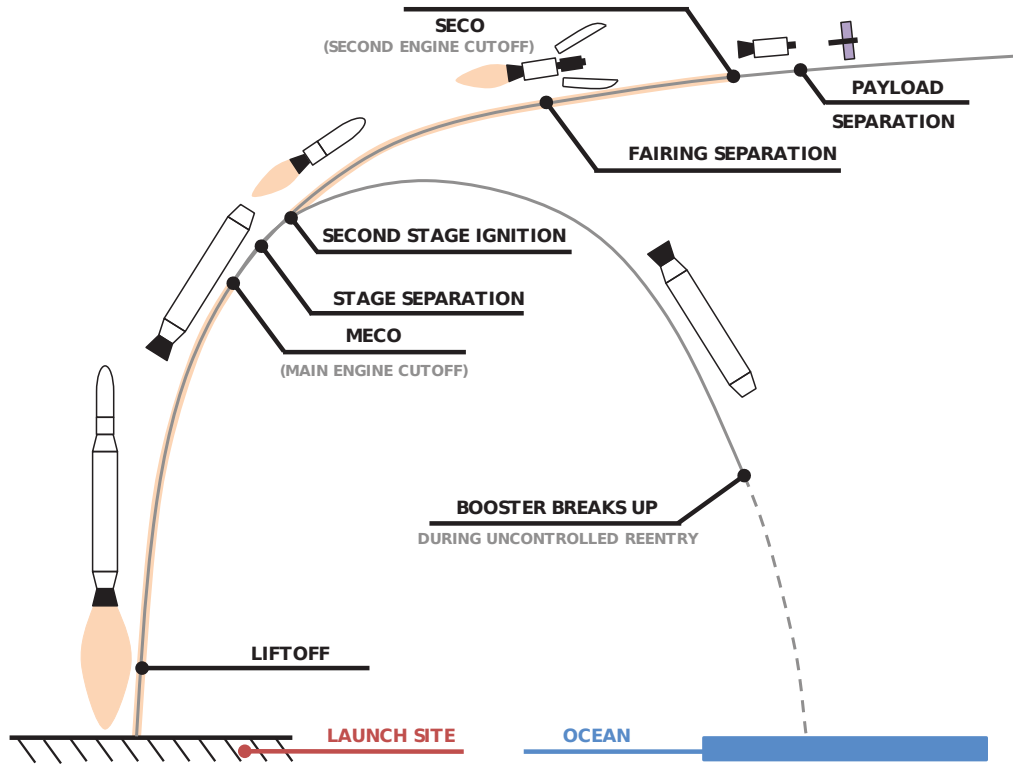


Figure 4: Illustration scheme of a first stage fallback phase (adapted from an infographic by Jon Ross (<http://www.zlsdesign.com>)).

394 be less safe. Then, one can highlight the fact that ARA/NAIS gets closer results to reference ones (obtained by ARA/CMC)
 395 than ARA/AIS-CE. The problem here is inherent to the cross-entropy method as it shows some difficulty to converge with
 396 a correct accuracy when the problem involves multiple failure regions. However, in [76], a cross-entropy-based adaptive
 397 importance sampling algorithm using Gaussian mixture has been proposed and seems to manage to compensate this issue.
 398 In terms of comparison, the predictive failure probability seems to be more sensitive to the hyper-parameters ξ_4 and ξ_3
 399 which are respectively the standard deviation and the mean of $\Theta_3 = \mu_{X_3}$. Here, the lack of knowledge affecting the mean
 400 value of the flight path angle perturbation really plays a key role on the final predictive failure probability. This can be a
 401 relevant information for refining the a priori probabilistic model for Θ_3 (especially in terms of variance reduction) and set
 402 up an investigation policy about the possible reduction of epistemic (statistical) uncertainty affecting Θ_3 . Concerning the
 403 efficiencies, while ARA/AIS-CE is inefficient in this specific case where AIS-CE is not accurate enough, ARA/NAIS manages
 404 to provide a precise estimation for both the probability and the sensitivities. The convergence plot in Figure 5a illustrates
 405 these results.


406 In the rare event context (★, as given in Table 10, one can still see that ARA/NAIS provides better results than ARA/AIS-
 407 CE, even if this one still manages to get relevant orders of magnitude for both the probability and the sensitivities. However,
 408 the efficiency of ARA/AIS-CE is annealed by the poor accuracy of the estimation while ARA/NAIS outperforms ARA/CMC
 409 by allowing to reduce the simulation budget by 207. Similar comparisons can be drawn to the previous case regarding the
 410 relative influence of the hyper-parameters. However, one can still notice that increasing the rareness of the failure event
 411 decreased, in proportion, the relative influence of ξ_4 . Finally, the global convergence of ARA/NAIS sensitivity estimation is
 412 represented in Figure 5b.

Table 9: Results for Example #3.

	ARA/CMC		ARA/AIS-CE		ARA/NAIS	
	$(N_{x,\theta} = 10^6 \text{ samples})$		$(N_{x,\theta} = 10^4 \text{ samples/threshold})$		$(N_{x,\theta} = 10^4 \text{ samples/threshold})$	
	Estimate	cv	Estimate	cv	Estimate	cv
\widehat{P}_f	4.40×10^{-3}	(1.38 %)	4.41×10^{-3}	(10.3 %)	4.40×10^{-3}	(2.08 %)
$\widehat{\partial P}_f / \partial \xi_1$	-9.13×10^{-4}	(3.44 %)	-8.68×10^{-4}	(27.7 %)	-9.12×10^{-4}	(5.90 %)
$\widehat{\partial P}_f / \partial \xi_2$	2.95×10^{-3}	(2.32 %)	3.02×10^{-3}	(14.8 %)	2.95×10^{-3}	(3.22 %)
$\widehat{\partial P}_f / \partial \xi_3$	-2.31	(3.88 %)	-2.29	(25.7 %)	-2.30	(5.82 %)
$\widehat{\partial P}_f / \partial \xi_4$	6.43	(2.18 %)	6.26	(14.6 %)	6.41	(3.77 %)
$\nu^{\text{ARA/AIS}}$	—	—	0.5	—	13	—

Table 10: Results for Example #3 considering the influence of the failure event rareness.

	ARA/AIS-CE (★)		ARA/NAIS (★)	
	$(N_{x,\theta} = 10^4 \text{ samples/step})$		$(N_{x,\theta} = 10^4 \text{ samples/step})$	
	Estimate	cv	Estimate	cv
\widehat{P}_f	1.00×10^{-4}	(29.7 %)	1.19×10^{-4}	(2.85 %)
$\widehat{\partial P}_f / \partial \xi_1$	-4.65×10^{-5}	(46.9 %)	-3.66×10^{-5}	(7.00 %)
$\widehat{\partial P}_f / \partial \xi_2$	1.21×10^{-4}	(40.3 %)	1.41×10^{-4}	(3.62 %)
$\widehat{\partial P}_f / \partial \xi_3$	-1.19×10^{-1}	(34.4 %)	-9.18×10^{-2}	(7.67 %)
$\widehat{\partial P}_f / \partial \xi_4$	2.51×10^{-1}	(25.2 %)	3.10×10^{-1}	(4.24 %)
$\nu^{\text{ARA/AIS}}$	2	—	207	—

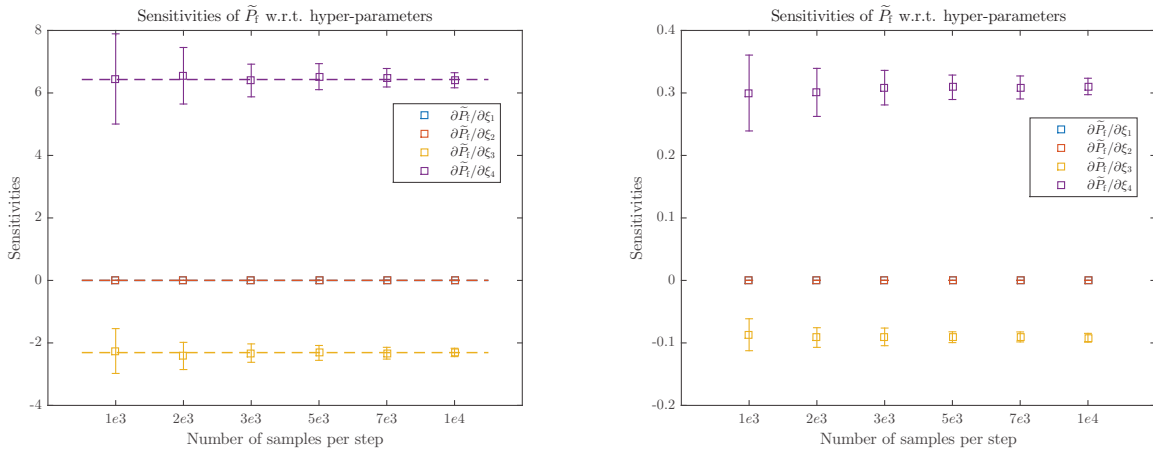

(a) Estimated sensitivities (error bars) vs. reference results obtained by ARA/CMC (dashed lines). (b) Estimated sensitivities (error bars) in a context of rare event (★).

Figure 5: Convergence plots obtained by ARA/NAIS for Example #3.

4.5. Synthesis about numerical results and discussion

The aim of this subsection is to give a synthesis for the interested reader to get the main advantages and drawbacks of the proposed approach. According to the numerical results, one can sum up the following characteristics:

- ARA/AIS-CE and ARA/NAIS lead to similar results for predictive failure probability and reliability-based sensitivities estimation to the reference approach, namely ARA/CMC. They both enable to reduce the variance of estimation and limit the number of calls to the black-box model;
- ARA/AIS-CE and ARA/NAIS, coupled to the derived sensitivity estimators, enable to estimate sensitivities w.r.t. distribution parameters appearing in both unbounded and bounded priors;
- ARA/AIS-CE suffers from the possible multimodality of the optimal auxiliary density (i.e. problem with multiple failure regions), which is a known issue of this method [76];
- ARA/NAIS is dedicated to problems whose input dimensionality (including the stochastic distribution parameters) is a few dozen while ARA/AIS-CE can handle higher input dimensions.

Figure 6 summarizes the evolution of the numerical efficiency $\nu^{\text{ARA/NAIS}}$ (only for the ARA/NAIS method here) for the two last examples (Example #2 and Example #3) in their two configurations – initial problem (■) and increased rareness of the failure event (★) – as a function of the number of samples per step (from $1e3$ to $1e4$). If the efficiencies for the initial problems reach values around $\nu^{\text{ARA/NAIS}} \approx 10$ to 15 (meaning that one can divide the simulation budget by 15), the efficiencies in a rare event context reach high values such as $\nu^{\text{ARA/NAIS}} \approx 50$ to 270 which indicates that the proposed method can efficiently handle problems with very low predictive failure probabilities whose estimation by ARA/CMC is definitely intractable. As a remark, one can notice that the increasing curves as a function of the number of samples only represent the underlying tradeoff of the proposed method between accuracy (coefficient of variation decreasing as the number of samples increases) and the global computational cost.

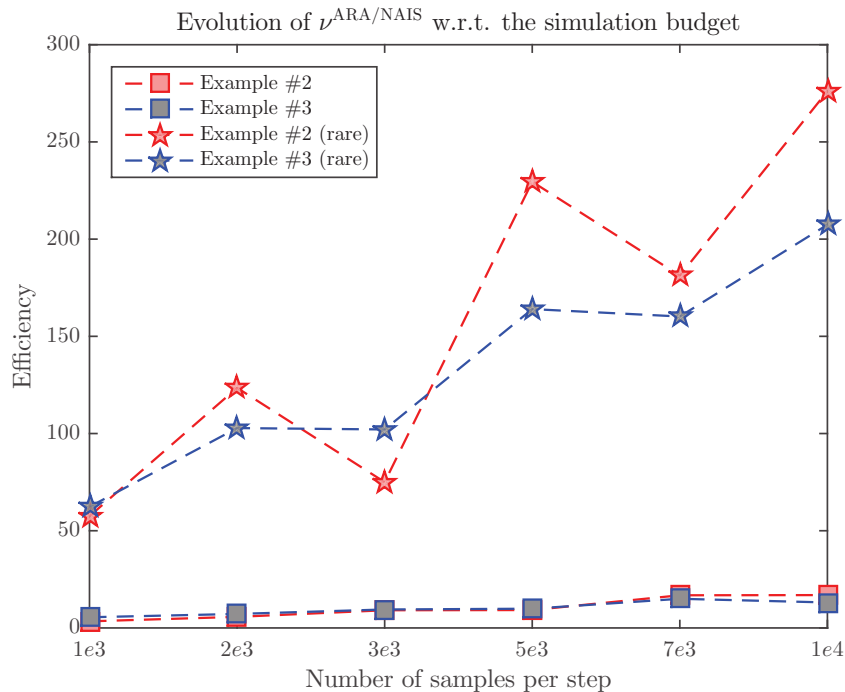


Figure 6: Efficiency.

In terms of interpretation of the sensitivities derived in this paper, one should remember that local sensitivities are not quantities that can be easily ranked. Using local sensitivities can only give a qualitative result which should be considered as an indication for the user to know whether he/she should get more information about the lack of knowledge affecting one or

439 more distribution parameters. It cannot be used as a variable importance measure for factor fixing purposes [10]. However,
440 they can be useful to highlight some features and underlying behaviors associated, either to the input probabilistic modeling,
441 or to the model behavior at failure. To do so, one should compare sensitivities of the same nature, for instance sensitivities
442 to a mean together, sensitivities to a standard deviation together, sensitivities to bounds together. Another possible solution
443 is to build what is called an *elasticity* which is a normalized sensitivity [3]. In reliability literature, several authors advocated
444 different types of elasticities. For instance, Table 11 gathers three different formulas and the corresponding literature sources
445 for computing elasticities (adapted here to the bi-level uncertainty framework). From the authors knowledge, there is no
446 consensus about the elasticity formulation. For the sake of generality, the sensitivity indicator provided in this paper do not
447 take into account any normalization factor. All the derivative-based formulas (and associated numerical results) described
448 in this paper can be combined with the formulas given in Table 11 to obtain elasticities.

Table 11: Different formulas for elasticities.

	Formula	Hyper-parameters	Source
449	(f1) $e_j = \frac{\partial \bar{P}_f}{\partial \xi_j} \times \frac{\sigma_{\theta_j}}{\bar{P}_f}$	$\xi_j = \mu_{\theta_j}$ or $\xi_j = \sigma_{\theta_j}$	[20]
	(f2) $e_j = \frac{\partial \bar{P}_f}{\partial \xi_j} \times \xi_j$	$\xi_j = \mu_{\theta_j}$ or $\xi_j = \sigma_{\theta_j}$	[77]
	(f3) $e_j = \frac{\partial \bar{P}_f}{\partial \xi_j} \times \frac{\xi_j}{\bar{P}_f}$	$\xi_j = \mu_{\theta_j}$ or $\xi_j = \sigma_{\theta_j}$	[3]

450 It is important to notice that the choice of prior distribution is a crucial step in practice and can be lead by various
451 techniques (expert judgment, data analysis, experimental results). For the sake of conciseness, in this paper, the sensitivity
452 estimator formula (and application cases) are explicitly given using only normal and uniform probability distributions as
453 priors. When facing more complex priors (e.g., truncated normal distribution to avoid unrealistic physical data), these
454 formula can be adapted. Finally, for some priors, score functions may not be available [26, 28, 29].

455 5. Conclusion - perspectives

456 In this article, new reliability-based sensitivity estimators are proposed using the so-called “augmented reliability ap-
457 proach”. The proposed derivative-based local sensitivity estimators of predictive failure probability, with respect to determin-
458 istic distribution hyper-parameters, are derived for two cases: firstly, when all the stochastic distribution parameters follow
459 some unbounded prior probability distributions; secondly, when at least one distribution parameter follows a bounded prior.
460 Thus, this method allows to get sensitivities with either none (in the unbounded case) or a moderate extra computational
461 effort (in the bounded case). To enhance the efficiency of the method, these estimators are derived using an *adaptive im-
462 portance sampling* scheme, either using a parametric algorithm (ARA/AIS-CE) or a nonparametric one (ARA/NAIS). Then,
463 three numerical applications on both academic and industrial test-cases (launch vehicle stage fallback zone estimation) are
464 considered, the final ones beeing representative of the complex simulation codes used in aerospace engineering. The com-
465 parison with a reference method (ARA/CMC) demonstrates the convergence and the performance of the proposed method.
466 Finally, this study shows the benefits of using an ARA/AIS strategy when the failure event becomes very rare, especially for
467 complex models.

468 A first enhancement track could be to study the possibility of enhancing ARA/AIS-CE strategy for reliability and sensi-
469 tivity assessment under bi-level uncertainty by adapting recent works on AIS-CE [76, 78] to handle both multiple failure
470 regions and high-dimensionality. In order to further reduce the computational cost of these estimations, another possible
471 enhancement track could be to couple the ARA/AIS strategy to a *metamodel* such as proposed in [79] to possibly extend

472 it to the bi-level uncertainty problem. However, metamodels also bring their own contribution to the overall uncertainty
473 by adding some “model uncertainty”. This type of uncertainty has to be handled and should not cover the uncertainty
474 introduced by considering a prior on the distribution parameters. Some recent metamodel-based strategies also consider a
475 so-called “augmented framework” by considering that the metamodel can handle all kinds of epistemic uncertainties in its
476 own definition [80]. These possible tracks are left for future work.

477 Acknowledgements

478 The authors would primarily like to thank the editor and the anonymous reviewers for the constructive remarks and
479 valuable suggestions. The first author is enrolled in a PhD program co-funded by ONERA – *The French Aerospace Lab* and
480 *SIGMA Clermont*. Their financial supports are gratefully acknowledged.

481 References

- 482 [1] J. Morio and M. Balesdent. *Estimation of Rare Event Probabilities in Complex Aerospace and Other Systems: A Practical Approach*. Woodhead Publishing,
483 Elsevier, 2015.
- 484 [2] R. Y. Rubinstein and D. P. Kroese. *Simulation and the Monte Carlo Method*. Wiley, Second edition, 2008.
- 485 [3] M. Lemaire. *Structural Reliability*. ISTE Ltd & John Wiley & Sons, Inc., 2009.
- 486 [4] J. Morio, M. Balesdent, D. Jacquemart, and C. Vergé. A survey of rare event simulation methods for static input-output models. *Simulation Modelling*
487 *Practice and Theory*, 49:297–304, 2014.
- 488 [5] B. Sudret. Meta-models for structural reliability and uncertainty quantification. In *Proc. of the 5th Asian-Pacific Symposium on Structural Reliability*
489 *and its Applications (5APSSRA)*, Singapore, 2012.
- 490 [6] A. Saltelli, S. Tarantola, F. Campolongo, and M. Ratto. *Sensitivity Analysis in Practice: A Guide to Assessing Scientific Models*. Wiley, 2004.
- 491 [7] J. C. Helton, J. D. Johnson, C. J. Sallaberry, and C. B. Storlie. Survey of sampling-based methods for uncertainty and sensitivity analysis. *Reliability*
492 *Engineering and System Safety*, 91:1175–1209, 2006.
- 493 [8] C. B. Storlie, L. P. Swiler, J. C. Helton, and C. J. Sallaberry. Implementation and evaluation of nonparametric regression procedures for sensitivity
494 analysis of computationally demanding models. *Reliability Engineering and System Safety*, 94:1735–1763, 2009.
- 495 [9] B. Iooss and P. Lemaître. A Review on Global Sensitivity Analysis Methods. In G. Dellino and C. Meloni, editors, *Uncertainty Management in*
496 *Simulation-Optimization of Complex Systems: Algorithms and Applications*, chapter 5, pages 101–122. Springer US, Boston, MA, 2015.
- 497 [10] P. Wei, Z. Lu, and S. Song. Variable importance analysis: a comprehensive review. *Reliability Engineering and System Safety*, 142:399–432, 2015.
- 498 [11] E. Borgonovo and E. Plischke. Sensitivity analysis: a review of recent advances. *European Journal of Operational Research*, 248:869–887, 2016.
- 499 [12] J. Morio. Influence of input PDF parameters of a model on a failure probability estimation. *Simulation Modelling Practice and Theory*, 19(10):2244–
500 2255, 2011.
- 501 [13] H. Liu, W. Chen, and A. Sudjianto. Relative Entropy Based Method for Probabilistic Sensitivity Analysis in Engineering Design. *Journal of Mechanical*
502 *Design*, 128(2):326–336, 2005.
- 503 [14] P. Lemaître, E. Sergienko, A. Arnaud, N. Bousquet, F. Gamboa, and B. Iooss. Density modification-based reliability sensitivity analysis. *Journal of*
504 *Statistical Computation and Simulation*, 85(6):1200–1223, 2015.
- 505 [15] T. Browne, J.-C. Fort, B. Iooss, and L. Le Gratiet. Estimate of quantile-oriented sensitivity indices. *HAL, hal-01450891, version 1*, 2017.
- 506 [16] P. Bjerager and S. Krenk. Parametric Sensitivity in First Order Reliability Theory. *Journal of the Engineering Mechanics*, 115:1577–1582, 1989.
- 507 [17] R. E. Melchers and M. Ahammed. A fast approximate method for parameter sensitivity estimation in Monte Carlo structural reliability. *Computers*
508 *and Structures*, 82:55–61, 2004.
- 509 [18] J.-M. Bourinet. FORM Sensitivities to Distribution Parameters with the Nataf Transformation. In P. Gardoni, editor, *Risk and Reliability Analysis:*
510 *Theory and Applications. In Honor of Prof. Armen Der Kiureghian*, Springer Series in Reliability Engineering, pages 277–302. Springer International
511 Publishing, 2017.
- 512 [19] H. O. Madsen. Omission sensitivity factors. *Structural Safety*, 5(1):35–45, 1988.
- 513 [20] Y.-T. Wu. Computational Methods for Efficient Structural Reliability and Reliability Sensitivity Analysis. *AIAA Journal*, 32(8):1717–1723, 1994.
- 514 [21] Y.-T. Wu. Adaptive Importance Sampling (AIS)-Based System Reliability Sensitivity Analysis Method. In P. D. Spanos and Y.-T. Wu, editors, *Proba-*
515 *bilistic Structural Mechanics: Advances in Structural Reliability Methods*, pages 550–564. Springer-Verlag, Berlin Heidelberg, 1994.

- 516 [22] Zhenzhou Lu, Shufang Song, Zhufeng Yue, and Jian Wang. Reliability sensitivity method by line sampling. *Structural Safety*, 30(6):517–532, 2008.
- 517 [23] S. Song, Z. Lu, and H. Qiao. Reliability sensitivity by method of moments. *Applied Mathematical Modelling*, 34(10):2860–2871, 2010.
- 518 [24] S. Song, Z. Lu, and H. Qiao. Subset simulation for structural reliability sensitivity analysis. *Reliability Engineering and System Safety*, 94(2):658–665,
519 2009.
- 520 [25] H. R. Millwater. Universal properties of kernel functions for probabilistic sensitivity analysis. *Probabilistic Engineering Mechanics*, 24:89–99, 2009.
- 521 [26] S. Rahman. Stochastic sensitivity analysis by dimensional decomposition and score functions. *Probabilistic Engineering Mechanics*, 24:278–287,
522 2009.
- 523 [27] H. R. Millwater, G. Singh, and M. Cortina. Development of a localized probabilistic sensitivity method to determine random variable regional
524 importance. *Reliability Engineering and System Safety*, 107:3–15, 2012.
- 525 [28] H. R. Millwater and Y. Feng. Probabilistic Sensitivity Analysis With Respect to Bounds of Truncated Distributions. *Journal of Mechanical Design*,
526 133(6):1–10, 2011.
- 527 [29] I. Lee, K. K. Choi, Y. Noh, L. Zhao, and D. Gorsich. Sampling-Based Stochastic Sensitivity Analysis Using Score Functions for RBDO Problems With
528 Correlated Random Variables. *Journal of Mechanical Design*, 133(2):1–10, 2011.
- 529 [30] J. C. Helton. Uncertainty and sensitivity analysis in the presence of stochastic and subjective uncertainty. *Journal of Statistical Computation and
530 Simulation*, 57:3–76, 1997.
- 531 [31] J. C. Helton, M. Pilch, and C. J. Sallaberry. Probability of loss of assured safety in systems with multiple time-dependent failure modes: Representa-
532 tions with aleatory and epistemic uncertainty. *Reliability Engineering and System Safety*, 124:171–200, 2014.
- 533 [32] J. C. Helton, C. W. Hansen, and C. J. Sallaberry. Conceptual structure and computational organization of the 2008 performance assessment for the
534 proposed high-level radioactive waste repository at Yucca Mountain, Nevada. *Reliability Engineering and System Safety*, 122:223–248, 2014.
- 535 [33] A. Der Kiureghian and O. Ditlevsen. Aleatory or epistemic? Does it matter? *Structural Safety*, 31(2):105–112, 2009.
- 536 [34] A. Pasanisi, E. De Rocquigny, N. Bousquet, and E. Parent. Some useful features of the Bayesian setting while dealing with uncertainties in industrial
537 practice. In *Proc. of the 19th European Safety and Reliability Conference (ESREL)*, Prague, Czech Republic, 2009.
- 538 [35] A. Pasanisi, M. Keller, and E. Parent. Estimation of a quantity of interest in uncertainty analysis: Some help from Bayesian decision theory. *Reliability
539 Engineering and System Safety*, 100:93–101, 2012.
- 540 [36] M. Beer, S. Ferson, and V. Kreinovich. Imprecise probabilities in engineering structures. *Mechanical Systems and Signal Processing*, 37:4–29, 2013.
- 541 [37] R. Schöbi. *Surrogate models for uncertainty quantification in the context of imprecise probability modelling*. PhD thesis, ETH Zürich, 2017.
- 542 [38] J. C. Helton, J. D. Johnson, and W. L. Oberkampf. An exploration of alternative approaches to the representation of uncertainty in model predictions.
543 *Reliability Engineering and System Safety*, 85:39–71, 2004.
- 544 [39] J. C. Helton, J. D. Johnson, W. L. Oberkampf, and C. J. Sallaberry. Sensitivity analysis in conjunction with evidence theory representations of epistemic
545 uncertainty. *Reliability Engineering and System Safety*, 91:1414–1434, 2006.
- 546 [40] J. C. Helton, J. D. Johnson, W. L. Oberkampf, and C. B. Storlie. A sampling-based computational strategy for the representation of epistemic
547 uncertainty in model predictions with evidence theory. *Computational Methods in Applied Mechanics and Engineering*, 196:3980–3998, 2007.
- 548 [41] J. C. Helton, J. D. Johnson, W. L. Oberkampf, and C. J. Sallaberry. Representation of analysis results involving aleatory and epistemic uncertainty.
549 *International Journal of General Systems*, 39:605–646, 2010.
- 550 [42] J. C. Helton and J. D. Johnson. Quantification of margins and uncertainties: Alternative representations of epistemic uncertainty. *Reliability
551 Engineering and System Safety*, 96:1034–1052, 2011.
- 552 [43] Z. Qiu, D. Yang, and I. Elishakoff. Probabilistic interval reliability of structural systems. *International Journal of Solids and Structures*, 45:2850–2860,
553 2008.
- 554 [44] R. Schöbi and B. Sudret. Structural reliability analysis for p-boxes using multi-level meta-models. *Probabilistic Engineering Mechanics*, 48:27–38,
555 2017.
- 556 [45] J. Li, X. Qi, and D. Xiu. On upper and lower bounds for quantity of interest in problems subject to epistemic uncertainty. *SIAM Journal on Scientific
557 Computing*, 36(2):A364–A376, 2014.
- 558 [46] N. Pedroni, E. Zio, E. Ferrario, A. Pasanisi, and M. Couplet. Hierarchical propagation of probabilistic and non-probabilistic uncertainty in the
559 parameters of a risk model. *Computers and Structures*, 126:199–213, 2013.
- 560 [47] V. Chabridon, M. Balesdent, J.-M. Bourinet, J. Morio, and N. Gayton. Evaluation of failure probability under parameter epistemic uncertainty:
561 application to aerospace system reliability assessment. *Aerospace Science and Technology*, 69:526–537, 2017.
- 562 [48] R. Lebrun and A. Dutfoy. Do Rosenblatt and Nataf isoprobabilistic transformations really differ? *Probabilistic Engineering Mechanics*, 24:577–584,
563 2009.
- 564 [49] S.-K. Au and J. L. Beck. Estimation of small failure probabilities in high dimensions by subset simulation. *Probabilistic Engineering Mechanics*,
565 16(4):263–277, 2001.
- 566 [50] A. Nataf. Détermination des distributions dont les marges sont données. *Comptes Rendus de l’Académie des Sciences*, 225:42–43, 1962. (in French).

- 567 [51] M. Rosenblatt. Remarks on a Multivariate Transformation. *Annals of Mathematical Statistics*, 23(3):470–472, 1952.
- 568 [52] O. Ditlevsen and H. O. Madsen. *Structural Reliability Methods*. Internet ed. 2.3.7, 2007.
- 569 [53] O. Ditlevsen. Generalized Second Moment Reliability Index. *Journal of Structural Mechanics*, 7(4):435–451, 1979.
- 570 [54] A. Der Kiureghian. Measures of Structural Safety Under Imperfect States of Knowledge. *Journal of Structural Engineering ASCE*, 115(5):1119–1140,
571 1989.
- 572 [55] A. Gelman, J. B. Carlin, H. S. Stern, D. B. Dunson, A. Vehtari, and D. B. Rubin. *Bayesian Data Analysis*. Chapman and Hall/CRC Texts in Statistical
573 Science. Chapman and Hall/CRC, Third edition, 2006.
- 574 [56] R. L. Iman and J. M. Davenport. Rank correlation plots for use with correlated input variables. *Communications in Statistics: Simulation and
575 Computation*, pages 335–360, 1982.
- 576 [57] J. C. Helton and F. J. Davis. Latin hypercube sampling and the propagation of uncertainty in analyses of complex systems. *Reliability Engineering
577 and System Safety*, 81:23–69, 2003.
- 578 [58] M. Roos, T. C. Martins, L. Held, and H. Rue. Sensitivity Analysis for Bayesian Hierarchical Models. *Bayesian Analysis*, 10(2):321–349, 2015.
- 579 [59] P. J. Davis and P. Rabinowitz. *Methods of Numerical Integration*. Computer Science and Applied Mathematics. Academic Press Limited, Second edition,
580 1984.
- 581 [60] L. Pronzato and W. G. Müller. Design of computer experiments: space filling and beyond. *Statistical and Computing*, 22:681–701, 2012.
- 582 [61] P. Limbourg, E. De Rocquigny, and G. Andrianov. Accelerated uncertainty propagation in two-level probabilistic studies under monotony. *Reliability
583 Engineering and System Safety*, 95:998–1010, 2010.
- 584 [62] M. Balesdent, J. Morio, and L. Brevault. Rare Event Probability Estimation in the Presence of Epistemic Uncertainty on Input Probability Distribution
585 Parameters. *Methodology and Computing in Applied Probability*, 18(1):197–216, 2016.
- 586 [63] S. Geisser. Aspects of the Predictive and Estimative Approaches in the Determination of Probabilities. *Biometrics*, 38:75–85, 1982.
- 587 [64] R. Christensen and M. D. Huffman. Bayesian Point Estimation Using the Predictive Distribution. *The American Statistician*, 39(4):319–321, 1985.
- 588 [65] H. P. Hong. Evaluation of the Probability of Failure with Uncertain Distribution Parameters. *Civil Engineering Systems*, 13:157–168, 1996.
- 589 [66] T. Most. Efficient structural reliability methods considering incomplete knowledge of random variable distributions. *Probabilistic Engineering Me-
590 chanics*, 26:380–386, 2011.
- 591 [67] J. Jacod and P. E. Protter. *Probability Essentials*. Universitext. Springer-Verlag Berlin Heidelberg, Second edition, 2004.
- 592 [68] R. Y. Rubinstein. The score function approach for sensitivity analysis of computer simulation models. *Mathematics and Computers in Simulation*,
593 28:351–379, 1986.
- 594 [69] S. T. Tokdar and R. E. Kass. Importance sampling: a review. *Wiley Interdisciplinary Reviews: Computational Statistics*, 2(1):54–60, 2009.
- 595 [70] J. Morio. Non-parametric adaptive importance sampling for the probability estimation of a launcher impact position. *Reliability Engineering and
596 System Safety*, 96(1):178–183, 2011.
- 597 [71] T. Homem-de Mello and R. Y. Rubinstein. Estimation of rare event probabilities using cross-entropy. In *Proc. of the Winter Simulation Conference
598 (WSC'02)*, San Diego, CA, USA, 2002.
- 599 [72] M. S. Hamada, A. G. Wilson, C. S. Reese, and H. F. Martz. *Bayesian Reliability*. Springer Science+Business Media, 2008.
- 600 [73] D. Straub and I. Papaioannou. Bayesian Updating with Structural Reliability Methods. *Journal of Engineering Mechanics ASCE*, 314:538–556, 2015.
- 601 [74] A. Der Kiureghian and M. De Stefano. Efficient Algorithm for Second-Order Reliability Analysis. *Journal of Engineering Mechanics ASCE*,
602 117(12):2904–2923, 1991.
- 603 [75] V. Chabridon, M. Balesdent, J.-M. Bourinet, J. Morio, and N. Gayton. Reliability-based sensitivity analysis of aerospace systems under distribution
604 parameter uncertainty using an augmented approach. In *Proc. of the 12th International Conference on Structural Safety and Reliability (ICOSSAR'17)*,
605 Vienna, Austria, 2017.
- 606 [76] N. Kurtz and J. Song. Cross-entropy-based adaptive importance sampling using Gaussian mixture. *Structural Safety*, 42:35–44, 2013.
- 607 [77] H. Millwater and Y. Wieland. Probabilistic Sensitivity-Based Ranking of Damage Tolerance Analysis Elements. *Journal of Aircraft*, 47(1):161–171,
608 2010.
- 609 [78] Z. Wang and J. Song. Cross-entropy-based adaptive importance sampling using von Mises-Fisher mixture for high dimensional reliability analysis.
610 *Structural Safety*, 59:42–52, 2016.
- 611 [79] V. Dubourg and B. Sudret. Metamodel-based importance sampling for reliability sensitivity analysis. *Structural Safety*, 49:27–36, 2014.
- 612 [80] C. Walter. Moving particles: A parallel optimal multilevel splitting method with application in quantiles estimation and meta-model based algorithms.
613 *Structural Safety*, 55:10–25, 2015.