



**HAL**  
open science

# The Efficiency of the VSI Exponentially Weighted Moving Average Median Control Chart

Kim Phuc Tran, Philippe Castagliola, Thi-Hien Nguyen, Anne Cuzol

► **To cite this version:**

Kim Phuc Tran, Philippe Castagliola, Thi-Hien Nguyen, Anne Cuzol. The Efficiency of the VSI Exponentially Weighted Moving Average Median Control Chart. 24th ISSAT International Conference on Reliability and Quality in Design, Aug 2018, Toronto, Canada. hal-01871495

**HAL Id: hal-01871495**

**<https://hal.science/hal-01871495>**

Submitted on 10 Sep 2018

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# The Efficiency of the VSI Exponentially Weighted Moving Average Median Control Chart

Kim Phuc Tran<sup>\*1</sup>, Philippe Castagliola<sup>2</sup>, Thi Hien Nguyen<sup>1</sup>, and Anne Cuzol<sup>1</sup>

<sup>1</sup>Laboratoire de Mathématiques de Bretagne Atlantique, UMR CNRS 6205, Université de Bretagne-Sud, Vannes, France

<sup>2</sup>Université de Nantes & LS2N UMR CNRS 6004, Nantes, France

May 14, 2018

## Abstract

In the literature, median type control charts have been widely investigated as easy and efficient means to monitor the process mean when observations are from a normal distribution. In this work, a Variable Sampling Interval (VSI) Exponentially Weighted Moving Average (EWMA) median control chart is proposed and studied. A Markov chain method is used to obtain optimal designs and evaluate the statistical performance of the proposed chart. Furthermore, practical guidelines and comparisons with the basic EWMA median control chart are provided. Results show that the proposed chart is considerably more efficient than the basic EWMA median control chart. Finally, the implementation of the proposed chart is illustrated with an example in the food production process.

**Keywords:** EWMA, VSI, Median, Control chart, Order statistics.

## 1 Introduction

Statistical Process Control (SPC) is a method of quality control which uses statistical methods in achieving process stability and improving capability through the reduction of variability, see Montgomery [1]. It's well known that control charts are the fundamental tool for SPC applications. There are numerous types of control charts, the most common ones are the Shewhart control charts, the cumulative sum (CUSUM) control charts and the exponentially weighted moving average (EWMA) control charts. The EWMA control charts have a "built in" mechanism for incorporating information from all previous subgroups by means of weights decreasing geometrically with the sample mean age. Thus EWMA type control charts are very effective for the detection of small or moderate process shifts, see Tran et al. [2]. Their properties and design strategies have been thoroughly investigated by many authors. For further details see, for instance, Robinson and Ho [3],

Hunter [4], Crowder [5], Lucas and Saccucci [6], Tran et al. [2] to name a few.

In recent years, many researchers have focused on developing advanced control charts with various applications in manufacturing and service processes, for example, see Castagliola and Figueiredo [7], Huang [8], Da Costa Quinino et al. [9], Tran et al. [10], Castagliola et al. [11], Tran [12], Tran et al. [13] and Tran [14]. Among these control charts, median ( $\tilde{X}$ ) type charts have been widely investigated as easy and efficient means to monitor the mean. The main advantages of median type charts are that they are simpler than mean ( $\bar{X}$ ) charts and that they are robust against outliers, contamination or small deviations from normality, see Castagliola et al. [11].

In the SPC literature, the EWMA median chart was introduced by Castagliola [15] (EWMA- $\tilde{X}$ ) with fast detection of assignable causes. Then, a generally weighted moving average median (GWMA- $\tilde{X}$ ) control chart has been studied by Sheu and Yang [16] as a continuation to improve the statistical performance of median type control charts. When the parameters are estimated, Castagliola and Figueiredo [7] and Castagliola et al. [11] developed a Shewhart median chart and a EWMA- $\tilde{X}$  chart, respectively, with estimated control limits to monitor the mean value of a normal process. Very recently, Lin et al. [17] investigated the performances of the EWMA- $\tilde{X}$  control chart under several distributions. As a result, the EWMA- $\tilde{X}$  is always more efficient than the EWMA- $\bar{X}$  chart in detecting shifts in the process mean if the data follow a heavy-tailed distribution. Finally, Tran [18] proposed and studied the Run Rules Shewhart median control charts ( $RR_{r,s} - \tilde{X}$  charts).

It is known that, the EWMA- $\tilde{X}$  control chart suggested by Castagliola [15] is a Fixed Sampling Interval (FSI) control chart. By definition, an adaptive control chart involves varying at least one of the chart's parameters, such as the sampling interval or the sample size. Variable Sampling Interval (VSI)

<sup>\*</sup>kim-phuc.tran@univ-ubs.fr (corresponding author)

control charts are adaptive control charts where the sampling intervals vary as a function of what is observed from the process. The VSI control charts are demonstrated to detect process changes faster than FSI control charts. The idea is that the time interval until the next sample should be short, if the position of the last plotted control statistic indicates a possible out-of-control situation; and long, if there is no indication of a change. Most work on developing VSI control charts has been done for the problem of monitoring the mean of the process (see Reynolds [19], Reynolds et al. [20] and Castagliola et al. [21]).

In this paper, we propose a VSI EWMA- $\tilde{X}$  control chart as a logical extension of the control chart developed by Castagliola [15]. The goal of this paper is to show how the VSI behaves with respect to the basic EWMA median control chart. The rest of this paper proceeds as follows: in Section 2, a brief review of the FSI EWMA- $\tilde{X}$  control chart is provided; Section 3 provides a VSI version of the FSI EWMA- $\tilde{X}$  control chart; in Section 4, the run length performances of proposed chart are defined by using the Markov Chain-based approach; in Section 5, the computational results and the tables reporting the optimal design parameters of the VSI EWMA- $\tilde{X}$  chart are presented. Section 6 presents an illustrative example and, finally, some concluding remarks and recommendations are made in Section 7.

## 2 The FSI EWMA- $\tilde{X}$ control chart

Let us assume that, at each sampling period  $i = 1, 2, \dots$ , we collect a sample of  $n$  independent random variables  $\{X_{i,1}, \dots, X_{i,n}\}$ . We assume that each  $X_{i,j}$  follows a normal distribution  $N(\mu_0 + \delta\sigma_0, \sigma_0)$ ,  $j = 1, \dots, n$ ,  $\mu_0$  is the in-control mean value,  $\sigma_0$  is the in-control standard deviation and  $\delta$  is the magnitude of the standardized mean shift. If  $\delta = 0$  the process is in-control and, when  $\delta \neq 0$ , the process is out-of-control. Let  $\tilde{X}_i$  be the sample median of subgroup  $i$ , i.e.

$$\tilde{X}_i = \begin{cases} X_{i,((n+1)/2)} & \text{if } n \text{ is odd} \\ \frac{X_{i,(n/2)} + X_{i,(n/2+1)}}{2} & \text{if } n \text{ is even} \end{cases} \quad (1)$$

where  $\{X_{i,(1)}, X_{i,(2)}, \dots, X_{i,(n)}\}$  is the ordered  $i$ -th subgroup. In the rest of this paper, without loss of generality, we assume that the sample size  $n$  is an odd value. Let  $Z_1, Z_2, \dots$  be the EWMA sequence obtained from  $\tilde{X}_1, \tilde{X}_2, \dots$ , i.e. for  $i \in \{1, 2, \dots\}$ ,

$$Z_i = (1 - \lambda)Z_{i-1} + \lambda\tilde{X}_i, \quad (2)$$

where  $Z_0 = \mu_0$  and  $\lambda \in (0, 1]$  is a smoothing constant. If the in-control mean value  $\mu_0$  and the standard deviation  $\sigma_0$  are assumed known, the control limits of the EWMA- $\tilde{X}$  chart for the median are simply equal to

$$LCL = \mu_0 - K\sqrt{\frac{\lambda}{2-\lambda}}\sigma_0, \quad (3)$$

$$UCL = \mu_0 + K\sqrt{\frac{\lambda}{2-\lambda}}\sigma_0, \quad (4)$$

where  $K > 0$  is a constant that depends on  $n$  and on the desired in-control performance.

## 3 Implementation of the VSI EWMA- $\tilde{X}$ control chart

In this section, a VSI version of the FSI EWMA- $\tilde{X}$  control chart described in the previous section is presented (denoted as VSI EWMA- $\tilde{X}$ ). The control statistic  $Z_i$  for the VSI EWMA- $\tilde{X}$  control chart is given by (2). The upper (UCL) and lower (LCL) control limits of the VSI EWMA- $\tilde{X}$  control chart can be easily calculated as:

$$LCL = \mu_0 - K\sqrt{\frac{\lambda}{2-\lambda}}\sigma_0, \quad (5)$$

$$UCL = \mu_0 + K\sqrt{\frac{\lambda}{2-\lambda}}\sigma_0, \quad (6)$$

where  $K \geq 0$  is a constant influencing the width of the control interval.

For the FSI control chart, the sampling interval is a fixed value  $h_0$ . As for the VSI control chart, the sampling interval depends on the current value of  $Z_i$ . A longer sampling interval  $h_L$  is used when the control statistic falls within region  $R_L = [LWL, UWL]$  defined as:

$$LWL = \mu_0 - W\sqrt{\frac{\lambda}{2-\lambda}}\sigma_0, \quad (7)$$

$$UWL = \mu_0 + W\sqrt{\frac{\lambda}{2-\lambda}}\sigma_0, \quad (8)$$

where  $W$  is the warning limit coefficient of the VSI EWMA- $\tilde{X}$  control chart that determines the proportion of times that the control statistic falls within the long and short sampling regions. On the other hand, the short sampling interval  $h_S$  is used when the control statistic falls within the region  $R_S = [LCL, LWL] \cup [UWL, UCL]$ . The process is considered out-of-control and action should be taken whenever  $Z_i$  falls outside the range of the control limits  $[LCL, UCL]$ . In order to evaluate the *ARL* and *SDRL* of the VSI EWMA- $\tilde{X}$  control chart, we follow the discrete Markov chain approach originally proposed by Brook and Evans [22]. In Appendix, the discrete Markov chain approach for VSI EWMA- $\tilde{X}$  control chart is provided.

## 4 Optimal design of the VSI EWMA- $\tilde{X}$ control chart

In the literature, the Average Run Length (*ARL*), defined as the average number of samples before the control chart signals an out-of-control condition or issues a false alarm, and the Average Time to Signal (*ATS*), which is the expected value of the time between the occurrence of a special cause and a signal from the chart are used as the performance measures of control charts, see Castagliola et al. [21]. It is well known that, when

the process is in-control, it is better to have a large  $ATS$ , since in this operating condition a signal represents a false alarm (in this case, the  $ATS$  will be denoted as  $ATS_0$ ). On the other hand, after the parameter of the process under control has shifted, it is preferable to have an  $ATS$  that is as small as possible (in this case, the  $ATS$  will be denoted as  $ATS_1$ ).

For a FSI model, the  $ATS$  is a multiple of the  $ARL$  since the sampling interval  $h_F$  is fixed. Thus, in this case we have the following expression:

$$ATS^{\text{FSI}} = h_F \times ARL^{\text{FSI}}. \quad (9)$$

For a VSI model, the  $ATS$  is defined as:

$$ATS^{\text{VSI}} = E(h) \times ARL^{\text{VSI}}. \quad (10)$$

where  $E(h)$  is the expected sampling interval value.

According to Castagliola et al. [21], for VSI type control charts, we need to define them with the same in-control  $ARL = ARL_0$  and the same in-control average sampling interval  $E_0(h)$ . For FSI-type control charts, the sampling interval is set equal to  $h_S = h_L = h_F = 1$  time units. Then, the in-control expected sampling interval of the VSI chart is set equal to  $E_0(h) = 1$  time unit to ensure  $ATS_0 = ARL_0$  time unit for both FSI and VSI type control charts. The value of  $h_S$  represents the shortest feasible time interval between subgroups from the process, see Castagliola et al. [21] for more details. Then, in this paper we will consider the impact on the expected time until detection, using small but non-zero values of  $h_S$ .

The design procedure of VSI EWMA- $\bar{X}$  control chart is implemented by finding out the optimal combination of parameters  $\lambda^*$ ,  $K^*$  and  $h_L^*$  which minimize the out-of-control  $ATS$  for predefined values of  $\delta$ ,  $W$ ,  $h_S$ ,  $n$  and  $ATS_0$ , i.e., the optimization scheme of the VSI EWMA- $\bar{X}$  consists in finding the optimal parameters  $\lambda^*$ ,  $K^*$  and  $h_L^*$  such that

$$(\lambda^*, K^*, h_L^*) = \underset{(\lambda, K, h_L)}{\operatorname{argmin}} ATS(n, \lambda, K, W, h_L, h_S, \delta) \quad (11)$$

subject to the constraint

$$\begin{aligned} E_0(h) &= 1, \\ ATS(n, \lambda, K, W, h_L, h_S, \delta = 0) &= ATS_0. \end{aligned} \quad (12)$$

Similar to Tran and Tran [23], the choice of the optimal combination of parameters generally entails two steps:

1. Find the potential combinations  $(\lambda, K, h_L)$  such that  $ATS = ATS_0$  and  $E_0(h) = 1$ .
2. Choose, among these potential combinations  $(\lambda, K, h_L)$ , the one  $(\lambda^*, K^*, h_L^*)$  that allows for the best performance, i.e. the smallest "out-of-control"  $ATS$  value for a particular shift  $\delta$ .

In this study, like in Tran and Tran [23], in order to find these optimal combinations  $(\lambda^*, K^*, h_L^*)$  we simultaneously use a non-linear equation solver coupled to an optimization algorithm (developed with Scicoslab software).

## 5 Numerical results

Optimal designs were obtained for the FSI and VSI EWMA- $\bar{X}$  control charts, for all combinations of  $\delta \in [0.5, 2]$  and  $n = \{3, 5, 7, 9\}$ . The sampling interval  $h_F$  of the FSI charts has been set equal to 1 time unit. The shorter time interval  $h_S$  can assume the following values: 0.5 and 0.1 time units. The optimal combinations of design parameters  $(\lambda^*, K^*, h_L^*)$  have been selected by constraining the in-control  $ATS$  at the value  $ATS_0 = 370.4$  and the in-control expected sampling interval of the VSI chart is set equal to  $E_0(h) = 1$ . To ensure a fair comparison, the  $ARL_0$  of EWMA- $\bar{X}$  chart is set as 370.4. The optimal combinations of design parameters  $(\lambda^*, K^*, h_L^*)$  of the VSI EWMA- $\bar{X}$  control chart are presented in Tables 1-4. Some simple conclusions can be drawn from Tables 1-4:

$n = 3$					
$h_S = 0.5$					
$\delta$	$W = 0.9$	$W = 0.6$	$W = 0.3$	$W = 0.2$	$W = 0.1$
0.1	(0.0500, 1.6686) (1.08, 139.5)	(0.0500, 1.6686) (1.24, 135.9)	(0.0500, 1.6686) (1.81, 133.8)	(0.0513, 1.6750) (2.54, 134.7)	(0.0514, 1.6750) (4.68, 135.9)
0.2	(0.0500, 1.6686) (1.08, 50.0)	(0.0500, 1.6686) (1.24, 47.3)	(0.0500, 1.6686) (1.81, 46.2)	(0.0500, 1.6686) (2.40, 46.4)	(0.0514, 1.6750) (4.68, 48.6)
0.3	(0.0514, 1.6750) (1.09, 26.1)	(0.0518, 1.6767) (1.26, 24.6)	(0.0500, 1.6686) (1.81, 24.3)	(0.0517, 1.6763) (2.55, 24.9)	(0.0535, 1.684) (4.68, 26.9)
0.5	(0.0989, 1.8090) (1.10, 11.8)	(0.1095, 1.8273) (1.28, 11.2)	(0.1073, 1.8234) (1.89, 11.4)	(0.1046, 1.8190) (2.46, 11.8)	(0.1124, 1.8315) (4.49, 13.8)
0.7	(0.1605, 1.8883) (1.10, 6.9)	(0.1690, 1.8957) (1.28, 6.7)	(0.1563, 1.8844) (1.87, 7.0)	(0.1742, 1.9000) (2.58, 7.6)	(0.1798, 1.9043) (4.39, 9.4)
1.0	(0.2743, 1.9557) (1.10, 4.0)	(0.2773, 1.9569) (1.29, 3.9)	(0.2759, 1.9563) (1.91, 4.4)	(0.2783, 1.9572) (2.54, 5.0)	(0.2885, 1.9609) (4.31, 6.8)
1.5	(0.4746, 2.0017) (1.10, 2.2)	(0.4681, 2.0008) (1.28, 2.3)	(0.4685, 2.0008) (1.89, 2.9)	(0.4745, 2.0016) (2.51, 3.5)	(0.4293, 1.9950) (4.26, 5.2)
2.0	(0.6883, 2.0195) (1.11, 1.6)	(0.6890, 2.0196) (1.30, 1.7)	(0.5499, 2.0100) (1.89, 2.3)	(0.5498, 2.0100) (2.50, 2.9)	(0.4293, 1.9950) (4.26, 4.7)
$h_S = 0.1$					
$\delta$	$W = 0.9$	$W = 0.6$	$W = 0.3$	$W = 0.2$	$W = 0.1$
0.1	(0.0500, 1.6686) (1.15, 134.2)	(0.0500, 1.6686) (1.44, 127.7)	(0.0500, 1.6686) (2.47, 124.0)	(0.0500, 1.6686) (3.52, 123.9)	(0.0500, 1.6686) (6.52, 125.5)
0.2	(0.0500, 1.6686) (1.15, 44.8)	(0.0500, 1.6686) (1.44, 40.0)	(0.0500, 1.6685) (2.47, 38.0)	(0.0500, 1.6686) (3.52, 38.5)	(0.0500, 1.6686) (6.52, 41.0)
0.3	(0.0515, 1.6752) (1.15, 22.1)	(0.0515, 1.6753) (1.46, 19.4)	(0.0577, 1.701) (2.57, 19.0)	(0.0502, 1.6693) (3.51, 19.8)	(0.0643, 1.7240) (7.53, 23.4)
0.5	(0.0987, 1.8090) (1.17, 9.3)	(0.1140, 1.8339) (1.50, 8.3)	(0.1278, 1.8530) (2.59, 8.5)	(0.1325, 1.8589) (3.90, 9.6)	(0.1394, 1.8669) (7.19, 12.8)
0.7	(0.1737, 1.8995) (1.18, 5.3)	(0.1952, 1.9154) (1.50, 4.8)	(0.2088, 1.9241) (2.67, 5.4)	(0.2142, 1.9273) (3.81, 6.5)	(0.2269, 1.9344) (7.02, 9.6)
1.0	(0.3086, 1.9676) (1.19, 3.0)	(0.3239, 1.9721) (1.52, 2.9)	(0.3326, 1.9746) (2.63, 3.7)	(0.3415, 1.9769) (3.74, 4.8)	(0.3661, 1.9829) (6.90, 7.9)
1.5	(0.5211, 2.0072) (1.18, 1.7)	(0.5218, 2.0072) (1.50, 1.9)	(0.5366, 2.0087) (2.59, 2.9)	(0.5498, 2.0100) (3.70, 4.0)	(0.4025, 1.9903) (6.88, 7.2)
2.0	(0.7043, 2.0203) (1.19, 1.3)	(0.5498, 2.0100) (1.50, 1.6)	(0.5498, 2.0100) (2.59, 2.7)	(0.5498, 2.0100) (3.70, 3.8)	(0.4025, 1.9903) (6.88, 7.0)

Table 1: Optimal couples  $(\lambda^*, K^*)$  (first row of each block) and values of  $(h_L, ATS_1)$  (second row of each block) of the VSI EWMA- $\bar{X}$  control chart for  $n = 3$ .

- Given the values of  $\delta$ ,  $n$  and  $W$ , the value of  $ATS$  depends on  $h_S$ . In particular, with smaller values of  $h_S$ , the value of  $ATS_1$  decreases. For example, when  $\delta = 0.1$ ,  $n = 3$ ,  $W = 0.6$  we have  $ATS_1 = 135.9$  for  $h_S = 0.5$  and  $ATS_1 = 127.7$  for  $h_S = 0.1$ , see Table 1.
- For a defined value of  $h_S$ , it is obvious that when  $W$  decreases the length of the long sampling interval  $h_L$  increases. For example, when  $\delta = 0.1$ ,  $n = 3$ ,  $h_S = 0.5$  we have  $h_L = 1.08$  for  $W = 0.9$  and  $h_L = 4.68$  for  $W = 0.1$ , see Table 1.

- The VSI EWMA- $\tilde{X}$  control chart is directly compared to the FSI EWMA- $\tilde{X}$  control chart, to evaluate the impact of the adaptive feature on the statistical performance of the original static chart. As expected, the results in Tables 1-4 clearly indicate that the VSI EWMA- $\tilde{X}$  chart is superior to the FSI EWMA- $\tilde{X}$  control chart. For example, when  $\delta = 0.1$ ,  $n = 3$ ,  $W = 0.6$  and  $h_S = 0.5$  we have  $ATS_1 = 135.9$  for VSI EWMA- $\tilde{X}$  chart and  $ARL = 146.1$  for FSI EWMA- $\tilde{X}$  control chart, see Table 3 in Castagliola [15].

n = 5					
h <sub>S</sub> = 0.5					
δ	W = 0.9	W = 0.6	W = 0.3	W = 0.2	W = 0.1
0.1	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)
	(1.03, 106.1)	(1.14, 101.4)	(1.60, 98.0)	(2.05, 97.7)	(3.60, 98.6)
0.2	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)
	(1.03, 36.7)	(1.14, 33.7)	(1.60, 32.1)	(2.05, 32.3)	(3.60, 33.6)
0.3	(0.06134, 1.3705)	(0.0619, 1.3719)	(0.0689, 1.3899)	(0.0710, 1.3951)	(0.0733, 1.4002)
	(1.04, 19.6)	(1.15, 17.9)	(1.63, 17.3)	(2.11, 17.6)	(3.53, 18.9)
0.5	(0.1290, 1.4828)	(0.1388, 1.4921)	(0.1467, 1.4989)	(0.1483, 1.5002)	(0.1526, 1.5036)
	(1.04, 8.8)	(1.16, 8.1)	(1.63, 8.0)	(2.15, 8.4)	(3.83, 10.0)
0.7	(0.2175, 1.5423)	(0.2304, 1.5479)	(0.2325, 1.5487)	(0.2264, 1.5462)	(0.2400, 1.5517)
	(1.05, 5.1)	(1.17, 4.8)	(1.65, 5.0)	(2.12, 5.4)	(3.76, 7.0)
1.0	(0.3773, 1.5869)	(0.3721, 1.5860)	(0.3662, 1.5850)	(0.3684, 1.5854)	(0.3804, 1.5874)
	(1.05, 3.0)	(1.17, 2.8)	(1.64, 3.2)	(2.21, 3.7)	(3.71, 5.2)
1.5	(0.6405, 1.6119)	(0.6369, 1.6117)	(0.6400, 1.6119)	(0.6450, 1.6121)	(0.6579, 1.6127)
	(1.05, 1.7)	(1.17, 1.7)	(1.68, 2.2)	(2.19, 2.7)	(3.67, 4.2)
2.0	(0.8517, 1.6182)	(0.8540, 1.6182)	(0.8594, 1.6183)	(0.8634, 1.6184)	(0.8728, 1.6185)
	(1.05, 1.2)	(1.17, 1.3)	(1.67, 1.8)	(2.19, 2.3)	(3.66, 3.8)
h <sub>S</sub> = 0.1					
δ	W = 0.9	W = 0.6	W = 0.3	W = 0.2	W = 0.1
0.1	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)
	(1.06, 102.7)	(1.25, 94.3)	(2.08, 88.1)	(2.89, 87.6, 370.4)	(5.69, 89.1)
0.2	(0.0500, 1.3341)	(0.0516, 1.3402)	(0.0500, 1.3341)	(0.0500, 1.3341)	(0.0500, 1.3341)
	(1.06, 33.7)	(1.27, 28.2, 370.4)	(2.08, 25.5)	(2.89, 25.8, 370.4)	(5.69, 28.2)
0.3	(0.0695, 1.3915)	(0.0644, 1.3788)	(0.0791, 1.4124)	(0.0837, 1.4212)	(0.0772, 1.4085)
	(1.07, 17.2)	(1.27, 14.2)	(2.11, 13.0)	(2.97, 13.5)	(5.53, 15.8)
0.5	(0.1573, 1.5075)	(0.1586, 1.5082)	(0.1543, 1.5050)	(0.1799, 1.5225)	(0.1902, 1.5286)
	(1.08, 7.2)	(1.31, 6.0)	(2.12, 5.9)	(3.05, 6.6)	(6.03, 9.4)
0.7	(0.2618, 1.5596)	(0.2629, 1.5598)	(0.2784, 1.5647)	(0.2264, 1.5462)	(0.3018, 1.5711)
	(1.09, 4.1)	(1.31, 3.5)	(2.16, 3.8)	(3.02, 4.6)	(5.92, 7.4)
1.0	(0.4059, 1.5914)	(0.4240, 1.5939)	(0.3768, 1.5868)	(0.4404, 1.5960)	(0.4721, 1.5996)
	(1.09, 2.3)	(1.32, 2.1)	(2.14, 2.7)	(3.17, 3.7)	(5.84, 6.4)
1.5	(0.6616, 1.6129)	(0.6621, 1.6129)	(0.3768, 1.5868)	(0.7056, 1.6146)	(0.7466, 1.6159)
	(1.09, 1.4)	(1.31, 1.5)	(2.14, 2.3)	(3.14, 3.3)	(5.79, 5.9)
2.0	(0.8505, 1.6182)	(0.8649, 1.6184)	(0.3768, 1.5868)	(0.9103, 1.6189)	(0.9343, 1.6191)
	(1.09, 1.1)	(1.31, 1.3)	(2.14, 2.2)	(3.13, 3.2)	(5.79, 5.8)

Table 2: Optimal couples ( $\lambda^*$ ,  $K^*$ ) (first row of each block) and values of ( $h_L, ATS_1$ ) (second row of each block) of the VSI EWMA- $\tilde{X}$  control chart for  $n = 5$ .

n = 7					
h <sub>S</sub> = 0.5					
δ	W = 0.9	W = 0.6	W = 0.3	W = 0.2	W = 0.1
0.1	(0.0500, 1.1427)	(0.0500, 1.1427)	(0.0500, 1.1427)	(0.0500, 1.1427)	(0.0500, 1.1427)
	(1.01, 87.0)	(1.09, 81.8)	(1.46, 77.5)	(1.88, 77.0)	(3.25, 77.7)
0.2	(0.0507, 1.1449)	(0.0500, 1.1427)	(0.0500, 1.1427)	(0.0500, 1.1427)	(0.0505, 1.1443)
	(1.01, 30.2)	(1.09, 27.0)	(1.46, 25.3)	(1.88, 25.4)	(3.25, 26.5)
0.3	(0.0870, 1.2223)	(0.0767, 1.2060)	(0.0860, 1.2208)	(0.0886, 1.2247)	(0.0913, 1.2286)
	(1.02, 16.2)	(1.10, 14.4)	(1.49, 13.6)	(1.91, 13.9)	(3.15, 14.9)
0.5	(0.1593, 1.2921)	(0.1723, 1.2998)	(0.1819, 1.3049)	(0.1831, 1.3055)	(0.1873, 1.3076)
	(1.02, 7.2)	(1.11, 6.5)	(1.49, 6.3)	(1.94, 6.6)	(3.37, 8.0)
0.7	(0.2678, 1.3370)	(0.2845, 1.3412)	(0.2847, 1.3413)	(0.2788, 1.3398)	(0.2912, 1.3428)
	(1.02, 4.2)	(1.12, 3.8)	(1.51, 3.9)	(1.91, 4.3)	(3.32, 5.7)
1.0	(0.4864, 1.3705)	(0.4590, 1.3681)	(0.4507, 1.3673)	(0.4527, 1.3675)	(0.4646, 1.3686)
	(1.03, 2.4)	(1.11, 2.3)	(1.50, 2.6)	(1.98, 3.0)	(3.28, 4.3)
1.5	(0.7609, 1.3831)	(0.7604, 1.3831)	(0.7643, 1.3831)	(0.7679, 1.3832)	(0.7766, 1.3834)
	(1.02, 1.4)	(1.12, 1.4)	(1.53, 1.8)	(1.97, 2.3)	(3.26, 3.5)
2.0	(0.9354, 1.3853)	(0.9377, 1.3853)	(0.9419, 1.3853)	(0.9448, 1.3853)	(0.9513, 1.3854)
	(1.02, 1.1)	(1.12, 1.2)	(1.53, 1.6)	(1.97, 2.0)	(3.25, 3.3)
h <sub>S</sub> = 0.1					
δ	W = 0.9	W = 0.6	W = 0.3	W = 0.2	W = 0.1
0.1	(0.0500, 1.1427)	(0.0500, 1.1427)	(0.0500, 1.1427)	(0.0500, 1.1427)	(0.0500, 1.1427)
	(1.02, 85.2)	(1.17, 75.8)	(1.82, 68.1)	(2.59, 67.2)	(5.05, 68.5)
0.2	(0.0557, 1.1596)	(0.0500, 1.1427)	(0.0505, 1.1443)	(0.0553, 1.1583)	(0.0599, 1.1702)
	(1.03, 28.6)	(1.17, 22.9)	(1.82, 19.7)	(2.57, 19.8)	(4.99, 21.8)
0.3	(0.0870, 1.2224)	(0.0927, 1.2306)	(0.0986, 1.2383)	(0.1046, 1.2455)	(0.0996, 1.2395)
	(1.03, 14.8)	(1.19, 11.5)	(1.87, 10.1)	(2.61, 10.4)	(4.84, 12.3)
0.5	(0.1593, 1.2921)	(0.1946, 1.3111)	(0.2161, 1.3201)	(0.2212, 1.3221)	(0.2330, 1.3264)
	(1.04, 6.2)	(1.20, 4.9)	(1.94, 4.6)	(2.67, 5.1)	(5.22, 7.6)
0.7	(0.3249, 1.3500)	(0.3204, 1.3491)	(0.3368, 1.3521)	(0.3426, 1.3532)	(0.3617, 1.3563)
	(1.04, 3.6)	(1.21, 2.9)	(1.91, 3.0)	(2.79, 3.8)	(5.14, 6.1)
1.0	(0.4890, 1.3707)	(0.5066, 1.3721)	(0.4709, 1.3692)	(0.5203, 1.3731)	(0.5548, 1.3753)
	(1.05, 2.0)	(1.21, 1.8)	(1.90, 2.3)	(2.76, 3.1)	(5.08, 5.4)
1.5	(0.7655, 1.3832)	(0.7675, 1.3832)	(0.4709, 1.3692)	(0.8106, 1.3840)	(0.8430, 1.3845)
	(1.04, 1.2)	(1.21, 1.3)	(1.90, 2.0)	(2.74, 2.8)	(5.06, 5.1)
2.0	(0.9324, 1.3853)	(0.9459, 1.3853)	(0.4709, 1.3692)	(0.9626, 1.3768)	(0.9825, 1.3854)
	(1.04, 1.1)	(1.21, 1.2)	(1.90, 1.9)	(2.56, 2.7)	(5.06, 5.1)

Table 3: Optimal couples ( $\lambda^*$ ,  $K^*$ ) (first row of each block) and values of ( $h_L, ATS_1$ ) (second row of each block) of the VSI EWMA- $\tilde{X}$  control chart for  $n = 7$ .

n = 9					
h <sub>S</sub> = 0.5					
δ	W = 0.9	W = 0.6	W = 0.3	W = 0.2	W = 0.1
0.1	(0.0500, 1.0152)	(0.0500, 1.0152)	(0.0500, 1.0152)	(0.0500, 1.0152)	(0.0500, 1.0152)
	(1.00, 74.4)	(1.06, 69.4)	(1.38, 64.3)	(1.75, 63.7)	(2.97, 64.2)
0.2	(0.0548, 1.0279)	(0.0524, 1.0220)	(0.0540, 1.0258)	(0.0569, 1.0330)	(0.0598, 1.0395)
	(1.01, 26.3)	(1.06, 23.1)	(1.37, 21.2)	(1.74, 21.2)	(2.94, 22.1)
0.3	(0.1013, 1.1030)	(0.0954, 1.0964)	(0.1017, 1.1034)	(0.1048, 1.1066)	(0.1077, 1.1096)
	(1.01, 14.1)	(1.07, 12.3)	(1.39, 11.4)	(1.76, 11.5)	(2.85, 12.4)
0.5	(0.1878, 1.1617)	(0.2030, 1.1679)	(0.2141, 1.1719)	(0.2145, 1.1720)	(0.2182, 1.1733)
	(1.01, 6.3)	(1.08, 5.5)	(1.42, 5.3)	(1.78, 5.5)	(3.03, 6.7)
0.7	(0.3139, 1.1970)	(0.3334, 1.2003)	(0.3318, 1.2000)	(0.2408, 1.1804)	(0.3367, 1.2008)
	(1.01, 3.7)	(1.08, 3.3)	(1.41, 3.3)	(1.77, 3.7)	(2.99, 4.8)
1.0	(0.5404, 1.2203)	(0.5410, 1.2203)	(0.5335, 1.2199)	(0.5354, 1.2200)	(0.5456, 1.2206)
	(1.01, 2.1)	(1.08, 2.0)	(1.43, 2.2)	(1.81, 2.6)	(2.96, 3.7)
1.5	(0.8434, 1.2289)	(0.8442, 1.2289)	(0.8480, 1.2289)	(0.8507, 1.2289)	(0.8570, 1.2290)
	(1.01, 1.2)	(1.08, 1.2)	(1.42, 1.6)	(1.81, 2.0)	(2.94, 3.1)
2.0	(0.9757, 1.2297)	(0.9772, 1.2297)	(0.9802, 1.2297)	(0.9822, 1.2297)	(0.9859, 1.2297)
	(1.01, 1.0)	(1.08, 1.1)	(1.42, 1.4)	(1.80, 1.8)	(2.94, 3.0)
h <sub>S</sub> = 0.1					
δ	W = 0.9	W = 0.6	W = 0.3	W = 0.2	W = 0.1
0.1	(0.0504, 1.0163)	(0.0500, 1.0152)	(0.0500, 1.0152)	(0.0500, 1.0152)	(0.0500, 1.0152)
	(1.01, 73.6)	(1.11, 64.7)	(1.68, 55.6)	(2.36, 54.4)	(4.55, 55.4)
0.2	(0.0599, 1.0397)	(0.0598, 1.0397)	(0.0599, 1.0398)	(0.0649, 1.0501)	(0.0711, 1.0616)
	(1.01, 25.4)	(1.11, 19.9)	(1.71, 16.3)	(2.32, 16.2)	(4.45, 17.9)
0.3	(0.1014, 1.1031)	(0.0964, 1.0975)	(0.1171, 1.1183)	(0.1106, 1.1124)	(0.1027, 1.1044)
	(1.01, 13.2)	(1.13, 10.0)	(1.75, 8.3)	(2.36, 8.5)	(4.35, 10.3)
0.5	(0.2224, 1.1747)	(0.2192, 1.1737)	(0.2524, 1.1836)	(0.2359, 1.1789)	(0.2701, 1.1880)
	(1.02, 5.6)	(1.13, 4.3)	(1.75, 3.8)	(2.39, 4.3)	(4.61, 6.4)
0.7	(0.3240, 1.1987)	(0.3737, 1.2060)	(0.3496, 1.2028)	(0.3916, 1.2082)	(0.4117, 1.2104)
	(1.02, 3.3)	(1.15, 2.5)	(2.6, 1.0)	(2.48, 3.2)	(4.55, 5.2)
1.0	(0.5801, 1.2223)	(0.5775, 1.2221)	(0.5783, 1.2222)	(0.5896, 1.2227)	(0.6235, 1.2240)
	(1.02, 1.8)	(1.14, 1.6)	(1.77, 2.0)	(2.46, 2.7)	(4.51, 4.7)
1.5	(0.8417, 1.2289)	(0.8441, 1.2289)	(0.8686, 1.2291)	(0.8829, 1.2292)	(0.9070, 1.2294)
	(1.02, 1.1)	(1.14, 1.2)	(1.76, 1.8)	(2.45, 2.5)	(4.50, 4.5)
2.0	(0.9741, 1.2297)	(0.9868, 1.2297)	(0.9496, 1.2028)	(0.9941, 1.2297)	(0.9967, 1.2297)
	(1.02, 1.0)	(1.14, 1.1)	(1.73, 1.7)	(0.92, 4.5, 2.5)	(4.50, 4.5)

Table 4: Optimal couples ( $\lambda^*$ ,  $K^*$ ) (first row of each block) and values of ( $h_L, ATS_1$ ) (second row of each block) of the VSI EWMA- $\tilde{X}$  control chart for  $n = 9$ .

## 6 Illustrative example

In this Section, we discuss the implementation of the VSI EWMA- $\tilde{X}$  chart. The context of the example presented here is similar as the one introduced in Castagliola et al. [11], i.e., a production process of 500 ml milk bottles where the quality characteristic  $X$  of interest is the capacity (in ml) of each bottle. Like in Castagliola et al. [11], we have  $\mu_0 = 500.0230$  and  $\sigma_0 = 0.9616$ . In fact, according to the process engineer experience, a shift  $\delta = 0.5$  should be interpreted as a signal that something is going wrong in the production process. Thus, for  $n = 5$ ,  $\delta = 0.5$  and  $ATS_0 = 370.4$  the VSI EWMA- $\tilde{X}$  parameters are chosen to be  $h_S = 0.5$ ,  $h_L = 1.63$ ,  $\lambda = 0.1467$ ,  $K = 1.4989$  and  $W = 0.3$ . This yields the following control limits for the VSI EWMA- $\tilde{X}$  chart:

$$LCL = 500.023 - 1.4989 \sqrt{\frac{0.1467}{2 - 0.1467}} \times 0.9616 = 499.617,$$

$$UCL = 500.023 + 1.4989 \sqrt{\frac{0.1467}{2 - 0.1467}} \times 0.9616 = 500.429.$$

and the warning control limits for the VSI EWMA- $\tilde{X}$  chart:

$$LWL = 500.023 - 0.3 \sqrt{\frac{0.1467}{1 - 0.1467}} \times 0.9616 = 499.942,$$

$$UWL = 500.023 + 0.3 \sqrt{\frac{0.1467}{1 - 0.1467}} \times 0.9616 = 500.104.$$

The first 10 subgroups are supposed to be in-control while the last 10 subgroups are supposed to have a lower milk capacity, and thus, to be out-of-control. The corresponding sample median values  $\tilde{X}_i$  and the EWMA sequence  $Z_i$  for VSI EWMA- $\tilde{X}$

control chart are both presented in Table 5 and plotted in Figure 1. This figure confirms that from sample #15 onwards, the process is clearly out-of-control.

Sample	Sampling interval	Total time	Phase II ( $X_{i,j}$ )						$\bar{X}_i$	$Z_i$
			1	2	3	4	5	6		
1	0.5	0.5	500.01	499.78	498.24	501.29	500.64	500.01	500.021	
2	1.63	2.13	499.41	500.95	499.53	498.72	502.81	499.53	499.949	
3	1.63	3.76	501.66	500.03	500.23	500.70	500.57	500.57	500.040	
4	1.63	5.39	499.67	499.26	501.28	500.21	498.89	499.67	499.986	
5	1.63	7.02	499.71	500.36	500.28	499.63	500.45	500.28	500.029	
6	1.63	8.65	499.63	499.44	500.94	501.23	501.26	500.94	500.163	
7	0.5	9.15	498.32	498.54	499.88	500.58	499.59	499.59	500.079	
8	1.63	10.78	500.12	500.62	501.02	499.46	500.09	500.12	500.085	
9	1.63	12.41	500.05	499.99	500.64	500.81	501.04	500.64	500.166	
10	0.5	12.91	500.79	498.70	501.02	501.04	498.41	500.79	500.258	
11	0.5	13.41	500.00	499.07	501.40	499.15	500.70	500.00	500.220	
12	0.5	13.91	499.90	500.62	499.81	500.67	501.39	500.62	500.279	
13	0.5	14.41	500.04	500.86	501.00	500.15	499.82	500.15	500.260	
14	0.5	14.91	501.03	500.42	501.36	502.33	499.83	501.03	500.373	
15	0.5	15.41	501.66	501.24	500.26	502.87	501.43	501.43	500.528	
16	0.5	15.91	498.44	499.96	500.45	500.47	500.36	500.36	500.503	
17	0.5	16.41	498.52	500.45	500.41	501.06	500.54	500.45	500.495	
18	0.5	16.91	500.09	500.05	501.02	499.78	500.47	500.09	500.436	
19	0.5	17.41	499.88	498.91	500.96	499.65	498.20	499.65	500.321	
20	0.5	17.91	500.31	500.48	499.78	499.56	502.04	500.31	500.319	

Table 5: Illustrative Phase II dataset

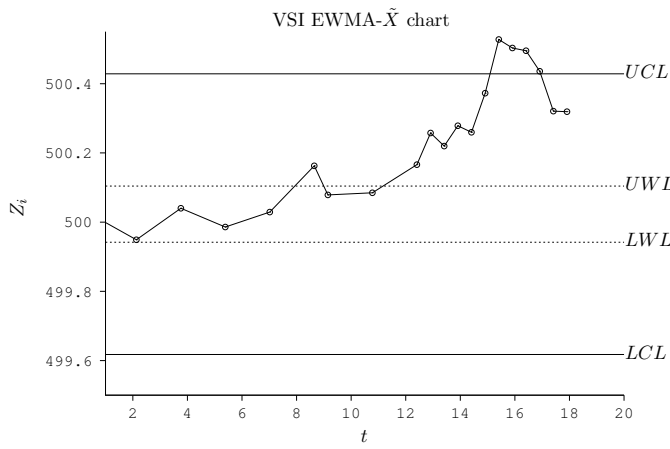


Figure 1: VSI EWMA- $\tilde{X}$  control chart corresponding to Phase II data set in Table 5.

## 7 Concluding remarks

In this paper, we have investigated a VSI EWMA- $\tilde{X}$  control chart for monitoring process median. We have also studied the statistical properties of the VSI EWMA- $\tilde{X}$  control chart and optimized their parameters for several shift sizes. For fixed values of the shift size  $\delta$ , several tables are provided for presenting the out-of-control  $ATS_1$  corresponding to many different scenarios. Also, the numerical comparison with the performance of the EWMA- $\tilde{X}$  control chart proposed by Castagliola [15] shows that the detection ability of the proposed control chart are better than the EWMA- $\tilde{X}$  control chart. Thus, the proposed chart can be used as a best alternative method.

Finally, possible enhancements and future work about VSI EWMA- $\tilde{X}$  control chart include the investigation of the effect of the parameters estimation and of the measurement errors on their statistical properties.

## Appendix

The Markov chain approach of Brook and Evans [22] and Lucas and Saccucci [6] is modified to evaluate the Run Length properties of the VSI EWMA- $\tilde{X}$  chart. This procedure involves dividing the interval  $[LCL, UCL]$  into  $2m + 1$  subintervals  $(H_j - \Delta, H_j + \Delta]$ ,  $j \in \{-m, \dots, 0, \dots, +m\}$ , centered at  $H_j = \frac{LCL+UCL}{2} + 2j\Delta$  where  $2\Delta = \frac{UCL-LCL}{(2m+1)}$ . Each subinterval  $(H_j - \Delta, H_j + \Delta]$ ,  $j \in \{-m, \dots, 0, \dots, +m\}$ , represents a transient state of a Markov chain. If  $Z_i \in (H_j - \Delta, H_j + \Delta]$  then the Markov chain is in the transient state  $j \in \{-m, \dots, 0, \dots, +m\}$  for sample  $i$ . If  $Z_i \notin (H_j - \Delta, H_j + \Delta]$  then the Markov chain reached the absorbing state  $(-\infty, LCL] \cup [UCL, +\infty)$ . We assume that  $H_j$  is the representative value of state  $j \in \{-m, \dots, 0, \dots, +m\}$ . Let  $\mathbf{Q}$  be the  $(2m + 1, 2m + 1)$  sub-matrix of probabilities  $Q_{j,k}$  corresponding to the  $2m + 1$  transient states defined above, i.e.

$$\mathbf{Q} = \begin{pmatrix} Q_{-m,-m} & \cdots & Q_{-m,-1} & Q_{-m,0} & Q_{-m,+1} & \cdots & Q_{-m,+m} \\ \vdots & & \vdots & \vdots & \vdots & & \vdots \\ Q_{-1,-m} & \cdots & Q_{-1,-1} & Q_{-1,0} & Q_{-1,+1} & \cdots & Q_{-1,+m} \\ Q_{0,-m} & \cdots & Q_{0,-1} & Q_{0,0} & Q_{0,+1} & \cdots & Q_{0,+m} \\ Q_{+1,-m} & \cdots & Q_{+1,-1} & Q_{+1,0} & Q_{+1,+1} & \cdots & Q_{+1,+m} \\ \vdots & & \vdots & \vdots & \vdots & & \vdots \\ Q_{+m,-m} & \cdots & Q_{+m,-1} & Q_{+m,0} & Q_{+m,+1} & \cdots & Q_{+m,+m} \end{pmatrix}.$$

By definition, we have  $Q_{j,k} = P(Z_i \in (H_k - \Delta, H_k + \Delta] | Z_{i-1} = H_j)$  or, equivalently,  $Q_{j,k} = P(Z_i \leq H_k + \Delta | Z_{i-1} = H_j) - P(Z_i \leq H_k - \Delta | Z_{i-1} = H_j)$ . Replacing  $Z_i = (1 - \lambda)Z_{i-1} + \lambda\tilde{X}_i$ ,  $Z_{i-1} = H_j$  and isolating  $\tilde{X}_i$  gives

$$Q_{j,k} = P\left(\tilde{X}_i \leq \frac{H_k + \Delta - (1 - \lambda)H_j}{\lambda}\right) - P\left(\tilde{X}_i \leq \frac{H_k - \Delta - (1 - \lambda)H_j}{\lambda}\right), \\ = F_{\tilde{X}}\left(\frac{H_k + \Delta - (1 - \lambda)H_j}{\lambda} \middle| n\right) - F_{\tilde{X}}\left(\frac{H_k - \Delta - (1 - \lambda)H_j}{\lambda} \middle| n\right),$$

where  $F_{\tilde{X}}(\dots | n)$  is the c.d.f. (cumulative distribution function) of the sample median  $\tilde{X}_i$ ,  $i \in \{1, 2, \dots\}$ , i.e.

$$F_{\tilde{X}}(y | n) = F_{\beta}\left(\Phi\left(\frac{y - \mu_0}{\sigma_0} - \delta\right) \middle| \frac{n+1}{2}, \frac{n+1}{2}\right), \quad (13)$$

where  $\Phi(x)$  is the c.d.f. of the standard normal distribution and  $F_{\beta}(x | a, b)$  is the c.d.f. of the beta distribution with parameters  $(a, b)$ . Here  $a = b = \frac{n+1}{2}$ . Let  $\mathbf{q} = (q_{-m}, \dots, q_0, \dots, q_m)^T$  be the  $(2m + 1, 1)$  vector of initial probabilities associated with the  $2m + 1$  transient states, where

$$q_j = \begin{cases} 0 & \text{if } Z_0 \notin (H_j - \Delta, H_j + \Delta] \\ 1 & \text{if } Z_0 \in (H_j - \Delta, H_j + \Delta] \end{cases}. \quad (14)$$

The  $ATS_1$  can be evaluated through the following expression:

$$ATS_1 = \mathbf{q}^T (\mathbf{I} - \mathbf{Q})^{-1} \mathbf{g} \quad (15)$$

where  $\mathbf{g}$  is the vector of sampling intervals corresponding to the discretized states of the Markov chain and the  $j$ th element  $g_j$  of the vector  $\mathbf{g}$  is the sampling interval when the control statistic is in state  $j$  (represented by  $H_j$ ), i.e.

$$g_j = \begin{cases} h_L & \text{if } LWL \leq H_j \leq UWL, \\ h_S & \text{otherwise.} \end{cases} \quad (16)$$

The average sampling interval of the VSI EWMA- $\bar{X}$  chart is given as:

$$E(h) = \frac{\mathbf{q}^T(\mathbf{I} - \mathbf{Q})^{-1}\mathbf{g}}{\mathbf{q}^T(\mathbf{I} - \mathbf{Q})^{-1}\mathbf{1}} \quad (17)$$

## References

- [1] D.C. Montgomery. *Statistical Quality Control: A Modern Introduction, 7th Edn.* John Wiley & Sons, Hoboken, New Jersey, 2013.
- [2] K.P. Tran, P. Castagliola, and G. Celano. Monitoring the Ratio of Two Normal Variables Using EWMA Type Control Charts. *Quality and Reliability Engineering International*, 32(2):1853–1869, 2016.
- [3] P.B. Robinson and T.Y. Ho. Average Run Lengths of Geometric Moving Average Charts by Numerical Methods. *Technometrics*, 20(1):85–93, 1978.
- [4] J.S Hunter. The Exponentially Weighted Moving Average. *Journal of Quality Technology*, 18:203–210, 1986.
- [5] S.V. Crowder. A Simple Method for Studying Run-Length Distributions of Exponentially Weighted Moving Average Charts. *Technometrics*, 29(4):401–407, 1987.
- [6] J.M. Lucas and M.S. Saccucci. Exponentially Weighted Moving Average Control Schemes: Properties and Enhancements. *Technometrics*, 32(1):1–12, 1990.
- [7] P. Castagliola and F.O. Figueiredo. The Median Chart with Estimated Parameters. *European Journal of Industrial Engineering*, 7(5):594–614, 2013.
- [8] C.C. Huang. Max control chart with adaptive sample sizes for jointly monitoring process mean and standard deviation. *Journal of the Operational Research Society*, 65(12):1788–1799, 2014.
- [9] E. Da Costa Quinino, L. L.L.L. Ho, and A. L. G. Trindade. Monitoring the process mean based on attribute inspection when a small sample is available. *Journal of the Operational Research Society*, 66(11):1860–1867, 2015.
- [10] K.P. Tran, P. Castagliola, and G. Celano. Monitoring the Ratio of Population Means of a Bivariate Normal distribution using CUSUM Type Control Charts. *Statistical Papers*, 2016. In press, DOI: 10.1007/s00362-016-0769-4.
- [11] P. Castagliola, P. E. Maravelakis, and F. O. Figueiredo. The EWMA Median chart with estimated parameters. *IIE Transactions*, 48(1):66–74, 2016.
- [12] K.P. Tran. The efficiency of the 4-out-of-5 Runs Rules scheme for monitoring the Ratio of Population Means of a Bivariate Normal distribution. *International Journal of Reliability, Quality and Safety Engineering*, 23(5):1–26, 2016.
- [13] K.P. Tran, P. Castagliola, G. Celano, and M.B.C Khoo. Monitoring compositional data using multivariate exponentially weighted moving average scheme. *Quality and Reliability Engineering International*, 2017. In press, DOI: 10.1002/qre.2260.
- [14] K.P. Tran. Designing of Run Rules  $t$  control charts for monitoring changes in the process mean. *Chemometrics and Intelligent Laboratory Systems*, 2018. In press, DOI: 10.1016/j.chemolab.2018.01.009.
- [15] P. Castagliola. An  $\bar{X}/R$ -EWMA Control Chart For Monitoring the Process Sample Median. *International Journal of Reliability, Quality and Safety Engineering*, 8(2):123–135, 2001.
- [16] S.H. Sheu and L. Yang. The Generally Weighted Moving Average Control Chart for Monitoring the Process Median. *Quality Engineering*, 18(3):333–344, 2006.
- [17] Y.C. Lin, C.Y. Chou, and C.H. Chen. Robustness of the EWMA median control chart to non-normality. *International Journal of Industrial and Systems Engineering*, 25(1):35–58, 2017.
- [18] K.P. Tran. Run Rules median control charts for monitoring process mean in manufacturing. *Quality and Reliability Engineering International*, 33(8):2437–2450, 2017.
- [19] M.R. Reynolds. Shewhart and EWMA variable sampling interval control charts with sampling at fixed times. *Journal of Quality Technology*, 28(2):199–212, 1996.
- [20] M.R. Reynolds, R.W. Amin, J.C. Arnold, and J.A. Nachlas. Charts with variable sampling intervals. *Technometrics*, 30(2):181–192, 1988.
- [21] P. Castagliola, G. Celano, S. Fichera, and F. Giuffrida. A variable sampling interval  $s^2$ -EWMA control chart for monitoring the process variance. *International Journal of Technology Management*, 37(1-2):125–146, 2006.
- [22] D. Brook and D.A. Evans. An Approach to the Probability Distribution of CUSUM Run Length. *Biometrika*, 59(3):539–549, 1972.
- [23] P.H. Tran and K. P. Tran. The Efficiency of CUSUM schemes for monitoring the Coefficient of Variation. *Stochastic Models in Business and Industry*, 2016. In press, DOI: 10.1002/asmb.2213.