



**HAL**  
open science

## A field-pilot for passive bioremediation of As-rich acid mine drainage

L. Fernandez-Rojo, C. Casiot, E. Laroche, V. Tardy, O. Bruneel, S. Delpoux, A. Desoeuvre, G. Grapin, J. Savignac, J. Boisson, et al.

► **To cite this version:**

L. Fernandez-Rojo, C. Casiot, E. Laroche, V. Tardy, O. Bruneel, et al.. A field-pilot for passive bioremediation of As-rich acid mine drainage. *Journal of Environmental Management*, 2019, 232, pp.910-918. 10.1016/j.jenvman.2018.11.116 . hal-02075868

**HAL Id: hal-02075868**

**<https://hal.science/hal-02075868v1>**

Submitted on 21 Mar 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# A field-pilot for passive bioremediation of As-rich acid mine drainage

Fernandez-Rojo L.<sup>a,1</sup>, Casiot C.<sup>a\*</sup>, Laroche E.<sup>a,b</sup>, Tardy V.<sup>a,2</sup>, Bruneel O.<sup>a</sup>, Delpoux S.<sup>a</sup>, Desoeuvre A.<sup>a</sup>, Grapin G.<sup>c</sup>, Savignac J.<sup>c</sup>, Boisson J.<sup>d</sup>, Morin G.<sup>e</sup>, Battaglia-Brunet F.<sup>b</sup>, Jouliau C.<sup>b</sup>, Héry M.<sup>a</sup>

<sup>a</sup> *HydroSciences Montpellier, Univ. Montpellier, CNRS, IRD, 163 rue Auguste Broussonnet, 34090 Montpellier, France*

<sup>b</sup> *French Geological Survey (BRGM), Geomicrobiology and environmental monitoring unit, 3, avenue Claude Guillemin, BP 36009, 45060 Orléans Cedex 2, France*

<sup>c</sup> *IRH Ingénieur Conseil, Antegroup, 427 rue Lavoisier - CS 50155, 54714, Ludres Cedex, France*

<sup>d</sup> *IRH Ingénieur Conseil, Antegroup, 197 avenue de Fronton, 31200, Toulouse, France*

<sup>e</sup> *Institut de Minéralogie, de Physique des Matériaux et de Cosmochimie (IMPMC), UMR 7590 CNRS-UPMC-IRD-MNHN, Sorbonne Universités, 4 place Jussieu, 75252 Paris cedex 05, France*

\*Author for correspondence: Corinne Casiot

Tel +33 (0)4 67 14 33 56

Email: [casiot@msem.univ-montp2.fr](mailto:casiot@msem.univ-montp2.fr)

Postal address: Université de Montpellier, Hydrosciences - CC57, 163 rue Auguste Broussonnet, 34090 Montpellier, France

Declarations of interest: none

---

<sup>1</sup> Present address: Institute of Environmental Assessment and Water Research (IDAEA), CSIC, Jordi Girona 18, 08034 Barcelona, Spain

<sup>2</sup> Present address: Irstea UR Milieux Aquatiques, Ecologie et Pollutions (UR MALY) – Irstea – 5 rue de la Doua BP 32108 F-69616 Villeurbanne Cedex, France

## 1 Abstract

2 A field-pilot bioreactor exploiting microbial iron (Fe) oxidation and subsequent arsenic  
3 (As) and Fe co-precipitation was monitored during 6 months for the passive treatment  
4 of As-rich acid mine drainage (AMD). It was implemented at the Carnoulès mining site  
5 (southern France) where AMD contained 790–1315 mg L<sup>-1</sup> Fe(II) and 84–152 mg L<sup>-1</sup>  
6 As, mainly as As(III) (78 – 83 %). The bioreactor consisted in five shallow trays of 1.5  
7 m<sup>2</sup> in series, continuously fed with AMD by natural flow. We monitored the flow rate  
8 and the water physico-chemistry including redox Fe and As speciation. Hydraulic  
9 retention time (HRT) was calculated and the precipitates formed inside the bioreactor  
10 were characterized (mineralogy, Fe and As content, As redox state). Since As(III)  
11 oxidation improves As retention onto Fe minerals, bacteria with the capacity to oxidize  
12 As(III) were quantified through their marker gene *aioA*. Arsenic removal yields in the  
13 pilot ranged between 3 % to 97 % (average rate  $(1.8 \pm 0.8) \times 10^{-8}$  mol L<sup>-1</sup> s<sup>-1</sup>), and were  
14 positively correlated to HRT and inlet water dissolved oxygen concentration. Fe  
15 removal yields did not exceed 11 % (average rate  $(7 \pm 5) \times 10^{-8}$  mol L<sup>-1</sup> s<sup>-1</sup>). In the first  
16 32 days, the precipitate contained tooeleite, a rare arsenite ferric sulfate mineral. Then,  
17 it evolved toward an amorphous ferric arsenate phase. The As/Fe molar ratio and As(V)  
18 to total As proportion increased from 0.29 to 0.86 and from ~20 % to 99 %, respectively.  
19 The number of bacterial *aioA* gene copies increased ten-fold during the  
20 first 48 days and stabilized thereafter. These results and the monitoring of arsenic  
21 speciation in the inlet and the outlet water, provide evidences that As(III) oxidized in  
22 the pilot. The biotreatment system we designed proved to be suitable for high As DMA.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23 The formation of sludge highly enriched into As(V) rather than As(III) is advantageous  
24 in the perspective of long term storage.

25

26 **Keywords:** field bioreactor, passive treatment, As(III) oxidation, amorphous ferric  
27 arsenate, tooeleite, arsenic removal rate

## 28 **1. Introduction**

29 Acid Mine Drainage (AMD) is one of the worst environmental hazards resulting from  
30 the extraction of base metals from sulfide deposits. These leachates result from the  
31 oxidation of metal sulfides (especially pyrite) in mine tailings. The process releases  
32 sulfate, iron and a range of toxic metals and metalloids, often including arsenic. This  
33 element can be present at high concentrations in AMD, up to 350 mg L<sup>-1</sup> (Paikaray,  
34 2015; Williams, 2001). Arsenic contamination may be attenuated to some extent by  
35 natural processes which involve biotic and abiotic Fe(II) oxidation and the subsequent  
36 precipitation of Fe(III)-hydroxysulfates and Fe(III)-oxyhydroxides, together with  
37 arsenite (As(III)) and arsenate (As(V)) adsorption and/or co-precipitation (Cheng et al.,  
38 2009). The oxidation of arsenite into arsenate, which is efficiently mediated by bacteria  
39 (Battaglia-Brunet et al., 2002; Bruneel et al., 2003) greatly improves As attenuation in  
40 AMD. Indeed, the solubility of As(V)-Fe(III)-hydroxysulfates is lower than the  
41 solubility of As(III)-Fe(III)-hydroxysulfates for a similar As/Fe ratio in the solid  
42 (Maillot et al., 2013). These natural processes can serve as a basis for the passive  
43 treatment of As-rich AMD if they are exploited in suitable systems. Passive treatments,  
44 that do not require neither power nor constant maintenance, are particularly adapted to

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45 remote locations. Numerous studies aimed to exploit microbial Fe(II) oxidation for the  
46 removal of As from AMD in lab-scale bioreactors processing synthetic mine water (e.g.  
47 Ahoranta et al., 2016; González-Contreras et al., 2012; Hedrich and Johnson, 2014).  
48 Conversely, few trials have been attempted to exploit this process in field-pilot passive  
49 bioreactors processing real AMD water (Elbaz-Poulichet et al., 2006; Macías et al.,  
50 2012; Whitehead et al., 2005) (Table 1).

51 In the present study, we investigated arsenic removal from an AMD containing extreme  
52 As concentrations (up to 140 mg L<sup>-1</sup>) under the most mobile and toxic form, As(III)  
53 (60–100 %, Casiot et al., 2003). The treatment consisted in a passive field-pilot  
54 bioreactor exploiting iron oxidation by autochthonous bacterial communities, resulting  
55 in the precipitation of Fe and As. The design of this reactor was derived from previous  
56 laboratory experiments with a bench-scale channel bioreactor that provided up to 80 %  
57 As removal during the treatment of AMD water originating from the same site  
58 (Fernandez-Rojo et al., 2017). The two key parameters of the bioreactor design were 1)  
59 a low water height above the precipitate and 2) a good oxygenation of the feed water  
60 (Fernandez-Rojo et al., 2017). The field-pilot bioreactor was continuously fed during  
61 six months with AMD by natural flow. The AMD was the spring of the Reigous Creek  
62 at the Carnoulès mine in southern France ([OREME, 2018](#)), whose biogeochemistry and  
63 microbial communities involved in Fe and As attenuation have been previously studied  
64 (Bruneel et al., 2006,2011; Casiot et al., 2003; Egal et al., 2010; Volant et al., 2014).  
65 We monitored inlet and outlet water physico-chemistry and the composition of Fe-As  
66 precipitate, including arsenic redox state in water and precipitate. To estimate potential  
67 microbial contribution to arsenite oxidation, the gene encoding the large subunit of the  
68 As(III) oxidase (*ainA*) was quantified.

## 69 2. Materials and methods

### 70 2.1. Field-scale passive bioreactor

71 A flow pipe collected the AMD from its spring, located at the base of the Carnoulès  
72 tailings dam, and transferred it to the bioreactor, located 115 m down the way (mean  
73 slope of 5.9 %). At the bioreactor inlet, a small feed tank (52 cm length × 21 cm width  
74 × 26 cm height) limited the flow rate entering the bioreactor by means of a V-notch  
75 weir and a siphon. The level of water in the V-notch weir tank was constant and it was  
76 adjustable by the height of the siphon. The overflow was redirected to the Reigous  
77 Creek through a flow pipe (Figure 1A). The inlet flow rate decreased over short time  
78 intervals (~ one to two weeks) due to the inflow of sand particles into the AMD carrying  
79 pipes. Thus, cleaning these pipes was necessary after each sampling survey to restore  
80 the flow rate. Besides, a decantation tank was inserted upstream from the AMD intake  
81 after day 147 to limit the introduction of sand particles into the pipe.

82 Water circulation within the bioreactor was powered by natural flow. The bioreactor  
83 consisted of five shallow trays stacked head to tail on a shelf (Figure 1). Each tray sized  
84 1.5 m<sup>2</sup> (1.5 × 1 m), 0.11 m depth, and it was made of 10 mm thick polyethylene sheets.  
85 Trays were divided into two compartments with a vertical separator leaving a 2 cm  
86 space at the bottom. The main compartment (1.2 × 1 m) was filled 3.5–4.5 cm in height  
87 with 80 kg of sand from river Moselle (uniformity coefficient 5.73, diameter at 10 % =  
88 0.31 mm, at 60 % = 1.78 mm, at 85 % = 5.75 mm, CaCO<sub>3</sub> content = 0.19 %), in order to  
89 provide a support for microbial attachment. The overflow fell over from the outlet end  
90 of one tray to the inlet end of the next tray, through a polypropylene tube (2 cm i.d.),

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

91 thus favoring the water oxygenation. Water passed through the different trays (T1, T2,  
92 T3, T4 and T5) before being discharged to the AMD stream.

## 93 **2.2. Monitoring**

94 The bioreactor was monitored during 194 days, between June 10<sup>th</sup> 2016 and December  
95 21<sup>st</sup> 2016. Nine sampling surveys were made during the summer period (June, July),  
96 one intermediate sampling in October, and four samplings during the autumn period  
97 (November, December). At each sampling campaign, inlet and outlet waters were  
98 collected. The following physico-chemical parameters were measured: pH, dissolved  
99 oxygen concentration (DO), temperature, redox potential (Eh) and electrical  
100 conductivity (EC). We also determined dissolved concentrations of Fe(II), total Fe,  
101 As(III), As(V), and total As, after filtration (0.22 µm) and preservation using procedures  
102 described in Fernandez-Rojo et al. (2017). We measured the flow rate and the water  
103 height in each tray in order to estimate the apparent hydraulic retention time (HRT). The  
104 apparent HRT was the mean of the maximum and the minimum HRT. To determine the  
105 maximum HRT, we assumed that water flowed through the sand pores and that there  
106 was no precipitate accumulation. On the contrary, for minimum HRT determination, we  
107 considered that the sand pores were clogged and that there was a precipitate layer above  
108 the sand. The maximum and the minimum HRT, expressed in hours, were calculated  
109 with the following Equation (1):

$$\text{Maximum/Minimum HRT} = \frac{\sum_{i=1}^n (L_i * W_i) * (WH_i - PH_i) - \left( \frac{SW_i}{\delta} - \phi_i \right)}{Q} \quad (1)$$

110 where “ $L_i$ ” and “ $W_i$ ” were the length and the width, respectively, in decimeters. “ $WH_i$ ”  
111 was the water height from the bottom of one tray measured in each sampling in  
112 decimeters. “ $PH_i$ ” was the precipitate height above the sand layer of one tray expressed  
113 in decimeters. “ $SW_i$ ” was the sand weight in kg, “ $\delta$ ” was the sand density in  $\text{kg dm}^{-3}$ ,  
114 “ $\emptyset$ ” was the sand vacuum volume in  $\text{dm}^3$ , and “ $Q$ ” the water flow rate in  $\text{dm}^3 \text{ h}^{-1}$ . “ $n$ ”  
115 corresponded to the number of trays (5) in the pilot. Details of these calculations are  
116 given in the supporting information file.

## 118 2.3. Analyses

### 119 2.3.1. *Water samples*

120 All analytical procedures are detailed in Fernandez-Rojo et al. (2017). Briefly, the  
121 concentrations of dissolved Fe(II) were determined using colorimetry at 510 nm after  
122 complexation with 1,10-phenanthroline chloride. Total dissolved concentrations of  
123 Fe, As and other elements (S ( $\text{SO}_4^{2-}$ ), Al, Zn, and Pb) were determined using ICP-MS.  
124 Arsenic redox speciation was determined using HPLC-ICP-MS.

125 The rates of Fe(II) oxidation, Fe- and As-removal (in  $\text{mol L}^{-1} \text{ s}^{-1}$ ) were calculated using  
126 Equation (2):

$$\text{Rate} = \frac{([X]_{inlet} - [X]_{outlet})}{HRT} \quad (2)$$



127 where [X] was the concentration of dissolved Fe(II), total dissolved Fe, total dissolved  
128 As, dissolved As(III) or dissolved As(V), respectively, in mol L<sup>-1</sup> and HRT the apparent  
129 hydraulic retention time in seconds.

130 Surface area is often a limitation in the design of passive treatments. To address this  
131 issue and to compare with the literature data on water treatment processes (Table 1),  
132 area-adjusted rates were calculated using Equation 3:

$$\text{Area - adjusted rate} = \frac{([X]_{inlet} - [X]_{outlet}) * Q}{\text{Surface area}} \quad (3)$$

133 where the concentration of total dissolved Fe or total dissolved As ([X]) were expressed  
134 in g L<sup>-1</sup>, the flow rate (Q) in L d<sup>-1</sup> and the surface area, in m<sup>2</sup>. Only the 7.5 m<sup>2</sup> surface  
135 above the sand layer was considered here because rapid clogging prevented water to  
136 circulate through the sand layer.

### 137 **2.3.2. Solid samples**

138 When sampling the precipitate, the surface of each tray was divided in three zones  
139 following the water flow path (Figure 1A): “A” refers to the 0.5 m<sup>2</sup> surface area close to  
140 the inlet of each tray, “B” represents the 0.5 m<sup>2</sup> surface area in the middle section, and  
141 “C” the 0.5 m<sup>2</sup> surface area close to the outlet of each tray. The precipitate from trays T1  
142 to T5 was collected with a sterilized spatula by scraping the solid surface. The  
143 precipitate was transferred into Falcon Tubes (50 mL) and centrifuged for 10 min at  
144 4400 × g (Sorwall ST40, Thermo Scientific). The supernatant was discarded and the  
145 precipitate was homogenized. A portion of the sample (~0.3 g) was dried in a vacuum  
146 desiccator. Redox As determination was performed by HPLC-ICP-MS on a subsample

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

147 (100 mg) after extraction with orthophosphoric acid (Resongles et al., 2016). No fine  
148 particles remained after this procedure, enabling total As and Fe determination. Another  
149 subsample was used for X-ray diffraction (XRD) and a third one for quantification of  
150 *aioA* gene copy numbers. These procedures were detailed in Fernandez-Rojo et al.  
151 (2017).

## 152 **2.4. Statistics**

153 Friedman tests and Nemenyi post-hoc tests were performed with the XLSTAT 2018  
154 software to compare the As/Fe molar ratio, the As(V)% and the number of *aioA*  
155 genes/ng of DNA of the biogenic precipitate between the sampling dates.

156 Principal Component Analysis (PCA) was performed on functional parameters of the  
157 pilot (As and Fe removal yields and rates) using the vegan package under R software  
158 (version 3.4.0) and provided an ordination of data in factorial maps based on the scores  
159 of the first two principal components. HRT and water physico-chemistry (inlet and  
160 outlet temperature and DO, pH, Eh, conductivity, Fe and As concentration, Fe(II) to  
161 total Fe proportion, As(III) to total As proportion) were fit to PCA ordinations in order  
162 to identify the correlations between these variables and the functional parameters of the  
163 pilot.

## 164 **3. Results**

### 165 **3.1. Flow rate and hydraulic retention time**

166 The HRT calculation relies mainly on the flow rate. This parameter exhibited important  
167 variations, from 6 to 130 L h<sup>-1</sup> in relation with partial clogging of the pipe carrying the

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

168 AMD to the bioreactor feed tank (Figure 2). The October survey (day 115) was  
169 characterized by extremely low flow rate occurring after a two-month period without  
170 flow pipe dredging. After day 147, a decantation tank was set up, resulting in a better  
171 stabilization of the flow rate, between 30 and 49 L h<sup>-1</sup>. The HRT calculation also relies  
172 on the water height measured from the bottom of the trays. This parameter varied  
173 between 34 and 112 mm. Indeed, the accumulation of precipitate within and over the  
174 sand bed modified water discharge at the outlet of each tray, which subsequently  
175 increased the water level within the tray. Consequently, the calculated apparent HRT  
176 varied from 4 h to ~50 h (Figure 2).

## 177 **3.2. Water physico-chemistry**

### 178 **3.2.1. Inlet water**

179 Inlet water pH, DO and temperature exhibited notable variations over the monitoring  
180 period (Figure 3). pH varied between 2.6 and 3.4 (Figure 3A). Dissolved oxygen  
181 concentration was generally lower than 4 mg L<sup>-1</sup> during the summer period (except on  
182 day 45) and increased to 5.2 ± 0.3 mg L<sup>-1</sup> in the autumn period (Figure 3B). The water  
183 temperature was higher during the summer period (19 ± 3 °C) than during the autumn  
184 period (11 ± 1 °C) (Figure 3C). Eh averaged 539 ± 30 mV (Figure 3D). Total dissolved  
185 Fe and As concentrations increased respectively from 962 mg L<sup>-1</sup> to 1314 mg L<sup>-1</sup> and  
186 from 111 to 152 mg L<sup>-1</sup> during the summer period and then decreased to 801 ± 81 mg  
187 L<sup>-1</sup> (Fe) and 92 ± 10 mg L<sup>-1</sup> (As) in the autumn period (Figure 3E-F). Both elements  
188 were predominantly under the reduced redox state (more than 84 % Fe(II) and 78 %  
189 As(III) (Figure S1B-D)). Dissolved sulfate and metal cations (Al, Zn, Pb)

190 concentrations in the inlet water averaged  $2.8 \pm 0.5 \text{ g L}^{-1}$  ( $\text{SO}_4^{2-}$ ),  $47 \pm 7 \text{ mg L}^{-1}$  (Al), 21  
191  $\pm 3 \text{ mg L}^{-1}$  (Zn) and  $1.5 \pm 0.3 \text{ mg L}^{-1}$  (Pb), respectively (Figure S1E-H).

### 192 **3.2.2. Outlet water**

193 There was a decrease of pH up to 0.4 unit in the outlet water compared to the inlet  
194 (Figure 3A). Water temperature between inlet and outlet varied within  $\pm 4^\circ\text{C}$  during  
195 summer period, while a decrease (up to  $7.3^\circ\text{C}$ ) was always observed during the autumn  
196 period (Figure 3C). Dissolved oxygen most systematically increased, by  $5 \text{ mg L}^{-1}$  at  
197 most, between inlet and outlet (except on day 45). Fe removal yield did not exceed 11  
198 % (Figure 3E) and up to 20 % Fe(II) was oxidized (Figure S1B)). Arsenic removal yield  
199 ranged from 3 % to 97 % (Figure 3F). The corresponding removal rates varied from  $5.7$   
200  $\times 10^{-9}$  to  $1.6 \times 10^{-7} \text{ mol L}^{-1} \text{ s}^{-1}$  for Fe (average rate  $7 \pm 5 \times 10^{-8} \text{ mol L}^{-1} \text{ s}^{-1}$ ) and from  $1$   
201  $\times 10^{-8}$  to  $3.2 \times 10^{-8} \text{ mol L}^{-1} \text{ s}^{-1}$  for As (average rate  $1.8 \pm 0.8 \times 10^{-8} \text{ mol L}^{-1} \text{ s}^{-1}$ ) (Figure  
202 4). Reduced Fe(II) and As(III) species remained predominant upon oxidized species in  
203 the outlet water (more than 85% Fe(II) and 74% As(III)). The October data (day 115)  
204 was an exception, with 98 % As(V) in the outlet water. Concentrations of dissolved Al,  
205 Zn, S ( $\text{SO}_4^{2-}$ ) and Pb also decreased between inlet and outlet, by less than 12 % for Al,  
206 Zn, S and up to 45 % for Pb (Figure S1 E-H).

207 PCA illustrates the relationships between the functional parameters of the pilot (As and  
208 Fe removal yields and rates) and the operating conditions including HRT and physico-  
209 chemical variables (Figure 5). Days 115 to 194 (autumn period) were characterized by  
210 the highest As removal yields, which were significantly correlated to HRT (p-  
211 value  $< 0.001$ ) and to inlet water DO concentration (p-value = 0.006). Days 11, 27 and

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

212 32 were characterized by the highest Fe removal yields, which were negatively  
213 correlated (p-value = 0.025) to the proportion of Fe(II) to total Fe in inlet water.

### 214 **3.3. Biogenic precipitate: mineralogy, molar As/Fe ratios, As redox state and** 215 ***aioA* gene quantification**

216 The precipitate recovered on the top of the sand layer contained quartz, mica, and  
217 potassium feldspar all originating from the sand filter material (Figure 6). The Fe and  
218 As content stabilized to  $179 \pm 39$  mg Fe g<sup>-1</sup> and  $152 \pm 33$  mg As g<sup>-1</sup> after 48 days (Table  
219 S1). Tooeleite, a ferric arsenite sulfate mineral ( $\text{Fe}_6(\text{AsO}_3)_4\text{SO}_4(\text{OH})_4 \cdot 4\text{H}_2\text{O}$ ) was the  
220 only crystallized Fe-As phase identified. The XRD pattern also evidenced an  
221 amorphous phase whose proportion increased at the expense of tooeleite, during the  
222 monitoring period (Figure 6). The molar As/Fe ratio in the precipitate significantly  
223 increased during the monitoring period from ~0.3 to ~0.7 in the three trays analyzed  
224 (Figure 7A). The proportion of As(V) upon total As in the precipitate also increased  
225 from ~20 % to ~85 % during the first 50 days, and then remained constant around  
226 nearly 100 % until the end of the monitoring period (Figure 7B). The color of the  
227 precipitate changed throughout time, from orange to pale yellow (Figure S2).

228 The relative abundance of arsenite oxidizing bacteria was assessed through the  
229 quantification of *aioA* genes. A ten-fold increase of the number of *aioA* genes was  
230 observed in the precipitate between day 11 and day 48. From this date, the number of  
231 *aioA* genes remained relatively stable until the end of the monitoring period (Figure  
232 7C).

## 233 4. Discussion

### 234 4.1. Arsenic and iron removal efficiency in the field-scale bioreactor

235 The field pilot removed 3 % to 97 % of total dissolved As from the Carnoulès AMD,  
236 while Fe removal yield did not exceed 11 %. The HRT had a significant influence on As  
237 removal yields; the important variations of HRT during the monitoring period are both  
238 due to flow rate fluctuations and to water level variations inside the trays. The average  
239 As removal rate ( $(1.8 \pm 0.8) \times 10^{-8} \text{ mol L}^{-1} \text{ s}^{-1}$ ) was close to our lab-scale experiments  
240 rates ( $2 \times 10^{-8}$  to  $5 \times 10^{-8} \text{ mol L}^{-1} \text{ s}^{-1}$ ) (Fernandez-Rojo et al., 2017). For comparison, in  
241 a laboratory bioreactor exploiting microbial Fe(II) oxidation, Ahoranta et al. (2016)  
242 obtained an As removal rate of  $\sim 1.5 \times 10^{-10} \text{ mol L}^{-1} \text{ s}^{-1}$  during the treatment of a  
243 synthetic AMD containing  $10 \text{ mg L}^{-1}$  As(III) by adsorption onto biogenic jarosite at pH  
244 3. Numerous factors, including water physico-chemistry, nature of precipitated solids,  
245 and microbial communities might influence As removal rate in AMD (Asta et al., 2010,  
246 2012). The Fe removal rate ( $(7 \pm 5) \times 10^{-8} \text{ mol L}^{-1} \text{ s}^{-1}$ ) in the field pilot was within the  
247 lower range of lab-scale experiments rates ( $1.8$  to  $24 \times 10^{-8} \text{ mol L}^{-1} \text{ s}^{-1}$ , Fernandez-Rojo  
248 et al. (2017)). The field pilot oxidized less than 20 % Fe(II) whatever the HRT (Figure  
249 S1-B), compared to nearly 100 % in the lab-scale pilot (Fernandez-Rojo et al., 2017).  
250 There was no link between Fe removal yield and HRT or inlet water DO (Figure 5).  
251 Thus, the system appeared not very effective regarding Fe oxidation and removal. One  
252 possible explanation is the large water height (15–70 mm) above the precipitate. We  
253 demonstrated in our lab-scale bioreactor that large water height limits oxygen  
254 availability (and then Fe(II) oxidation and subsequent Fe precipitation) at the

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

255 water/precipitate interface, due to faster metabolic consumption, relative to the oxygen  
256 diffusion (Fernandez-Rojo et al., 2017).

257 A few *in situ* devices exploiting microbial or abiotic Fe(II) oxidation have been  
258 experienced so far for arsenic removal in AMD in a passive way (Table 1). They were  
259 in the form of ponds (Elbaz-Poulichet et al., 2006), lagoons (Macías et al., 2012) or  
260 wetlands (Hamilton et al., 1999; Whitehead et al., 2005). Some of them were preceded  
261 by closed or open channels or drains filled with alkaline rocks (Caraballo et al., 2009;  
262 Gusek et al., 1994; Rötting et al., 2008) in order to promote rapid abiotic Fe(II)  
263 oxidation at near-neutral pH prior to As retention (Table 1). Most of these systems  
264 achieved more than 80 % removal for AMD containing low As concentrations (< 3  
265 mg L<sup>-1</sup>). Area-adjusted arsenic removal rates obtained in the present study were higher  
266 (3–12 g m<sup>-2</sup> d<sup>-1</sup>) than those described in previous studies, in relation with higher  
267 dissolved arsenic content. The high As concentration of the Carnoulès AMD is  
268 particularly challenging. In a previous field-pilot experiment in Carnoulès, only 13–20  
269 % As removal was achieved (Elbaz-Poulichet et al., 2006). The present bioreactor  
270 showed a substantial improvement of As removal yield.

#### 271 **4.2. As-bearing phases formed in the pilot**

272 Tooeleite and an amorphous-Fe-As phase were identified in the biogenic precipitate of  
273 the field-pilot. These mineral phases have been observed for years in the upstream  
274 section of Reigous Creek, in fresh and dry sediments, and in laminated concretions  
275 (Morin et al., 2003; Egal et al., 2010). These solid phases were favored upon the most  
276 widespread As-schwertmannite due to the As/Fe ratio exceeding 0.3 in the precipitate.  
277 Indeed, an As/Fe ratio higher than 0.15 was shown to disrupt the crystallization of

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

278 As(V)-schwertmannite (Carlson et al., 2002). In the field-pilot, tooeleite was replaced  
279 over time by an amorphous phase subsequently to As(V) enrichment in the precipitate  
280 (Figure 6; Table S1), consistently with the study of Liu et al. (2015). These authors  
281 found that the crystallinity of tooeleite decreased with increasing As(V)/As(III) ratio  
282 and no more tooeleite was detected on the XRD spectrum when the As(V)/As(III) ratio  
283 exceeded 0.4 (Liu et al., 2015). The latter conditions occurred after day 19 in the present  
284 experiment, with As(V)/As(III) ratio in the precipitate increasing beyond 0.7. This is  
285 consistent with the formation of an amorphous ferric arsenate phase. Future work  
286 should examine whether the characteristics of As-bearing phases (As content, As/Fe  
287 ratio and mineralogy) and their evolution over the long-term constitute limiting factors  
288 in the achievement of the lowest As concentration in the treated water.

### 289 **4.3. Arsenic oxidation**

290 As(III) was predominant (> 78 %) over As(V) in the feed water and both As(III) and  
291 As(V) species were removed from the dissolved phase in similar proportion in the  
292 bioreactor (Figure S1C-D). Conversely, As(V) was predominant (> 50 %) over As(III)  
293 in the precipitate after 20 days functioning and reached nearly one hundred percent in  
294 trays T1-C, T2-C and T5-C after 170 days (Figure 7B; Table S1). Thus, As(III)  
295 appeared to be oxidized within the field pilot. Both biotic and abiotic As(III) oxidation  
296 may be involved. Abiotic As(III) oxidation may occur in presence of dissolved Fe(III)  
297 (Asta et al., 2012; Emmett and Khoe, 2001) or at the surface of Fe(III) minerals (Bhandari  
298 et al., 2011; 2012; Paikaray et al., 2014; Pozdnyakov et al., 2016; Sun and Doner, 1998)  
299 in acidic environments in presence of light. However, batch experiments conducted with  
300 AMD waters from Carnoulès showed that the photochemical oxidation was negligible



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

301 compared to the biological oxidation (Egal et al., 2009). Similar results were obtained  
302 by other authors in an acid hydrothermal discharge (Leiva et al., 2014).

303 Furthermore, the temporal increase of the As-oxidation genetic potential (expressed as  
304 the number of copies of *aioA* genes/ng of DNA) during the first 50 days (Figure 6C)  
305 strongly suggests the establishment of As(III)-oxidizing bacteria in the biogenic  
306 precipitate. The As(III)-oxidizing *Thiomonas* spp. have proved to be active members of  
307 the bacterial community in the Reigous Creek (Bruneel et al., 2011). They are the only  
308 arsenite oxidizers described so far in Carnoulès where they express *in situ* their arsenite  
309 oxidation activity catalyzed by the AioA enzyme (Hovasse et al., 2016). We can  
310 therefore hypothesize that arsenite oxidation occurring in the bioreactor is mainly  
311 biological.

## 312 **5. Conclusion and perspectives**

313 The present field system provided As removal at a similar rate than the lab-scale pilot.  
314 However, the water circulation in the system must be improved to stabilize the HRT in  
315 future work. Fe oxidation and precipitation yield appeared to be limited by the large  
316 water height above the precipitate. Nevertheless, the low amount of iron precipitated  
317 (maximum 11 %), compared to other systems where the AMD is neutralized, enables  
318 the production of low amounts of sludge, highly concentrated in arsenic (up to 20 % dry  
319 weight), thus limiting the cost of As-rich sludge disposal in engineered hazardous  
320 wastes landfill facilities. The nature of the As-bearing phases produced, mainly  
321 amorphous ferric arsenate, is advantageous in the perspective of long-term storage of  
322 these treatment sludges. This solid phase has a high As load and a low solubility  
323 compared to As(III)-Fe(III) phases (Langmuir et al., 2006; Virčíková et al., 1995;

1  
2 324 Maillot et al., 2013). However, the influence of storage conditions on sludge stability  
3 325 needs to be fully evaluated.  
4

5 326 Future efforts should focus on As removal rate improvement. For this, higher  
6 327 oxygenation should be tested, together with the introduction in the trays of a physical  
7 328 support with high pore volume, such as pozzolana, to prevent fast clogging and to  
8 329 maximize surface area of Fe-and As-oxidizing biofilm per unit of water volume  
9 330 (Battaglia-Brunet et al., 2006). In the perspective of upscaling of the treatment unit,  
10 331 long-term monitoring would be necessary to explore possible seasonal variation of the  
11 332 removal yields and As redox state in the precipitate. Long-term monitoring would also  
12 333 provide information on the frequency of sludge removal from the system. Furthermore,  
13 334 the spatio-temporal dynamic of bacteria involved in Fe(II) and As(III) oxidation such as  
14 335 *Thiomonas* spp. in the present field-scale pilot deserves further research.  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30

31 336 This treatment could be implemented as one step targeting arsenic in a multi-step AMD  
32 337 treatment. Indeed, iron, sulfate and metal cations (Al, Zn, Pb) are only partially removed  
33 338 by this treatment and outlet pH remains acid (pH~3). A sulfate reduction bioreactor  
34 339 could be implemented to raise the pH and selectively recover zinc in the form of sulfide  
35 340 (Chen et al., 2016; Hedrich and Johnson, 2014; Le Pape et al., 2017). A finish treatment  
36 341 such as Dispersed alkaline substrate (DAS) and decantation ponds might be used to  
37 342 further raise the pH and remove remaining Fe, Al, and other metal cations, before  
38 343 discharge into natural water bodies (Caraballo et al., 2011, 2009; Rötting et al., 2008).  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50

#### 51 344 **Acknowledgements**

52  
53  
54

55 345 The authors thank the IngECOST-DMA project (ANR-13-ECOT-0009), the OSU  
56 346 OREME (SO POLLUMINE Observatory, funded since 2009) and the Ecole Doctorale  
57  
58  
59  
60  
61  
62  
63  
64  
65

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

347 GAIA (PhD fellowship of Lidia Fernandez-Rojo, 2014-2017) for the financial support.  
348 We thank Remi Freydier and Léa Causse for ICP-MS analysis on the AETE-ISO  
349 platform (OSU OREME, University of Montpellier). We thank Pierre Marchand for his  
350 assistance in field sampling campaigns. We thank Simone Toller, from the University of  
351 Pisa, for his valuable involvement during the setup of the bioreactor. We thank Qiuwei  
352 Li, from the Université Pierre et Marie Curie, for her contribution in XRD  
353 measurements during her internship at Institut de minéralogie, de physique des  
354 matériaux et de cosmochimie (IMPMC).

355

356 **References**

- 1  
2  
3  
4 357 Ahoranta, S.H., Kokko, M.E., Papirio, S., Özkaya, B., Puhakka, J.A., 2016. Arsenic  
5 358 removal from acidic solutions with biogenic ferric precipitates. *J. Hazard. Mater.*  
6 359 306, 124–132. doi:10.1016/j.jhazmat.2015.12.012  
7  
8 360 Asta, M.P., Ayora, C., Acero, P., Cama, J., 2010. Field rates for natural attenuation of  
9 361 arsenic in Tinto Santa Rosa acid mine drainage (SW Spain). *J. Hazard. Mater.* 177,  
10 362 1102–1111. doi:10.1016/j.jhazmat.2010.01.034  
11  
12 363 Asta, M.P., Kirk Nordstrom, D., Blaine McCleskey, R., 2012. Simultaneous oxidation  
13 364 of arsenic and antimony at low and circumneutral pH, with and without microbial  
14 365 catalysis. *Appl. Geochem.* 27, 281–291.  
15 366 doi:http://dx.doi.org/10.1016/j.apgeochem.2011.09.002  
16  
17 367 Battaglia-Brunet, F., Dictor, M.-C., Garrido, F., Crouzet, C., Morin, D., Dekeyser, K.,  
18 368 Clarens, M., Baranger, P., 2002. An arsenic(III)-oxidizing bacterial population:  
19 369 selection, characterization, and performance in reactors. *J. Appl. Microbiol.* 93,  
20 370 656–667. doi:10.1046/j.1365-2672.2002.01726.x  
21  
22 371 Battaglia-Brunet, F., Itard, Y., Garrido, F., Delorme, F., Crouzet, C., Greffie, C.,  
23 372 Jouliau, C., 2006. A simple biogeochemical process removing arsenic from a mine  
24 373 drainage water. *Geomicrobiol. J.* 23, 201–211. doi:10.1080/01490450600724282  
25  
26 374 Bhandari, N., Reeder, R.J., Strongin, D.R., 2011. Photoinduced oxidation of arsenite to  
27 375 arsenate on ferrihydrite. *Environ. Sci. Technol.* 45, 2783–2789.  
28 376 doi:10.1021/es103793y  
29  
30 377 Bhandari, N., Reeder, R.J., Strongin, D.R., 2012. Photoinduced oxidation of arsenite to  
31 378 arsenate on goethite. *Environ. Sci. Technol.* 46, 8044–8051.  
32 379 doi:10.1021/es300988p  
33  
34 380 Bruneel, O., Personné, J.C., Casiot, C., Leblanc, M., Elbaz-Poulichet, F., Mahler, B.J.,  
35 381 Le Flèche, A., Grimont, P.A.D., 2003. Mediation of arsenic oxidation by  
36 382 *Thiomonas* sp. in acid-mine drainage (Carnoulès, France). *J. Appl. Microbiol.* 95,  
37 383 492–499. doi :10.1046/j.1365-2672.2003.02004.x  
38  
39 384 Bruneel, O., Duran, R., Casiot, C., Elbaz-Poulichet, F., Personné, J.C., 2006. Diversity  
40 385 of microorganisms in Fe-As-rich acid mine drainage waters of Carnoulès, France.  
41 386 *Appl. Environ. Microbiol.* 72, 551–556. doi:10.1128/AEM.72.1.551-556.2006  
42  
43 387 Bruneel, O., Volant, A., Gallien, S., Chaumande, B., Casiot, C., Carapito, C., Bardil, A.,  
44 388 Morin, G., Brown Jr., G.E., Personné, J.C., Le Paslier, D., Schaeffer, C., Van  
45 389 Dorselaer, A., Bertin, P.N., Elbaz-Poulichet, F., Arsène-Ploetze, F., 2011.  
46 390 Characterization of the active bacterial community involved in natural attenuation  
47 391 processes in arsenic-rich creek sediments. *Microb. Ecol.* 61, 793–810.  
48 392 doi:10.1007/s00248-011-9808-9  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

- 393 Caraballo, M.A., Rötting, T.S., Macías, F., Nieto, J.M., Ayora, C., 2009. Field multi-  
394 step limestone and MgO passive system to treat acid mine drainage with high  
395 metal concentrations. *Appl. Geochem.* 24, 2301–2311.  
396 doi:10.1016/j.apgeochem.2009.09.007
- 397 Caraballo, M.A., Macías, F., Rötting, T.S., Nieto, J.M., Ayora, C., 2011. Long term  
398 remediation of highly polluted acid mine drainage: A sustainable approach to  
399 restore the environmental quality of the Odiel river basin. *Environ. Pollut.* 159,  
400 3613–3619. doi:10.1016/j.envpol.2011.08.003
- 401 Carlson, L., Bigham, J.M., Schwertmann, U., Kyek, A., Wagner, F., 2002. Scavenging  
402 of As from acid mine drainage by schwertmannite and ferrihydrite: a comparison  
403 with synthetic analogues. *Environ. Sci. Technol.* 36, 1712–  
404 1719. doi:10.1021/es0110271
- 405 Casiot, C., Morin, G., Juillot, F., Bruneel, O., Personné, J.-C., Leblanc, M., Duquesne,  
406 K., Bonnefoy, V., Elbaz-Poulichet, F., 2003. Bacterial immobilization and  
407 oxidation of arsenic in acid mine drainage (Carnoulès creek, France). *Water Res.*  
408 37, 2929–2936. doi:http://dx.doi.org/10.1016/S0043-1354(03)00080-0
- 409 Chen, C.-J., Jiang, W.-T., 2012. Influence of waterfall aeration and seasonal  
410 temperature variation on the iron and arsenic attenuation rates in an acid mine  
411 drainage system. *Appl. Geochem.* 27, 1966–1978.  
412 doi:http://dx.doi.org/10.1016/j.apgeochem.2012.06.003
- 413 Chen, L.-X., Huang, L.-N., Méndez-García, C., Kuang, J.-L., Hua, Z.-S., Liu, J., Shu,  
414 W.-S., 2016. Microbial communities, processes and functions in acid mine  
415 drainage ecosystems. *Curr. Opin. Biotechnol.* 38, 150–158.  
416 doi:10.1016/j.copbio.2016.01.013
- 417 Cheng, H., Hu, Y., Luo, J., Xu, B., Zhao, J., 2009. Geochemical processes controlling  
418 fate and transport of arsenic in acid mine drainage (AMD) and natural systems. *J*  
419 *Hazard Mater.* 165, 13-26. doi: 10.1016/j.jhazmat.2008.10.070.
- 420 Egal, M., Casiot, C., Morin, G., Parmentier, M., Bruneel, O., Lebrun, S., Elbaz-  
421 Poulichet, F., 2009. Kinetic control on the formation of tooeleite, schwertmannite  
422 and jarosite by *Acidithiobacillus ferrooxidans* strains in an As(III)-rich acid mine  
423 water. *Chem. Geol.* 265, 432–441. doi:10.1016/j.chemgeo.2009.05.008
- 424 Egal, M., Casiot, C., Morin, G., Elbaz-Poulichet, F., Cordier, M.-A., Bruneel, O., 2010.  
425 An updated insight into the natural attenuation of As concentrations in Reigous  
426 Creek (southern France). *Appl. Geochem.* 25, 1949–1957.  
427 doi:http://dx.doi.org/10.1016/j.apgeochem.2010.10.012
- 428 Elbaz-Poulichet, F., Bruneel, O., Casiot, C., 2006. The Carnoulès mine. Generation of  
429 As-rich acid mine drainage, natural attenuation processes and solutions for passive  
430 in-situ remediation, in: *Diffpolmine (Diffuse Pollution From Mining Activities)*.
- 431 Emmett, M.T., Khoe, G.H., 2001. Photochemical oxidation of arsenic by oxygen and iron  
432 in acidic solutions. *Water Res.* 35, 649–656. doi:http://dx.doi.org/10.1016/S0043-

433 1354(00)00294-3

434 Fernandez-Rojo, L., Héry, M., Le Pape, P., Braungardt, C., Desoeuvre, A., Torres, E.,  
435 Tardy, V., Resongles, E., Laroche, E., Delpoux, S., Jouliau, C., Battaglia-Brunet,  
436 F., Boisson, J., Grapin, G., Morin, G., Casiot, C., 2017. Biological attenuation of  
437 arsenic and iron in a continuous flow bioreactor treating acid mine drainage  
438 (AMD). *Water Res.* 123, 594–606. doi:10.1016/j.watres.2017.06.059

439 González-Contreras, P., Weijma, J., Buisman, C.J.N., 2012. Continuous bioscorodite  
440 crystallization in CSTRs for arsenic removal and disposal. *Water Res.* 46, 5883–  
441 5892. doi:10.1016/j.watres.2012.07.055

442 Gusek, J.J., Gormley, J.T., Scheetz, J.W., 1994. Design and construction aspects of  
443 pilot-scale passive treatment systems for acid rock drainage at metal mines.  
444 *Hydrometallurgy* 777–793. doi:10.1007/978-94-011-1214-7

445 Hamilton, Q.U.I., Lamb, H.M., Hallett, C., Proctor, J. a., 1999. Passive treatment  
446 systems for the remediation of acid mine drainage at Wheal Jane, Cornwall. *Water*  
447 *Environ. J.* 13, 93–103. doi:10.1111/j.1747-6593.1999.tb01014.x

448 Hedrich, S., Johnson, D.B., 2014. Remediation and selective recovery of metals from  
449 acidic mine waters using novel modular bioreactors. *Environ. Sci. Technol.* 48,  
450 12206–12212. doi:10.1021/es5030367

451 Hovasse, A., Bruneel, O., Casiot, C., Desoeuvre, A., Farasin, J., Hery, M., Van  
452 Dorselaer, A., Carapito, C., Arsène-Plöetz, F., 2016. Spatio-temporal detection  
453 of the *Thiomonas* population and the *Thiomonas arsenite oxidase* involved in  
454 natural arsenite attenuation processes in the Carnoulès acid mine drainage. *Front.*  
455 *Cell Dev. Biol.* 4, 1–14. doi:10.3389/fcell.2016.00003

456 Langmuir, D., Mahoney, J., Rowson, J., 2006. Solubility products of amorphous ferric  
457 arsenate and crystalline scorodite ( $\text{FeAsO}_4 \cdot 2\text{H}_2\text{O}$ ) and their application to arsenic  
458 behavior in buried mine tailings. *Geochim. Cosmochim. Acta* 70, 2942–2956.  
459 doi:10.1016/j.gca.2006.03.006

460 Leiva, E.D., Rámila, C. d P., Vargas, I.T., Escauriaza, C.R., Bonilla, C.A., Pizarro,  
461 G.E., Regan, J.M., Pasten, P.A., 2014. Natural attenuation process via microbial  
462 oxidation of arsenic in a high Andean watershed. *Sci. Total Environ.* 466–467,  
463 490–502. doi:10.1016/j.scitotenv.2013.07.009

464 Le Pape, P., Battaglia-Brunet, F., Parmentier, M., Jouliau, C., Gassaud, C., Fernandez-  
465 Rojo, L., Guigner, J.-M., Ikogou, M., Stetten, L., Olivi, L., Casiot, C., Morin, G.,  
466 2017. Complete removal of arsenic and zinc from a heavily contaminated acid  
467 mine drainage via an indigenous SRB consortium. *J. Hazard. Mater.* 321, 764–772.  
468 doi:10.1016/j.jhazmat.2016.09.060

469 Liu, J., Deng, S., Zhao, F., Cheng, H., Frost, R.L., 2015. Spectroscopic characterization  
470 and solubility investigation on the effects of As(V) on mineral structure tooeleite  
471 ( $\text{Fe}_6(\text{AsO}_3)_4\text{SO}_4(\text{OH})_4 \cdot \text{H}_2\text{O}$ ). *Spectrochim. Acta A Mol. Biomol. Spectrosc.* 134,  
472 428–433. doi:10.1016/j.saa.2014.06.111

- 473 Macías, F., Caraballo, M.A., Nieto, J.M., Rötting, T.S., Ayora, C., 2012. Natural  
474 pretreatment and passive remediation of highly polluted acid mine drainage. *J.*  
475 *Environ. Manage.* 104, 93–100.  
476 doi:<http://dx.doi.org/10.1016/j.jenvman.2012.03.027>
- 477 Maillot, F., Morin, G., Juillot, F., Bruneel, O., Casiot, C., Ona-Nguema, G., Wang, Y.,  
478 Lebrun, S., Aubry, E., Vlaic, G., Brown Jr., G.E., 2013. Structure and reactivity of  
479 As(III)- and As(V)-rich schwertmannites and amorphous ferric arsenate sulfate  
480 from the Carnoulès acid mine drainage, France: comparison with biotic and abiotic  
481 model compounds and implications for As remediation. *Geochim. Cosmochim.*  
482 *Acta* 104, 310–329. doi:10.1016/j.gca.2012.11.016.
- 483 Morin, G., Juillot, F., Casiot, C., Bruneel, O., Personné, J.-C., Elbaz-Poulichet, F.,  
484 Leblanc, M., Ildefonse, P., Calas, G., 2003. Bacterial formation of tooeleite and  
485 mixed arsenic(III) or arsenic(V)–iron(III) gels in the Carnoulès acid mine drainage,  
486 France. A XANES, XRD, and SEM study. *Environ. Sci. Technol.* 37, 1705–1712.  
487 doi:10.1021/es025688p
- 488 OREME, observatoire de l'ancien site minier de Carnoulès (2018).  
489 <https://data.oreme.org/carnoules/home> (accessed on November 19<sup>th</sup> 2018).
- 490 Paikaray, S., Essilfie-Dughan, J., Göttlicher, J., Pollok, K., Peiffer, S., 2014. Redox  
491 stability of As(III) on schwertmannite surfaces. *J. Hazard. Mater.* 265, 208–216.  
492 doi:10.1016/j.jhazmat.2013.11.068
- 493 Paikaray, S., 2015. Arsenic geochemistry of acid mine drainage. *Mine Water Environ.*  
494 34, 181–196. doi:10.1007/s10230-014-0286-4
- 495 Pozdnyakov, I.P., Ding, W., Xu, J., Chen, L., Wu, F., Grivin, V.P., Plyusnin, V.F.,  
496 2016. Photochemical transformation of an iron(III)-arsenite complex in acidic  
497 aqueous solution. *Photochem. Photobiol. Sci.* 15, 431–439.  
498 doi:10.1039/c5pp00240k
- 499 Resongles, E., Le Pape, P., Fernandez-Rojo, L., Morin, G., Brest, J., Guo, S., Casiot, C.,  
500 2016. Routine determination of inorganic arsenic speciation in precipitates from  
501 acid mine drainage using orthophosphoric acid extraction followed by HPLC-ICP-  
502 MS. *Anal. Methods* 8, 7420–7426. doi:10.1039/c6ay02084d
- 503 Rötting, T.S., Caraballo, M.A., Serrano, J.A., Ayora, C., Carrera, J., 2008. Field  
504 application of calcite Dispersed Alkaline Substrate (calcite-DAS) for passive  
505 treatment of acid mine drainage with high Al and metal concentrations. *Appl.*  
506 *Geochem.* 23, 1660–1674. doi:10.1016/j.apgeochem.2008.02.023
- 507 Sun, X., Doner, H.E., 1998. Adsorption and oxidation of arsenite on goethite. *Soil Sci.*  
508 163, 278–287. doi:10.1097/00010694-199804000-00003
- 509 Virčíková, E., Molnár, L., Lech, P., Reitznerová, E., 1995. Solubilities of amorphous  
510 Fe-As precipitates. *Hydrometallurgy* 38, 111–123.  
511 doi:[http://dx.doi.org/10.1016/0304-386X\(94\)00072-B](http://dx.doi.org/10.1016/0304-386X(94)00072-B)

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

512 Volant, A., Bruneel, O., Desoeuvre, A., Héry, M., Casiot, C., Bru, N., Delpoux, S.,  
513 Fahy, A., Javerliat, F., Bouchez, O., Duran, R., Bertin, P.N., Elbaz-Poulichet, F.,  
514 Lauga, B., 2014. Diversity and spatiotemporal dynamics of bacterial communities:  
515 physicochemical and other drivers along an acid mine drainage. *FEMS Microbiol.*  
516 *Ecol.* 90, 247–263. doi:10.1111/1574-6941.12394

517 Whitehead, P.G., Hall, G., Neal, C., Prior, H., 2005. Chemical behaviour of the Wheal  
518 Jane bioremediation system. *Sci. Total Environ.* 338, 41–51.  
519 doi:10.1016/j.scitotenv.2004.09.004

520 Williams, M., 2001. Arsenic in mine waters: an international study. *Environ. Geol.* 40,  
521 267–278. doi:10.1007/s002540000162



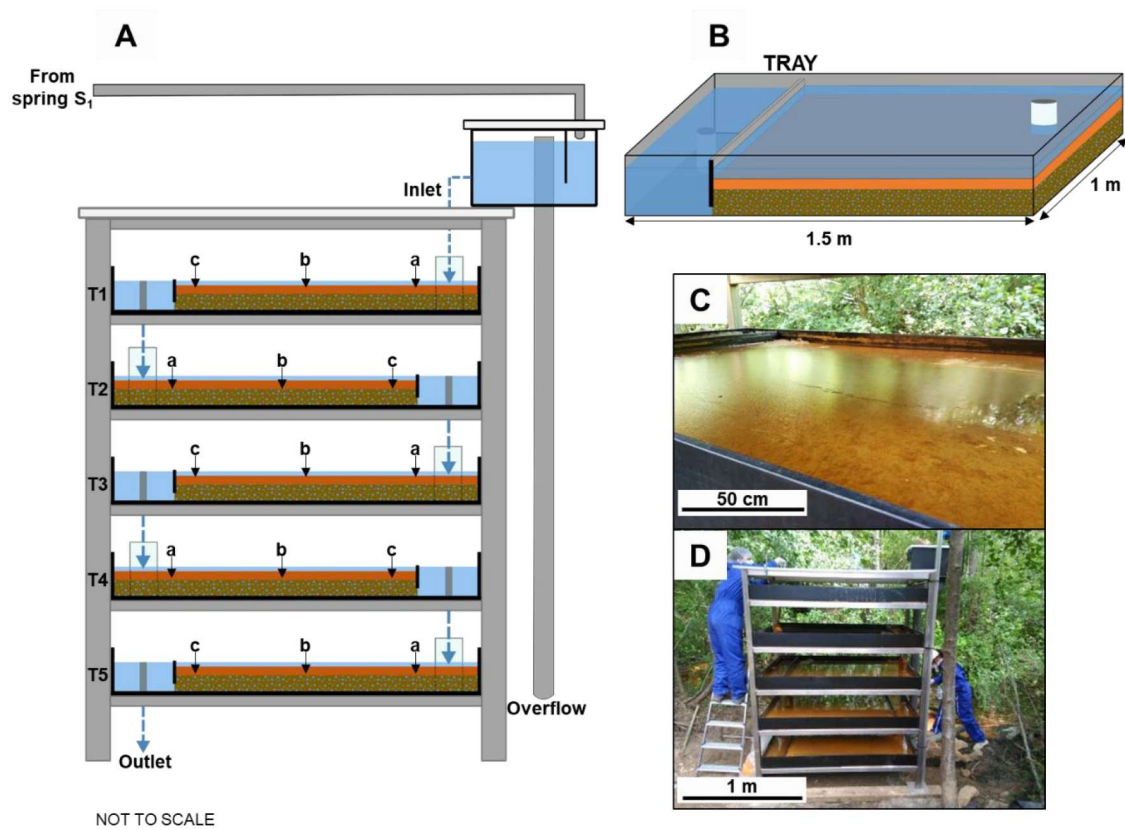


Figure 1. Schematic representation of the field bioreactor with the five trays (T = tray) (A) and detail of each tray (B). Pictures of one of the trays showing the orange biogenic precipitate below the thin water layer (C), and of the whole field bioreactor (D) from June 2016. Letters a, b and c in (A) indicate the biogenic precipitates sampling locations.

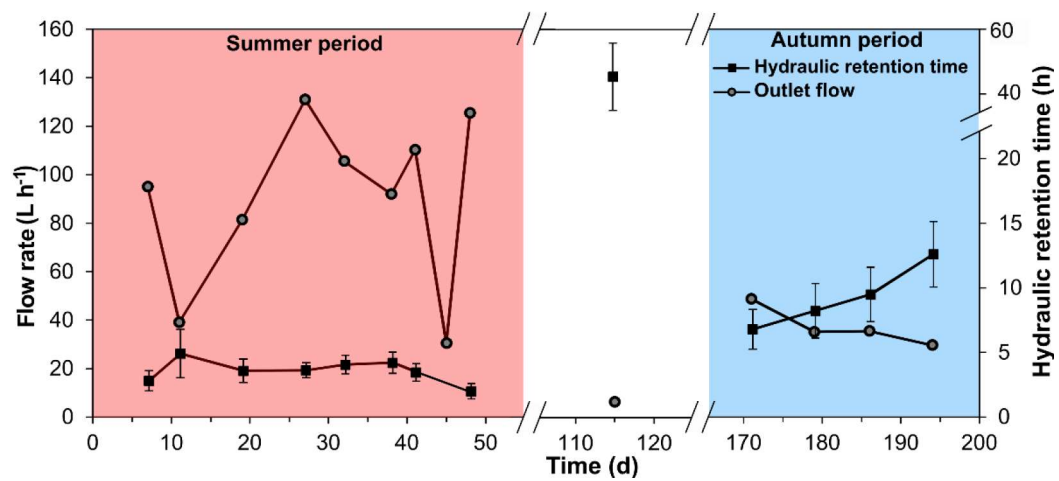


Figure 2. Variation of the flow rate during the monitoring period and estimation of the HRT.

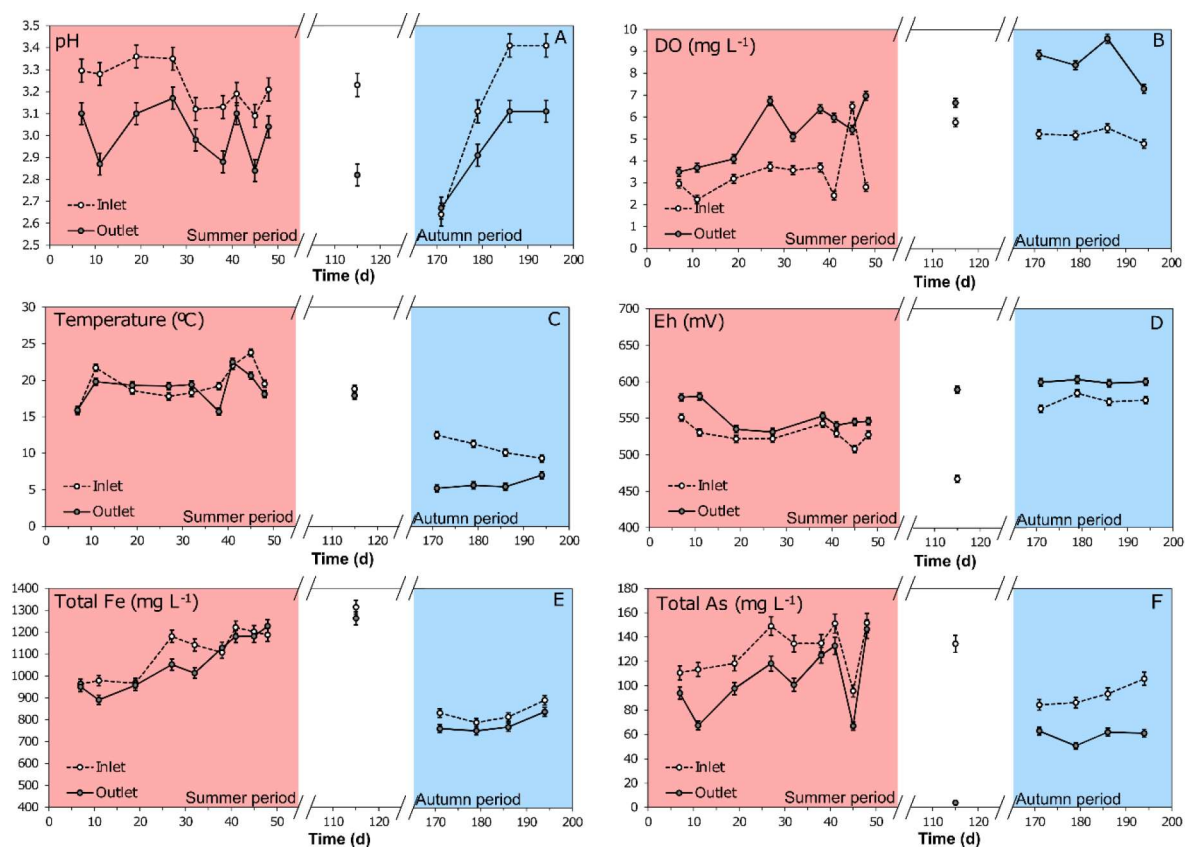
**Figure 3**[Click here to download Figure: 20181014\\_Figure 3.docx](#)

Figure 3. Monitoring of inlet and outlet water pH (A), dissolved oxygen concentration (B), temperature (C), redox potential (D), total dissolved Fe concentration (E), and total dissolved As concentration (F) in the field bioreactor.

Figure 4

[Click here to download Figure: 20181014\\_Figure 4.docx](#)

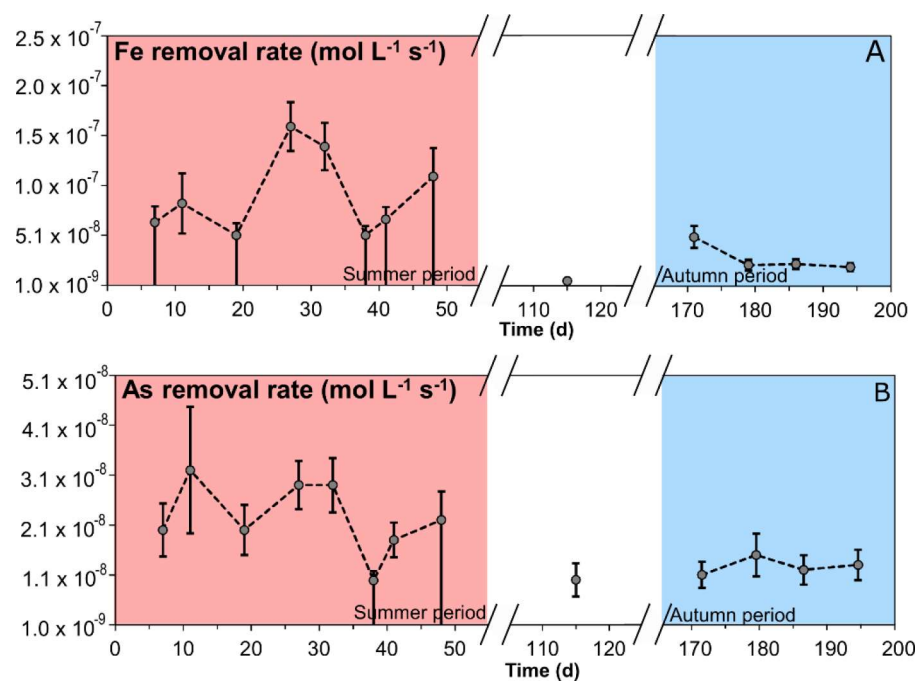


Figure 4. Monitoring of the Fe (A) and As removal rates (B) in the field bioreactor. Rate values represented by a high negative SD correspond to maximum removal rates estimated from the analytical detection limit (no significant total Fe or total As concentration decrease between inlet and outlet).

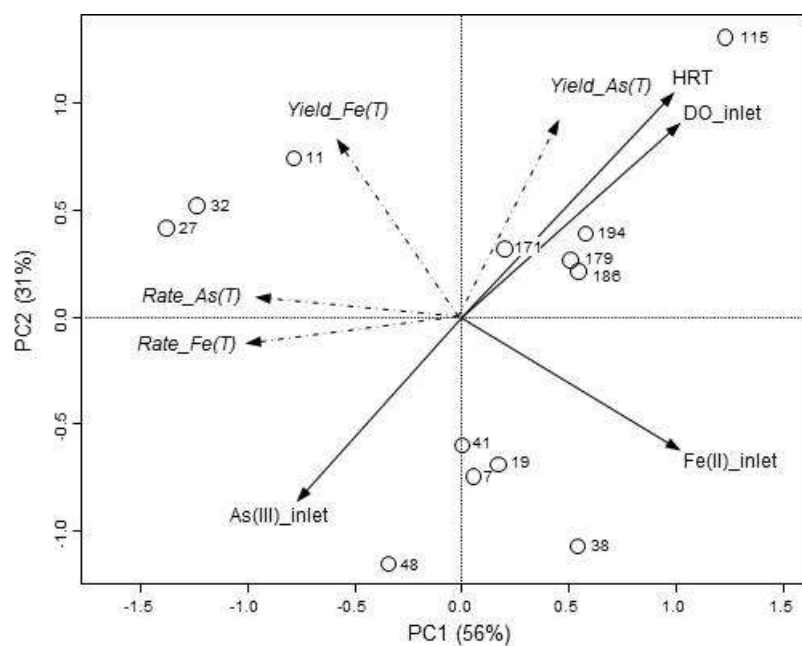
**Figure 5**[Click here to download Figure: 20181014\\_Figure 5.docx](#)

Figure 5. Principal Component Analysis (PC1 × PC2) based on functional parameters (total As and total Fe removal yields and rates) of the bioreactor across time. Circles with numbers represent the sampling days after the bioreactor setup. Vectors in the biplot overlay were constructed from a data frame containing HRT and water physico-chemistry parameters (inlet and outlet temperature, DO, pH, Eh, conductivity, Fe and As concentrations and proportions of Fe(II) to total Fe and As(III) to total As). Only correlations with p-values  $\leq 0.05$  were included. The angle and length of the vector indicate the direction and strength of the variable.

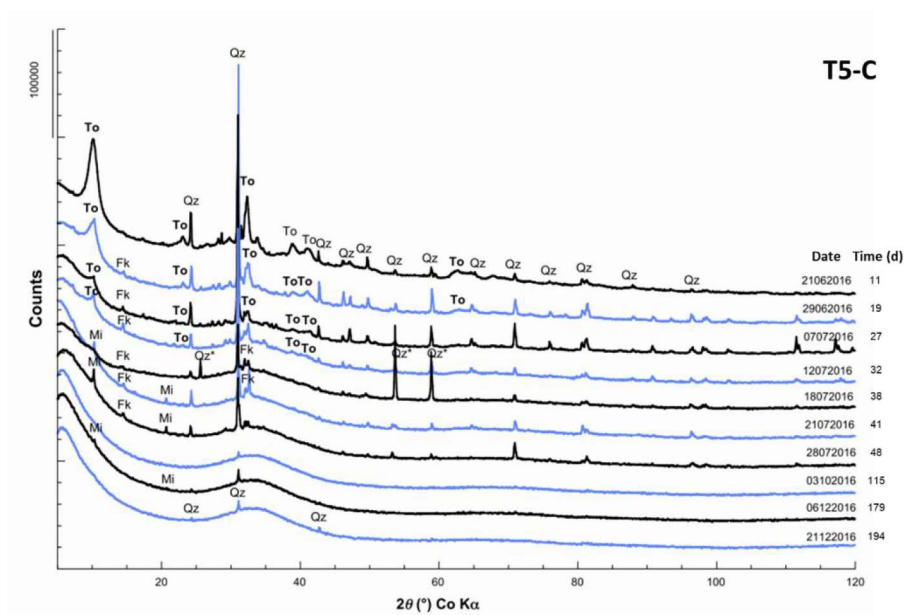


Figure 6. Evolution of X-ray diffractograms on the biogenic precipitate in tray T5-C during the monitoring period. Qz = quartz, To = tooeleite, Fk = potassium feldspar, Mi = micas.

Figure 7

[Click here to download Figure: 20181014\\_Figure 7.docx](#)

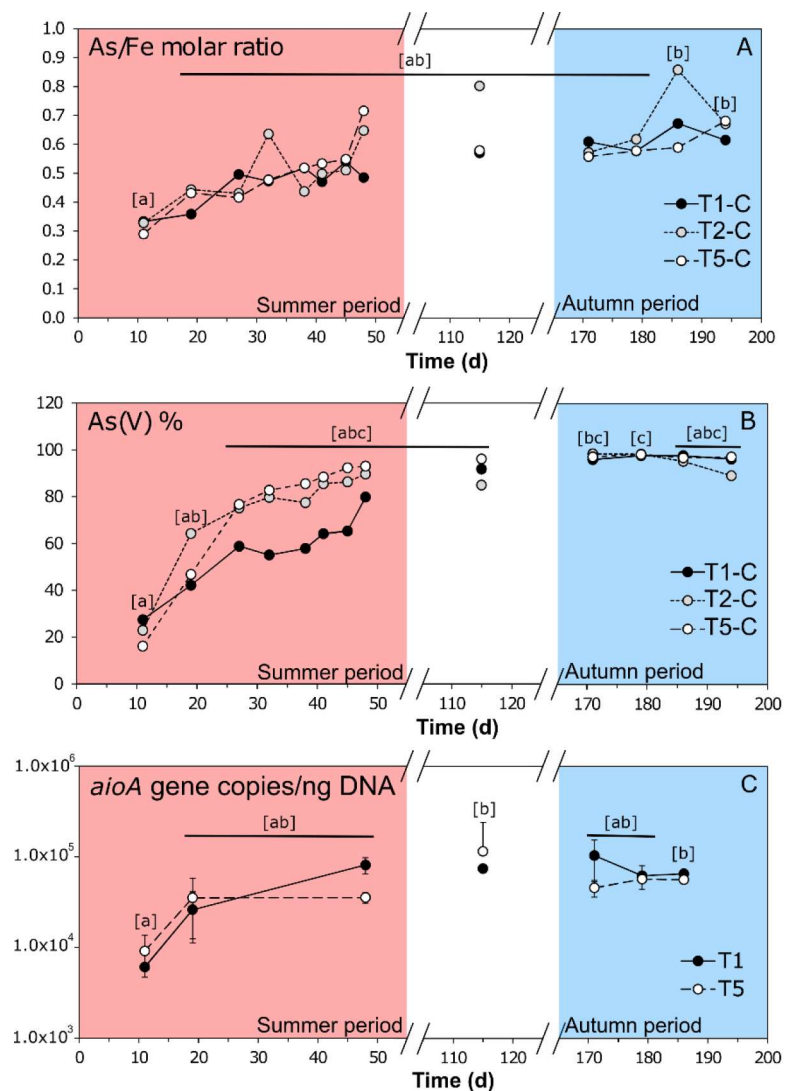


Figure 7. Evolution of As/Fe molar ratio (A) and As(V) percentage (B) in the biogenic precipitate from trays T1-C, T2-C, and T5-C during the monitoring period. Evolution of number of *aioA* gene copies/ng of DNA for trays T1 and T5 (A, B, and C section samples) during the same time (C). Different letters in brackets indicate statistically significant differences according to Friedman ( $p$ -value < 0.05) and Nemenyi multiple pairwise comparisons tests.

Table 1. Comparison with other field trials exploiting biological or chemical Fe precipitation and As removal from AMD water in passive treatment devices

Reference	Site	Whole design	System evaluated	Influent pH	Influent As (mg L <sup>-1</sup> )	Influent Fe (mg L <sup>-1</sup> )	As removal %	Fe removal %	As removal rate (g m <sup>-2</sup> d <sup>-1</sup> )	Fe removal rate (g m <sup>-2</sup> d <sup>-1</sup> )	HRT (h)	Mineralogy	As/Fe molar ratio or As concentration in the solid phase
<b>Biological treatments</b>													
This study	Carroselx mine (France)	5 aerobic ponds stacked on top of each other connected by cascades	Whole system	2.6–3.5	85–150	700–1200	3–97	<0–11	2–3	<0–64	2.3–50	Tascheit, Amorphous ferric arsenate	0.29–0.86
Elbaz-Poulichet et al. (2006)	Carroselx mine (France)	Aerobic pond (3 different configurations a) with ridges, b) shallow pond, c) with cascades) + decantation pond (DP) + anaerobic wetland	Aerobic ponds	2.5–4.5	50–250	800–1200	11–20	n.s.	5–10	n.s.	0.5–3	n.s.	n.s.
Macías et al. (2012)	Monte Romero mine (Spain)	Natural iron oxidizing lagoon (NFOL) + dispersed alkaline substrate (DAS) + 2 DP joined by cascades + DAS	NFOL	~3	0.1–1	275 (99% Fe(II))	80	38	0.1–1*	100*	n.s.	Sch. gre (from Floreng calculation)	0.002*
Hamilton et al. (1999)	Wheat Jane mine (UK)	5 aerobic wetlands + anaerobic pond + rock filter	5 aerobic wetlands	~4	2.4	~140	> 99	74	n.s.	1.2	n.s.	n.s.	n.s.
Whitehead et al. (2005)	Wheat Jane mine (UK)	5 aerobic wetlands + anaerobic pond + rock filter	5 aerobic wetlands	3.8	2.7	144	> 99*	75*	n.s.	5.8 (first unit)	n.s.	n.s.	< 0.1% As (first aerobic cell)
Kalm and Cietano Chaves (2003)	Nova Lima mining district (Brazil)	4 oxidation-precipitation-settling ponds + 3 anaerobic ponds	first oxidation-precipitation-settling pond	~2–4	< LD	20–300	n.s.	15–38 (4 aerobic ponds)	–0.004	–11	48	n.s.	–0.004* (4 aerobic ponds)
<b>Chemical treatments</b>													
Rötting et al. (2008)	Monte Romero mine (Spain)	DAS + 3 DP joined by cascades	DAS	3.0–3.9	0.1–1.5	290–357 (95% Fe(II))	99	48 (whole system)	0.05–0.75*	n.s.	24	Sch. gre (0–3 cm depth)	–0.002* (0–3 cm depth)
Caraballo et al. (2009)	Monte Romero mine (Spain)	DAS + 2 DP joined by cascades + DAS + 2 DP joined by cascades + DAS (MgO)	1 <sup>st</sup> DAS	3.08	0.3	358	> 99	34 (1 <sup>st</sup> DAS + 2 DP)	n.s.	n.s.	24 h	Sch. gre (0–3 cm depth)	n.s.
Gusck et al. (1994)	Leviathan mine (USA)	AED, 3 aerobic pond, macrobiont pond	Whole system	4.5	0.1	340	90	99	n.s.	n.s.	n.s.	n.s.	n.s.

\*calculated

n.s. = not specified

LD = limit of detection

Sch = schwertmannite, Gre = goethite