



HAL
open science

Data-driven monitoring of Systems On Chip for Multifunction Modular Cockpit Display

Oussama Djedidi, Mohand Djeziri, Kouider Nacer M'Sirdi

► **To cite this version:**

Oussama Djedidi, Mohand Djeziri, Kouider Nacer M'Sirdi. Data-driven monitoring of Systems On Chip for Multifunction Modular Cockpit Display. 5th Summer School on INtelligent signal processing for FrontIER Research and Industry (INFIERI 2019), May 2019, Wuhan, China. . hal-02144441

HAL Id: hal-02144441

<https://hal.science/hal-02144441>

Submitted on 30 May 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Introduction:

The ubiquity of microprocessor-based and embedded systems inspired research about their monitoring and reliability, notably in safety-critical systems. This work is a part of a project to develop touchscreens for futuristic cockpits, in which, we focus on the supervision and monitoring of the Systems-on-Chips (SoCs). We create a monitoring framework to detect drifts and faults in the behavior of the heterogeneous SoC (CPU and GPU). Firstly, we built an incremental interconnected model to estimate a set of characterizing variables for the chip. Then this model is associated with a fault detection algorithm. Estimations from the model constitute inputs to the diagnosis module. The latter generates alarms in the presence of faults or drifts in the characteristics and features of SoC. The obtained results validate the proposed monitoring algorithm and demonstrate the effectiveness of the fault detection algorithm.

Objective: The Cockpit of the future:

- A user-friendly interface with touchscreens
- Displays to provide pilots with intuitive interactions
- Be able to accommodate the complex functions of the aircraft and systems



Main lines of research:

- Incremental modeling of variable structure systems
- Characteristics drift detection
- Life Cycle Optimization (MTTF Optimization)
- Estimation of the Remaining useful life

Online supervision through Analytical redundancy:

- A reference model runs in parallel to the system
- The outputs from the model are compared with outputs of the system
- Though this comparison results in Residuals
- The state of the system is deduced by analyzing these residuals
- The residuals are also indicators of diagnosis and prognosis of the system

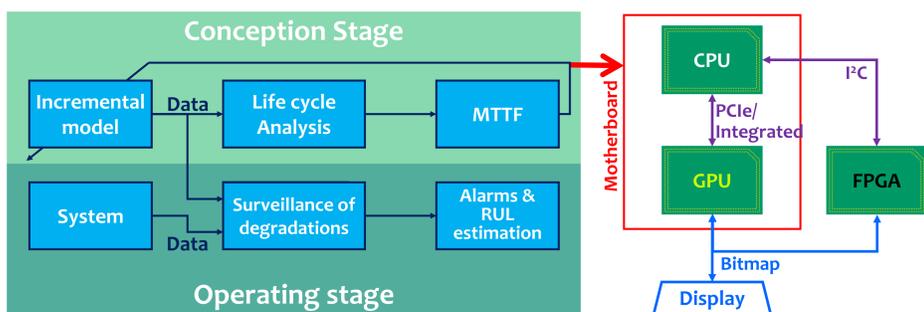


Fig 1. Monitoring and analysis of an embedded system

Modeling :

- Exploiting the causal relationships between variables for simpler incremental modeling [Fig 2]
 $Frequency \rightarrow Voltage \rightarrow Power \rightarrow Temperature$
- The model is adaptable and portable to all devices with same architecture
- Easy swapping of sub-model to adapt to different operating modes and devices
- Use of black-box and machine learning rather than white-box for simplicity and performance
- Need to accommodate 20 ms sampling Real-time sampling time

Variable	Model type	Performance
Frequency	Algorithm	MAE = 0% Max Delay = 80 ms
Voltage	Look-up table	MAE = 0% Max Delay = 110 ms
Power	NARX Neural network	MAPE = 2.8%
Temperature	ARMAX	MAPE = 0.8377%

Monitoring residual evaluation :

- Comparison of the estimation to measurements \rightarrow Raw residuals
 $r_x = (x_{estm} - x_{meas})/x_{estm}$
- Residuals are processed to avoid false alarms due estimation errors (P and T):
$$r_{m_x} = \frac{1}{n} \sum_{i=1}^n r_x$$
- Threshold are computed statistically, that if surpassed an alarm is generated
 $th_{r_x} = \mu \pm 3 \times \sigma$

Results and conclusion :

- Both the model and the monitoring frameworks are validated [Fig 2]
- The monitoring framework detects an array of driver, environment, and system faults
- Program deployed to and validated on multiple different devices
- Future works will focus on the diagnosis and remaining useful life of the system

Acknowledgments:

This project is funded by BpiFrance, to whom we address our gratitude. Our thanks are also address to French Ministry of Foreign Affairs and the Service for the Science and Technology at the French Embassy in China, in Beijing for their full support for the participation in the 5th INFIERI Summer School.

References:

- Oussama Djedidi, Mohand Djeziri, Nacer M'Sirdi. Data-Driven Approach for Feature Drift Detection in Embedded Electronic Devices. IFAC-PapersOnLine, Elsevier, 2018, 51 (24), pp.1024 - 1029. DOI: 10.1016/j.ifacol.2018.09.714.
- Oussama Djedidi, Mohand Djeziri, Nacer M'Sirdi. Modular Modelling of an Embedded Mobile CPU-GPU Chip for Feature Estimation. 14th International Conference on Informatics in Control, Automation and Robotics, Jul 2017, Madrid, Spain. SCITEPRESS - Science and Technology Publications, Proceedings of the 14th International Conference on Informatics in Control, Automation and Robotics. DOI:10.5220/0006470803380345.

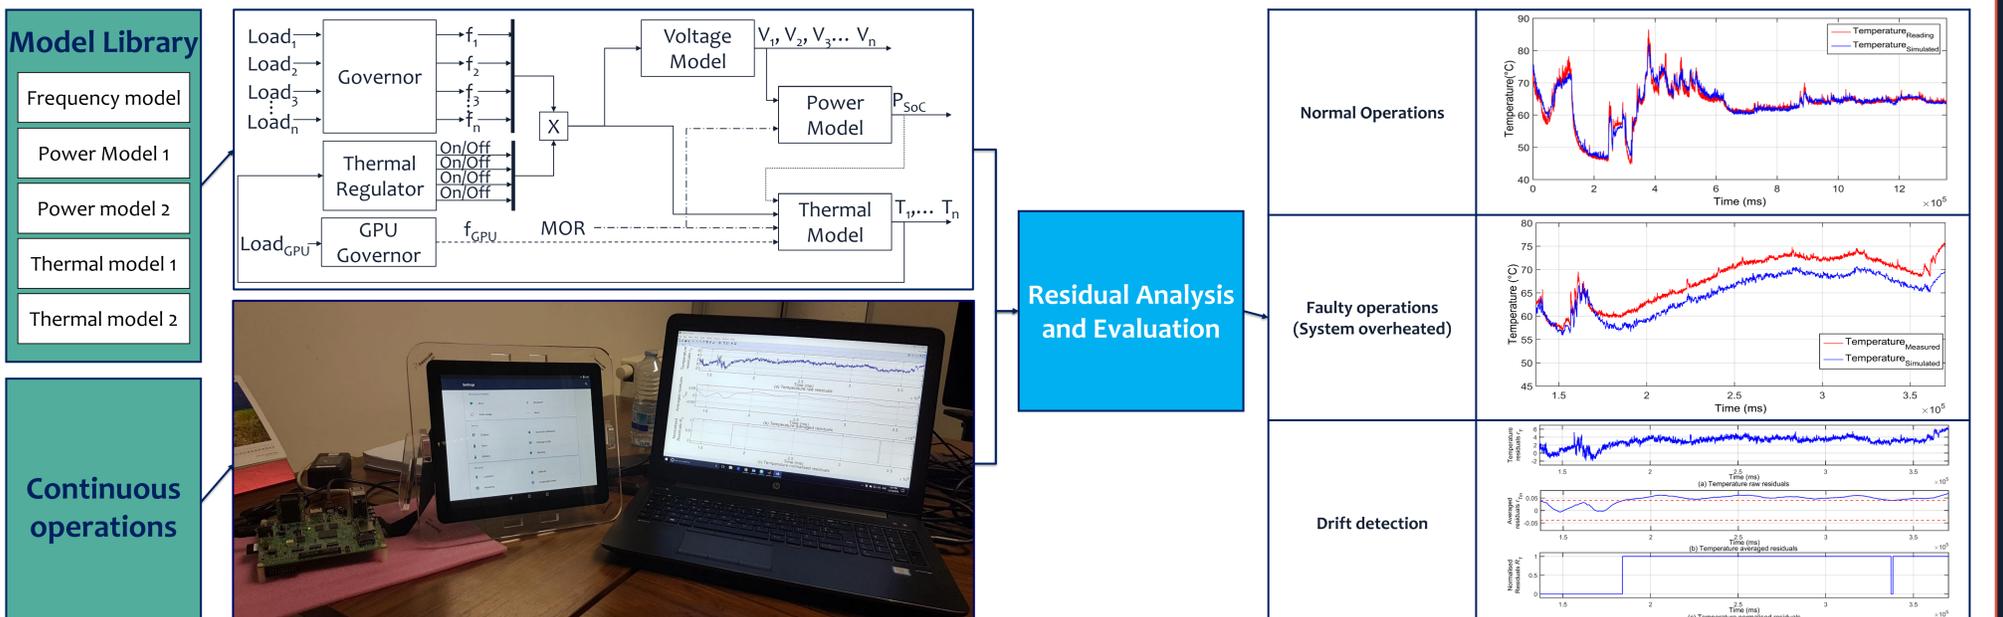


Fig 2. Interconnected and Incremental modeling and online monitoring