



A Transparent Display with Per-Pixel Color and Opacity Control

Tj J Rhodes, Gavin Miller, Qi Sun, Daichi Ito, Li-Yi Wei

► To cite this version:

Tj J Rhodes, Gavin Miller, Qi Sun, Daichi Ito, Li-Yi Wei. A Transparent Display with Per-Pixel Color and Opacity Control. SIGGRAPH 2019 Emerging Technologies, Jul 2019, Los Angeles, United States. pp.1-2, 10.1145/3305367.3327984 . hal-02189965v2

HAL Id: hal-02189965

<https://hal.science/hal-02189965v2>

Submitted on 27 Jul 2019 (v2), last revised 5 Aug 2019 (v3)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

A Transparent Display with Per-Pixel Color and Opacity Control

TJ Rhodes
Gavin Miller
Adobe Research

Qi Sun
Daichi Ito
Adobe Research

Li-Yi Wei
Adobe Research

ABSTRACT

Based on the working principal published in [Smithwick 2016], we have implemented a display system that composites matted foreground animated graphics and video, with per-pixel controllable emitted color and transparency, over real-world dynamic objects seen through a transparent display. Multiple users can participate simultaneously without any glasses, trackers, or additional devices. To evaluate the experiences enabled by such a device and to study perceptual issues, we used a panel capable of 240Hz display, and augmented the design with an interactive touch screen.

CCS CONCEPTS

• **Human-centered computing** → **Mixed / augmented reality**; *Displays and imagers*; • **Computing methodologies** → **Mixed / augmented reality**.

KEYWORDS

display, perception, augmented reality

ACM Reference Format:

TJ Rhodes, Gavin Miller, Qi Sun, Daichi Ito, and Li-Yi Wei. 2019. A Transparent Display with Per-Pixel Color and Opacity Control. In *Proceedings of SIGGRAPH '19 Emerging Technologies*. ACM, New York, NY, USA, 2 pages. <https://doi.org/10.1145/3305367.3327984>

1 INTRODUCTION

Transparent displays can be useful to display graphical information in the presence of real-world objects, such as behind the display. Common transparent displays take two basic forms - emissive displays and transmissive displays. Transparent emissive displays emit light in all directions from each pixel. Light may also travel directly through the display, but may be attenuated by a fixed amount due to the fixed opacity of the display. This can be achieved with transparent Organic Light Emitting Diodes (OLEDs) or using a switchable diffuser with back projection [Izadi et al. 2008]. Transparent transmissive displays control the intensity of light passing through each pixel over a range of angles, but do not emit light. Liquid crystal displays (LCDs) are a common form of transmissive display.

An ideal transparent display would modulate the emissive color and transparency of each pixel allowing for the Over operator of Porter Duff compositing [Porter and Duff 1984] with real-world objects. The color image would be the graphic color with pre-multiplied alpha, and the transparency image would contain the color transparency mask of the graphics. One approach for a practical device would layer an OLED on top of an LCD. However, this

SIGGRAPH '19 Emerging Technologies, July 28 - August 01, 2019, Los Angeles, CA, USA
© 2019 Copyright held by the owner/author(s). Publication rights licensed to ACM.
This is the author's version of the work. It is posted here for your personal use. Not for redistribution. The definitive Version of Record was published in *Proceedings of SIGGRAPH '19 Emerging Technologies*, <https://doi.org/10.1145/3305367.3327984>.

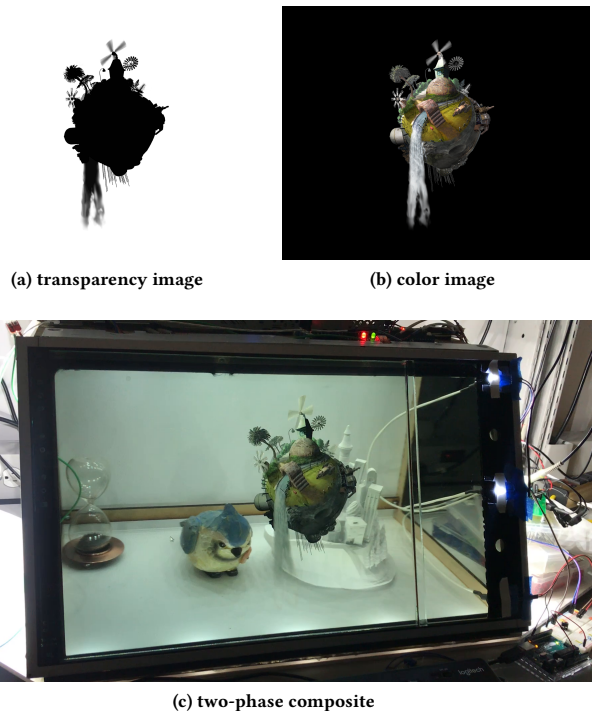


Figure 1: Our composite display system. The transparency image, (a), displays white to represent transparent areas while black heavily attenuates the view. The color image, (b), displays the color channel over the illuminated diffuser. At 144 Hz, the two-phase composite, (c), occludes physical objects within the display box.

would require an exact match of pixel pitch, careful alignment of the panels and may lead to viewing-direction-dependent artifacts as the two pixel structures blocked each other, leading to Moiré fringes.

Instead, we combine a conventional LCD and a switchable single-element diffuser. The display works by time-multiplexing a transparent phase and an emissive phase, with retinal fusion leading to the perception of compositing the foreground graphic over the background real-world scene. Multiple users can simultaneously view and interact with our prototype system without any glasses, trackers, or additional devices.

2 DESIGN

Our composite display system consists of: an enclosure, display layer, and controller. Figure 1 illustrates our system design.

A modern LCD desktop monitor consists of a display and backlight assembly that fit within a 1 cm thick enclosure. We expand this distance enough to place physical objects between the display and backlight. Our display system box measures approximately $55 \times 30 \times 35$ (width, height, depth in cm). The display face tilts into the volume of the box at a 65 degree incline. The left, right, and rear sides are equipped with hinged walls for access to insert or remove objects within the box. The backlight system uses thirty (3-up) high-power LED stars. The LEDs are divided amongst eight LED rails with separate drivers. Depending on the configuration, a portion of the LED rails illuminate the placed objects while the remainder illuminate the display layer. The backlight system is capable of producing 13,740 lm (luminous flux) combined.

The display layer consists of an LCD stacked on top of a switchable diffuser. The layer is oriented so the diffuser faces the interior and the LCD faces the viewer. The LCD is harvested from an ordinary NVIDIA 3D Vision ready consumer-grade desktop monitor. The display layer shown in Figure 1 uses a 1920×1080 , 24.5", 240 Hz, twisted-nematic (TN) display. However, our system has been tested to work with other LCDs at various resolutions and refresh rates. The single-element switchable diffuser alternates between a scattering (diffuse) and transparent state.

The controller consists of: a microcontroller, protective circuitry, and individual LED rail drivers. Together, they synchronize the display layer components and lights to produce the desired effect. The microcontroller uses pulse width modulation (PWM) dimming to control the backlight system. The switchable diffuser is controlled through protective circuitry to ensure it does not remain energized. The LCD is driven by the original video controller harvested from the desktop monitor, and an ordinary frame buffer located in a separate host computer. DVI or DisplayPort is required to display content due to the high frame rate.

3 IMPLEMENTATION

Figure 2 exemplifies our digital overlay with variable opacity over physical objects. We rapidly alternate between a transparency phase and color phase to achieve this result.

The transparency phase is responsible for per-pixel attenuation of the enclosure interior. An LCD modulates the light traveling through it over a range of angles. We leverage this property by filling the frame buffer with a per-color-channel transparency mask. White pixels represent transparent areas while black pixels heavily attenuate the view behind the display layer (down to the contrast ratio of the display). Intermediate transparency values attenuate the light proportionately. The switchable diffuser is transparent during this phase, so many view directions through the display are appropriately modulated by the transparency image.

The color phase is responsible for displaying the color channel of the desired content. The switchable diffuser is scattering during this phase, so nothing within the enclosure interior is visible. The white backlight system illuminates the diffuser, making the display layer function as an ordinary LCD assembly. The frame buffer contains the per channel color pre-multiplied by one minus per-channel transparency for each pixel.

The two-phase composite is generated by alternating between the transparency and color phases at 144 frames per second (fps).



Figure 2: Per-pixel opacity control.

This frame rate enables us to display not only static images, but also dynamic animations and video at 72 fps. The diffuser is synchronized with the frame buffer using a VESA stereo signal from the host computer.

4 DISCUSSION

The progressive display of scanlines on the LCD combined with a single-element diffuser leads to cross-talk artifacts between the transparency and color phases. We address this by flashing the backlight briefly for each phase, after the full frame is displayed.

This device enabled some compelling mixed reality experiences. However, careful content design is needed to prevent the user from ignoring the contents of the box by focusing too much on the animated screen layer. In addition, we experienced a few flicker artifacts. These can be significantly reduced by displaying at 240Hz, but at the expense of smaller useable area of the display, due to the transition time of the LCD.

REFERENCES

- Shahram Izadi, Steve Hodges, Stuart Taylor, Dan Rosenfeld, Nicolas Villar, Alex Butler, and Jonathan Westhues. 2008. Going Beyond the Display: A Surface Technology with an Electronically Switchable Diffuser. In *UIST '08*. 269–278.
- Thomas Porter and Tom Duff. 1984. Compositing Digital Images. In *SIGGRAPH '84*. 253–259.
- Quinn Smithwick. 2016. A switched emissive transparent display with controllable per-pixel opacity. *Journal of the Society for Information Display* 24, 9 (2016), 537–544.