

Towards successful cleaning of chert samples for improved 10Be and 26Al measurements

Regis Braucher, Hidy Alan J., Matmon Ari, D.L. Bourles, Georges Aumaitre, Keddadouche Karim

▶ To cite this version:

Regis Braucher, Hidy Alan J., Matmon Ari, D.L. Bourles, Georges Aumaitre, et al.. Towards successful cleaning of chert samples for improved 10Be and 26Al measurements. Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms, 2019, 456, pp.257-263. 10.1016/j.nimb.2019.03.030. hal-02268973

HAL Id: hal-02268973

https://hal.science/hal-02268973

Submitted on 25 Oct 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Towards successful cleaning of chert samples for improved ¹⁰Be and ²⁶Al measurements

Braucher Régis^{1,*}; Hidy Alan J.^{2,3}, Matmon Ari³; Bourlès Didier¹; Aumaître Georges¹; Keddadouche Karim¹.

- 1: CEREGE, Aix-Marseille Univ., CNRS, IRD, Coll. France, INRA, UM 34
- 2: Center for Accelerator Mass Spectrometry, Lawrence Livermore National Laboratory, Livermore, CA 94550, USA
- 3: The Fredy & Nadine Herrmann Institute of Earth Sciences, The Hebrew University of Jerusalem, Edmond J. Safra Campus, Jerusalem 91904, Israel

Abstract

In situ-produced cosmogenic ¹⁰Be and ²⁶Al measurements are widely applied in geomorphological studies and in archaeology and paleoanthropology as a chronologic tool applicable to the past 5 Ma. While most of these measurements are made from concentrates of quartz, a ubiquitous and resistant mineral, it is of great interest to extend this method to other silicates and particularly to the amorphous silicates whose purification may not be as straightforward. This paper presents a cleaning procedure that has been applied on ten samples of various siliceous rocks (chert, granite and quartzolite). The aim is to monitor the ¹⁰Be, ²⁷Al and ²⁶Al concentration evolution as a function of cleaning steps. While this protocol appears suitable for ¹⁰Be, when measuring ²⁶Al careful attention should be paid to ²⁷Al, whose concentration should be measured regularly to ensure that a constant value is achieved and most important, allowing measuring ²⁶Al/²⁷Al by AMS.

Keywords: Beryllium, Aluminum, Cosmogenic, Silicate, ASTER.

Introduction

Measurements of in situ-produced ¹⁰Be and ²⁶Al are routinely used for determining exposure or burial durations and denudation rates. In quartz, these cosmogenic nuclides are mainly produced through spallation reactions on oxygen and silicon. Quartz is presently the mineral of choice because it is ubiquitous, resistant to alteration, and a means of purification is established. Thus, huge efforts have been made to calibrate ¹⁰Be and ²⁶Al production rates within this mineral (e.g. Nishiizumi et al., 1989, Evans et al., 1997, Balco et al, 2009, Putnam et al. 2010, Kaplan et al, 2011, Borchers 2016). However, for other silicate minerals (feldspars, sanidine, chert), obtaining pure mineral fractions is not as straightforward and requires more attention (Zerathe et al. (2013, 2017); Kober et al. (2005)).

¹⁰Be and ²⁶Al concentrations are calculated from measurements of ¹⁰Be/⁹Be and ²⁶Al/²⁷Al by accelerator mass spectrometry (AMS). Therefore, concentrations of the stable isotope (⁹Be or

^{*:} corresponding author; Email: braucher@cerege.fr

²⁷Al), must be accurately and precisely determined before sample dissolution. Beryllium is generally negligible in most silicate minerals and thus the addition of a ⁹Be carrier is required. Conversely, aluminum is relatively abundant in most silicate minerals, with ²⁷Al concentrations often sufficient for AMS measurement without addition of a carrier. Therefore, measurements of ²⁶Al require the natural ²⁷Al concentration to be accurately determined. In many laboratories (Mifsud et al., 2013; Corbett et al., 2016), the cleaning procedure ends when this natural content, measured on small aliquot (1-2 g) is below 100 ppm Al. These previous approaches have been shown to be suitable for well crystallized silica with homogeneous aluminum content. However, for amorphous silica with a potential heterogeneous chemical composition, this procedure may be inappropriate and could result in ²⁶Al and/or ¹⁰Be concentrations that either do not solely reflect in-situ production or reflect in-situ production from uncharacterized mineral impurities (Boaretto et al 2000, Matmon et al., 2003; Guralnik et al., 2010, Zerathe et al. 2013) as evidenced by the assumed "clean" material having anomalously high ²⁷Al concentrations.

In this paper, ten samples of various siliceous rocks (chert, granite, vein quartz and quartzolite (silicified carbonate rock)) were processed and measured for ¹⁰Be and ²⁶Al analyses with an adapted chemical protocol based on Zerathe et al. (2013). The purpose of this study is to 1) determine if cosmogenic ¹⁰Be and ²⁶Al concentrations measured from samples of different lithologies, but collected from the same location with presumably identical exposure histories, yield identical values; and if not, 2) determine the effectiveness of additional cleaning steps at resolving any lithologic concentration differences. To do this, we monitor the ¹⁰Be, ²⁷Al and ²⁶Al concentration evolutions as a function of cleaning steps. Additionally, we measure in-situ produced ³⁶Cl in carbonate-rich samples at one site (ZEB) for an independent exposure age comparison.

Samples (Braucher.kmz here)

Samples were collected in the Negev Desert, southern Israel, are from four locations named ZEB, YEH, HEM, and ARAD (refer to kmz and table 1). These locations were chosen for this experiment because each site featured geomorphic surfaces with long surface exposure histories and provided multiple silica-bearing lithologies (ZEB, HEM, and ARAD were collected from desert pavements, and YEH from eroding bedrock). From each location, samples of different lithology were collected. Considering their short identifications (Short ID, Table 1), samples 1 and 2 are from the ZEB location (chert and quartzolite respectively), samples 3, 4, and 5 are from the YEH location (chert, granite and quartz vein respectively), samples 6 and 7 are from the ARAD location (chert and quartzolite respectively) and samples 8, 9 and 10 are from the HEM location (quartzolites and two distinct types of chert, respectively). For more information on the regional geological context of these samples, one can refer to Matmon et al (2017).

With the exception of the carbonate-rich ZEB samples, all samples were crushed, decarbonated, and processed at CEREGE. These steps were not performed on the ZEB samples because it was possible to measure ³⁶Cl from the carbonate fraction as well as ¹⁰Be and ²⁶Al from the chert fraction (Figure 1).

Chemical preparation and cleaning strategy for silica samples

Original samples were crushed and sieved (0.25–.85 mm), then divided into four sub-samples (Bulk; HF; KOH and KOH-*bis*) (Table 2) which were subjected to different cleaning steps. Following each cleaning step, sample concentrates were rinsed several times in ultra-pure water and dried for 24 hours at 90°C.

The Bulk sub-sample underwent no cleaning steps.

The three other sub-samples were subjected to Aqua Regia to remove the carbonate fraction and purified by selective dissolutions with HCl and H₂SiF₆. To eliminate the potential atmospheric ¹⁰Be adsorbed to grain surfaces, the remaining dried and weighted samples were cleaned using sequential 48% HF dissolutions (Brown et al., 1991; Kohl and Nishiizumi, 1992; Cerling and Craig, 1994), with each step dissolving ~10% of the material.

Sub-sample HF was dissolved and processed without further cleaning.

Sub-samples KOH and KOH-bis were subjected to one and two rounds, respectively, of a 48 hours leaching in 3N KOH at 80°C prior to spiking and complete dissolution. As shown in Verstraete (2005) and tested in Zerathe et al (2013), the 3N KOH solution gently dissolves amorphous silica, enabling a smooth cleaning of the material and, allowing, if they are present the accumulation of micro-crystallized quartz spherules (see Zerathe et al (2013)).

Samples were dried to quantify sample loss between cleaning steps and enable the calculation of efficiency cleaning by:

Reagent efficiency = (Mass dissolved by reagent) / (Total reagent volume). This efficiency unit is in (g sample) / (ml reagent).

After cleaning, all samples were spiked with ~ 0.1 g of an in-house ^9Be carrier (3025±9 ppm; Merchel et al, 2008), totally dissolved in an acid cocktail (concentrated HF, 10 mL HNO₃, and 3 mL HClO₄), and then re-dissolved in 7N HCl. Final solutions were weighed and a 100 μ l aliquot was collected and diluted in HNO₃ 2% in order to determine the ^{27}Al concentration by ICP-OES on a 6500 ICAP from Thermo Scientific.

Finally, ¹⁰Be and ²⁶Al were extracted by ion exchange resins (200 mesh DOWEX® 1X8 and 50WX8), precipitated as hydroxides and converted to oxides by ignition at 700°C.

Beryllium oxide was mixed with 325 mesh niobium powder and aluminum oxide with silver powder prior to AMS measurements, which were carried out at ASTER, the 5 MV French AMS national facility at CEREGE (Arnold et al., 2010).

The 10 Be data were calibrated directly against STD11 in house standard (10 Be/ 9 Be value of (1.191±0.013) x10⁻¹¹, Braucher et al. 2015). Analytical uncertainties (reported as 1 σ) include uncertainties associated with AMS counting statistics, chemical blank measurements and AMS internal error (0.5%).

The measured 26 Al/ 27 Al ratios were calibrated against the ASTER in-house standard SM-Al-11 whose nominal value is 26 Al/ 27 Al = (7.401 ± 0.064) x10⁻¹² (Merchel and Bremser, 2004). 10 Be/ 9 Be blank ratio was 3.38x10⁻¹⁶ (± 37%), and 26 Al/ 27 Al blank ratio was 5.26x10⁻¹⁵ (±26 %).

Chemical preparation for ³⁶Cl measurements

The crushed samples (0.250- 1 mm fraction) experienced a 4h water-leaching, followed by a 10%-dissolution using HNO₃ (2 mol.l⁻¹). The resulting material was totally dissolved in HNO₃ after addition of ~1.5 mg of a ³⁵Cl-enriched carrier (³⁵Cl/³⁷Cl ~ 800) allowing natural chlorine determination by isotope AMS dilution. Potential residues were recovered from the solution for further ¹⁰Be and ²⁶Al preparations. After taking an aliquot for Ca-determination by ICP-OES, 1 ml of an AgNO₃ solution (10%) was added to the dissolved sample to precipitate AgCl. To reduce ³⁶S isobaric interference during AMS measurement of ³⁶Cl, the AgCl precipitate was re-dissolved using NH₄OH, and sulfur was co-precipitated with BaCO₃ as BaSO₄ by addition of a slightly ammoniac saturated Ba(NO₃)₂ solution. The final AgCl-target was produced by reprecipitation using HNO₃, repeated washing cycles with HNO₃ and H₂O and drying at 80°C. Chlorine AMS measurements were performed at the ASTER AMS national facility (CEREGE, Aix en Provence, France) (Klein et al, 2008; Finkel et al., 2013), and normalized using KNSTD1600 calibration material (³⁶Cl/³⁵Cl=2.112x10⁻¹²) (Sharma et al, 1990).

Results and discussion

³⁶Cl measurements

The 36 Cl, natural 35 Cl and Ca concentrations of carbonate fractions of samples 1 and 2 are presented in sub table 3. As the 35 Cl concentrations are low, no extra isotopic determination were performed on these samples. Long term denudation rates or minimum exposure durations have been determined using a mean production rate of (42.2 ± 2) at/g/yr (Schimmelpfennig et al 2009; Braucher et al. 2011) and the muon scheme of Braucher et al. (2011). These denudation rates and exposure ages are 2.19 ± 0.07 m/Ma and 275 ± 9 . ka for sample 1 and 0.18 ± 0.01 m/Ma and 1065 ± 37 ka for sample 2. These denudation rates and exposure durations are in agreement with previous measurements from the same location (Matmon et al., 2016).

¹⁰Be concentrations:

The ¹⁰Be concentrations behave as expected. They indeed decrease as the number of cleaning steps increases until a plateau corresponding to the sole in situ-produced ¹⁰Be concentration is reached, (Brown 1991). Thus at this stage, one can say that the proposed cleaning procedure (3HF cleaning steps plus 2 cleanings in 3N KOH) allows obtaining accurate in situ-produced ¹⁰Be concentrations for chert (Figure 2 and Table 3).

²⁷Al concentrations:

As for ¹⁰Be, ²⁷Al concentration evolutions were determined all along the cleaning process. It is thus possible to monitor the cleaning efficiency of each individual step (Table 4).

Samples 5 (quartz) and 7, 8, (quartzolites) yield the lower efficiencies for both HF and KOH, between 0.28 and 0.32 g/ml for HF and below 0.06 g/ml for KOH. The HF efficiency corresponds to that expected from a stoichiometric reaction of HF (48%) on well crystallized SiO₂. However, there is a reduced effect of KOH on the quartzolite.

For other samples both cleaning efficiencies are higher. HF efficiency ranges from 0.38 up to 0.75g/ml and the KOH efficiency ranges from 0.075 up to 0.26 g/ml. A value higher than 0.32g/ml for HF and higher than 0.075 g/ml for subsequent KOH leachings appears to be related to poorly-crystallized or amorphous mineral phases.

Four samples (2, 3, 4 and 10) with high HF efficiencies exhibit a high release of ²⁷Al after the HF cleaning. This is unexpected since selective dissolution is typically employed to reduce the relative abundance ²⁷Al with respect to the silica concentrate, and this is in spite of the careful washing that was performed before drying the remaining sample. In fact, such high ²⁷Al content (several hundred to thousands of ppm!) would be expected in the leachate rather than the remaining silica concentrate

These unexpected ²⁷Al peaks may therefore be linked to a highly inhomogeneous distribution of the elements within the studied samples. To better understand this, it would be interesting in future to perform in situ measurements (such as X-ray fluorescence spectrometry) to localize if they exist, potential ²⁷Al enriched phases or potential sites that may have the ability do complex cations. Sample 4, described as granite presents a dual behavior with a high efficiency for the 3 HF leachings as observed for chert samples but a low efficiency with KOH solution as observed for pure quartz or quartzite. This sample also exhibit unexpected high ²⁷Al content.

To conclude, it appears important to monitor the ²⁷Al content after each cleaning step (Figure 3). If a plateau is reached, as for samples 3, 7, 8 and probably 9, the material is ready for total dissolution and for ²⁶Al measurement. However, the magnitude of the plateau in ²⁷Al concentration should also be considered. If it is of the order of several hundred of ppm Al, then it might result in a ²⁶Al/²⁷Al too low to be measured by AMS.

²⁶Al concentration.

Among the 38 prepared samples, no ²⁶Al was detected in two of them (4-HF and 4-KOH), only one event was counted (100% uncertainty) for two others (4-Bulk and 4-KOH-*bis*) and 10 of them did not reach the minimum ²⁷Al⁻ current (20 nA at the high energy faraday cup) for an accurate AMS measurement. For the remaining samples, the mean ²⁷Al⁻ currents were between 300 and 20 nA. Based on these data, it seems that the chemical composition of the mineral may be the reason of such poor currents. This was also the case in a previous attempt to measure samples 13-IL-ZEB-02C and 13-IL-HEM-17 at LLNL where low currents were also obtained.

Denudation rates and minimum exposure durations.

The main purpose of this paper was to develop a chemical procedure enabling to measure in situ-produced cosmogenic nuclides (10 Be and 26 Al) within silica samples of various compositions. Although the results concerning aluminum must imperatively be improved, it is important to present the output of these measurements (mainly 10 Be concentrations) in term of geomorphological information such as denudation rates or minimum exposure durations (Table 5).

Basically, denudation rates were determined assuming steady state and minimum exposure ages were calculated assuming no denudation. Production parameters have been scaled using Stone polynomial (Stone 2000 after Lal 1991) and a standard atmosphere. The spallation sea level production rate is the one presented by Borchers et al. (2016) that is (4.02 ± 0.18) at/g/a and the muon contributions from Braucher et al. (2011).

As the bulk fractions were not clean, their results will not be discussed.

Denudation rate and minimum exposure duration have been determined for the ZEB location from 10 Be and 36 Cl concentrations. Both nuclides yield to similar results. Sample 1 yields exposure ages of 256 ± 25 ka and 275 ± 9 ka for 10 Be and 36 Cl respectively in total agreement with the ages of 241±26 ka and 248±27ka determined by Matmon et al.(2016) using 10 Be only.

Considering sample 2, despite a constant 10 Be concentration on the order of 7.5 \pm 0.2 Mat/g it seems that this sample is saturated. For this sample, Matmon et al. deduced exposure ages of 1671 ± 267 ka and 1950 ± 338 ka for the coarse and fine fractions from 10 Be measurements. For 36 Cl the carbonate fraction allows determining an age of 1065 ± 37 ka.

For the YEH samples, the chert sample number 3 appears to be more resistant to denudation than the neighboring granite (Sample 4) or quartz vein (sample 5). This surface experienced denudation rates ranging from 7 to 17 m/Ma and is exposed at least since 40 ka.

For the ARAD samples composed of a chert (sample 6) and a quartzite (sample 7), the outputs of both samples are comparable and yield to a denudation rate lower than 1.5 m/Ma and a minimum exposure duration of 350 ka. Again, chert samples seem to be more resistant than the co-existing quartzite.

The last group, HEM, presents similar results for the quartzite sample 8 but a slightly lower denudation rate for the 2 others chert samples (9 and 10). Here again, chert fraction appears to be more resistant than quartzite. Based on the two chert sub samples (9 and 10), the minimum exposure duration of the surface is of the order of 1.1 Ma.

Conclusions

In this paper, a cleaning procedure derived from that used for quartz mineral, but adapted for other silica minerals, is presented. The main outputs are:

- It is important to monitor the leaching efficiency throughout the cleaning procedure. A value closed to 0.3 g of material dissolved per milliliter of HF indicates "well" crystallized quartz. A higher value may indicate the presence of an amorphous phase.
- In case of amorphous phase, the use of a 3N KOH solution at 80°C for 2 days may help to gently dissolve the amorphous phase. This step has to be done at least twice.
- It is important to measure ²⁷Al content after each cleaning step in KOH to ensure that a concentration plateau is reached. In this study, 2 KOH leachings were not sufficient for all samples.
- Based on ¹⁰Be only, chert samples seem to be more resistant than quartz to denudation processes in desert environment.

As described in Zerathe et al (2013), thin sections of the chert samples may help to better characterize the chert structure. In some chert types, micro crystalline quartz can be present. If it is the case, the cleaning procedure described in this paper will then allow the accumulation of this micro crystalline quartz throughout all cleaning steps.

Acknowledgements

ASTER AMS national facility (CEREGE, Aix en Provence) is supported by the INSU/CNRS, the ANR through the "Projets thématiques d'excellence" program for the "Equipements d'excellence" ASTER-CEREGE action and IRD. RB thanks Laetitia Leanni and Valery Guillou for fruitful discussions. A component of this work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344. This is LLNL-JRNL-745527. The authors thank S. Zerathe for thoughtful suggestions that improved the manuscript.

References:

Arnold M., Merchel S., Bourles D.L., Braucher R., Benedetti L., Finkel R.C., Aumaître G., Gottdang A. & Klein M., 2010. The French accelerator mass spectrometry facility ASTER: Improved performance and developments. Nuclear Instruments and Methods in Physics Research B, 268: 1954 - 1959.

Balco, G., Briner, J., Finkel, R.C., Rayburn, J.A., Ridge, J.C., Schaefer, J.M., 2009. Regional Beryllium-10 production rate calibration for late-glacial northeastern North America. Quaternary Geochronology. 4, 93-107.

Boaretto, E., Berkovits, D., Hass, M., Hui, S.K., Kaufman, A., Paul, M., Weiner, S., 2000. Dating of prehistoric cave sediments and flints using ¹⁰Be and ²⁶Al in quartz from Tabun Cave, Israel. Nuclear Instruments and Methods in Physics Research. B 172, 767 - 771.

Borchers B., Marrero S., Balco G., Caffee M., Goehring B., Lifton N., Nishiizumi K., Phillips F., Schaefer J., Stone J., 2016. Geological calibration of spallation production rates in the CRONUS-Earth project, Quaternary Geochronology, 31, 188-198

Braucher R., Guillou V., Bourlès D.L., Arnold M., Aumaître G., Keddadouche K., Nottoli E. 2015. Preparation of ASTER in-house 10 Be/9 Be standard solutions. Nuclear Instruments and Methods in Physics Research B 361 335-340

Braucher, R., Merchel, S., Borgomano, J., Bourlès, D., 2011. Production of cosmogenic radionuclides at great depths: A multi element approach. Earth Planet. Sci. Lett. 309, 1-9.

Brown, E.T., Edmond, J.M., Raisbeck, G.M., Yiou, F., Kurz, M.D., Brook, E.J., 1991. Examination of surface exposure ages of antarctic moraines using insitu produced Be-10 and Al-26. Geochimica and Cosmochimica Acta 55, 2269-2283.

Cerling, T.E. and Craig, H., 1994. Geomorphology and in-situ cosmogenic isotopes. Annual Reviews of Earth and Planetary Sciences, 22: 273-317.

Corbett L. B., Bierman P. R., Rood D. H., 2016. An approach for optimizing in situ cosmogenic ¹⁰Be sample preparation, Quaternary Geochronology, 33, 24-34,

Evans, J.M., Stone, J.O.H., Fifield, L.K., Cresswell, R.G., 1997. Cosmogenic chlorine-36 production in K-feldspar. Nuclear Instruments and Methods in Physics Research. B 123, 334-340

Finkel R., Arnold M., Aumaître G., Benedetti L., Bourlès D., Keddadouche K., Merchel S., Improved ³⁶Cl performance at the ASTER HVE 5 MV accelerator mass spectrometer national facility, Nuclear Instruments and Methods in Physics Research. B, 294, 121-125, (2013).

Guralnik, B., Matmon, A., Avni, Y., Fink, D., 2010. ¹⁰Be exposure ages of ancient desert pavements reveal Quaternary evolution of the Dead Sea drainage basin and rift margin tilting. Earth and Planetary Science Letters. 290, 132-141.

Kaplan, M.R., Strelin, J.A., Schaeffer, J., Denton, G.H., Finkel, R., Schwartz, R., Putnam, A.E., Goehring, B.M., Travis, S.G., 2011. In-situ cosmogenic ¹⁰Be production rate at Lago Argentino, Patagonia: Implications for late-glacial climate chronology. Earth and Planetary Science Letters, 309, 21-32.

Kober F., Ivy-Ochs S., Leya I., Baur H., Magna T., Wieler R., Kubik P.W., 2005, In situ cosmogenic ¹⁰Be and ²¹Ne in sanidine and in situ cosmogenic ³He in Fe–Ti-oxide minerals, Earth and Planetary Science Letters, 236, 1–2, 404-418

Kohl C.P, Nishiizumi K,1992. Chemical isolation of quartz for measurement of in-situ -produced cosmogenic nuclides, Geochimica et Cosmochimica Acta, 56, 9,3583-3587.

Klein G., Gottdang A., Mous D.J.W., Bourlès D.L., Arnold M., Hamelin B., Aumaître G., Braucher R., Merchel S., Chauvet F., 2008, Performance of the HVE 5 MV AMS system at CEREGE using an absorber foil for isobar suppression, Nuclear Instruments and Methods in Physics Research. B 266, 1828-1832.

Matmon, A., Crouvi, O., Enzel, Y., Bierman, P., Larsen, J., Porat, N., Amit, R., Caffee, M., 2003. Complex exposure histories of chert clasts in the late Pleistocene shorelines of Lake Lisan, southern Israel. Earth and Surface Processes and Landscape. 28, 493 - 506.

Lal D. 1991. Cosmic ray labeling of erosion surfaces: in-situ nuclide production rates and erosion models. Earth and Planetary Science Letters, 104, 424-439.

Matmon, A., Elfassi, S., Hidy, A., Geller, Y., Porat, N., ASTER Team, 2016. Controls on aggradation and incision in the NE Negev, Israel, since the middle Pleistocene. Geomorphology, v. 261, p. 132-146.

Merchel, S., Bremser, W., 2004. First international ²⁶Al interlaboratory comparison – Part I. Nuclear Instrumentation Methods in Physics Research, B: Beam Interactions with Materials and Atoms. 223–224, 393–400

Merchel, S., Arnold, M., Aumaitre, G., Benedetti, L., Bourlès, D.L., Braucher, R., Alfimov, V., Freeman, S.P.H.T., Steier, P., Wallner, A., 2008. Towards more precise ¹⁰Be and ³⁶Cl data from measurements at the 10–14 level: influence of sample preparation. Nuclear Instruments and Methods in Physics Research B 266, 4921–4926.

Mifsud, C., Fujioka, T., Fink, D., 2013. Extraction and purification of quartz in rock using hot phosphoric acid for in situ cosmogenic exposure dating. Nucl. Instrum. Nuclear Instruments and Methods in Physics Research B 268, 1179-1184.

Schimmelpfennig, I., Benedetti, L., Finkel, R., Pik, R., Blard, P.H., Bourlès, D., Burnard, P., Williams, A., 2009. Sources of in-situ ³⁶Cl in basaltic rocks. Implications for calibration of production rates. Quaternary Geochronology. 4, 441-461.

Nishiizumi, K., Winterer, E.L., Kohl, C.P., Klein, J., Middleton, R., Lal, D., Arnold, J.R., 1989. Cosmic ray production rates of ¹⁰Be and ²⁶Al in quartz from glacially polished rocks. Journal of Geophysical Research. 94, 9.

Putnam, A.E., Schaefer, J.M., Barrell, D.J.A., Vandergoes, M., Denton, G.H., Kaplan, M.R., Finkel, R.C., Schwartz, R., Goehring, B.M., Kelley, S.E., 2010. In situ cosmogenic ¹⁰Be production-rate calibration from the Southern Alps, New Zealand. Quaternary Geochronology, 5, 392-409.

Sharma P., Kubik P. W., Fehn U., Gove H. E., Nishiizumi K., Elmore D., 1990, Development of ³⁶C1 standards for AMS. Nuclear Instruments and Methods in Physics Research B 52, 410-415.

Schimmelpfennig I., L. Benedetti, V. Garreta, R. Pik, P-Henri Blard, P. Burnard, D. Bourlès, R. Finkel, K. Ammon, T. Dunai, 2011. Calibration of cosmogenic ³⁶Cl production rates from Ca and K spallation in lava flows from Mt. Etna (38°N, Italy) and Payun Matru (36°S, Argentina), Geochimica et Cosmochimica Acta, 75, 10,2611-2632.


Stone, J.O., 2000. Air pressure and cosmogenic isotope production. Journal of Geophysical Research, 105, 23753-23759.


Verstraete, J., 2005. Approche multi-technique et multi-échelle d'étude des propriétés structurales des matériaux hétérogènes : application à un granulat siliceux naturel. Ph. D. Thesis, Mulhouse Univ.

Zerathe S., Braucher R., Lebourg T., Bourlès D., Manetti M., Léanni L. 2013. Dating chert (diagenetic silica) using in-situ produced 10Be: Possible complications revealed through a comparison with ³⁶Cl applied to coexisting limestone. Quaternary Geochronology, Volume 17, 81-93.

Zerathe S., Blard P-H., Braucher R., Bourlès D., Audin L., Carcaillet J., Delgado F., Benavente C., 2017, Toward the feldspar alternative for cosmogenic ¹⁰Be applications. Quaternary Geochronology, 41, 83-96.

- **Table 1:** Sample identification (as named when sampled and simplified short identification).
- **Table 2:** Presentation of the different cleaning steps. The names (Bulk, HF, KOH and KOH-bis) refer to cleaning sequences (see text); "Yes" in a cell means that the cleaning step indicated in the first column has been performed.
- **Table 3:** Tables 3: Sample analytical data and cosmogenic nuclide concentrations. (1-KOH and 1 KOH-*bis* not prepared because of lack of sample)
- **Table 4 :** Leaching efficiency; This "efficiency" represents, for a given cleaning step (HF, KOH) the mass dissolved divided by the volume of solution used; (In case of HF, the volume is the total volume used for the 3 sequential leachings)
- **Table 5:** Denudation rates and minimum exposure ages for the studied samples.
- **Figure 1:** Photography of Sample 1 (13-IL-ZEB-01). Limestone (light brown) has been used to determine the ³⁶Cl concentrations and the chert fraction (dark brown) for the determination of ¹⁰Be and ²⁶Al concentrations.
- **Figure 2:** Evolution of ¹⁰Be concentrations as a function of the cleaning process steps.
- **Figure 3:** Evolution of ²⁷Al concentration as a function of the cleaning process steps.

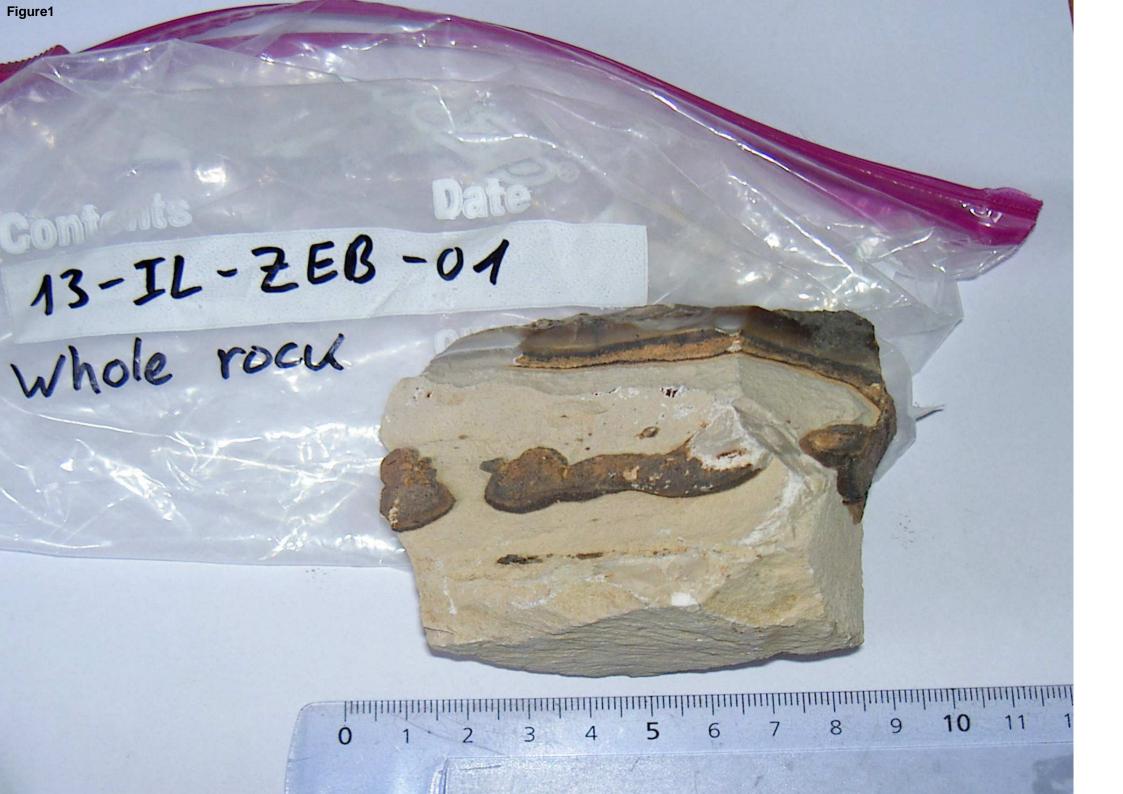

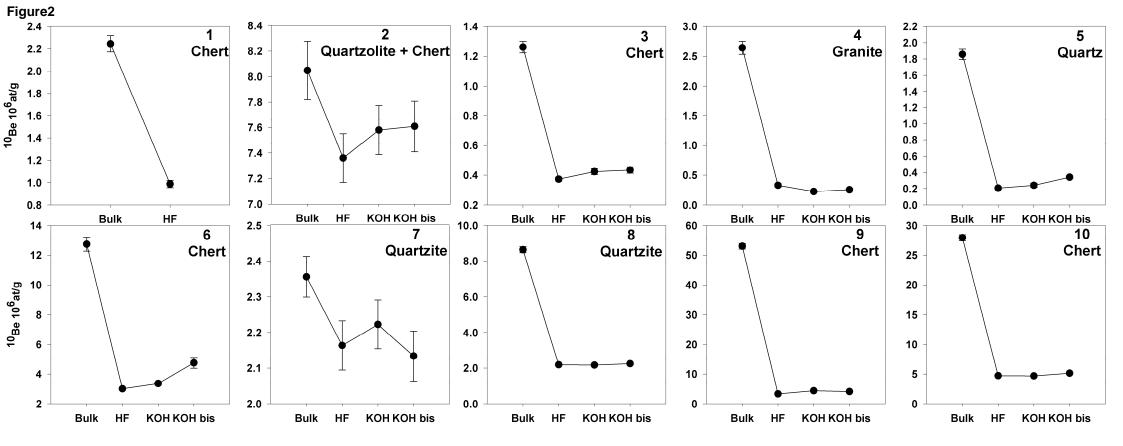

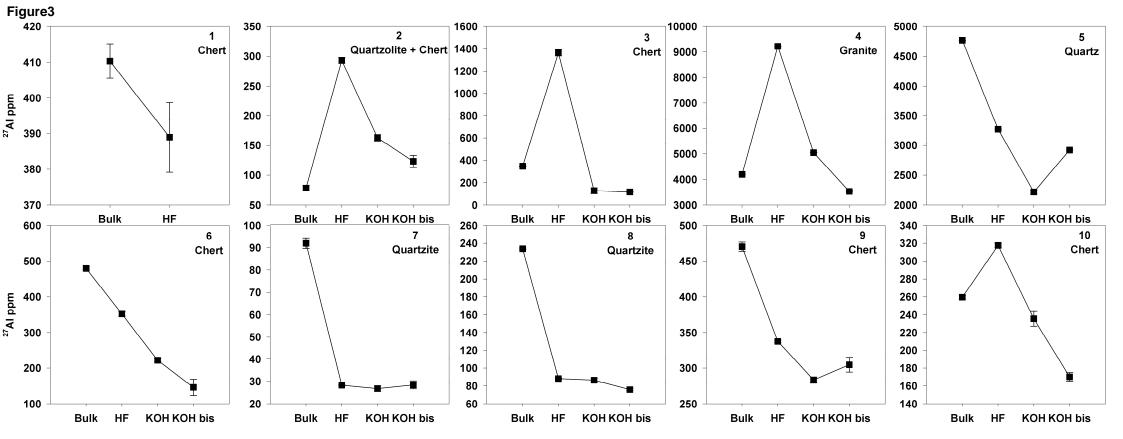


Table 1: Sample identification (as named when sampled and simplified short identification).

Sample ID	Short ID	Latitude	Longitude	Alt.(m)	Туре
13-IL-ZEB-01	1	31.020	35.285	83	"Zebra surface" Limestone clast with chert inside; chert band from ~2 cm depth; coarse fraction
13-IL-ZEB-02	2	31.020	35.285	83	"Zebra surface" Quartzolite sample; at surface and homogeneous; coarse fraction
13-IL-YEH-09	3	29.561	34.892	357	"Wadi Yehoshafhat" fractured chert amalgam (50-60 clasts)
13-IL-YEH-10	4	29.561	34.892	359	"Wadi Yehoshafhat" fractured granite amalgam (~80 clasts)
13-IL-YEH-11	5	29.561	34.892	359	"Wadi Yehoshafhat" quartz vein in Precambrian granite bench
13-IL-ARAD-14	6	31.227	35.210	637	"Mount Kina" near Arad; ~40 clast chert amalgam from gently sloping pads near hill crest
13-IL-ARAD-15	7	31.227	35.210	637	"Mount Kina" near Arad; ~40 clast quartzalite amalgam from gently sloping pads near hill crest
13-IL-HEM-17	8	31.132	35.170	434	"Hemar Formation" desert pavement atop mesa; quartzalite pebble amalgam (40-50)
13-IL-HEM-18	9	31.132	35.170	434	"Hemar Formation" desert pavement atop mesa; Imported Chert* pebble amalgam (40-50)
13-IL-HEM-19	10	31.132	35.170	434	"Hemar Formation" desert pavement atop mesa; senonian chert** pebble amalgam (40-50)

^{*} Imported chert: Eocene Chert transported from east of the Dead Sea rift to lts current location by Miocene drainage systems.

^{**} Senonian chert : chert clasts derived from local bedrock outcrops

Table 2: Presentation of the different cleaning steps. The names (Bulk, HF, KOH and KOH-bis) refer to cleaning sequences (see text); "Yes" in a cell means that the cleaning step indicated in the first column has been performed.

Cleaning steps	Sample				
Crushing / Sieving (0.25-1mm)	Yes				
	Crushed sample divided in 4 sub samples				
	Sub-Sample - BULK	Sub-Sample - HF	Sub-Sample - KOH	Sub-Sample - KOH-bis	
Aqua regia		Yes	Yes	Yes	
H ₂ SiF ₆ -HCL		Yes	Yes	Yes	
Meteoritic ¹⁰ Be removal					
(3sequential dissolutions in		Yes	Yes	Yes	
48%HF					
3N KOH / 80°C- 2 days			Yes	Yes	
3N KOH / 80°C- 2 days				Yes	
Total dissolution (10Ml HNO ₃ ;	Yes	Yes	Vac	Vas	
3Ml HClO ₄	1 es	res	Yes	Yes	
²⁷ Al determination	Yes	Yes	Yes	Yes	
AMS Measurements	Yes	Yes	Yes	Yes	

Tables 3: Sample analytical data and cosmogenic nuclide concentrations. (1-KOH and 1 KOH-*bis* not prepared because of lack of sample)

Commla	Cub samulas	Mass	¹⁰ Be	²⁷ Al	²⁶ Al
Sample	Sub samples	g	Mat/g	ppm	Mat/g
12 H. ZED 01	1-Bulk	7.02	2.24 ± 0.07	410.3 ± 4.8	2.52 ± 0.24
13-IL-ZEB-01	1-HF	3.03	0.99 ± 0.03	388.9 ± 9.8	n.a.
	2-Bulk	18.31	8.05 ± 0.23	78.4 ± 4.8	2.54 ± 0.25
12 H. ZED 02	2-HF	4.08	7.36 ± 0.19	293.1 ± 4.5	7.69 ± 2.06
13-IL-ZEB-02	2-KOH	3.50	7.58 ± 0.19	162.6 ± 5.6	n.a.
	2-KOH-bis	3.00	7.61 ± 0.2	123.1 ± 10.1	9.17 ± 0.8
	3-Bulk	12.92	1.26 ± 0.04	346.6 ± 1.9	1.69 ± 0.1
12 H VEH 00	3-HF	5.70	0.37 ± 0.01	1364.1 ± 28.8	n.a.
13-IL-YEH-09	3-КОН	3.36	0.42 ± 0.02	127.9 ± 24.6	n.a.
	3-KOH-bis	3.38	0.43 ± 0.02	116.7 ± 2	n.a.
	4-Bulk	17.73	2.64 ± 0.11	4196 ± 1.2	0.11 ± 0.13
12 11 37511 10	4-HF	7.73	0.33 ± 0.03	9225 ± 1.9	5.29 ± 6.56
13-IL-YEH-10	4-KOH	7.05	0.23 ± 0.01	5048.9 ± 11	1.14 ± 1.19
	4-KOH-bis	6.39	0.26 ± 0.02	3533.2 ± 29.6	n.a. (²⁶ Al/ ²⁷ Al < blank)
	5-Bulk	17.33	1.86 ± 0.06	4768.7 ± 2.2	0.09 ± 0.11
10 11 1/011 11	5-HF	11.55	0.21 ± 0.02	3269.4 ± 2.2	1.54 ± 0.72
13-IL-YEH-11	5-KOH	10.51	0.24 ± 0.03	2218.5 ± 25.7	0.41 ± 0.16
	5-KOH-bis	11.22	0.34 ± 0.02	2920.4 ± 0.9	0.38 ± 0.23
	6-Bulk	16.59	12.74 ± 0.46	479.3 ± 3.8	9.05 ± 0.81
13-IL-ARAD-14	6-HF	9.65	3.01 ± 0.09	352.5 ± 6.6	12.13 ± 0.96
	6-KOH	4.95	3.36 ± 0.11	221.6 ± 4.7	10.8 ± 0.65
	6-KOH-bis	2.86	4.75 ± 0.36	145.9 ± 23	n.a.
	7-Bulk	16.46	2.36 ± 0.06	92 ± 2.4	n.a.
12 11 ADAD 15	7-HF	11.29	2.16 ± 0.07	28.3 ± 0.4	n.a.
13-IL-ARAD-15	7-KOH	11.33	2.22 ± 0.07	26.8 ± 1.3	n.a.
	7-KOH-bis	10.59	2.13 ± 0.07	28.4 ± 1.8	0.3 ± 0.1
	8-Bulk	17.03	8.64 ± 0.17	233.7 ± 1	9.59 ± 0.61
12 H HEM 17	8-HF	11.23	2.19 ± 0.07	88.2 ± 0.8	n.a.
13-IL-HEM-17	8-KOH	11.14	2.16 ± 0.07	86.4 ± 2.3	9.63 ± 0.7
	8-KOH-bis	10.44	2.24 ± 0.07	75.9 ± 1	8.79 ± 1.05
	9-Bulk	14.59	52.99 ± 0.95	470.1 ± 6.3	6.28 ± 0.58
13-IL-HEM-18	9-HF	7.44	3.33 ± 0.11	337.6 ± 2	8.15 ± 0.41
	9-КОН	5.08	4.38 ± 0.15	283.3 ± 4.2	8.42 ± 0.53
	9-KOH-bis	1.90	4.1 ± 0.13	304.6 ± 10.2	8.7 ± 1.91
	10-Bulk	18.50	27.92 ± 0.49	259.6 ± 2.1	6.38 ± 0.45
12 11 11534 10	10-HF	11.67	4.71 ± 0.13	317.4 ± 2.2	11.41 ± 0.51
13-IL-HEM-19	10-KOH	4.86	4.68 ± 0.15	235.6 ± 8.3	9.64 ± 1.03
	10-KOH-bis	3.40	5.13 ± 0.16	170.1 ± 4.8	6.52 ± 1.26

Sample	Mass	³⁶ Cl	³⁵ Cl	Ca
	g	Mat/g	ppm	%
13-IL-ZEB-01	46.54	3.36±0.11	2.49 ± 0.08	37.4
13-IL-ZEB-02	17.59	7.30±0.25	2.49 ± 0.08	41.0

Table 4: Leaching efficiency; This "efficiency" represents, for a given cleaning step (HF, KOH) the total mass dissolved divided by the volume of solution used; (In case of HF, the volume is the sum of the three HF volumes used to perform the three sequential leachings)

Short ID	Sample type	Leaching efficiency		
	1 11	(g/ml)	KOH	KOH L:
1.110	Cl. 1111 1	HF	KOH	KOH-bis
1-HF	Chert within carbonate matrix	0.51	-	-
2-HF		0.65	-	-
2-KOH	Quartzolite/dispersed chert and carbonate	0.59	0.05	-
2-KOH-bis		0.75	0.02	0.001
3-HF		0.52	-	-
3-КОН	Amalgamated pebbles (chert)	0.55	0.08	-
3-KOH-bis		0.55	0.07	0.075
4-HF		0.52	-	-
4-KOH	Amalgamated pebbles (granite)	0.54	0.01	-
4-KOH-bis		0.51	0.04	0.004
5-HF		0.32	-	-
5-KOH	Amalgamated pebbles (quartz vein)	0.32	0.05	-
5-KOH-bis	, , ,	0.29	0.06	0.003
6-HF		0.38	-	-
6-KOH	Amalgamated pebbles (chert)	0.42	0.22	-
6-KOH-bis		0.42	0.17	0.087
7-HF		0.29	-	-
7-КОН	Amalgamated pebbles (quartzite)	0.28	0.01	_
7-KOH-bis		0.28	0.01	0.005
8-HF		0.29	-	-
8-KOH	Amalgamated pebbles (quartzite)	0.28	0.03	-
8-KOH-bis		0.30	0.01	0.004
9-HF		0.46	_	_
9-KOH	Amalgamated pebbles (chert)	0.38	0.17	_
9-KOH-bis		0.39	0.16	0.103
10-HF		0.34	-	-
10-KOH	Amalgamated pebbles (chert)	0.51	0.16	_
10-KOH-bis	i illiaigailiatea peooles (ellett)	0.36	0.26	0.112

Table 5: Denudation rates and minimum exposure ages for the studied samples.

	T	¹⁰ Be		
	Location name	Denudation rates	Exposure ages	
Short ID		m/Ma	ka	
1-Bulk		0.72 ± 0.02	638 ± 69	
1-HF		2.15 ± 0.07	256 ± 25	
2-Bulk	ZED	n.a.	Saturated	
2-HF	ZEB	0	Saturated	
2-KOH		0	Saturated	
2-KOH-bis		0	Saturated	
3-Bulk		2.08 ± 0.06	267 ± 26	
3-HF		8.41 ± 0.3	75 ± 7	
3-КОН		7.3 ± 0.35	86 ± 9	
3- KOH-bis		7.11 ± 0.35	88 ± 9	
4-Bulk		0.79 ± 0.03	606 ± 67	
4-HF	YEH	9.66 ± 0.82	66 ± 8	
4-KOH	1 E11	14.59 ± 0.8	45 ± 5	
4-KOH bis		12.75 ± 1.08	51 ± 6	
5-Bulk		1.28 ± 0.04	406 ± 42	
5-HF		16.01 ± 1.28	41 ± 5	
5-KOH		13.55 ± 1.53	48 ± 7	
5- KOH-bis		9.31 ± 0.5	69 ± 7	
6-Bulk		n.a.	Saturated	
6-HF		0.92 ± 0.03	536 ± 56	
6-KOH		0.79 ± 0.02	610 ± 65	
6- KOH-bis	ARAD	0.46 ± 0.03	927 ± 134	
7-Bulk		1.28 ± 0.03	407 ± 40	
7-HF		1.42 ± 0.05	371 ± 37	
7-КОН		1.38 ± 0.04	382 ± 38	
7- KOH-bis		1.45 ± 0.05	365 ± 37	
8-Bulk		0.04 ± 0.00	3090 ± 646	
8-HF		1.15 ± 0.04	444 ± 45	
8-KOH		1.17 ± 0.04	439 ± 45	
8- KOH-bis		1.11 ± 0.04	457 ± 47	
9-Bulk		n.a.	Saturated	
9-HF	HEM	0.63 ± 0.02	722 ± 79	
9-КОН	1112171	0.4 ± 0.01	1018 ± 122	
9- KOH-bis		0.45 ± 0.01	935 ± 108	
10-Bulk		n.a.	Saturated	
10-HF		0.35 ± 0.01	1119 ± 134	
10-KOH		0.35 ± 0.01	1111 ± 135	
10- KOH-bis		0.29 ± 0.01	1259 ± 159	

³⁶ Cl			
Denudation rates	Exposure ages		
m/Ma	ka		
2.19 ± 0.07	275 ± 9		
0.18 ± 0.01	1065 ± 37		