



**HAL**  
open science

# Flue Gas Desulphurization in Circulating Fluidized Beds

Yiming Deng, Renaud Ansart, Jan Baeyens, Zhang Huili

► **To cite this version:**

Yiming Deng, Renaud Ansart, Jan Baeyens, Zhang Huili. Flue Gas Desulphurization in Circulating Fluidized Beds. *Energies*, 2019, 12 (20), pp.1-19. 10.3390/en12203908 . hal-02339692

**HAL Id: hal-02339692**

**<https://hal.science/hal-02339692>**

Submitted on 30 Oct 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.





## Open Archive Toulouse Archive Ouverte

OATAO is an open access repository that collects the work of Toulouse researchers and makes it freely available over the web where possible

This is an author's version published in: <http://oatao.univ-toulouse.fr/24547>

**Official URL:** <https://doi.org/10.3390/en12203908>

**To cite this version:**

Deng, Yiming  and Ansart, Renaud  and Baeyens, Jan and Huili, Zhang *Flue Gas Desulphurization in Circulating Fluidized Beds*. (2019) *Energies*, 12 (20). 1-19. ISSN 1996-1073

Any correspondence concerning this service should be sent to the repository administrator: [tech-oatao@listes-diff.inp-toulouse.fr](mailto:tech-oatao@listes-diff.inp-toulouse.fr)

Article

# Flue Gas Desulphurization in Circulating Fluidized Beds

Yimin Deng <sup>1</sup>, Renaud Ansart <sup>1</sup>, Jan Baeyens <sup>2</sup> and Huili Zhang <sup>3,\*</sup>

<sup>1</sup> Laboratoire de Génie Chimique, Université de Toulouse, CNRS, INPT, UPS, 31432 Toulouse Cedex 4, France; y\_deng@etud.insa-toulouse.fr (Y.D.); renaud.ansart@toulouse-inp.fr (R.A.)

<sup>2</sup> Beijing Advanced Innovation Centre of Soft Matter and Engineering, Beijing University of Chemical Technology, Beijing 100029, China; Baeyens.J@mail.buct.edu.cn

<sup>3</sup> School of Life Science and Technology, Beijing University of Chemical Technology, Beijing 100029, China; zhhl@mail.buct.edu.cn

\* Correspondence: zhhl@mail.buct.edu.cn; Tel.: +86-135-8196-2967

Received: 4 September 2019; Accepted: 12 October 2019; Published: 15 October 2019

**Abstract:** Sulphur dioxide (SO<sub>2</sub>) is mostly emitted from coal-fueled power plants, from waste incineration, from sulphuric acid manufacturing, from clay brick plants and from treating nonferrous metals. The emission of SO<sub>2</sub> needs to be abated. Both wet scrubbing (absorption) and dry or semi-dry (reaction) systems are used. In the dry process, both bubbling and circulating fluidized beds (BFB, CFB) can be used as contactor. Experimental results demonstrate a SO<sub>2</sub>-removal efficiency in excess of 94% in a CFB application. A general model of the heterogeneous reaction is proposed, combining the external diffusion of SO<sub>2</sub> across the gas film, the internal diffusion of SO<sub>2</sub> in the porous particles and the reaction as such (irreversible, 1<sup>st</sup> order). For the reaction of SO<sub>2</sub> with a fine particulate reactant, the reaction rate constant and the relevant contact time are the dominant parameters. Application of the model equations reveals that the circulating fluidized bed is the most appropriate technique, where the high solid to gas ratio guarantees a high conversion in a short reaction time. For the CFB operation, the required gas contact time in a CFB at given superficial gas velocities and solids circulation rates will determine the SO<sub>2</sub> removal rate.

**Keywords:** SO<sub>2</sub> abatement; dry or semi-dry reaction; calcium oxide; model; efficiency

---

## 1. Introduction

### 1.1. An Overview of the Sulphur Problem

SO<sub>2</sub> is mostly related to energy generation from fossil fuels. The International Energy Agency (IEA) reported that fossil fuels account for over 80% of the world energy supply [1]. In China, about 70% of the energy is provided by coal and fuel oil. Although the combustion of fossil fuels is the dominant contribution for anthropogenic CO<sub>2</sub> emission [2], the combustion-derived emissions of NO<sub>x</sub> and SO<sub>2</sub> are also important towards atmospheric pollution. The ultimate analysis of some fuels determines the composition and the extent of the possible SO<sub>2</sub> problem. Table 1 illustrates some example compositions. Even biomass or waste activated sewage sludge contain non-negligible S-contents.

The NO<sub>x</sub> problem related to combustion has been extensively dealt with by Mahmoudi et al. [3]. The emission and abatement of SO<sub>2</sub> merits a further attention, especially in the field of in-situ removal in the combustor. Although sulphur dioxide (SO<sub>2</sub>) is mostly emitted from coal-fueled power plants,

from waste incineration and fuel combustion, it also originates from sulphuric acid manufacturing, from clay brick plants and from treating nonferrous metals.

Its presence in the atmosphere is one of the major environmental concerns, since it contributes to acid rain formation [4,5], has various other environmental impacts such as localised cooling (by reflecting sunlight back into space) [6] and is hazardous to human health resulting in many types of respiratory illnesses such as asthma and bronchitis [7,8]. The emission of SO<sub>2</sub> by industrial activities also needs to be limited.

Two types of SO<sub>2</sub>-loaded off gases need to be distinguished. Power plant flue gases generally contain low concentrations of SO<sub>2</sub> (less than 0.5% by volume), but are emitted at high volumetric flow rates: A coal-fired power plant burning 1% sulphur coal (by weight) produces 20 kg of SO<sub>2</sub> for every ton of coal burned, and this at over 10,000 Nm<sup>3</sup>/t of exhaust gas [6]. Similarly, a clay brick kiln will emit about 6 g/Nm<sup>3</sup> of SO<sub>2</sub> at high flue gas flow rates (~ 100,000 Nm<sup>3</sup>/h for a medium size brick kiln). These “dilute” SO<sub>2</sub> gases will mainly rely on a “throw-away” reactant for the abatement, as further described in Section 1.2 below.

Highly loaded off gases are produced by e.g., smelter operations, containing SO<sub>2</sub> at a concentration of about 10% by volume. These concentrated gases will be mostly water-scrubbed in a counter-current absorption tower, and the resulting liquid will be upgraded to sulphuric acid (H<sub>2</sub>SO<sub>4</sub>). The upgrading of sulphuric acid to commercial grade (>95%) is necessary for making this method economically feasible [9–12].

**Table 1.** Characteristics of combustion feedstock.

Parameters	Used in the present research			Petroleum fuels oil			
	Coal (Columbia)	Wood bark	Sludge	No.1 fuel oil (41.5° A.P.I.)	No.2 fuel oil (33° A.P.I.)	Low sulfur (12.6° A.P.I.)	High sulfur (15.5° A.P.I.)
Ash content (wt.% dry)	7.7–9.2	0.2–0.3	7.0–22.9	<0.01	<0.01	0.04	0.02
C (wt.%)	60.1–62.1	17.8–22.3	10.3–15.7	86.4	87.3	87.26	84.67
H (wt.%)	4.22–4.25	1.11–2.72	1.39–2.09	13.6	12.6	10.49	11.02
S (wt.%)	0.58–0.59	0.02–0.05	0.05–0.06	0.09	0.22	0.84	3.97
N (wt.%)	1.26–1.35	0.04–0.17	0.05–0.09	0.003	0.006	0.28	0.18
O (wt.%)	8.92–8.97	16.42–18.82	12.71–15.13	0.01	0.04	0.64	0.38

### 1.2. Review of De-SO<sub>2</sub> Techniques

There are two approaches to SO<sub>2</sub> emission control, i.e., the removal of sulphur from the fuel before it is burned, by using low-sulphur fuels [13], or the end-of-pipe removal of SO<sub>2</sub> from the exhaust gases before emission into the atmosphere. In the flue gas treatment, both wet (scrubbing) and dry systems (sorbent injection) are used. The present research only deals with SO<sub>2</sub> removal from flue gases, since the complete removal of S from the fuel prior to combustion is at present neither technically nor economically viable [13]. Some relevant references are given in Table 2. A further description is given below.

**Table 2.** Relevant literature findings for end-of-pipe deSO<sub>x</sub>.

Author	Methods	Characteristics
[14,15]	Semi-dry flue gas desulphurization (FGD)	Contact with slurry of Ca(OH) <sub>2</sub> Production of CaSO <sub>4</sub> (in some cases reusable in building industry)
[11,16]	Scrubbing (H <sub>2</sub> O)	Scrubbing with water in countercurrent adsorption tower Formation of H <sub>2</sub> SO <sub>4</sub>

		Concentration to technical grade H <sub>2</sub> SO <sub>4</sub> needed
[17–19]	Thiosorb lime wet scrubbing	Reagent of 3–6 wt% MgO acts as catalyst for SO <sub>2</sub> removal by lime Reliable and cost-effective process for high-sulphur applications
[20–23]	Regenerative alumina process	Simultaneous removal of NO <sub>x</sub> and SO <sub>2</sub> by of alumina pellets with sodium aluminates Spent sorbent is regenerated No longer used in practical applications
[24,25]	Dry limestone	Most practical method, using dry limestone or lime Application in fluidized beds
[26–28]	Electron beam flue gas treatment (EBFT)	Simultaneous dry removing of SO <sub>2</sub> and NO <sub>x</sub> Flue gas irradiation with fast electrons initiating chemical reactions High capital and operating costs
[29]	Oxy-fuel combustion	The substitution of N <sub>2</sub> by O <sub>2</sub> in oxy-fuel combustion does not affect the release of sulphur from the coal during combustion. Increased retention will reduce the SO <sub>2</sub> emission rate




Various “throw-away” techniques for desulphurisation have been developed in semi-dry or dry flue gas desulphurisation (FGD). Hydrated lime (Ca(OH)<sub>2</sub>) and/or sodium bicarbonate (NaHCO<sub>3</sub>) are commonly used as SO<sub>2</sub> reactants, with solid reaction product (CaSO<sub>4</sub>/ Na<sub>2</sub>SO<sub>4</sub>) removed with the gas exhaust of the contactor and partly recycled (till exhausting the active reactant) or finally recovered in a collection device (fabric filter or electrostatic precipitator). A portion of solids is recycled, mixed with fresh reactant and fed (semi-) dry to the contactor. Dry reaction products are obtained. In the dry process, both bubbling and circulating fluidized beds (BFB, CFB) can be used as contactor [30–33]. In this process no waste water is produced and dry calcium sulphate is the product of reaction [14].

In a wet scrubbing process [16], SO<sub>2</sub> is removed by scrubbing with water or alkali solutions in a counter-current absorption tower, and sulphuric acid is formed. The concentration of sulphuric acid to commercial grade (>95%) is necessary for making this method economically feasible.

The Thiosorb process is an example of a mixed deSO<sub>x</sub> process and requires the use of lime reagent with 3–6 wt% magnesium oxide (MgO) for SO<sub>2</sub> capture in a wet flue gas desulphurization system. Absorbent slurry is sprayed into the gas containing SO<sub>2</sub>. The pure lime scrubbing process has a number of deficiencies and desulphurization is exceptionally low (removal efficiency of 50% to 85%). A large volume of slurry has to be brought into contact with flue gas for abatement of SO<sub>2</sub> and it needs a significant amount of energy for pumping. By addition of MgO, which acts as catalyst and reactant, lime scrubbing can achieve SO<sub>2</sub> removal of 99% with high sulphur coal. This system is recognized as a reliable process for high-sulphur applications and is cost-efficient [17,18].

A system based on sorption on alkalis alumina simultaneously removes SO<sub>2</sub> and NO<sub>x</sub> uses a fluidized bed of alumina pellets with sodium aluminate. Flue gas in the range of 120–150 °C passes through a fluidized bed which contains the active sorbent to remove SO<sub>2</sub> and NO<sub>x</sub> and form sodium sulphate, sulphite and nitrate. Spent sorbent, recovered separated from the absorption reactor, is regenerated in a number of steps: initially, the sorbent is heated with hot air and the stripped gas is subsequently sent to a selective catalyst reduction to transform NO<sub>x</sub> to N<sub>2</sub>, and finally to a multistage regenerator to react with steam and natural gas to obtain hydrogen sulphide (H<sub>2</sub>S) and SO<sub>2</sub>. This technology was developed by the U.S. Bureau of Mines, but it has subsequently been abandoned [20].

One of the most practical methods to reduce SO<sub>2</sub> emissions is using dry lime [CaO, Ca(OH)<sub>2</sub>] or limestone (CaCO<sub>3</sub>). This method will be further investigated in this paper. Limestone and/or lime are used to enable SO<sub>2</sub> gas to chemically react with CaCO<sub>3</sub> or CaO forming calcium sulphate (CaSO<sub>4</sub>) and calcium sulphite (CaSO<sub>3</sub>) as can be seen in the following reactions.



A continuous circulating fluidized bed (CFB) is commonly chosen as the most appropriate processing unit due to the high velocity of air being used, thus reducing the plant size and providing very good mixing and contact for the desired removal. The flue gas is forced into the riser via a fan and a distributor situated at the bottom of the riser. After the distributor, the flue gas will be in contact with limestone or lime being both fed from the L-valve, and injected as fresh reactant. The excellent mixing achieved in the CFB promotes mass transfer between the limestone and the flue gas. As the air/solid mixture leaves the riser, it enters the cyclone. The cyclone will collect coarser solids and recycle them to the riser. Over time, particles erode and become smaller, they become saturated with chemisorbed SO<sub>2</sub> and need to be removed from the system. Very small solids together with the flue gas will leave the system from the top of the cyclone, at approximately the same temperature as the inlet flue gas, and are directed to a polishing filtration.

CFB technology was commercially introduced by Lurgi in the early eighties for the abatement of acid gases, especially for flue gas desulphurization using Ca<sup>2+</sup> compounds. Numerous plants based on this CFB desulphurization technology are in commercial operation [34–37]. Leuschke et al. [38], have shown that it is possible to achieve desulphurization efficiencies in excess of 99%, reducing residual SO<sub>2</sub> emissions to about 50 mg/Nm<sup>3</sup>. The model developed in the present paper will theoretically demonstrate that these high efficiencies can indeed be achieved.

### 1.3. Objectives and Novelties of the Present Research

Despite numerous previous researches, as highlighted in 1.2 above, the SO<sub>2</sub> capture by alkali sorbents is not fully understood towards (1) the reaction rate; (2) the application in a large-scale combustor.

The present study offers answers to these questions. The de-SO<sub>2</sub> efficiency is analyzed in a large-scale CFBC, with cheap Ca(OH)<sub>2</sub> as alkali sorbent. It moreover develops a theoretical model approach, applicable to any alkali sorbent of different particle size, by developing model equations that combine gas film diffusion, reaction rate and gas diffusion in the pore of the sorbent.

Application of the overall model to sorbents of small particle size will determine that the reaction of SO<sub>2</sub> with CaO is the dominant factors in the reaction rate. The conversion can be predicted when the SO<sub>2</sub> to sorbent ratio and the gas-solid contact time are determined.


The continuous circulating fluidized bed (CFB) is demonstrated to be the most appropriate processing unit due to both the high gas velocity (U) and solid circulation flux (G) being used, thus reducing the plant size, and providing very good mixing and contact between SO<sub>2</sub> and reactant for the desired removal [39–41]. A cyclone will collect solids and recycle them to the riser of CFB. When the size of solids becomes smaller due to attrition, the particles have a higher surface area per unit volume to react with the SO<sub>2</sub>. Usually very fine solids are SO<sub>2</sub>-saturated and can no longer be separated by the cyclone. These very fine particle will exit the system together with the fly ash and flue gas, and need subsequent cooling before a fabric filter or electrostatic precipitator [42,43].

## 2. Experimental Set-Up and Results

The specific reactions of SO<sub>2</sub> with Ca<sup>2+</sup> in the circulating fluidized bed combustor of biomass were examined in a large scale CFB combustor of UPM-Kymmene (UK) Ltd (Caledonian paper mill, Irvine, Ayrshire, Scotland, UK) while burning coal, wood bark and sewage treatment sludge. The layout of the plant and its operational conditions are illustrated in Figure 1. Relevant dimensions are given in Table 3. The feedstock of the CFB was given in Table 1. Due to the high percentage of coal

used (2.1 kg/s for a total of 2.5 kg/s), the SO<sub>2</sub> formed is between 1.25 and 1.4 g/m<sup>3</sup> as measured in the stack exhaust. Measurements were made continuously while adding Ca(OH)<sub>2</sub> to the feed of the CFB. Since Ca(OH)<sub>2</sub> decomposes to CaO and H<sub>2</sub>O at ~ 580 °C, the reaction of SO<sub>2</sub> at the operating temperature of ≥800 °C should consider CaO as reactant. Due to the fact that the CFB combustor is essential in the paper manufacturing process to supply process steam, variations in the CFB operation were limited (towards operating temperature (T), superficial gas velocity (U), and solids circulation flux (G)).

Experimental results are expressed as percentage SO<sub>2</sub>-removed in function of the operating temperature, with the operating superficial gas velocity (U) and solid circulation flux (G) as additional parameters. Hydrated lime [Ca(OH)<sub>2</sub>] of particle size <<100 μm was added within the fuel feed, at such a mass flow rate that the resulting CaO inventory in the CFB was between 1 and 2 wt%. Due to particle attrition in the CFB, reacted lime (as CaSO<sub>4</sub>) was removed with the fly-ash in the electrostatic precipitator. Due to particle attrition in the CFB, reacted lime (as CaSO<sub>4</sub>) was removed with the fly ash in the electrostatic precipitator.

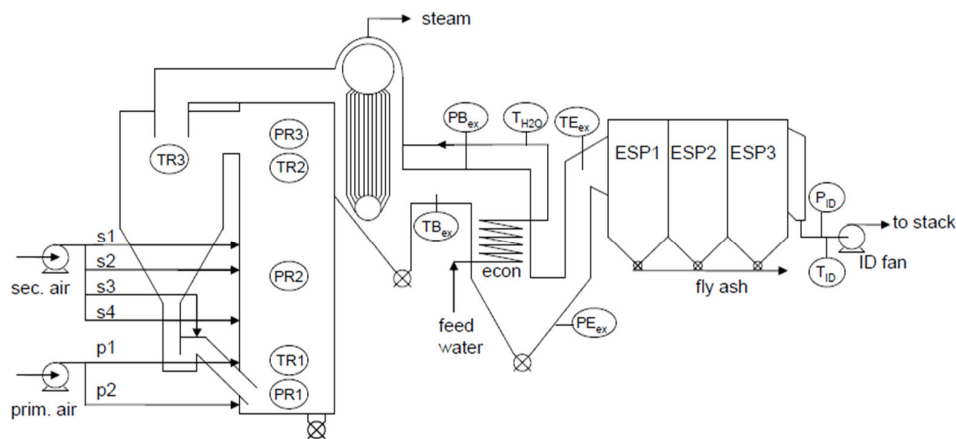


Flow rate (m <sup>3</sup> /s)	Pressure (mbar)	Temperature (°C)	ESP1: 46KV, 446 mA
S1	2.17	PR1 189.75	TR1 822–831
S2	0.76	PR2 33.37	TR2 816–829
S3	0.76	PR3 1.01	TR3 770–778
S4	1.55	PB <sub>ex</sub> -10.45	TB <sub>ex</sub> 392–398
P1	3.11	PE <sub>ex</sub> -24.82	TE <sub>ex</sub> 152–161
P2	11.31	P <sub>ID</sub> -27.64	T <sub>ID</sub> 146–152
ID fan	17.64		T <sub>H2O</sub> 208

**Figure 1.** Flow-sheet and operating conditions of the 58 MW<sub>th</sub> circulating fluidized bed (CFB)-combustor at UPM-Kymmene (UK) Ltd., Caledonian paper mill, Irvine, Ayrshire, Scotland, UK [3] (Reprinted from [3], with permission from Elsevier, 2019.)

**Table 3.** Relevant dimensions of the CFB.

Riser				Cyclone			
Square	Total length	Length above L-valve	Diameter cylinder	Length cylinder	Length conical part	Solids apex	Gas outlet
3780 mm	18,450 mm	14,000 mm	4560 mm	5460 mm	5000 mm	1310 mm	1860 mm

Ca(OH)<sub>2</sub> consists of soft hexagonal crystals. Its particle size is illustrated in Figure 2. The figure also includes the laser diffractometry size analysis of the fines collected (CaSO<sub>4</sub> and flyash) collected. Since both flyash and CaSO<sub>4</sub> cannot be separated from the discharge of the electrostatic precipitators, both are jointly analyzed.

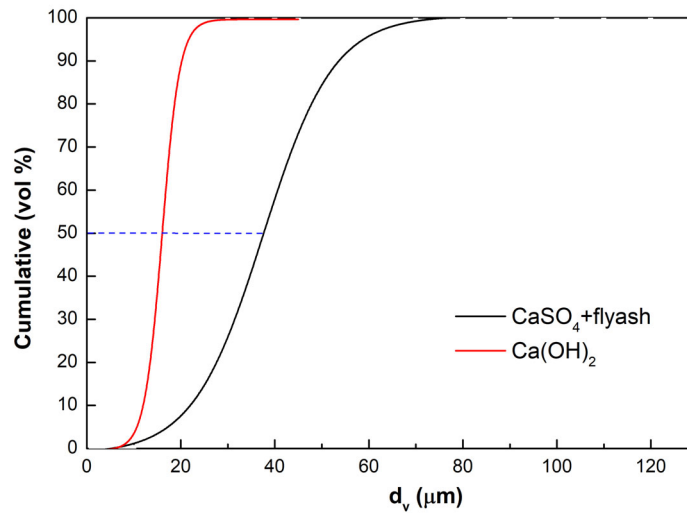


**Figure 2.** Particle size analysis (Malvern) of the  $\text{Ca}(\text{OH})_2$  sorbent used, and of the flyash- $\text{CaSO}_4$  fines collected.

The BET of the  $\text{Ca}(\text{OH})_2$  used was  $40.6 \text{ m}^2/\text{g}$ , against only  $3.4$  to  $4.9 \text{ m}^2/\text{g}$  for the flyash- $\text{CaSO}_4$  discharge. These Malvern results clearly indicate that  $\text{Ca}(\text{OH})_2$  is a brittle sorbent, reduced to smaller particle sizes by reaction, thermal decrepitation and attrition. BET results also tentatively demonstrate that the formation of  $\text{CaSO}_4$  reduces the porosity of the sorbent. This is expected, since the molar volume of  $\text{CaSO}_4$  is  $74.69 \text{ cm}^3/\text{mol}$ , against  $31.66 \text{ cm}^3/\text{mol}$  for  $\text{Ca}(\text{OH})_2$ :  $\text{CaSO}_4$  with a higher molar volume tends to block the  $\text{Ca}(\text{OH})_2$  pores upon reaction.

Additional measurements for  $\text{Ca}(\text{OH})_2$  include the pore size distribution, and field emission scanning electron microscopy (FESEM). Nitrogen adsorption-desorption isotherms were measured using a ASiQwin, ver.5.2, Quantachrome Instruments, as shown in Figure 3 and Table 4. The surface morphology of the adsorbent was determined by JEOL JSM-7800F field emission scanning electron microscope (FESEM), as illustrated in Figure 4.

**Table 4.** BET results of  $\text{Ca}(\text{OH})_2$  nanoparticles.

Component	Pore volume ( $\text{cm}^3/\text{g}$ )	BET surface area ( $\text{m}^2/\text{g}$ )	Type of porosity
$\text{Ca}(\text{OH})_2$	0.20	40.6	Mesoporous 5–12 nm

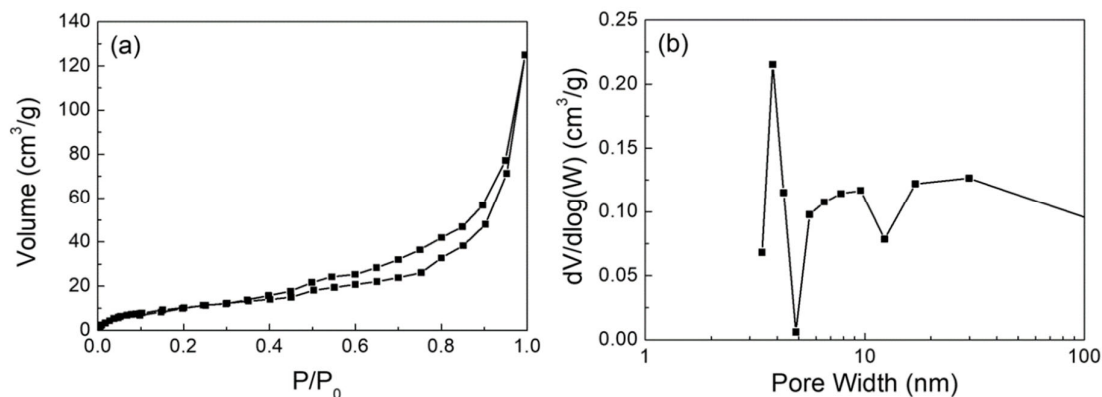

**Figure 3.** (a) Adsorption and desorption curve; (b) Pore size distribution of  $\text{Ca}(\text{OH})_2$ .



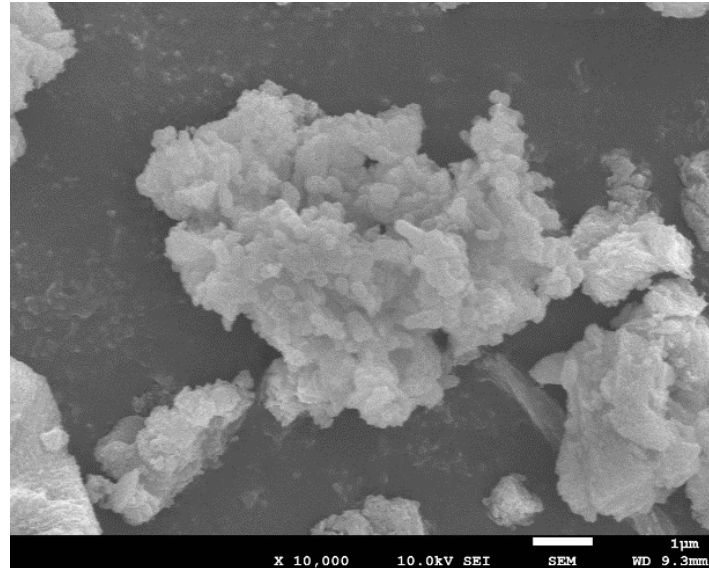


Figure 4. SEM imaging of  $\text{Ca}(\text{OH})_2$  particles.

The pores of the  $\text{Ca}(\text{OH})_2$  particles are all mesopores. The pore size of  $\text{Ca}(\text{OH})_2$  is anyway larger than  $\text{CaSO}_4$ . Similar measurements could not be made for the reaction product,  $\text{CaSO}_4$ , since it was collected together with the flyash fines. SEM images reveal the porous and irregular structure of the  $\text{Ca}(\text{OH})_2$  particles.

The  $\text{SO}_2$  abatement experiments reveal  $\text{SO}_2$  removal efficiencies between 95% and 99.5%, as a function of operating superficial air velocity, solid circulation flux and temperature (Figure 5).

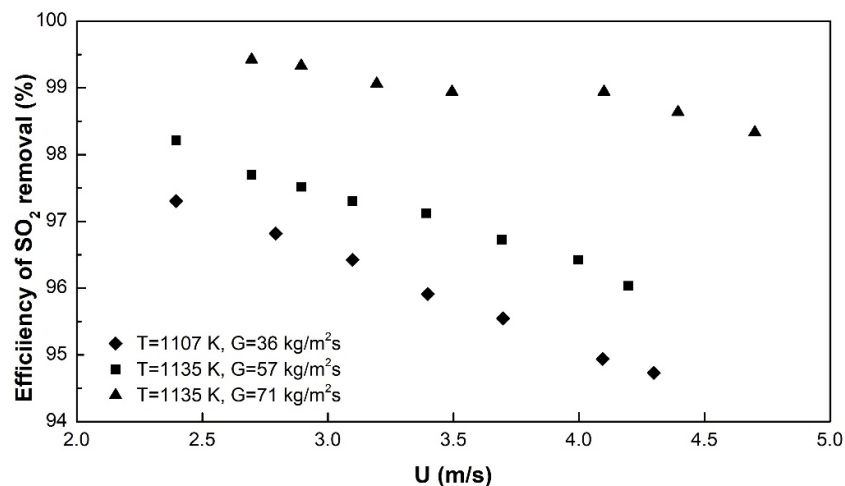


Figure 5. Experimental data under different conditions, at  $d_p = 40 \mu\text{m}$ .

The results will be further compared with model predictions in Section 5. An increasing  $G$  increases the efficiency of  $\text{SO}_2$  removal, irrespective of  $U$ . Increasing values of  $U$  at a given  $G$  reduce the removal efficiency. Both effects are in accordance with the hydrodynamic expectations: An increasing  $U$  will reduce the  $\text{SO}_2$ - $\text{CaO}$  contact (residence) time, thus reducing the reaction potential; an increasing  $G$  on the contrary will increase the amount of  $\text{CaO}$  present in the riser, thus enhancing the reaction by the increasing  $\text{CaO}/\text{SO}_2$ -ratio [44]. These effects will also be further discussed when model equations are applied.


### 3. Development of a General Gas-Solid Model for $\text{SO}_2$ Capture

### 3.1. Model Equations

The reaction of the solid reactant with SO<sub>2</sub> follows a first order kinetics in SO<sub>2</sub>, provided O<sub>2</sub> is present in high concentrations [45,46]. This is always the case in combustion flue gases in view of the legal obligation to emit them into the atmosphere at minimum 6 vol % O<sub>2</sub>.

As shown in Figure 6, three combined factors are important in the SO<sub>2</sub> /particle reaction:

1. The external diffusion of SO<sub>2</sub> across the gas film, determined by the Sherwood number, and a function of the turbulence of the system and therefore of the type of reactor;
2. The internal diffusion of SO<sub>2</sub> in the porous particles, expected to play a role in particles of large diameter, only;
3. The reaction as such (1st order), function of the reaction rate constant and the contact time.

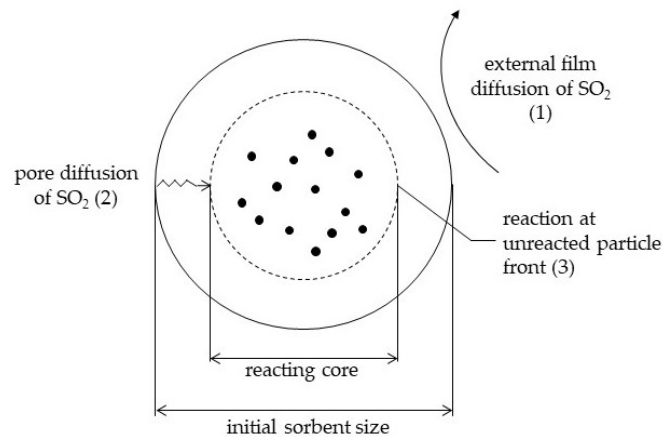

**Figure 6.** Graphical illustration of resistances in the overall reaction mechanism.

These 3 factors are combined in general model equations, although the gas film diffusion is expected to only control the overall reaction rate in the early stages of conversion when no product layer is present: A product layer will introduce a pore-diffusion resistance. Since CFB attrition might however remove the product layer, gas film diffusion was included in the calculations.

To develop a model that spans a wide range of particles sizes of the CaO reactant, a shrinking core model is used, which assumes a sharp boundary between the un-reacted core and the formed product layer [47]. CaO particles, are assumed spherical and of uniform size. The overall mass balance is expressed in terms of the SO<sub>2</sub> and CaO conversion by:

$$C = C_g/C_{g0} = 1 - M_R X \quad (1)$$

$C_{g0}$  and  $C_g$ , Initial SO<sub>2</sub> concentration, and SO<sub>2</sub>-concentration at any time (mol/m<sup>3</sup>)

$M_R$ , Molar ratio of Ca<sup>2+</sup>-reactant/SO<sub>2</sub> (mol/mol)

$X$ , Fractional conversion of Ca<sup>2+</sup>-reactant (-)

The relationship between the conversion  $X$ , and the radius of the shrinking core,  $r_c$ , as a function of its initial radius,  $R_0$ , is given by:

$$1 - X = (r_c/R_0)^3 \quad (2)$$

The reaction rate can be expressed in terms of the determining factors where gas film mass transfer ( $k_g$ ), pore diffusion ( $D_e$ ) and reaction rate constant ( $k_c$ ) are combined [47,48].

$$-\frac{\rho_P}{M_s} \frac{dr_c}{dt} = \frac{C_g}{\frac{r_c^2}{R_0^2 k_g} + \frac{(R_0 - r_c)r_c}{R_0 D_e} + \frac{1}{k_c}} \quad (3)$$

$r_c$  and  $R_0$ , Radius of the reaction boundary and Initial radius (m), respectively;  $M_s$ , Molar mass of solid reagent (CaO) (kg/kmol);  $\rho_p$ , Particle density (kg/m<sup>3</sup>);  $k_g$ , Gas film mass transfer coefficient (m/s);  $D_e$ , Effective Diffusivity of SO<sub>2</sub> in the porous reagent (m<sup>2</sup>/s);  $k_c$ , Reaction rate constant (m/s).

Introducing  $M_R$  and  $X$  from equations (1) and (2) respectively, together with a dimensionless reaction time  $\tau$  according to equation (4), and dimensionless groups that include the relevant reaction resistances ( $Bi$ ,  $Da$ ), yields:

$$\tau = \frac{D_e M_s C_{g0}}{R_0^2 \rho_p} t \quad (4)$$

$$\frac{dX}{d\tau} = \frac{3(1-X)^{\frac{1}{3}}}{1 - \left(1 - \frac{1}{Bi}\right) (1-X)^{\frac{1}{3}} + Da^{-1} (1-X)^{\frac{1}{3}}} (1 - M_R X) \quad (5)$$

$t$  = Reaction time (s);  $\tau$  = Dimensionless time (-);  $Bi$  = Biot number =  $k_g R_0 / D_e$ , incorporating film and intra-particle (pore) diffusion;  $Da$  = Damkohler number =  $k_c R_0 / D_e$ , including reaction rate constant and pore diffusion.

This equation is solved with the following boundary conditions: at  $\tau = 0$ ,  $X = 0$  (no CaO conversion at  $t = \tau = 0$ ) and  $C = 1$  ( $C_g = C_{g0}$  at  $t = \tau = 0$ )

Introducing further appropriate ratios and equations provides a general solution [48]:

$$\alpha = \left(\frac{1 - M_g}{M_g}\right)^{1/3} \quad (6)$$

$$\gamma = (1 - X)^{1/3} \quad (7)$$

$$\tau = (1 + \alpha^3)(g_1 \varphi_1 + g_2 \varphi_2 + g_3 (g_4 - \varphi_3)) \quad (8)$$

$$g_1 = \frac{1}{2\alpha} \left(1 - \frac{Da^{-1}}{\alpha}\right) \quad (9)$$

$$g_2 = \frac{1}{3} (1 - Bi^{-1}) - \frac{1}{6\alpha} \left(1 - \frac{Da^{-1}}{\alpha}\right) \quad (10)$$

$$g_3 = \frac{1}{\alpha\sqrt{3}} \left(1 + \frac{Da^{-1}}{\alpha}\right) \quad (11)$$

$$g_4 = \tan^{-1} \left(\frac{2 - \alpha}{\alpha\sqrt{3}}\right) \quad (12)$$

$$\varphi_1 = \ln \left(\frac{\gamma + \alpha}{\gamma - \alpha}\right) \quad (13)$$

$$\varphi_2 = \ln \left(\frac{\gamma^3 + \alpha^3}{1 + \alpha^3}\right) \quad (14)$$

$$\varphi_3 = \tan^{-1} \left(\frac{2\gamma - \alpha}{\alpha\sqrt{3}}\right) \quad (15)$$

The integrated reaction equation includes the dominant parameters. Physical properties are included in the Biot- and Damkohler numbers. The required reaction yield can be predicted for any value of  $M_R$  and/or  $\tau$  provided these parameters are calculated.

### 3.2. Evaluation of the Model Parameters

### 3.2.1. External Diffusion

The rate coefficient of gas diffusion,  $k_g$ , is commonly expressed in terms of the Sherwood number,  $Sh$ , being the ratio of the mass transfer coefficient at the particle surface and the gas diffusivity.


Different expressions are used in powder-gas systems:

$$Sh = f(Re, Sc) = \left( \frac{k_g d_p}{D_g} \right) \quad (16)$$

$Sh$ , Sherwood number, $k_g d_p / D_g$	(-)
$Re$ , Reynolds number, $d_p U_{sl} \rho_g / \mu_g$	(-)
$Sc$ , Schmidt number, $\mu_g / \rho_g D_g$	(-)
$D_g$ , Diffusivity of $SO_2$ in the gas flow	( $m^2/s$ )
$d_p$ , Particle diameter	( $m$ )
$k_g$ , Gas film mass transfer coefficient	( $m/s$ )
$U_{sl}$ , Slip velocity (i.e., $\sim U - U_t$ )	( $m/s$ )
$U$ , Superficial gas velocity in the CFB	( $m/s$ )
$U_t$ , Particle terminal velocity	( $m/s$ )
$\mu_g$ , Gas viscosity	( $Pa \cdot s$ )
$\rho_g$ , Gas density	( $kg/m^3$ )

All gas-related parameter values need to be calculated at the operating temperature. Powder related parameters are nearly insensitive to the temperature.

Equations for the Sherwood number are given by Li and Wang [49], Zevenhoven and Jarvinen [50], and Gunn [51]. A CFB combustor, the UPM-Kymmene (UK) Ltd (Caledonian paper mill, Irvine, Ayrshire, Scotland, UK) application with a riser of  $3.78 \times 3.78 m^2$  being a typical example, operates at temperatures between 1023 K and 1173 K, with small particles ( $Ca^{2+}$ -reactant is injected with particle size  $\leq 74 \mu m$ ). The slip velocities, being the difference of the superficial gas velocity,  $U$ , and the calculated terminal (free fall) velocity of the particle,  $U_t$ , are around 3 m/s [52]. Application of the literature equations leads to the following predictions of  $k_g$ , as illustrated in Figure 7.

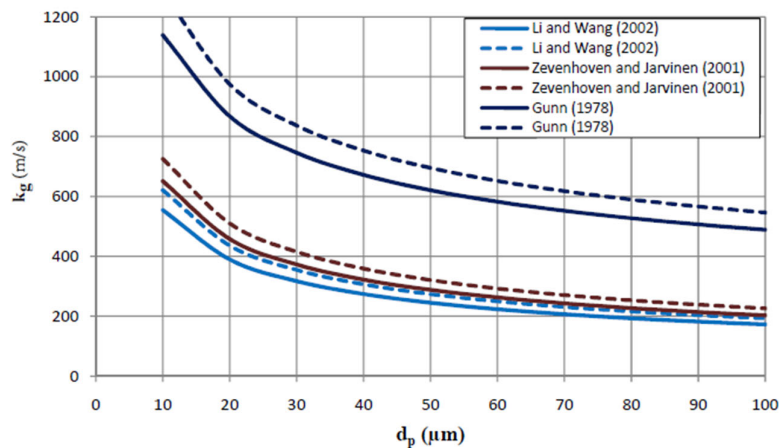

**Figure 7.** Predicted  $k_g$  (in  $m/s$ ) in CFB combustors, at  $\text{—}$  1023K and  $\text{- - -}$  1123K.

Although predicted values differ among the equations, the  $k_g$  value exceeds 200  $m/s$  for reactant particle sizes below  $74 \mu m$ , being closer to 300  $m/s$  for an average particle size of  $\sim 40 \mu m$ .

From these calculated  $k_g$ -values, it is also clear that the effect of the gas diffusion resistance can be assumed negligible ( $\frac{r_c^2}{R_0^2 k_g} \ll 1$ ) for fine particles, as will also be proven by further calculations.

### 3.2.2. The Effective Internal Diffusion Coefficient, $D_e$

The effective pore diffusivity  $D_e$  determines the resistance to gas penetration within the particle. It depends on pressure, temperature, particle porosity, and particle size. As previously experienced [52], it only plays a role for coarser particles. For fine particles the contribution of the pore diffusion resistance is small. The effect of the internal pressure is limited, and pressure is assumed to remain atmospheric in a CFB environment. At atmospheric pressure, and using sorbent particles between 2 and 106  $\mu\text{m}$  at absorption temperatures between 773 and 1123  $^\circ\text{C}$ , the effective diffusivity in  $\text{m}^2/\text{s}$  was determined by various researches, as illustrated in Table 4. Values differ by several orders of magnitude i.e., from  $6.4 \times 10^{-10}$  [53], to  $2.1 \times 10^{-9}$  [54] and  $7.3 \times 10^{-7}$  [55]. The effect of pressure is not outspoken [56–59].

**Table 5.** Table of effective diffusivities, measured for different systems at atmosphere pressure.

Authors	T(K)	Composition	Particle size( $\mu\text{m}$ )	$D_e$ ( $\text{m}^2/\text{s}$ )
[55]	773–1213	SO <sub>2</sub> : 0.3%; O <sub>2</sub> : 5%; CO <sub>2</sub> : 95%	2–106	$7.341 \times 10^{-7}$
[53]	923–1173	SO <sub>2</sub> : 0.25%; O <sub>2</sub> : 3.6%; CO <sub>2</sub> : 96.4%	2–106	$6.34 \times 10^{-10}$
[54]	1073	SO <sub>2</sub> : 0.1%–0.5%; O <sub>2</sub> : 10%; CO <sub>2</sub> : 70%	4–5.4	$2.1 \times 10^{-9}$

It is common to use  $D_e \sim 10^{-9} \text{ m}^2/\text{s}$  in reaction rate calculations.

### 3.2.3. The Reaction Rate Constant, $k_c$

This key parameter for all gas-solid reactions. For limestone it is of the order of  $10^{-4}$  to  $10^{-3} \text{ m/s}$  [54,55,57,59,60]. It is between  $10^{-2}$  to  $10^{-3} \text{ m/s}$  for CaO [45,46,59,61,62]. Since the sulphation of  $\text{Ca}^{2+}$  is an exothermic process, reaction rates are lower at high temperatures and higher at lower temperatures.

### 3.2.4. The Molar Ratio $M_R$ (Expressed as Ca/S or CaO/S)

To find the molar ratio, the molar flow rate of CaO (or  $\text{CaCO}_3$ ) and molar flow rate of  $\text{SO}_2$  are required operational variables. With a solid circulation flux,  $G$  ( $\text{kg}/\text{m}^2\text{s}$ ) and cross-sectional area of the riser,  $A$  ( $\text{m}^2$ ), the molar flow rate of solids is known.

$$\text{Molar flow rate of solid reactant} = \frac{G A (\% \text{CaCO}_3)}{MM_{\text{CaCO}_3}} \text{ or } \frac{G A (\% \text{CaO})}{MM_{\text{CaO}}} \quad (17)$$

Where,

$G$ , Solid circulation flux	( $\text{kg}/\text{m}^2\text{s}$ )
$A$ , Cross sectional area of the riser	( $\text{m}^2$ )
$MM_{\text{CaCO}_3}$ , molecular weight of $\text{CaCO}_3$	100 $\text{kg}/\text{kmol}$
$MM_{\text{CaO}}$ , molecular weight of CaO	56 $\text{kg}/\text{kmol}$
$\% \text{CaCO}_3/\% \text{CaO}$ , weight percentage in $G$	-

Similarly, for a superficial gas velocity,  $U$  ( $\text{m/s}$ ) in the same riser dimensions, the molar flow rate of  $\text{SO}_2$  is also defined.

$$\text{Molar flow rate of } \text{SO}_2 = \frac{AU}{MV_{\text{SO}_2}} \frac{\text{SO}_2(\text{ppmv})}{10^6} * \frac{273}{(T+273)}$$

$$MV_{\text{SO}_2} \text{ molar volume of } \text{SO}_2 \quad 22.4 \text{ Nm}^3/\text{kmol}$$

$$M_R = \frac{\frac{GA(\% \text{CaO})}{56}}{UA \frac{\text{SO}_2(\text{ppmv})}{10^6} * \frac{273}{22.4(T+273)}} \text{ or } M_R = \frac{\frac{GA(\% \text{CaCO}_3)}{100}}{UA \frac{\text{SO}_2(\text{ppmv})}{10^6} * \frac{273}{22.4(T+273)}} \quad (18)$$


### 3.2.5. Evaluation of the Model Parameters

During the experiments, the CFB of UPM-Kymmene (UK) Ltd (Caledonian paper mill, Irvine, Ayrshire, Scotland, UK) was operated at 1107–1135 K, for superficial velocities of 2.5 to 4.8  $\text{m/s}$  and solids circulation fluxes of 36 to 71  $\text{kg}/\text{m}^2\text{s}$ . The initial  $\text{SO}_2$  concentration was between 1250 and 1400  $\text{mg}/\text{m}^3$  i.e., 438 to 525 ppmv. The transport velocity of the bed material was

0.8 m/s. The amount of CaO in the bed was between 1 to 2 wt%, and was continuously kept at that level by adding fresh CaO [as Ca(OH)<sub>2</sub>].

Under these specific operating conditions, the essential parameters can be retrieved from previous equations and data, whilst  $M_R$  and the contact time  $t$  are calculated below:

1.  $D_e$ :  $10^{-7}$  to  $10^{-9}$  m<sup>2</sup>/s, commonly adopted as  $10^{-9}$  m<sup>2</sup>/s
2.  $k_g$ : Allowing for a safety margin,  $k_g$  is taken at a conservative average of 300 m/s, for the particle size range (<74  $\mu$ m) under scrutiny
3.  $k_c$ :  $5 \times 10^{-2}$  m/s
4. The  $M_R$  ratio is calculated according to the equations before, and illustrated in Figures 8.

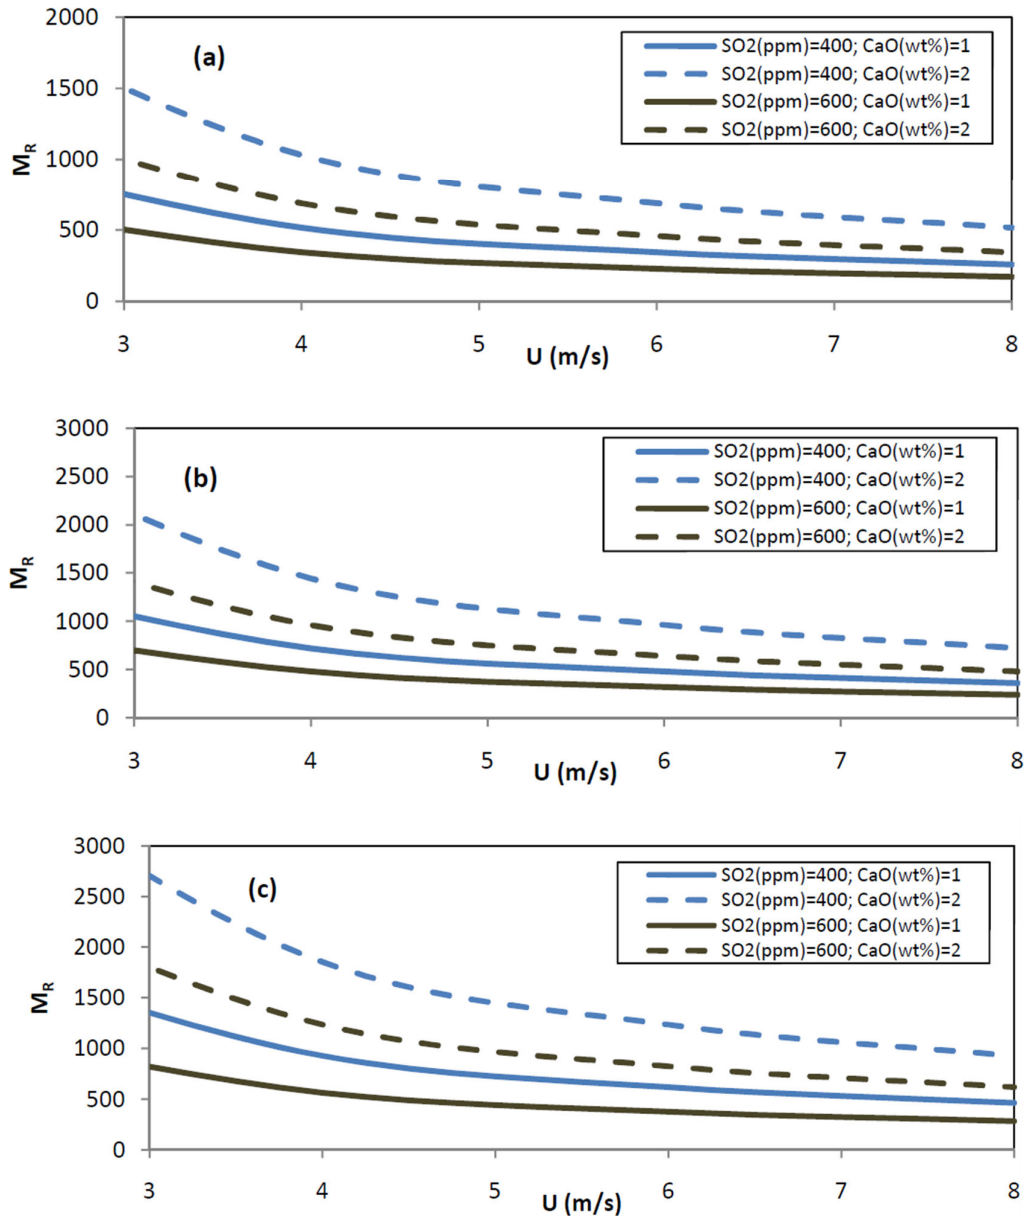

**Figure 8.** Molar ratio CaO/SO<sub>2</sub> at selected operating conditions ( $T = 1125$  K) for  $G = 50$  (a), 70 (b) and 90 (c) kg/m<sup>2</sup>s.

5. The residence time distribution of the gas phase in the riser of a CFB was studied by [39]. The average contact time is given by:

$$\bar{t} = 0.54(U-U_{TR})^{-0.25}G^{-0.2}H \text{ with } \bar{t} \text{ in s and } H, \text{ the riser height in m (19)}$$


It should be remembered that  $U$  is the superficial gas velocity, whereas  $U_{TR}$  is the superficial gas velocity whereby a CFB operating mode is initiated [31,63,64].

Considering a riser of 14 m height above the solids recycle feed as in the UPM-Kymmene (UK) Ltd (Caledonian paper mill, Irvine, Ayrshire, Scotland, UK) case, operating at an average velocity of 3.5 m/s for particles with  $U_{TR}$  of 0.8 m/s, yields  $\bar{t}$ -values of  $\bar{t} = 2.98$  s for  $G = 30$  kg/m<sup>2</sup>s and 2.52 s for  $G = 10$  kg/m<sup>2</sup>s.

#### 4. Application of the Model Equations and Comparison with Experimental Result

##### 4.1. Effect of Contact Mode

From the model application, Figure 9 illustrates that a short time contact time,  $\tau$ , is needed in a CFB, and an average  $\tau$  in a BFB. The required residence times in a pneumatic conveying line ( $\gg 100$  s) make this solution in practice impossible since extremely long piping would be needed at a velocity of e.g., 2 m/s.

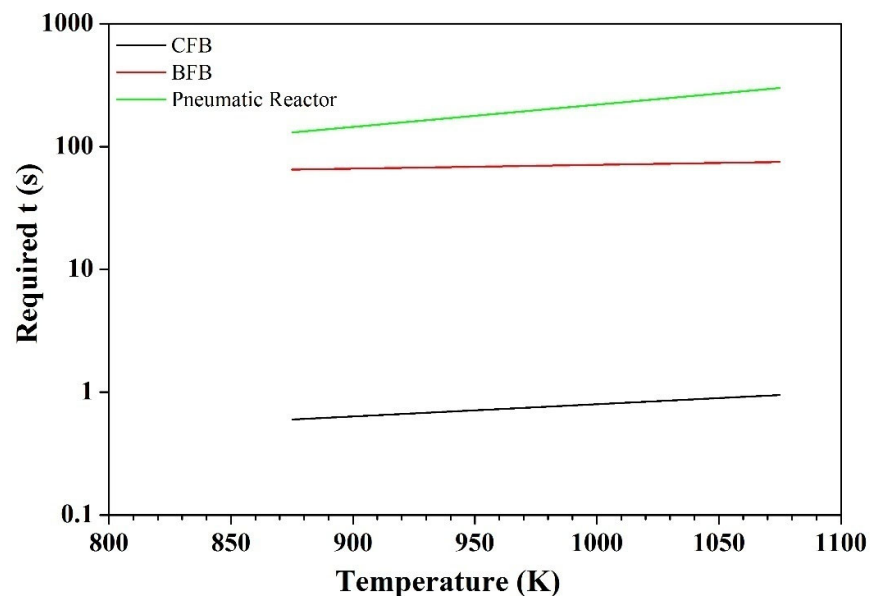

**Figure 9.** Theoretical contact time vs. Temperature with CaO, for a removal efficiency of 95% in a bubbling fluidized bed (BFB), CFB, and pneumatic reactor.


##### 4.2. The CFB Contact Mode

Using the parameters of 3.2, the model equations can be used to predict SO<sub>2</sub> capture efficiencies and parameter influences.

1. Prior to performing detailed predictions, the effect of both  $k_g$  and  $D_e$  were assessed. All other parameters remaining within the predicted range of 4.2, the effects of both  $k_g$  and  $D_e$  are negligible. Increasing  $k_g$  from 200 to 2000 m/s has a negligible effect on the predicted time for a given conversion: this was indeed expected due to the high Reynolds number in the riser, where flue gas film diffusion is of negligible influence.

Similarly, the variation of  $D_e$  by 2 orders of magnitude, at  $k_g \sim 300$  m/s for an average particle size of 40  $\mu\text{m}$ , has an effect well below 10% on the expected conversion. Pore diffusion is not a rate-limiting resistance when using small particles, as is common in CFB combustors.

2. Using  $k_g \sim 300$  m/s,  $D_e = 10^{-9}$  m<sup>2</sup>/s and  $k_c = 5 \times 10^{-2}$  m/s, the model equations predict the required time ( $t$ ) for a given conversion. This is illustrated in Figure 10 below,  $M_R$  being the remaining variable.

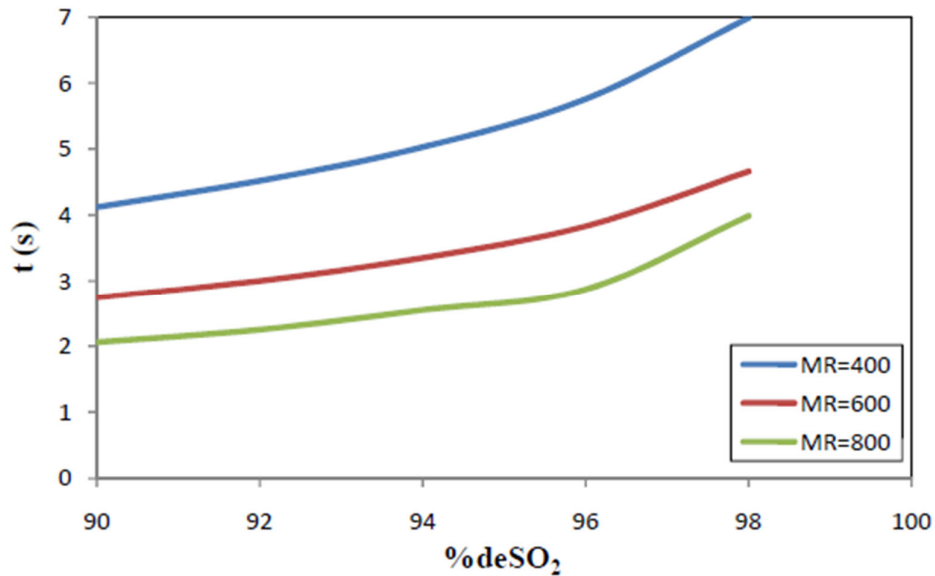

**Figure 10.** Predicted required reaction time for a given de-SO<sub>2</sub> efficiency, at various values of  $M_R$  (1125K,  $k_g = 300$  m/s,  $D_e = 10^{-7}$  m<sup>2</sup>/s.).

Since the average gas-solid contact time in the CFB-riser is between 2.5 and 3 s and  $M_R$ -values exceed 500, very high SO<sub>2</sub>-removal efficiencies are predicted.


3. The effect of CaO-particle size is important. For e.g.,  $M_R = 400$ ,  $k_g = 300$  m/s,  $D_e = 10^{-7}$  m<sup>2</sup>/s, the required contact time is between 2 sec (for 90% SO<sub>2</sub> removal) and 3 sec (for 98% SO<sub>2</sub> removal) when using 25  $\mu$ m sorbent particles. Since for a continuous reaction system, required times are proportional with the particle size, these required contact times need to be multiplied by 2, respectively 4, when using sorbent particles of 50 or 100  $\mu$ m.

Clearly, operating with coarser CaO-particles, increases the required reaction time for a required conversion. Commercial Ca(OH)<sub>2</sub> normally has a particle size  $\ll 74 \mu$ m, with an average around 40  $\mu$ m: efficiencies well in excess of 95% can then be expected in the CFB.

Since particles in a CFB are subjected to attrition, their particle size will progressively decrease. They will be carried out of the system when their particle size is lower than the cut-size of the CFB cyclone [42]. The attrition will not affect the gas-solid contact mode, since the bulk CFB bed material will either be an inert powder (e.g., sand), and fresh reactant is continuously added. However, the reaction rate for small particles is inversely proportional to the particle size. Finer particles will therefore be more rapidly converted, thus providing a safety margin towards the required reaction time predicted by the model on the basis of the average particle size.

4. When using the model equations to predict the SO<sub>2</sub> removal rate over the range of operating conditions of the UPM-Kymmene (UK) Ltd (Caledonian paper mill, Irvine, Ayrshire, Scotland, UK) application the correspondence of predicted and measured removal yields is illustrated in Figure 11 (with  $k_c$  at a conservative 0.03 m/s).



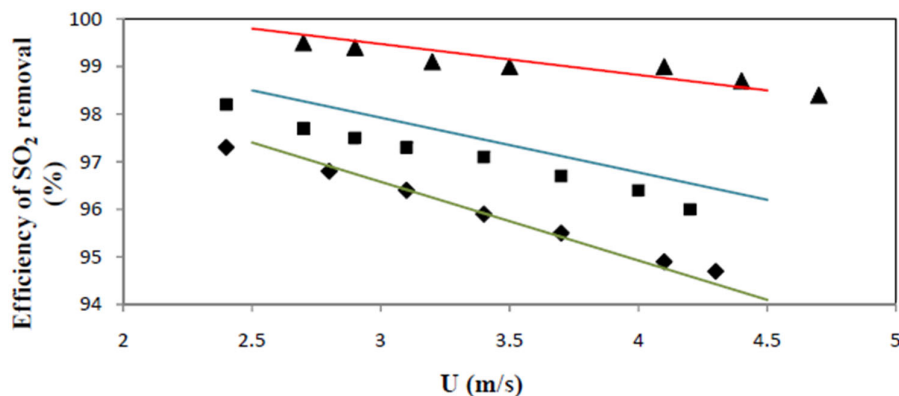

**Figure 11.** Comparison of experimental data and model predictions, at  $d_p = 40 \mu\text{m}$ . ◆  $T = 1107 \text{ K}$ ,  $G = 36 \text{ kg/m}^2\text{s}$ ; ■  $T = 1135 \text{ K}$ ,  $G = 57 \text{ kg/m}^2\text{s}$ ; ▲  $T = 1135 \text{ K}$ ,  $G = 71 \text{ kg/m}^2\text{s}$ ; —, —, — Model prediction for ◆, ■ and ▲ respectively.

A very fair agreement is obtained. The limited over/underestimation might be due to the  $k_c$ -value taken at  $0.03 \text{ m/s}$  (at  $k_c = 0.025 \text{ m/s}$ , the predicted removal efficiencies decrease on average by about  $0.2\%$ ); a slight overestimation of the reaction time, and/or the use of an average particle size of  $40 \mu\text{m}$ : since the lime used has a wide size distribution and decreases due to attrition, the average particle size can be below  $40 \mu\text{m}$ .

The experimental and model comparison however stresses the reliability of the model approach.

This was further assessed for the case of using  $\text{CaCO}_3$ -filler, with commonly quoted efficiencies of  $>99.9\%$  [38], and widely applied in the Lurgi CFB- $\text{SO}_2$  removal plants. In these applications, a  $\text{CaCO}_3$  circulating bed is used. At an average conversion of  $50\%$ , the  $\text{CaCO}_3$ -content of the bed can be assumed as  $50\%$ .  $M_R$  values in this case vary between  $5000$  and  $14,000$  for  $\text{SO}_2 = 600 \text{ ppm}_v$  and  $U$  decreasing from  $6$  to  $3 \text{ m/s}$  respectively. For  $\text{SO}_2 = 400 \text{ ppm}_v$  the  $M_R$ -values increase to  $11,000$  and  $21,000$  respectively at  $6$  and  $3 \text{ m/s}$ .

It is hence clear that  $\text{SO}_2$  removal efficiencies in a CFB-riser are excellent and are achieved by a simple direct contact between the  $\text{Ca}^{2+}$  reactant and  $\text{SO}_2$ .

## 5. Conclusion

The  $\text{SO}_2$  capture by alkali sorbents is examined for a large-scale CFBC ( $58 \text{ MW}_{th}$ ) of coal, biomass and sludge.

Experimental results demonstrate a removal efficiency of  $>94.5$  at high superficial gas velocity and low solid circulation flux. Efficiencies of over  $99.5\%$  are reached at lower operating velocities and higher solid circulation flux.

A theoretical reaction model was developed to encompass gas film diffusion, gas diffusion in the sorbent pores, and the chemical reaction at the unreacted particle core.

From the evaluation of the model parameters, the chemical reaction is the major resistance in the overall reaction rate.

The application of the model equations moreover demonstrate that a CFB is a better gas–solid contacting mode than a BFB. A pneumatic reactor is practically unacceptable.

The fair agreement between experimental and model results stress the reliability of the model approach.

**Author Contributions:** Y.D. and J.B. performed the experiments. Y.D., J.B. and R.A. developed and compiled the model. J.B. and H.Z. provided parameter data. All authors participated in the preparation and presentation of the manuscript.

**Funding:** This research received no external funding.

**Acknowledgments:** This work was funded by the Beijing Advanced Innovation Center for Soft Matter Science and Engineering of the Beijing University of Chemical Technology.

**Conflicts of Interest:** The authors declare no conflict of interest.

## Nomenclature

A	Cross sectional area of the riser	$m^2$
C	Dimensionless gas reactant concentration	-
$C_{g0}$	Initial gas concentration	$mol/m^3$
$C_g$	Gas concentration at any time	$mol/m^3$
$d_p$	Particle diameter	m
D	Diameter of riser	m
$D_e$	Effective Diffusivity of $SO_2$ in the porous reagent	$m^2/s$
$D_g$	Diffusivity of $SO_2$ in the gas flow	$m^2/s$
H	Height of the riser	m
G	Solid circulation flux	$kg/m^2s$
$g_i$	Reaction rate parameters defined by equations (9) to (12)	-
$k_c$	Reaction rate constant	m/s
$k_g$	Gas film mass transfer coefficient	m/s
$M_R$	Molar ratio of $Ca^{2+}$ -reactant and S	-
$M_s$	Molar mass of solid reagent (CaO)	g/mol
MM	molecular weight	kg/kmol
MV	molar volume	$Nm^3/kmol$
P	Pressure	Pa
$r_c$	Radius of the reaction boundary	m
$R_0$	Initial radius	m
T	Temperature	K
t	Reaction time	s
$\bar{t}$	Average contact time in CFB	s
U	Superficial gas velocity in the CFB	m/s
$U_{sl}$	Slip velocity (i.e., $\sim U-U_t$ )	m/s
$U_t$	Terminal velocity of particle	m/s
$U_{TR}$	Transport velocity	m/s
X	Fractional conversion	-
Greek letters		
$\rho_g$	Gas density	$kg/m^3$
$\rho_p$	Particle density	$kg/m^3$
$\mu_g$	Gas viscosity	Pa·s
$\tau$	Dimensionless time	-
$\varepsilon$	Voidage in the riser	-
$\varphi_i$	Reaction rate parameters defined by equations (13) to (15)	-

## Abbreviations

A.P.I	American Petroleum Institute
BFB	Bubbling fluidized bed
Bi	Biot number, $k_g R_0 / D_e$
CFB	Circulating fluidized bed
CFBC	Circulating fluidized bed combustor
Da	Damkohler number, $k_c R_0 / D_e$
deSO <sub>2</sub>	SO <sub>2</sub> Removal

EBFT	Electron beam flue gas treatment
FGD	Flue gas desulphurisation
Re	Reynolds number, $d_p U_{sl} Q_g / \mu_g$
Sc	Schmidt number, $\mu_g / Q_g D_g$
Sh	Sherwood number, $k_g / d_p D_g$

## References

1. IEA. *CO<sub>2</sub> Emissions from Fuel Combustion*; OECD iLibrary: Marrakesh, Morocco, 2016; ISBN: 9789264258563, doi:10.1787/co2\_fuel-2016-en.
2. Quéré, C.; Andrew, R.; Friedlingstein, P.; Sitch, S.; Hauck, J.; Pongratz, J.; Pickers, P.; Ivar Korsbakken, J.; Peters, G.; Canadell, J.; et al. Global Carbon Budget 2018. *Earth Syst. Sci. Data* **2018**, *10*, 2141–2194, doi:10.5194/essd-10-2141-2018.
3. Mahmoudi, S.; Baeyens, J.; Seville, J.P. NO<sub>x</sub> formation and selective non-catalytic reduction (SNCR) in a fluidized bed combustor of biomass. *Biomass Bioenergy* **2010**, *34*, 1393–1409.
4. Urone, P. The primary air pollutants—Gaseous. Their occurrence, sources, and effects. In *Air Pollution*; Stern, A.C., Ed.; Academic Press: New York, NY, USA, 1976; Volume 1.
5. Gibeaux, S.; Thomachot-Schneider, C.; Eyssautier-Chuine, S.; Marin, B.; Vázquez, P. Simulation of acid weathering on natural and artificial building stones according to the current atmospheric SO<sub>2</sub>/NO<sub>x</sub> rate. *Environ. Earth Sci.* **2018**, *77*, 327.
6. Oruc, O.; Dincer, I. Environmental impact assessment of using various fuels in a thermal power plant. *Int. J. Glob. Warm.* **2019**, *18*, 191–205.
7. Carnell, E.; Vieno, M.; Vardoulakis, S.; Beck, R.; Heaviside, C.; Tomlinson, S.; Dragosits, U.; Heal, M.; Reis, S. Modelling public health improvements as a result of air pollution control policies in the UK over four decades—1970 to 2010. *Environ. Res. Lett.* **2019**, doi:10.1088/1748-9326/ab1542.
8. Amsalu, E.; Guo, Y.; Li, H.; Wang, T.; Liu, Y.; Wang, A.; Liu, X.; Tao, L.; Luo, Y.; Zhang, F.; et al. Short-term effect of ambient sulfur dioxide (SO<sub>2</sub>) on cause-specific cardiovascular hospital admission in Beijing, China: A time series study. *Atmos. Environ.* **2019**, *208*, 74–81.
9. Wang, H.; Yuan, B.; Hao, R.; Zhao, Y.; Wang, X. A critical review on the method of simultaneous removal of multi-air-pollutant in flue gas. *Chem. Eng. J.* **2019**, *378*, 122155.
10. Tao, L.; Wang, X.; Ning, P.; Wang, L.; Fan, W. Removing sulfur dioxide from smelting flue and increasing resource utilization of copper tailing through the liquid catalytic oxidation. *Fuel Process. Technol.* **2019**, *192*, 36–44.
11. Iliuta, I.; Iliuta, M.C. Modeling of SO<sub>2</sub> seawater scrubbing in countercurrent packed-bed columns with high performance packings. *Sep. Purif. Technol.* **2019**, *226*, 162–180, doi:10.1016/j.seppur.2019.05.078.
12. He, J.; Zhang, J.; Shang, H. Dynamic modelling and simulation of the sulphur dioxide converter in an industrial smelter. *Can. J. Chem. Eng.* **2019**, *97*, 1838–1847.
13. Nurrohim, A.; Sakugawa, H. Fuel-based inventory of NO<sub>x</sub> and SO<sub>2</sub> emissions from motor vehicles in the Hiroshima Prefecture, Japan. *Appl. Energy* **2005**, *80*, 291–305.
14. Ma, X.; Kaneko, T.; Tashimo, T.; Yoshida, T.; Kato, K. *Use of Limestone for SO<sub>2</sub> Removal from Flue Gas in the Semidry FGD Process with a Powder-Particle Spouted Bed*; *Chem. Eng. Sci.* **2000**, *55*, 4643–4652, doi:10.1016/S0009-2509(00)00090-7.
15. Moeini, M.; Hatamipour, M.S. Flue Gas Desulfurization by a Powder-Particle Spouted Bed. *Chem. Eng. Technol.* **2008**, *31*, 71–82.
16. Backhurst, J.R.; Sinnott, R.K.; Richardson, J.F. *Coulson & Richardson Chemical Engineering*; Butterworth-Heinemann: Oxford, UK, 2001; pp. 105–107.
17. Selmeczi, J.G.; Stewart, D.A. Flue gas desulfurization/The Dravo Corp. Thiosorbic flue gas desulfurization process. *Chem. Eng. Prog.* **1978**, *74*, 2.
18. Benson, L. Development and Commercialization of the Thiosorbic Lime Wet Scrubbing Process for Flue Gas Desulfurization. In *Lime for Environmental Uses*, ed. A. Gutshick, West Conshohocken, PA: ASTM International, 1987, 20–31.

19. Gutschick, K. *Lime for Environmental Uses: A Symposium Sponsored by ASTM Committee C-7 on Lime, Los Angeles, CA, 25 June 1985*; 1987.
20. Cunic, D.; Lunt, R. *Profiles in Flue Gas Desulphurization*; American Institute of Chemical Engineers: New York, NY, USA, 1994.
21. Medellin, P.M.; Weger, E.; Dudukovic, M.P. Removal of SO<sub>2</sub> and NO<sub>x</sub> from Simulated Flue Gases by Alkalized Alumina in a Radial Flow Fixed Bed. *Ind. Eng. Chem. Process. Des. Dev.* **1978**, *17*, 528–536.
22. Hao, R.; Wang, X.; Mao, X.; Tian, B.; Zhao, Y.; Yuan, B.; Tao, Z.; Shen, Y. An integrated dual-reactor system for simultaneous removal of SO<sub>2</sub> and NO: Factors assessment, reaction mechanism and application prospect. *Fuel* **2018**, *220*, 240–247.
23. Park, H.-W.; Uhm, S. Various technologies for simultaneous removal of NO and SO from flue gas. *Appl. Chem. Eng.* **2017**, *28*, 607–618.
24. Ar, I.; Balci, S. Sulfation reaction between SO<sub>2</sub> and limestone: Application of deactivation model. *Chem. Eng. Process. Process Intensif.* **2002**, *41*, 179–188.
25. Baege, R.; Sauer, H. *Recent Developments in CFB-FGD Technology*; VGB PowerTech: Essen, Germany, 2000.
26. Basfar, A.; Fageeha, O.; Kunnummal, N.; Al-Ghamdi, S.; Chmielewski, A.G.; Licki, J.; Pawelec, A.; Tymiński, B.; Zimek, Z. Electron beam flue gas treatment (EBFGT) technology for simultaneous removal of SO<sub>2</sub> and NO<sub>x</sub> from combustion of liquid fuels. *Fuel* **2008**, *87*, 1446–1452.
27. Licki, J.; Chmielewski, A.; Iller, E.; Zimek, Z.; Mazurek, J.; Sobolewski, L. Electron-beam flue-gas treatment for multicomponent air-pollution control. *Appl. Energy* **2003**, *75*, 145–154.
28. Zwolińska, E.; Gogulancea, V.; Sun, Y.; Lavric, V.; Chmielewski, A. A kinetic sensitivity analysis for the SO<sub>2</sub> and NO<sub>x</sub> removal using the electron beam technology. *Radiat. Phys. Chem.* **2017**, *138*, 29–36.
29. Toftegaard, M.; Brix, J.; Jensen, P.; Glarborg, P.; Jensen, A.D. Oxy-fuel combustion of solid fuels. *Prog. Energy Combust. Sci.* **2010**, *36*, 581–625.
30. Chen, L.; Wang, C.; Si, T.; Anthony, E.J. Modelling the simultaneous calcination/sulfation behavior of limestone under circulating fluidized bed combustion conditions. *Fuel* **2019**, *257*, 116072.
31. Mahmoudi, S.; Chan, C.W.; Brems, A.; Seville, J.; Baeyens, J. Solids flow diagram of a CFB riser using Geldart B-type powders. *Particuology* **2012**, *10*, 51–61.
32. Van Caneghem, J.; Brems, A.; Lievens, P.; Block, C.; Billen, P.; Vermeulen, I.; Dewil, R.; Baeyens, J.; Vandecasteele, C. Fluidized bed waste incinerators: Design, operational and environmental issues. *Prog. Energy Combust. Sci.* **2012**, *38*, 551–582.
33. Van De Velden, M.; Baeyens, J.; Dougan, B.; McMurdo, A. Investigation of operational parameters for an industrial CFB combustor of coal, biomass and sludge. *China Particuol.* **2007**, *5*, 247–254.
34. Yi, J.; Sauer, H.; Leuschke, F.; Baege, R. What is possible to achieve on flue gas cleaning using the CFB technology. In Proceedings of the 8th International Conference on CFB, Hangzhou, China, 10–13 May 2005.
35. Hollett, G.T. Dry removal of SO<sub>2</sub>: Application to industrial coal-fired boilers. *Proc. Annu. Meet. Air Pollut. Control Assoc.* **1979**, June 25–29.
36. Sauer, H.; Porter, D.E. *Dry Removal of Gaseous Pollutants from Flue Gases with the Circulating Fluid Bed Scrubber*; Report C479/022, IMechE, London, 20<sup>th</sup> Oct. 1994.
37. Hansen, S.K.; Toher, J.; Lanois, G.; Sauer, H. *High Efficiency, Dry Flue Gas SO<sub>x</sub> and Combined SO<sub>x</sub>/NO<sub>x</sub> Removal Experience with the Lurgi Circulating Fluid Bed Dry Scrubber—a new economical retrofit option for U.S. utilities for acid rain remediation*; International Power Generation Conference, San Diego, CA, USA, 1991.
38. Leuschke, F.; Bleckwehl, S.; Ratschow, L.; Werther, J. Flue gas desulphurization in a circulating fluidized bed: Investigation after 10 years of successful commercial operation at the facility of Pilsen/Cz. In: Werther W., Nowak W., Wirth K-E., Hartge E.U. (Eds), 9<sup>th</sup> International Conference on Circulating Fluidized Beds, Hamburg, TuTech Innovation GmbH Germany, **2008**, 943–948.
39. Mahmoudi, S.; Seville, J.; Baeyens, J. The residence time distribution and mixing of the gas phase in the riser of a circulating fluidized bed. *Powder Technol.* **2010**, *203*, 322–330.
40. Zhang, H.; Kong, W.; Tan, T.; Gilles, F.; Baeyens, J. Experiments support an improved model for particle transport in fluidized beds. *Sci. Rep.* **2017**, *7*, 10178.
41. Chan, C.; Seville, J.P.K.; Parker, D.J.; Baeyens, J. Particle velocities and their residence time distribution in the riser of a CFB. *Powder Technol.* **2010**, doi:10.1016/j.powtec.2010.05.008.
42. Dewil, R.; Baeyens, J.; Caerts, B. CFB cyclones at high temperature: Operational results and design assessment. *Particuology* **2008**, *6*, 149–156.

43. Zhang, H.; Degève, J.; Baeyens, J.; Wu, S.-Y. Powder attrition in gas fluidized beds. *Powder Technol.* **2016**, *287*, 1–11.
44. Mahmoudi, S.; Baeyens, J.; Seville, J. The solids flow in the CFB-riser quantified by single radioactive particle tracking. *Powder Technol.* **2011**, *211*, 135–143.
45. Han, K.; Lu, C.; Cheng, S.; Zhao, G.; Wang, Y.; Zhao, J. Effect of characteristics of calcium-based sorbents on the sulfation kinetics. *Fuel* **2005**, *84*, 1933–1939.
46. Hartman, M.; Svoboda, K.; Trnka, O.; Veselý, V. Reaction of sulphur dioxide with magnesia in a fluidised bed. *Chem. Eng. Sci.* **1988**, *43*, 2045–2050.
47. Kunii, D.; Levenspiel, O. *Fluidization Engineering*; Butterworth-Heinemann: Newton, MA, 1991.
48. Benitez, J. *Process Engineering and Design for Air Pollution Control*; Prentice Hall: Englewood Cliffs, NJ, USA, 1993; Volume 8.
49. Li, J.; Wang, L. Concentration distributions during mass transfer in circulating fluidized beds. In Proceedings of the 7th International Conference on Circulating Fluidized Beds, Niagara Falls, Ontario, Canada, 5–8 May 2002.
50. Zevenhoven, R.; Järvinen, M. Particle/Turbulence Interactions, Mass Transfer and Gas/Solid Chemistry in a CFBC Riser. *Flow Turbul. Combust* **2001**, *67*, 107–124.
51. Gunn, D. Transfer of heat or mass to particles in fixed and fluidised beds. *Int. J. Heat Mass Transf.* **1978**, *21*, 467–476.
52. Van De Velden, M.; Baeyens, J.; Brems, A.; Janssens, B.; Dewil, R. Fundamentals, kinetics and endothermicity of the biomass pyrolysis reaction. *Renew. Energy* **2010**, *35*, 232–242.
53. Fuertes, A.B.; Velasco, G.; Fuente, E.; Alvarez, T. Study of the direct sulfation of limestone particles at high CO<sub>2</sub> partial pressures. *Fuel Process. Technol.* **1994**, *38*, 181–192.
54. Zhong, Q. Direct sulfation reaction of SO<sub>2</sub> with calcium carbonate. *Thermochim. Acta* **1995**, *260*, 125–136.
55. Hajaligol, M.R.; Longwell, J.P.; Sarofim, A.F. Analysis and Modeling of the Direct Sulfation of CaCO<sub>2</sub>. *Ind. Eng. Chem. Res.* **1988**, doi:10.1021/ie00084a002.
56. Iisa, K.; Hupa, M.; Yrjas, P. Product layer diffusion in the sulphation of calcium carbonate. *Symp. Combust.* **1992**, *24*, 1349–1356.
57. Liu, H.; Katagiri, S.; Kaneko, U.; Okazaki, K. Sulfation behavior of limestone under high CO<sub>2</sub> concentration in O<sub>2</sub>/CO<sub>2</sub> coal combustion. *Fuel* **2000**, *79*, 945–953.
58. Qiu, K.; Lindqvist, O. Direct sulfation of limestone at elevated pressures. *Chem. Eng. Sci.* **2000**, *55*, 3091–3100.
59. Zevenhoven, R.; Yrjas, P.; Hupa, M. Sulfur dioxide capture under PFBC conditions: The influence of sorbent particle structure. *Fuel* **1998**, *77*, 285–292.
60. Snow, M.J.H.; Longwell, J.P.; Sarofim, A.F. Direct sulfation of calcium carbonate. *Ind. Eng. Chem. Res.* **1988**, *27*, 268–273.
61. Simons, G.A.; Rawlins, W.T. Reaction of Sulfur Dioxide and Hydrogen Sulfide with Porous Calcined Limestone. *Ind. Eng. Chem. Process. Des. Dev.* **1980**, *19*, 565–572.
62. Borgwardt, R.H. Kinetics of the Reaction of SO<sub>2</sub> with Calcined Limestone. *Environ. Sci. Technol.* **1970**, doi:10.1021/es60036a001.
63. Zhang, H.; Degève, J.; Dewil, R.; Baeyens, J. Operation Diagram of Circulating Fluidized Beds (CFBs). *Procedia Eng.* **2015**, *102*, 1092–1103.
64. Zhang, H.; Degève, J.; Baeyens, J.; Dewil, R. The Voidage in a CFB Riser as Function of Solids Flux and Gas Velocity. *Procedia Eng.* **2015**, *102*, 1112–1122.

