



HAL
open science

A parsimonious software sensor for estimating the individual dynamic pattern of methane emissions from cattle

Rafael Munoz Tamayo, J. Ramírez Agudelo, R. Dewhurst, G. Miller, T. Vernon, H. Kettle

► **To cite this version:**

Rafael Munoz Tamayo, J. Ramírez Agudelo, R. Dewhurst, G. Miller, T. Vernon, et al.. A parsimonious software sensor for estimating the individual dynamic pattern of methane emissions from cattle. *Animal*, 2019, 13 (06), pp.1180-1187. 10.1017/S1751731118002550 . hal-02369429

HAL Id: hal-02369429

<https://hal.science/hal-02369429>

Submitted on 12 Feb 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

A parsimonious software sensor for estimating the individual dynamic pattern of methane emissions from cattle

R. Muñoz-Tamayo^{1†}, J. F. Ramírez Agudelo², R. J. Dewhurst³, G. Miller³, T. Vernon⁴
and H. Kettle⁴

¹UMR Modélisation Systémique Appliquée aux Ruminants, INRA, AgroParisTech, Université Paris-Saclay, 75005 Paris, France; ²Universidad de Antioquia – UdeA, Facultad de Ciencias Agrarias, Grupo de Investigación en Ciencias Agrarias – GRICA, Ciudadela de Robledo, Carrera 75N° 65-87, Medellín, Colombia; ³Future Farming Systems, SRUC, West Mains Road, Edinburgh EH9 3JG, UK; ⁴Biomathematics and Statistics Scotland (BioSS), Kings Buildings, Edinburgh EH9 3FD, UK

(Received 10 April 2018; Accepted 7 September 2018; First published online 18 October 2018)

Large efforts have been deployed in developing methods to estimate methane emissions from cattle. For large scale applications, accurate and inexpensive methane predictors are required. Within a livestock precision farming context, the objective of this work was to integrate real-time data on animal feeding behaviour with an in silico model for predicting the individual dynamic pattern of methane emission in cattle. The integration of real-time data with a mathematical model to predict variables that are not directly measured constitutes a software sensor. We developed a dynamic parsimonious grey-box model that uses as predictor variables either dry matter intake (DMI) or the intake time (IT). The model is described by ordinary differential equations.

Model building was supported by experimental data of methane emissions from respiration chambers. The data set comes from a study with finishing beef steers (cross-bred Charolais and purebred Luining finishing). Dry matter intake and IT were recorded using feed bins. For research purposes, in this work, our software sensor operated off-line. That is, the predictor variables (DMI, IT) were extracted from the recorded data (rather than from an on-line sensor). A total of 37 individual dynamic patterns of methane production were analyzed. Model performance was assessed by concordance analysis between the predicted methane output and the methane measured in respiration chambers. The model predictors DMI and IT performed similarly with a Lin's concordance correlation coefficient (CCC) of 0.78 on average. When predicting the daily methane production, the CCC was 0.99 for both DMI and IT predictors. Consequently, on the basis of concordance analysis, our model performs very well compared with reported literature results for methane proxies and predictive models. As IT measurements are easier to obtain than DMI measurements, this study suggests that a software sensor that integrates our in silico model with a real-time sensor providing accurate IT measurements is a viable solution for predicting methane output in a large scale context.

Keywords: greenhouse gas, methane, modelling, ruminant, precision farming

Implications

Reducing methane emissions from ruminants is a major target for sustainable and efficient livestock farming. For the animal, methane production represents a loss of feed energy. For the environment, methane exerts a potent greenhouse effect. Methane mitigation strategies require accurate, non-invasive and inexpensive techniques for estimating individual methane emissions on farm. In this study, we integrate measurements of feeding behaviour in cattle and a mathematical model to estimate individual methane production. Together, model and measurements form a software sensor that efficiently predicts methane output. Our software sensor

is a promising approach for estimating methane emissions at large scale.

Introduction

Methane emission from cattle is an output associated with animal efficiency that impacts the environmental footprint of livestock farming. Accordingly, reducing enteric methane production is a major target for ruminant production systems (Martin *et al.*, 2010; Hristov *et al.*, 2013). Large efforts have been deployed to develop methods and devices to measure and estimate methane emissions from ruminants, with respiration chambers being the gold standard under rigorous operation (Gardiner *et al.*, 2015; Hammond *et al.*, 2016). However, some of these techniques are usually costly and

† E-mail: rafael.munoz-tamayo@inra.fr

not suitable to be applied for on farm application at large scale for the development of strategies to mitigate greenhouse gas emissions. An ideal technique for large scale application should provide, at low cost, individual accurate estimations of methane produced by ruminants (Negussie *et al.*, 2017b). In complement to the development of methane proxies, mathematical modelling offers a useful tool for methane prediction. Mathematical models are often categorized as white box (phenomenological, mechanistic) or black box (empirical) models. A model with mechanistic and empirical components is termed a grey box model. With respect to the models developed for predicting methane production by ruminants, white box models aim at describing the biological phenomena associated with rumen fermentation and methanogenesis (Mills *et al.*, 2001; Huhtanen *et al.*, 2015; Vetharanim *et al.*, 2015). These phenomena may include for instance the microbial activity of archaea methanogens (Wang *et al.*, 2015; Muñoz-Tamayo *et al.*, 2016). Alternatively, black box models aim at deriving regression equations that quantify relationships between variable predictors and methane emissions (Sauvant *et al.*, 2011; Ramin and Huhtanen, 2013). In general, white box models offer the possibility of quantifying the dynamics of key variables whereas black box models are often static. On the other hand, black box models are less complex than white box models which favour their implementation for practical purposes (e.g. on-farm monitoring). Existing black box models for methane predictions are algebraic equations that use an average measure of dry matter intake (DMI) as primary predictor (Giger-Reverdin *et al.*, 2003; Charmley *et al.*, 2016; Niu *et al.*, 2018). Generally, models and techniques have been applied to estimate the daily average methane emission. Few studies report predictions of the dynamic pattern of methane production (Wang *et al.*, 2015). Integrating dynamic data from dedicated sensors with mathematical models to support livestock management decisions, and guide timely interventions is the great promise of precision livestock farming (Wathes *et al.*, 2008; Rutten *et al.*, 2013; Friggens *et al.*, 2017). The integration of real-time data with a mathematical model to predict variables that are not directly measured constitutes what is called a software sensor (observer) in the automatic control scientific literature (Dochain, 2003). Software sensors have been broadly applied to monitor and control biotechnological processes. A high performing software sensor is composed of (i) real-time sensors that accurately measure variables of interest and (ii) a reliable model that provides accurate predictions and has a simple structure to facilitate its implementation. In this context, the objective of this work was to develop a software sensor for predicting the individual dynamic pattern of methane emissions in cattle. Before a real on-line implementation, it is common practice to assess the performance of the software sensor via simulation using either virtual data or off-line data. In our work, for research purposes, we used off-line data obtained from published work (Troy *et al.*, 2015). Our software sensor is composed of a dynamic grey box model and dynamic data on animal

feeding behaviour measured either as DMI or simply as intake time (IT).

Material and methods

Experimental data

Model building was supported by the analysis of experimental data obtained from studies conducted at Scotland's Rural College (SRUC, UK) with finishing beef steers from two breeds (cross-bred Charolais and purebred Luining) (Troy *et al.*, 2015). Animals received two contrasting basal diets consisting (g/kg dry matter (DM)) of 500 : 500 and 80 : 920 forage to concentrate ratios. Within each basal diet, there were two treatments: a control treatment with rapeseed meal as protein source, and an oil treatment with rapeseed cake as protein source to increase dietary oil from 27 (control) to 53 g/kg DM. Methane emissions were measured in a respiration chamber facility with a turnover rate constant of 0.04/min and a gas recovery of 98% (Rooke *et al.*, 2014). The gas sampling time was 6 min. The steers were fed once daily and had *ad libitum* access to feed. Dry matter intake was recorded using Hoko feed bins (Insentec, Marknesse, The Netherlands). We determined IT directly from the DMI data as a Boolean variable having the value 1 to indicate intake (eating) activity and 0 otherwise. A total of 37 individual dynamic patterns of methane production was analyzed.

Mathematical model development

A mass balance applied to the respiration chamber for methane gives the following ordinary differential equation (ODE):

$$\frac{dx_c(t)}{dt} = a \times x_a(t) - b \times (x_c(t) - x_i(t)) \quad (1)$$

where x_c , x_i are the amount (in grams) of methane inside the chamber and at the inlet of the chamber respectively, and x_a is the amount of methane in the gas flow released by the animal (exhalation + eructation). The parameter a (min^{-1}) is the rate constant of the animal gas emission and b (min^{-1}) is the turnover rate of the chamber. Note that in reality, a may be time varying. If x_i is almost constant over time and $x_i \ll x_c$, then equation (1) is simplified to:

$$\frac{dx_c(t)}{dt} = a \times x_a(t) - b \times x_c(t) \quad (2)$$

The quantity $a \times x_a$ is the gas produced (g/min) by the animal whereas $b \times x_c$ is the gas production (g/min) measured in the chamber. For mathematical convenience, we denote $y_a = a \times x_a$ and $y_c = b \times x_c$. Equation (2) is thus translated to:

$$\frac{dy_c(t)}{dt} = b \times (y_a(t) - y_c(t)) \quad (3)$$

If the turnover rate of the chamber is optimally chosen, it can be shown that y_c follows almost the same dynamics of y_a (see Supplementary material S1). In the remaining of the text, we will assume that $y_c = y_a$. Based on this assumption, we proposed the following ODE model for predicting the animal

methane emission y_a :

$$\frac{dy_a(t)}{dt} = c \times u(t) - d \times y_a(t) \quad (4)$$

where u is either the DMI or IT. Dry matter intake is in g/min and IT is a Boolean variable having the value 1 to indicate intake (eating) activity and 0 otherwise. The parameters c , d are specific to the animal and diet and must be estimated from the experimental data. The parameter d (min^{-1}). The parameter c is in $\text{g CH}_4/(\text{g} \times \text{DM} \times \text{min})$ or in $\text{g CH}_4/\text{min}^2$ when using DMI or IT as predictors respectively. The model in equation (4) has a parsimonious structure with only two parameters. Although very simple, it follows the structure of a mass balance model (as equation (2)) in aggregated form. Indeed, the quantity parameter d can be interpreted as a yield factor, that is the mass of methane produced per mass of DM (when using DMI as a predictor). Given this phenomenological characteristic, the model is referred to as a grey box model. Additionally, the model has the property of being identifiable, that is that the parameters c , d can, in theory, be uniquely estimated if noise-free dynamic data of y_a and u are available (see, for example, Muñoz-Tamayo *et al.*, 2018 for a discussion on parameter identifiability). The model in equation (4) can also be written in finite differential form. By applying backward differentiation with a constant time step Δt , we obtain:

$$y_a(t) = \frac{c \times \Delta t}{1 + d \times \Delta t} \times u(t) + \frac{1}{1 + d \times \Delta t} \times y_a(t - \Delta t) \quad (5)$$

Equation (5) is an exponential smoothing filter. After a sensitivity analysis (not shown), the step time was fixed to $\Delta t = 1.0$ min. The model was implemented in the open source software Scilab (<https://www.scilab.org>). Model calibration was performed by minimizing the sum of squared errors between experimental data and predicted output for each of the 37 dynamic methane patterns. The minimization was performed using the Nelder–Mead algorithm implemented in the `fminsearch` function of Scilab. Our grey box model has the simplest structure to represent the dynamics of methane emissions from time series data of DMI or IT. To assess if increasing model complexity could lead to gains in goodness of fitting, we tested the performance of different linear models (described by Laplace transfer functions) with higher number of parameters than our model using the Matlab® System Identification Toolbox (Ljung, 1997). Our model was the best linear candidate model with respect to the Akaike’s information criterion which provides an indicator of model parsimony based on a trade-off between goodness of fit and model complexity (quantified by the number of model parameters). The Lin’s concordance correlation coefficient (CCC) (Lin, 1989) was computed to quantify the agreement between the methane estimation provided by the software sensor and the methane measured in respiration chambers (the gold standard).

Results

Figure 1 shows typical data extracted from the experimental study. The dynamics of methane production is modulated by the feeding pattern (DMI or IT). Methane emissions increased following feeding and declined towards a basal value before the next feeding, as observed in other studies (Crompton *et al.*, 2011; Wang *et al.*, 2015; Olijhoek *et al.*, 2016). Figure 2 displays the individual dynamic pattern of methane production against software sensor predictions for the best and worst fitting cases. Plots are given for the model using either DMI or IT as predictors applied to both control and oil treatments. Figure 3 displays the observations *v.* predictions from both models for all dynamic individual data ($n = 15\,041$ time data points). Figure 4 shows the individual daily average methane emission ($n = 37$ steers) against predicted methane production. It is observed that individuals fed with the mixed basal diet produce more methane than those fed with the control basal diet (Troy *et al.*, 2015).

Tables 1 and 2 show the results of the model calibration for the individual dynamics of methane production using either DMI or IT as predictors for the control and oil treatments, respectively. Classical statistical indicators are also given. The statistical analysis about the effects of genotype, basal diet and treatment on methane production has already been published (Troy *et al.*, 2015). To avoid redundancy, we focus here on the analysis of model parameters. Figure 5 shows the boxplots for the model parameters by treatment and basal diet. Table 3 shows the results of unpaired *t*-tests at the 5% level testing for a difference in parameter means in concentrate *v.* mixed basal diets and rapeseed meal *v.* rapeseed cake. The model parameter c is significantly lower for a concentrate diet compared with a mixed basal diet, but parameter d is not significantly different (at the 5% level) for each diet. This is to be expected as c includes the methane yield factor that converts $u(t)$ (DMI or IT) to $y_a(t)$, whereas d is simply a specific rate constant related to gas release. Although the methane yield depends on the level of concentrate in the diet, the concentrate level might not have impact on the rate of gas release (exhalation + eructation).

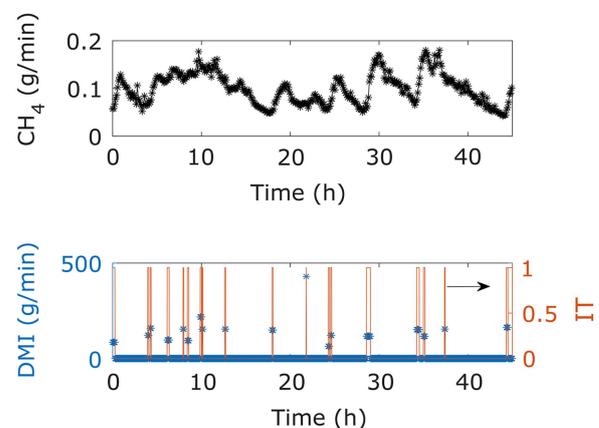


Figure 1 Example of dynamic data of methane production (top) and feeding behaviour measured as dry matter intake (DMI) (*) and intake time (IT) (solid line) from beef steers.

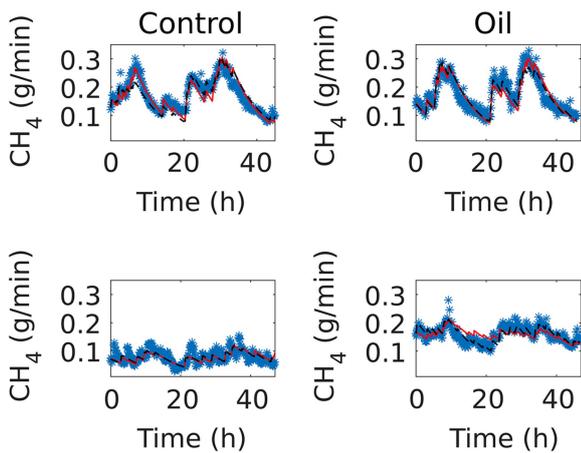


Figure 2 Experimental (*) v. predicted methane emissions from beef steers using dry matter intake (DMI) (red solid line) and intake time (IT) (dashed black line) as predictors for control and oil treatments. Top plots are the experiments where model fits were the best. Bottom plots are the experiments where model fits were the poorest. Intake time is as good predictor as DMI.

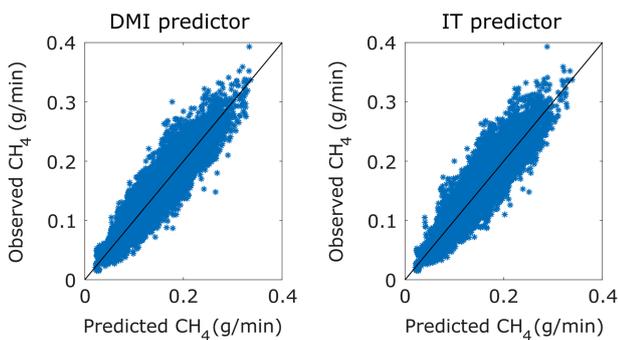


Figure 3 Experimental data v. predicted output of the dynamic pattern of methane of production from beef steers. The isocline is the solid line. Results are presented for the model using either dry matter intake (DMI) or intake time (IT) as predictors.

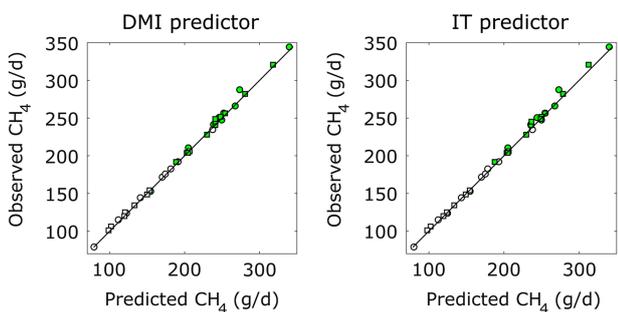


Figure 4 Experimental data v. predicted output of daily average methane emission production from beef steers for control (o) and oil (□) treatments. Filled marks are for the mixed basal diet, unfilled marks are for the concentrate basal diet. The isocline is the solid line. Results are presented for the model using either dry matter intake (DMI) or intake time (IT) as predictors.

The level of dietary oil (oil and control) did not have significant effect on any of the parameters.

Our software sensor provides satisfactory results for predicting the dynamics of methane production with similar

levels of performance between DMI and IT as predictors. For DMI, the average CCC was of 0.79. For IT, the average CCC was 0.76. Interestingly, for 14 out of 37 dynamic data, the CCC for IT was higher than the CCC for DMI, indicating the great potential of using IT as predictor. When the software sensor was applied for predicting the daily average methane emission (Figure 4), the CCC was 0.99. On the basis of concordance analysis, our software sensor performs very well compared with reported literature results for methane proxies and predictive models (Wang *et al.*, 2015; Negussie *et al.*, 2017a; Niu *et al.*, 2018).

Discussion

The primary role of the feeding pattern on methane emissions in cattle (Crompton *et al.*, 2011) motivated us to investigate the capability of predicting the dynamics of methane production from cattle using only time-series data of feeding behaviour (DMI or IT) *via* the construction of a software sensor. The objective of this construction was to develop a suitable tool for estimating methane that could be applied at large scale. The outcome of our work is encouraging to envisage a real-time implementation provided that accurate measurements or estimations of feeding behaviour are guaranteed, which is in compliance with other studies (Appuhamy *et al.*, 2016). As the pattern of feeding behaviour is an individual trait among ruminants (Morita *et al.*, 1996; Giger-Reverdin *et al.*, 2012), individual characterization of feeding patterns is central for producing individual estimations of methane by ruminants in a large scale context. As occurs in all model development, the quality of the prediction of our model strongly depends on the quality of the estimation of feed intake. Errors associated with DMI and IT estimation from on-line sensors will be propagated to the methane estimation. To allow robust estimation on-line, diagnostic algorithms should be implemented to identify sensor drift.

Our study suggest that IT is a good predictor of methane emissions. The use of IT as predictor in our model relies on the assumption that the intake rate is constant across the day. This assumption applied to the data analyzed here was shown to be adequate for methane prediction purposes, but additional data should be further analyzed to assess the assumption robustness. For a real implementation at large scale, using IT as predictor instead of DMI has great advantages in terms of costs and setting. Successful results on real-time determination of IT by means of accelerometers (Oudshoorn *et al.*, 2013; Arcidiacono *et al.*, 2017) are encouraging to make of our software sensor a feasible and low cost solution for on farm applications in the future. Recently, it has been suggested that, for a stable management of feed allocation, the diurnal pattern of methane is constant over time (Bell *et al.*, 2018), which, with respect to our modelling work, translates into a constant diurnal feeding behaviour pattern. Accordingly, monitoring IT offers an opportunity not only to predict methane

Table 1 Model calibration results of beef steers for the control treatment

Animal*	Model with DMI as predictor					Model with IT as predictor				
	$c/10^5 \text{ gCH}_4/(\text{g} \times \text{DM} \times \text{min})$	$d/10^3 /\text{min}$	CCC**	r^2	$\text{CV}_{\text{RMSE}}^{***}$	$c/10^3 \text{ gCH}_4/\text{min}^2$	$d/10^3 /\text{min}$	CCC	r^2	CV_{RMSE}
ChC1	2.93	2.35	0.74	0.51	22.53	3.47	2.12	0.78	0.61	20.07
ChC2	2.51	2.53	0.78	0.58	23.29	2.04	2.32	0.72	0.50	25.50
ChC4	3.63	2.31	0.80	0.64	18.71	3.19	2.33	0.72	0.54	21.27
ChC5	3.55	1.38	0.85	0.72	13.81	2.36	1.49	0.80	0.61	16.38
ChC6	2.84	1.90	0.66	0.46	14.41	2.83	1.68	0.61	0.42	14.89
ChM1	4.80	2.12	0.92	0.83	12.90	3.78	1.90	0.89	0.77	14.89
ChM3	3.08	1.17	0.82	0.63	16.55	0.79	0.47	0.70	0.50	19.21
ChM4	4.53	1.49	0.81	0.63	12.03	7.22	1.87	0.85	0.69	10.96
ChM5	4.17	1.62	0.77	0.59	16.70	3.60	1.46	0.77	0.57	17.07
LuC1	3.21	2.26	0.88	0.76	13.47	2.51	1.78	0.81	0.69	15.38
LuC3	3.50	1.76	0.83	0.72	13.26	2.51	1.57	0.71	0.52	17.35
LuC4	3.41	1.60	0.83	0.67	10.61	1.88	0.98	0.77	0.63	11.26
LuC6	2.00	1.58	0.52	0.26	24.35	2.06	1.58	0.53	0.31	23.64
LuM1	4.59	1.87	0.91	0.79	13.92	3.93	1.88	0.90	0.78	14.37
LuM3	2.21	1.24	0.61	0.43	20.09	1.74	1.08	0.59	0.41	20.35
LuM4	4.37	1.37	0.81	0.65	16.02	5.29	1.85	0.74	0.52	18.90
LuM5	5.30	1.90	0.87	0.71	13.54	3.42	1.91	0.91	0.82	10.71
LuM6	3.52	1.41	0.89	0.79	12.70	2.48	1.46	0.87	0.74	13.93
Mean	3.56	1.77	0.79	0.63	16.05	3.06	1.65	0.76	0.59	17.01

DMI = dry matter intake; IT = intake time; DM = dry matter; CCC = concordance correlation coefficient.

*Animals are identified by the type of breed: Charolais (Ch) or Luing (Lu), and the type of basal diet: mixed (M) or concentrate (C).

**CCC: Lin's CCC.

*** CV_{RMSE} : coefficient of variation of the root mean squared error.

Table 2 Model calibration results of beef steers for the oil treatment

Animal*	Model with DMI as predictor					Model with IT as predictor				
	$c/10^5 \text{ gCH}_4(\text{g} \times \text{DM} \times \text{min})$	$d/10^3 /\text{min}$	CCC**	r^2	$\text{CV}_{\text{RMSE}}^{***}$	$c/10^3 \text{ gCH}_4/\text{min}^2$	$d/10^3 /\text{min}$	CCC	r^2	CV_{RMSE}
ChC1	2.90	2.08	0.88	0.77	21.01	4.20	2.36	0.89	0.79	20.33
ChC3	2.52	1.13	0.84	0.72	12.71	1.54	1.15	0.85	0.73	12.34
ChC5	3.21	2.65	0.80	0.63	18.06	2.20	2.61	0.84	0.72	15.66
ChC6	2.94	1.54	0.76	0.52	15.94	2.12	1.49	0.87	0.76	11.20
ChM1	2.14	0.95	0.53	0.31	14.05	2.49	1.54	0.82	0.66	9.82
ChM2	3.48	1.45	0.80	0.61	11.38	2.29	1.39	0.81	0.64	10.99
ChM3	3.28	1.39	0.82	0.66	12.45	2.88	1.10	0.69	0.46	15.73
ChM4	3.79	1.54	0.84	0.70	13.20	3.59	1.33	0.73	0.51	16.97
ChM5	4.49	2.06	0.91	0.80	11.70	3.53	1.95	0.76	0.47	19.05
ChM6	2.77	1.40	0.86	0.77	12.75	1.85	1.19	0.83	0.73	13.89
LuC2	1.74	1.25	0.53	0.26	14.67	0.19	0.33	0.15	0.05	16.58
LuC3	3.17	2.40	0.78	0.60	23.11	4.21	2.27	0.77	0.59	23.26
LuC4	2.73	1.77	0.87	0.76	18.44	2.27	1.79	0.89	0.80	16.62
LuC5	3.29	2.63	0.71	0.53	18.72	2.24	2.39	0.69	0.48	19.57
LuM1	4.58	2.01	0.90	0.81	10.49	4.86	1.97	0.86	0.74	12.32
LuM2	4.74	1.95	0.91	0.82	14.59	3.57	1.88	0.93	0.86	12.93
LuM4	4.88	2.55	0.65	0.35	20.04	7.34	2.43	0.62	0.31	20.69
LuM5	3.56	1.45	0.79	0.47	11.48	2.47	1.22	0.90	0.82	6.69
LuM6	4.34	2.17	0.75	0.61	11.97	2.36	1.57	0.90	0.82	8.15
Mean	3.40	1.81	0.79	0.62	15.09	2.96	1.68	0.78	0.63	14.88

DMI = dry matter intake; IT = intake time; DM = dry matter; CCC = concordance correlation coefficient.

*Animals are identified by the type of breed: Charolais (Ch) or Luing (Lu), and the type of basal diet: mixed (M) or concentrate (C).

**CCC: Lin's CCC.

*** CV_{RMSE} : coefficient of variation of the root mean squared error.

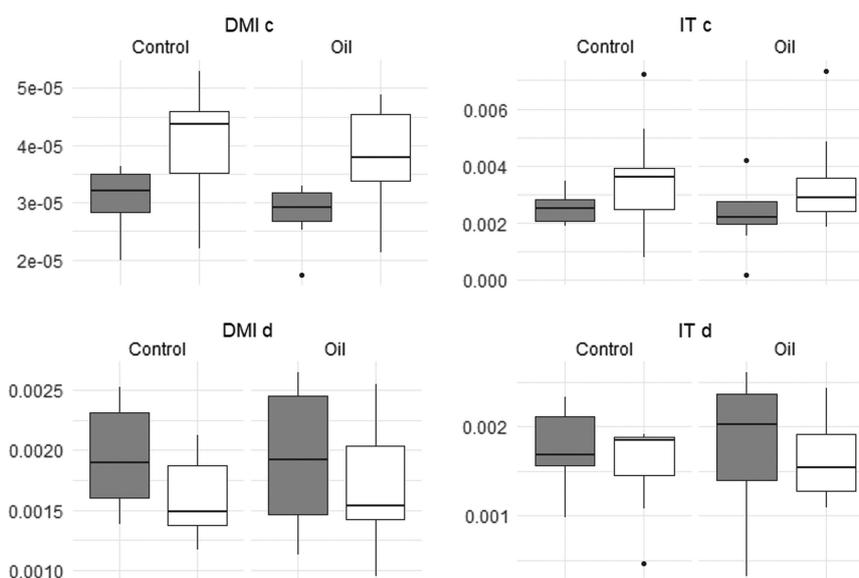


Figure 5 Estimated parameters of the model of methane emission from beef steers by treatment (control and oil). Grey boxes are for the concentrate basal diet and white boxes are for the mixed basal diet.

Table 3 P-values when testing for a difference in the means of the model parameters (c,d) between basal diet and level of dietary oil groups

P-values	Basal diet	Level of dietary oil
DMI \times c	<0.001	0.5807
DMI \times d	0.0603	0.8048
IT \times c	0.0287	0.8349
IT \times d	0.2508	0.8596

DMI = dry matter intake; IT = intake time.

emissions but also a tool to characterize individual normal feeding patterns. By this, it will be possible to signal when an animal exhibits a different pattern from its normal pattern. This change of pattern could be associated to a perturbation, providing useful information for timely interventions.

Finally, a software sensor is meant to operate in real time using on-line measurements. In this work, however, our analysis was developed off-line. Further work needs to be carried out to evaluate the developed software sensor in real-time by integrating accelerometers for IT estimation. Running the software sensor requires prior calibration of the model parameters. In our study, model calibration was performed with data from respiration chambers. We have observed that feeding behaviour may differ between respiration chamber and barn conditions. However, for a given diet, it is a good approximation to assume that methane yield (represented in our model by the parameter c) will not vary. Accordingly, we expect that the mathematical model will be valid in barn conditions, as the methane production estimation will always be dependent on the actual measurement of DMI or IT. It is important to highlight that the parameter c is diet specific and need to be estimated when testing for instance a methane inhibition feed. Respiration chambers are the gold

standard for enteric methane estimation and thus model calibration should ideally be performed using chambers. However, since the use of respiration chambers at large scale is costly, an alternative is to use the GreenFeed system given its reliability for determining methane emissions on farm (Doreau *et al.*, 2018), when appropriate protocols are used (Renand and Maupetit, 2016). It is clear however, that for a practical implementation, even the GreenFeed system might not be available for model calibration, so other methods for methane estimation, such as those reviewed by Hammond *et al.*, (2016), will be required. Implementation of our estimator is then conditioned by the ability to monitor feeding behaviour and to have accurate methane data for the preliminary model calibration. Once the model parameters are estimated, the software sensor can be applied by setting an initial condition for methane production. This initial condition has a strong impact on the amplitude of the methane emissions pattern. In our study, we extracted the initial condition from the experimental data. For real implementation, it would be recommended to start the software sensor at a moment when the methane production is close to the basal production of methane (e.g. before a meal). From the experiments analyzed in this study, the basal production of methane was between 0.015 and 0.13 g/min. The strategy of starting the software sensor at a moment where the methane production is close to basal production reduces the impact of a wrong choice of initial condition. Since the methane emission pattern might change over age and the physiological state of animals (e.g., lactation stage for dairy cattle), adjustment of model parameters might be required when appropriate.

Acknowledgements

The authors thank Dr John A. Rooke for helpful explanations on the respiration data from the study conducted at SRUC. The

authors thank Dr Glenn Marion (BioSS) for his valuable comments for improving the clarity of the manuscript. John Fredy Ramírez Agudelo is supported by a PhD grant of Colciencias (Colombia). BioSS and SRUC are funded by the Scottish Government through the Strategic Research programme of the Scottish Government's Rural and Environment Science and Analytical Services Division (RESAS). Helen Kettle was also funded under the Scottish Government's Strategic Partnership in Animal Science Excellence.

Note: a pre-print version of this manuscript has first been published at <https://www.biorxiv.org/content/early/2018/04/10/298679>

Declaration of interest

The authors declare to have no conflicts of interest.

Ethics statement

No statement.

Software and data repository resources

The Scilab implementation of the model and the calibration routine with virtual data will be made available on request for academic purposes.

Supplementary material

To view supplementary material for this article, please visit <https://doi.org/10.1017/S1751731118002550>

References

Appuhamy JADRN, France J and Kebreab E 2016. Models for predicting enteric methane emissions from dairy cows in North America, Europe, and Australia and New Zealand. *Global Change Biology* 22, 3039–3056.

Arcidiacono C, Porto SMC, Mancino M and Cascone G 2017. Development of a threshold-based classifier for real-time recognition of cow feeding and standing behavioural activities from accelerometer data. *Computers and Electronics in Agriculture* 134, 124–134.

Bell M, Craigon J, Saunders N, Goodman J and Garnsworthy P 2018. Does the diurnal pattern of enteric methane emissions from dairy cows change over time? *Animal* 22, 1–6.

Charmley E, Williams SRO, Moate PJ, Hegarty RS, Herd RM, Oddy VH, Reyenga P, Staunton KM, Anderson A and Hannah MC 2016. A universal equation to predict methane production of forage-fed cattle in Australia. *Animal Production Science* 56, 169–180.

Crompton LA, Mills JAN, Reynolds CK and France J 2011. Fluctuations in methane emission in response to feeding pattern in lactating dairy cows. In *Modelling nutrient digestion and utilisation in farm animals* (ed. D Sauvant, J Van Milgen, P Faverdin and NN Friggens), pp. 176–180. Wageningen Academic Publishers, Wageningen, The Netherlands.

Dochain D 2003. State and parameter estimation in chemical and biochemical processes: a tutorial. *Journal of Process Control* 13, 801–818.

Doreau M, Arbre M, Rochette Y, Lascoux C, Eugène M and Martin C 2018. Comparison of 3 methods for estimating enteric methane and carbon dioxide emission in nonlactating cows. *Journal of Animal Science* 96, 1559–1569.

Friggens NC, Blanc F, Berry DP and Puillet L 2017. Review: deciphering animal robustness. a synthesis to facilitate its use in livestock breeding and management. *Animal* 11, 2237–2251.

Gardiner TD, Coleman MD, Innocenti F, Tompkins J, Connor A, Garnsworthy PC, Moorby JM, Reynolds CK, Waterhouse A and Wills D 2015. Determination of the

absolute accuracy of UK chamber facilities used in measuring methane emissions from livestock. *Measurement* 66, 272–279.

Giger-Reverdin S, Lebarbier E, Duvaux-Ponter C and Desnoyers M 2012. A new segmentation-clustering method to analyse feeding behaviour of ruminants from within-day cumulative intake patterns. *Computers and Electronics in Agriculture* 83, 109–116.

Giger-Reverdin S, Morand-Fehr P and Tran G 2003. Literature survey of the influence of dietary fat composition on methane production in dairy cattle. *Livestock Production Science* 82, 73–79.

Hammond K, Crompton LA, Bannink A, Dijkstra J, Yanez-Ruiz DR, O'Kiely P, Kebreab E, Eugene MA, Yu Z, Shingfield KJ, Schwarm A, Hristov AN and Reynolds CK 2016. Review of current in vivo measurement techniques for quantifying enteric methane emission from ruminants. *Animal Feed Science and Technology* 219, 13–30.

Hristov AN, Oh J, Firkins JL, Dijkstra J, Kebreab E, Waghorn G, Makkar HPS, Adesogan AT, Yang W, Lee C, Gerber PJ, Henderson B and Tricarico JM 2013. Special topics—mitigation of methane and nitrous oxide emissions from animal operations: I. A review of enteric methane mitigation options. *Journal of Animal Science* 91, 5045–5069.

Huhtanen P, Ramin M and Udén P 2015. Nordic dairy cow model Karoline in predicting methane emissions: 1. Model description and sensitivity analysis. *Livestock Science* 178, 71–80.

Lin LI 1989. A concordance correlation coefficient to evaluate reproducibility. *Biometrics* 45, 255–268.

Ljung L 1997. System identification toolbox for use with Matlab. The Mathworks, Inc. Natick, MA, USA.

Martin C, Morgavi DP and Doreau M 2010. Methane mitigation in ruminants: from microbe to the farm scale. *Animal* 4, 351–365.

Mills JA, Dijkstra J, Bannink A, Cammell SB, Kebreab E and France J 2001. A mechanistic model of whole-tract digestion and methanogenesis in the lactating dairy cow: model development, evaluation, and application. *Journal of Animal Science* 79, 1584–1597.

Morita S, Devir S, Ketelaar-De Lauwere CC, Smits AC, Hogeveen H and Metz JHM 1996. Effects of concentrate intake on subsequent roughage intake and eating behavior of cows in an automatic milking system. *Journal of Dairy Science* 79, 1572–1580.

Muñoz-Tamayo R, Giger-Reverdin S and Sauvant D 2016. Mechanistic modelling of in vitro fermentation by rumen microbiota. *Animal Feed Science and Technology* 220, 1–21.

Muñoz-Tamayo R, Puillet L, Daniel JB, Sauvant D, Martin O, Taghipoor M and Blavy P 2018. Review: to be or not to be an identifiable model. Is this a relevant question in animal science modelling? *Animal* 12, 701–712.

Negussie E, de Haas Y, Dehareng F, Dewhurst RJ, Dijkstra J, Gengler N, Morgavi DP, Soyeurt H, van Gastelen S, Yan T and Biscarini F 2017b. Invited review: large-scale indirect measurements for enteric methane emissions in dairy cattle: a review of proxies and their potential for use in management and breeding decisions. *Journal of Dairy Science* 100, 2433–2453.

Negussie E, Lehtinen J, Mantysaari P, Bayat AR, Linnanmäki AE, Mantysaari EA and Lidauer MH 2017a. Non-invasive individual methane measurement in dairy cows. *Animal* 11, 890–899.

Niu M, Kebreab E, Hristov AN, Oh J, Arndt C, Bannink A, Bayat AR, Brito AF, Boland T, Casper D, Crompton LA, Dijkstra J, Eugène MA, Garnsworthy PC, Haque MN, Hellwing ALF, Huhtanen P, Kreuzer M, Kuhla B, Lund P, Madsen J, Martin C, McClelland SC, McGee M, Moate PJ, Muetzel S, Muñoz C, O'Kiely P, Peiren N, Reynolds CK, Schwarm A, Shingfield KJ, Storlien TM, Weisbjerg MR, Yáñez-Ruiz DR and Yu Z 2018. Prediction of enteric methane production, yield and intensity in dairy cattle using an intercontinental database. *Global Change Biology* 24, 3368–3389.

Olijhoek DW, Hellwing ALF, Brask M, Weisbjerg MR, Hojberg O, Larsen MK, Dijkstra J, Erlandsen EJ and Lund P 2016. Effect of dietary nitrate level on enteric methane production, hydrogen emission, rumen fermentation, and nutrient digestibility in dairy cows. *Journal of Dairy Science* 99, 6191–6205.

Oudshoorn FW, Cornou C, Hellwing ALF, Hansen HH, Munksgaard L, Lund P and Kristensen T 2013. Estimation of grass intake on pasture for dairy cows using tightly and loosely mounted di- and tri-axial accelerometers combined with bite count. *Computers and Electronics in Agriculture* 99, 227–235.

Ramin M and Huhtanen P 2013. Development of equations for predicting methane emissions from ruminants. *Journal of Dairy Science* 96, 2476–2493.

Renand G and Maupetit D 2016. Assessing individual differences in enteric methane emission among beef heifers using the GreenFeed Emission Monitoring system: effect of the length of testing period on precision. *Animal Production Science* 56, 218–223.

Rooke JA, Wallace RJ, Duthie CA, McKain N, de Souza SM, Hyslop JJ, Ross DW, Waterhouse T and Roehe R 2014. Hydrogen and methane emissions from beef cattle and their rumen microbial community vary with diet, time after feeding and genotype. *British Journal of Nutrition* 112, 398–407.

Rutten CJ, Velthuis AGJ, Steeneveld W and Hogeveen H 2013. Invited review: sensors to support health management on dairy farms. *Journal of Dairy Science* 96, 1928–1952.

Sauvant D, Giger-Reverdin S, Serment A and Broudiscou L 2011. Influences des regimes et de leur fermentation dans le rumen sur la production de methane par les ruminants. *Productions Animales* 24, 433.

Troy SM, Duthie CA, Hyslop JJ, Roehe R, Ross DW, Wallace RJ, Waterhouse A and Rooke JA 2015. Effectiveness of nitrate addition and increased oil content as methane mitigation strategies for beef cattle fed two contrasting basal diets. *Journal of Animal Science* 93, 1815–1823.

Vetharaniam I, Vibart RE, Hanigan MD, Janssen PH, Tavendale MH and Pacheco D 2015. A modified version of the Molly rumen model to quantify methane emissions from sheep. *Journal of Animal Science* 93, 3551–3563.

Wang M, Wang R, Sun X, Chen L, Tang S, Zhou C, Han X, Kang J, Tan Z and He Z 2015. A mathematical model to describe the diurnal pattern of enteric methane emissions from non-lactating dairy cows post-feeding. *Animal Nutrition* 1, 329–338.

Wathes CM, Kristensen HH, Aerts JM and Berckmans D 2008. Is precision livestock farming an engineer's daydream or nightmare, an animal's friend or foe, and a farmer's panacea or pitfall? *Computers and Electronics in Agriculture* 64, 2–10.