



HAL
open science

BIO-HYBRID EXPERIMENTS USING TUNABLE REAL-TIME BIOMIMETIC NEURAL NETWORK

Farad Khoystatee, Thomas Benneteau, Agnès Tixier-Mita, Sylvain Saïghi,
Timothée Levi

► **To cite this version:**

Farad Khoystatee, Thomas Benneteau, Agnès Tixier-Mita, Sylvain Saïghi, Timothée Levi. BIO-HYBRID EXPERIMENTS USING TUNABLE REAL-TIME BIOMIMETIC NEURAL NETWORK. 10th International Symposium on Microchemistry and Microsystems (ISMM 2018), Jun 2018, Busan, South Korea. hal-02484017

HAL Id: hal-02484017

<https://hal.science/hal-02484017>

Submitted on 19 Feb 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

BIO-HYBRID EXPERIMENTS USING TUNABLE REAL-TIME BIOMIMETIC NEURAL NETWORK

Farad Khoystatee^{1,2}, Thomas Benneteau², Agnès Tixier-Mita², Sylvain Saïghi¹, Timothée Levi^{1,2}

¹ IMS, University of Bordeaux, France,

² IIS, University of Tokyo, Japan

INTRODUCTION

Neuroscience has been the object of many studies and new fields these last decades leading to an era where technology and biology could be mixed in order to find advanced solutions for curing diseases. Neuroprosthesis require to take into consideration the biological activity of the cells and the connection between machines and biological cells. Understanding the mechanism underlying of affected cells also require to use a tunable and real time system such as a Field Programmable Gate Array (FPGA) to explore different conditions and parameters. Here, we propose to study neurological diseases by using digital hardware system reproducing the spike activity of Fast Spiking (FS), Regular Spiking (RS), Intrinsically Bursting (IB) and Low-Threshold Spiking (LTS) class of cortical neurons [1]. We use Hodgkin and Huxley (HH) [2] which is the most bio-plausible model.

METHODS

Mathematical statements using HH paradigm are complex but it is possible to reduce them by using mathematical and numerical functions like COordinate Rotation DIgital Computer (CORDIC) to perform hyperbolic functions, Euler methods to solve derivative functions and non-restoring divisions. The more the equations are reduced, the more the speed and space are increased. Thus, implementing other biological parameters like axonal delay, synaptic noise is possible. Synapses and short-term plasticity have also been implemented and allow the chip to compute biomimetic locomotion with Central Patter Generator (CPG). The integrated system is fully pipelined and is composed of a main unit managing RAM, computation units and the Digital to Analog Converter (DAC) which is used to output the APs. Moreover, Real-time modification of biological parameters like reversal potential, ionic conductance or membrane capacitance is allowed. The results have been verified by comparing biological data in [2] and electrical activities from the FPGA. Then, cross-correlation equations have

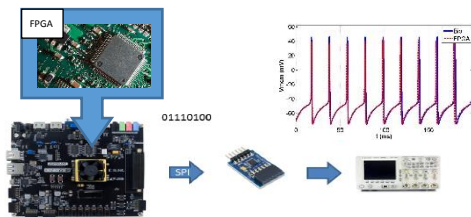


Figure 1: Set-up to observe the FPGA output

been used to evaluate the proximity rate of the results.

RESULTS

Mathematical equations have been significantly simplified. Resources are reduced by 80% from original model. Regular and simplified equations of biomimetic neural network are implemented on a FPGA. Electrical activities of different classes of cortical neurons can be simulated in biological time scale. Mathematical tools show strong correlation between hardware simulations and biological recordings (see figure 1). This biomimetic system is ready for bio-hybrid experiments with 'in vitro' neuron culture.

CONCLUSION

A biomimetic chip has been designed using mathematical and numerical technics for bio-hybrid experiments. The simplification of the equations allow future work on the implementation of multi-compartmental model which takes account of different part of cells, characterization of disorders effect on a neural networks. This system can be connected to an in-vitro culture with a pattern using a microfluidic technic (see figure 2).




Figure 2: In-vitro culture using microfluidics technic stimulated by electrical system

References

- [1] Pospischil M, Toledo-Rodriguez M, Monier C, Piwkowska Z, Bal T, Frégnac Y, Markram H, Destexhe A, "Minimal Hodgkin-Huxley type models for different classes of cortical and thalamic neurons", in *Biological Cybernetics*, 2008, 99:427-441
- [2] Hodgkin AL, Huxley AF, "A quantitative description of membrane current and its applications to conduction and excitation in nerve", in *The Journal of Physiology*, 1952, 117:500-544
- [3] Hill AAV, Lu J, Masino MA, Olsen OH, Calabrese RL, "A Model of a Segmental Oscillator in the Leech Heartbeat Neuronal Network », in *Journal of Computational Neuroscience*, 2001, 10:281-302

KEYWORDS: Biomimetic, Neural Network, Hodgkin-Huxley, FPGA, Bio-hybrid Experiments