



**HAL**  
open science

# The Extended Kanban System for Production Control of Assembly Systems

Claudine Chaouiya, George Liberopoulos, Yves Dallery

► **To cite this version:**

Claudine Chaouiya, George Liberopoulos, Yves Dallery. The Extended Kanban System for Production Control of Assembly Systems. [Research Report] lip6.1998.024, LIP6. 1998. hal-02547737

**HAL Id: hal-02547737**

**<https://hal.science/hal-02547737>**

Submitted on 20 Apr 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# The Extended Kanban System for Production Control of Assembly Systems

C. Chaouiya<sup>\*</sup>, G. Liberopoulos<sup>\*\*</sup>, Y. Dallery<sup>\*\*\*</sup>

**Abstract :** In many manufacturing systems, production of parts proceeds in stages. An important managerial concern is how to control the flow of parts through the stages. In many systems this is done by implementing a pull control policy, that is, a policy that decides when to produce parts based on when customer demands arrive to the system. A significant amount of work has been devoted to this issue for serial systems, i.e., systems consisting of stages in series. Different pull control mechanisms have been proposed in the literature, among which the Base Stock Control System (BSCS) the Kanban Control System (KCS) and the Generalized Kanban Control System (GKCS) are of special interest. Recently a new control mechanism referred to as the Extended Kanban Control System (EKCS) was introduced in [7]. The purpose of this paper is to generalize the EKCS to assembly structures. It turns out that we need to define two different control policies depending on whether parts are transferred simultaneously or independently into the assembly stage. This leads to the definition of the Simultaneous Extended Kanban Control System (SEKCS) and the Independent Extended Kanban Control System (IEKCS). Properties and comparisons of these two control mechanisms are presented.

---

\* Université Française du Pacifique, CUNC  
BP4477, 98847 Noumea - NEW CALEDONIA  
chaouiya@ufp.nc

\*\* University of Thessaly, Department of Mechanical and Industrial Engineering  
Pedion Areos  
GR-38334 Volos - GREECE  
glib@uth.gr

\*\*\* LIP6, Laboratoire d'Informatique de Paris 6  
Université Pierre et Marie Curie - CNRS  
4, Place Jussieu - F-75252 Paris Cedex 05 - FRANCE  
Yves.Dallery@lip6.fr

## 1. Introduction

In many manufacturing systems, production of parts proceeds in stages. Each stage may be thought of as a production/inventory system composed of a manufacturing process and an output buffer. The manufacturing process may consist of a single machine or a subnetwork of several machines (e.g. a production line or a manufacturing cell). It contains parts which are currently being processed (referred to as the *Work In Process*, (WIP) of the stage). The output buffer is a storage area that contains parts that have completed processing in the stage (referred to as *finished parts* of the stage). The manufacturing system is fed by raw parts, and releases finished parts to customers.

An important managerial concern is how to control the flow of parts through the stages. In many systems this is done by implementing a pull control policy, that is, a policy that decides when to produce parts based on when customer demands arrive to the system. A significant amount of work has been devoted to this issue for serial systems, i.e., systems consisting of stages in series. Different pull control mechanisms have been proposed in the literature, among which the Base Stock Control System (BSCS) and the Kanban Control System (KCS) have proved to be of high interest [4]. The BSCS is a classical mechanism borrowed from inventory theory, while the KCS was invented by Toyota and has since been widely used in industry. The main advantage of these control policies is that they are very simple to understand and implement. In particular, they depend on only one parameter per stage. Therefore, to define a policy of this type it suffices to fix this parameter for each stage of the system. However, it has also been found that these policies do not always achieve a good trade-off between inventory costs and customer service levels. As a result, several authors have proposed more general pull control policies with the goal of leading to better trade-offs. Among these, the Generalized Kanban Control System (GKCS) introduced in [3] and studied in detail in [4] and the Extended Kanban Control System (EKCS) proposed in [7] are of special interest. Both of these policies are characterized by two parameters per stage. A general discussion and comparison of these four control policies can be found in [7]. It appears that the EKCS has some important advantages over the GKCS.

For industrial applications, it is important to extend these control policies to systems having more general structures, in particular assembly systems. In this case, a stage may have more than one immediate upstream stage. Although this situation is highly encountered in industry, little work has been done in this area. In [8] the KCS is extended to assembly systems. One important additional feature arises (with respect to the serial system case), namely the definition of the way parts are released into the assembly stage. Two cases can be considered, namely a simultaneous transfer mechanism or an independent transfer mechanism leading to the definition of the so-called Simultaneous Kanban Control System (SKCS) and the Independent Kanban Control System (IKCS), respectively.

The purpose of this paper is to generalize the EKCS to assembly structures. As for the KCS we need to define two different control policies depending on whether parts are transferred simultaneously or independently into the assembly stage. This leads to the definition of the Simultaneous Extended Kanban Control System (SEKCS) and the Independent Extended Kanban Control System (IEKCS).

The rest of the paper is organized as follows. Section 2 briefly describes the EKCS defined in [7] in the case of serial systems. In section 3, we define the generalization of the EKCS to assembly systems, successively describing the SEKCS and the IEKCS. Properties of these two

control mechanisms are given in section 4. These properties are pertaining to invariants, bounds, evolution equations, the influence of the variation of the parameters and production capacity. Finally, the two mechanisms are compared in section 5. For the sake of completeness, the generalizations of the BSCS and the KCS to assembly systems are discussed in Appendix A.


## 2. Extended Kanban Control System: stages in series

The EKCS has recently been introduced by Y.Dallery and G.Liberopoulos in [7]. This new kanban based control system appears to be an interesting alternative to other pull controlled systems. The EKCS has the following features:

- simplicity,
- limitation of the WIP in each stage (unlike in the Base Stock Control System),
- immediate transfer of demands to all stages of the system (unlike in the Kanban Control System),
- clearly separated role of the parameters, number of kanbans and base stock level (unlike in the Generalized Kanban Control System).


In this section, we briefly describe the Extended Kanban Control System for a manufacturing system having stages in series. For a detailed description and properties, refer to [7].

Figure 2-1 describes a manufacturing system having N stages in series. Each stage may be seen as a manufacturing process (single machine, production line, flexible manufacturing cell, job-shop, etc.) with an output buffer.

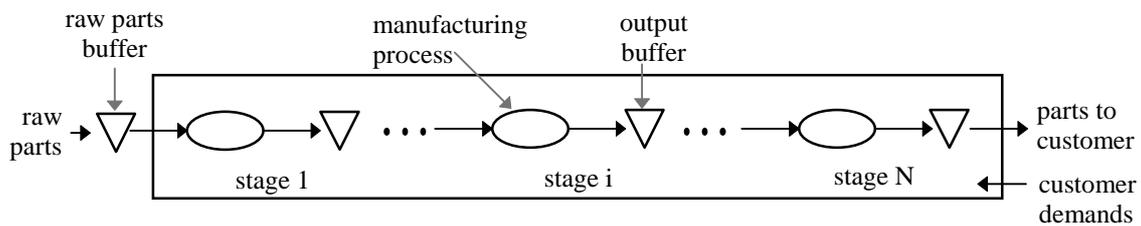

**Figure 2-1: Manufacturing system with N stages in series**

The EKCS is a pull control mechanism that can be viewed as a combination of the Base Stock Control System (BSCS) and the Kanban Control System (KCS) (see [4], [7] and Appendix A). Figure 2-2 shows the queueing network model of an EKCS having N stages in series.

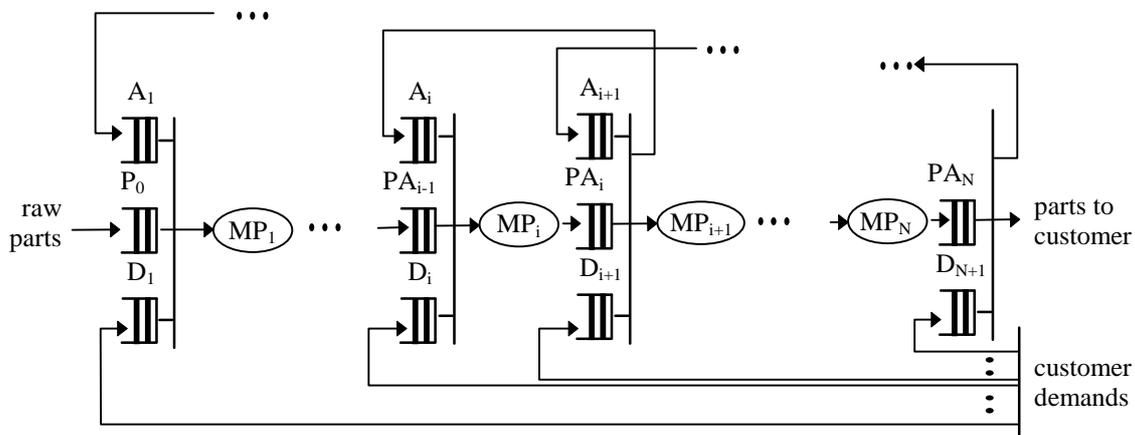

**Figure 2-2: Queueing network model of the EKCS**

We use the following notation introduced in [7]:

$p_i$	$i=1, \dots, N$	a stage- $i$ finished part
$q_i$	$i=1, \dots, N$	a part currently being processed in stage $i$
$d_i$	$i=1, \dots, N$	a demand for the production of a new $p_i$
$d_{N+1}$		a demand for a $p_N$
$a_i$	$i=1, \dots, N$	an authorization card (kanban) for the production of a new $p_i$

Table 2-1 describes the contents and initial values of the queues, or network of queues in the case of  $MP_i$ , in Figure 2-2:

Queue	Contents	Initial value
$MP_i$ $i=1, \dots, N$	$(q_i, a_i)$	0
$PA_i$ $i=1, \dots, N$	$(p_i, a_i)$	$S_i$
$A_i$ $i=1, \dots, N$	$a_i$	$K_i - S_i$
$D_i$ $i=1, \dots, N+1$	$d_i$	0

**Table 2-1: Contents and initial values of the queues in the EKCS**

The initial number of raw parts in the raw parts buffer  $P_0$  and the arrival process of new parts into  $P_0$  fall outside the scope of the control mechanism and are considered as given.

Each stage  $i$  has  $K_i$  kanbans  $a_i$  that authorize the production of stage- $i$  finished parts. Initially, in stage  $i$ , there are  $S_i$  kanbans  $a_i$  attached onto an equal number of parts  $p_i$  in  $PA_i$ , and therefore  $K_i - S_i$  kanbans  $a_i$  in  $A_i$  (initially no part is being processed in  $MP_i$ ). When a customer demand arrives to the system, it is immediately transmitted to all stages by adding 1 to the contents  $d_i$  of queue  $D_i$  ( $i=1, \dots, N+1$ ).

The behavior of the system can be described as follows.

**Release of parts into the manufacturing stages:**

At the 1st manufacturing stage, queues  $P_0$ ,  $A_1$ , and  $D_1$  are joined in a synchronization station. Raw parts in  $P_0$  do not have any kanbans attached to them. Therefore the stage 1 can begin processing a part as soon as there are at least: one part  $p_0$  in  $P_0$ , one authorization card  $a_1$  in  $A_1$  and one demand  $d_1$  in  $D_1$ . When these conditions are satisfied, then,

- the kanban  $a_1$  is attached onto  $p_0$  which is relabelled  $q_1$ , and together they are transferred downstream to  $MP_1$  as a pair  $(q_1, a_1)$ , and
- the demand  $d_1$  is satisfied and is therefore discarded.

The  $i^{\text{th}}$  manufacturing stage ( $i=2, \dots, N$ ) can begin processing a part only when there are at least: a pair  $(p_{i-1}, a_{i-1})$  in  $PA_{i-1}$ , an authorization card  $a_i$  in  $A_i$  and a demand  $d_i$  in  $D_i$ . When these conditions are satisfied, then,

- the kanban  $a_{i-1}$  is detached from  $p_{i-1}$  and is transferred upstream to  $A_{i-1}$ ,
- the kanban  $a_i$  is attached onto  $p_{i-1}$  which is relabelled  $q_i$ , and together they are transferred downstream to  $MP_i$  as a pair  $(q_i, a_i)$ , and
- the demand  $d_i$  is satisfied and is therefore discarded.

When the part  $q_i$  ( $i=1, \dots, N$ ) finishes its processing in  $MP_i$ , it is relabelled  $p_i$ , and, together with the kanban  $a_i$  that was attached onto it, they join  $PA_i$  as a pair  $(p_i, a_i)$ .

### Delivery of finished parts to the customer:


There is no need for an authorization to release a finished part  $p_N$  to the customer. Therefore, the delivery of a finished part can occur as soon as there are a pair  $(p_N, a_N)$  in  $PA_N$  and a demand  $d_{R+1}$  in  $D_{R+1}$ . When these conditions are satisfied, then,

- the kanban  $a_N$  is detached from  $p_N$  and is transferred upstream to  $A_N$ ,
- the part  $p_N$  is released to the customer, and
- the demand  $d_{N+1}$  is satisfied and is therefore discarded.

The EKCS has two parameters per stage,  $K_i$  and  $S_i$ . These parameters must be adjusted to achieve a good compromise between 1) keeping a low inventory of parts in the system and 2) attaining a high level of immediate customer demand satisfaction. The use of kanbans guarantees that the number of parts (WIP plus the finished parts) in each stage is bounded by the number of kanbans in that stage.

### 3. Extended Kanban Control Systems for Assembly


The EKCS described for the serial system configuration in Figure 2-2 can be generalized to manufacturing systems having assembly system configuration. Figure 3-1 illustrates the topology of a system having assembly stages (stages supplied by several raw parts buffers) and manufacturing stages (stages supplied by a single raw parts buffer). This topology is a tree structure.

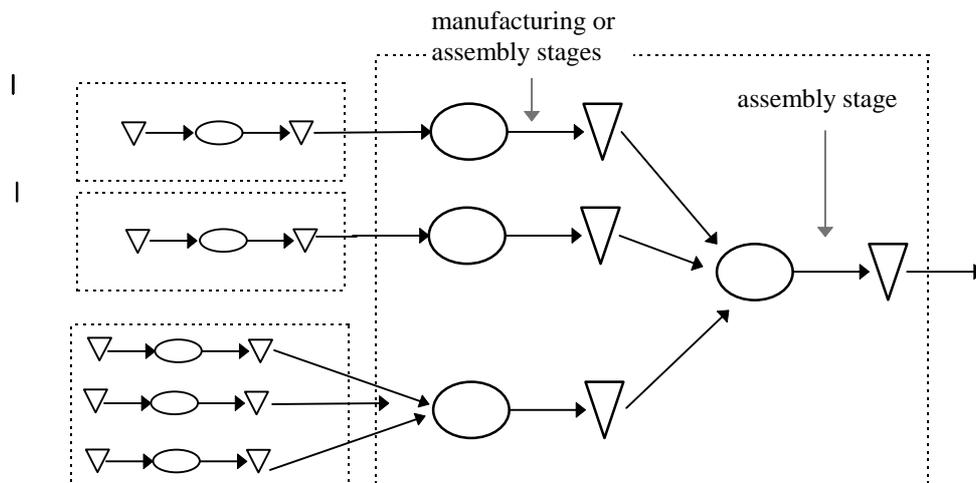

**Figure 3-1: General topology for assembly manufacturing systems**

For simplicity, we restrict our study to assembly systems having  $(R-1)$  manufacturing stages supplying a single assembly stage (Figure 3-2). However, the results in this paper can be easily extended to general topologies.

The assembly structure we are considering is the classical one. That is, each item of the final product is produced by assembly of one item of each manufacturing stage. The extension of the presentation to situations where more than one item of each manufacturing stage is needed to assemble a single item of the final product is straightforward and for the sake of conciseness will not be considered in this paper.

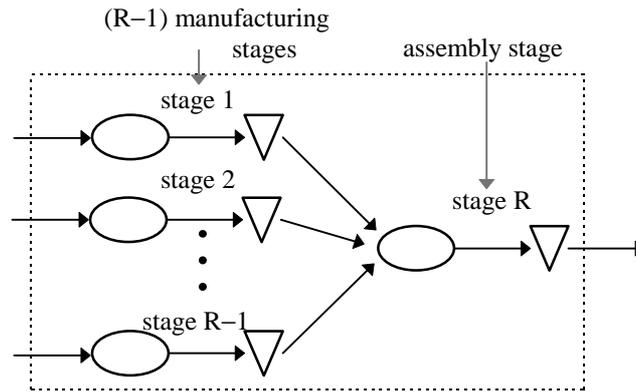


**Figure 3-2: R-1 manufacturing stages supplying a single assembly stage**

The extension of the EKCS to assembly systems leads to two kanban release mechanisms as was the case in the extension of the KCS to assembly systems [8]. These mechanisms are the Simultaneous EKCS (SEKCS) and the Independent EKCS (IEKCS). Next, we describe them.

### 3.1. Simultaneous Extended Kanban Control System (SEKCS): Definition

Figure 3-3 shows the queuing network model for the SEKCS. We represent the case of (R-1) manufacturing stages supplying a single assembly stage.

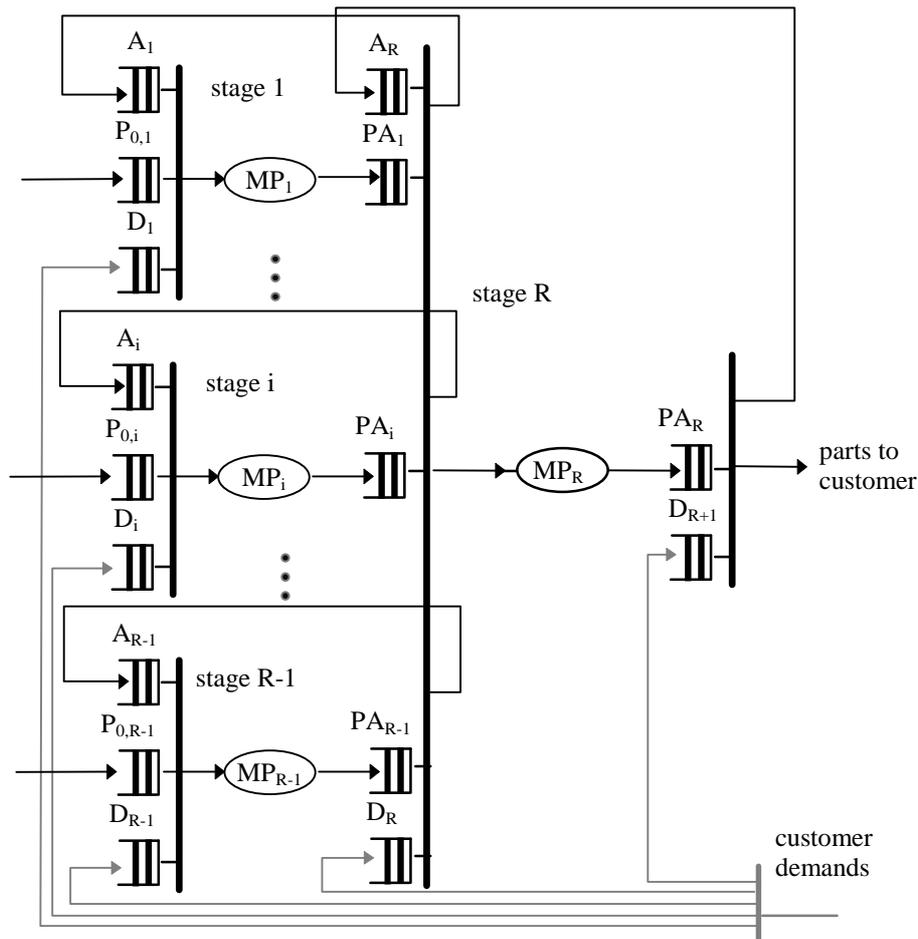

**Figure 3-3: Queuing network model for the SEKCS**

We use the following notation:

$p_{0,i}$	$i=1,\dots,R-1$	a stage- $i$ raw part
$p_i$	$i=1,\dots,R-1$	a stage- $i$ finished part
$p_R$		a stage- $R$ assembled part
$q_i$	$i=1,\dots,R-1$	a part currently being processed in stage $i$
$q_R$		a part currently being assembled in stage $R$
$d_i$	$i=1,\dots,R-1$	a demand for the production of a new $p_i$
$d_R$		a demand for the assembly of a new $p_R$
$d_{R+1}$		a demand for a $p_R$
$a_i$	$i=1,\dots,R-1$	an authorization card (kanban) for the production of a new $p_i$
$a_R$		an authorization card (kanban) for the assembly of a new $p_R$

Table 3-2 shows the contents and initial values of the queues or network of queues in the case of  $MP_i$ ,

Queue	Contents	Initial value
$MP_i$ $i=1,\dots,R-1$	$(q_i, a_i)$	0
$MP_R$	$(q_R, a_R)$	0
$PA_i$ $i=1,\dots,R-1$	$(p_i, a_i)$	$S_i$
$PA_R$	$(p_R, a_R)$	$S_R$
$A_i$ $i=1,\dots,R-1$	$a_i$	$K_i - S_i$
$A_R$	$a_R$	$K_R - S_R$
$D_i$ , $i=1, \dots, R-1$	$d_i$	0
$D_R$	$d_R$	0
$D_{R+1}$	$d_{R+1}$	0

**Table 3-2: Contents and initial values of the queues in the SEKCS**

As was the case in the EKCS, queue  $P_{0,i}$  ( $i=1,\dots,R-1$ ) represents the raw parts buffer supplying manufacturing stage  $i$ . The initial number of raw parts in  $P_{0,i}$  and the arrival process of new parts into  $P_{0,i}$  fall outside the scope of the control mechanism and are considered as given. When a customer demand arrives to the system, it is immediately transmitted to all stages by adding 1 to the contents  $d_i$  of queue  $D_i$  ( $i=1,\dots,R+1$ ).

The behavior of the SEKCS can be described as follows.

**Release of parts into the manufacturing stages:**

At each manufacturing stage  $i$  ( $i=1,\dots,R-1$ ), queues  $P_{0,i}$ ,  $A_i$ , and  $D_i$  are joined in a synchronization station. This means that stage  $i$  can begin the production of a part only when there are at least: a part  $p_{0,i}$  in  $P_{0,i}$ , an authorization card  $a_i$  in  $A_i$  and a demand  $d_i$  in  $D_i$ . When these conditions are met, then:

- the kanban  $a_i$  is attached onto  $p_{0,i}$  which is relabelled  $q_i$ , and together they are transferred downstream to  $MP_i$  as a pair  $(q_i, a_i)$ , and
- the demand  $d_i$  is satisfied and is therefore discarded.

When the part  $q_i$  finishes its processing in  $MP_i$ , it is relabelled  $p_i$ , and, together with the kanban  $a_i$  that was attached onto it, they join  $PA_i$  as a pair  $(p_i, a_i)$ .

### Release of parts into the assembly stage:

At the assembly stage  $R$ , queues  $PA_i$  ( $i=1,\dots,R-1$ ),  $A_R$ , and  $D_R$  are joined in a synchronization station. This means that the assembly operation can begin only when there are at least: a pair  $(p_i, a_i)$  in  $PA_i$  for every  $i=1,\dots,R-1$ , an authorization  $a_R$  in  $A_R$  and a demand  $d_{R+1}$  in  $D_{R+1}$ . When these conditions are satisfied, then,

- the kanbans  $a_i$  are simultaneously detached from the  $p_i$  ( $i=1,\dots,R-1$ ) and are transferred upstream to their corresponding previous stage,
- the kanban  $a_R$  is attached onto  $(p_1, p_2, \dots, p_{R-1})$  which is relabelled  $q_R$ , and together they are transferred downstream to  $MP_R$  as a pair  $(q_R, a_R)$ ,
- the demand  $d_R$  is satisfied and is therefore discarded.

When a part  $q_R$  finishes its assembly process in  $MP_R$ , it is relabelled  $p_R$ , and, together with the kanban  $a_R$  that was attached onto it, they join  $PA_R$  as a pair  $(p_R, a_R)$ .

### Delivery of finished parts to the customer:

At the final stage, queues  $PA_R$  and  $D_{R+1}$  are joined in a synchronization station. There is no need for authorization to release a finished part to the customer. Therefore, the delivery of a finished assembled part can occur as soon as there are a pair  $(p_R, a_R)$  in  $PA_R$  and a demand  $d_{R+1}$  in  $D_{R+1}$ . When these conditions are satisfied, then,

- the kanban  $a_R$  is detached from  $p_R$  and is transferred upstream to  $A_R$ ,
- part  $p_R$  is released to the customer,
- the demand  $d_{R+1}$  is satisfied and is therefore discarded.

## 3.2. Independent Extended Kanban Control System (IEKCS): Definition

Figure 3-4 shows the queueing network model for the IEKCS in the case of  $(R-1)$  manufacturing processes supplying a single assembly process.

We use the following notation:

$p_{0,i}$	$i=1,\dots,R-1$	a raw part for stage- $i$
$p_i$	$i=1,\dots,R-1$	a stage- $i$ finished part
$p_R$		a stage- $R$ assembled part
$q_i$	$i=1,\dots,R-1$	a part currently being processed in stage $i$
$q_R$		a part currently being assembled in stage $R$
$d_i$	$i=1,\dots,R-1$	a demand for the production of a new $p_i$
$d_{R,i}$	$i=1,\dots,R-1$	a demand for the assembly of a new $p_R$ using a stage- $i$ finished part $p_i$
$d_{R+1}$		a demand for a $p_R$
$a_i$	$i=1,\dots,R-1$	an authorization card (kanban) for the production of a new $p_i$
$a_R$		an authorization card (kanban) for the assembly of a new $p_R$
$a_{R,i}$	$i=1,\dots,R-1$	an authorization card (issued from some $a_R$ ) for the assembly of a new $p_R$ using a stage- $i$ finished part $p_i$


Table 3-3 describes the contents and initial values of the queues, or network of queues in the case of  $MP_i$ .

As was the case in the SEKCS, queues  $P_{0,i}$  ( $i=1,\dots,R-1$ ) represent the raw parts buffer supplying the manufacturing stage  $i$ . The initial number of raw parts in  $P_{0,i}$  and the arrival process of new parts into  $P_{0,i}$  fall outside the scope of the control mechanism and are considered as given. When a customer demand arrives to the system, it is immediately

transmitted to all stages by adding 1 to the contents  $d_i$  of queue  $D_i$  ( $i=1,\dots,R+1$ ) and by adding 1 to the contents  $d_{R,i}$  of queue  $D_{R,i}$  ( $i=1,\dots,R-1$ ).

Queue	Contents	Initial value
$MP_i$ $i=1,\dots,R-1$	$(q_i, a_i)$	0
$MP_R$	$(q_R, a_R)$	0
$PA_i$ $i=1,\dots,R-1$	$(p_i, a_i)$	$S_i$
$PA_R$	$(p_R, a_R)$	$S_R$
$A_i$ $i=1,\dots,R-1$	$a_i$	$K_i - S_i$
$A_{R,i}$ $i=1,\dots,R-1$	$a_{R,i}$	$K_R - S_R$
$B_i$ $i=1,\dots,R-1$	$(p_i, a_{R,i})$	0
$D_i$ $i=1,\dots,R-1$	$d_i$	0
$D_{R,i}$ $i=1,\dots,R-1$	$d_{R,i}$	0
$D_{R+1}$	$d_{R+1}$	0

**Table 3-3: Contents and initial values of the queues in the IEKCS**

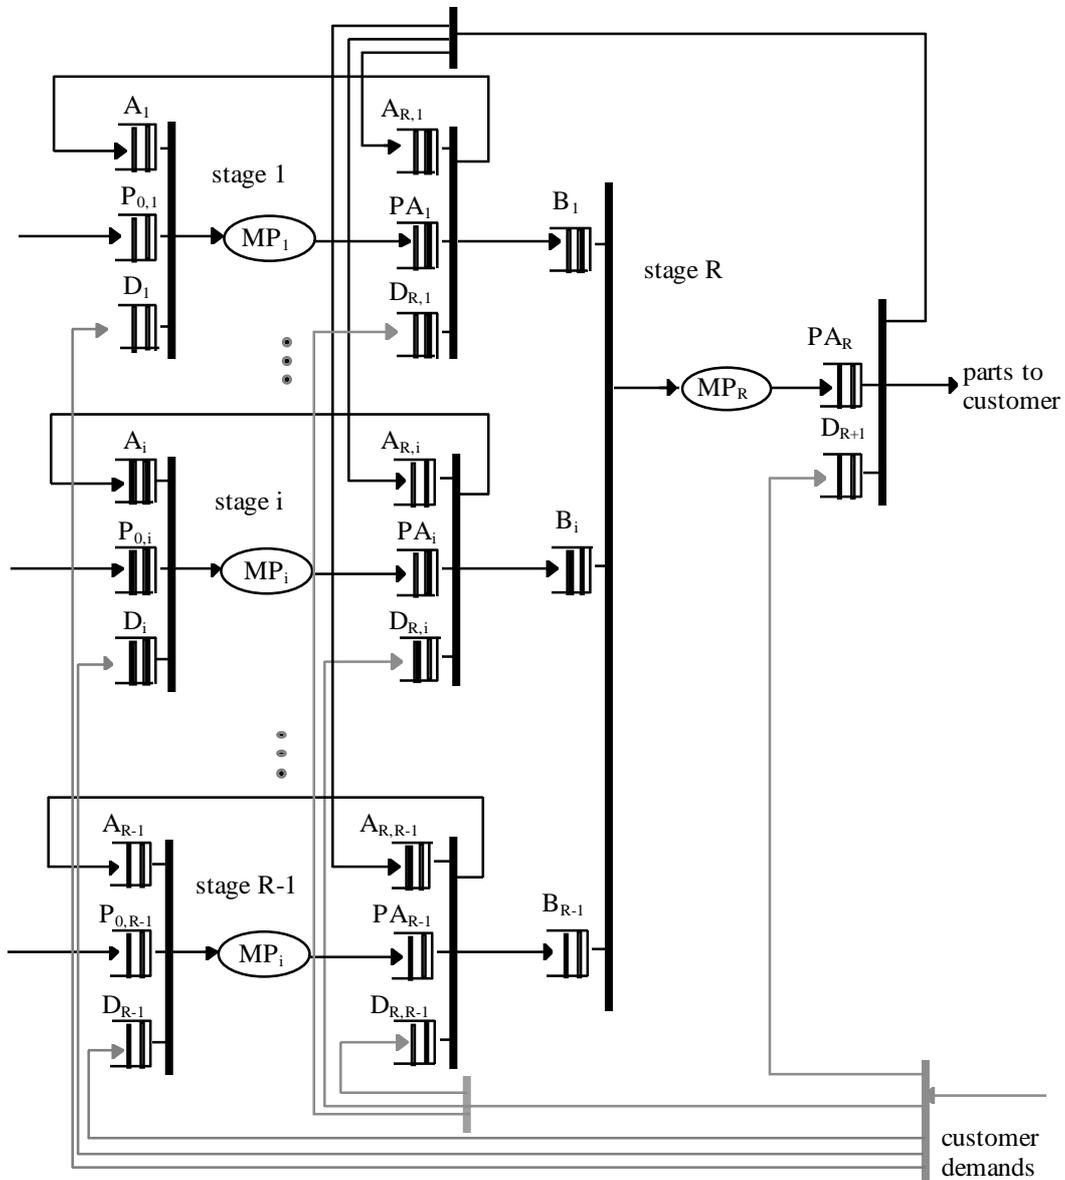

**Figure 3-4: Queuing network model for the IEKCS**

The behavior of the IEKCS can be described as follows.

**Release of parts into the manufacturing stages:** It is identical to the SEKCS.

**Release of parts into the assembly stage:**

The difference between the SEKCS and the IEKCS is in the way kanbans are transferred in stages  $1, \dots, R-1$ . In the SEKCS all kanbans are transferred simultaneously, whereas in the IEKCS they can be transferred independently of each other. In the IEKCS, each demand for an assembly operation is split into  $R-1$  demands  $d_{R,i}$  ( $i = 1, \dots, R-1$ ). In the same way, each stage- $R$  kanban is split into  $R-1$  kanbans  $a_{R,i}$ , upon its liberation from a finished part  $p_r$ .

Between the  $R-1$  manufacturing stages  $1, \dots, R-1$  and the assembly stage  $R$  there are 2 layers of synchronization stations. The first layer consists of  $R-1$  synchronization stations in parallel, one for each manufacturing stage, and the second layer consists of a single synchronization station fed by the synchronization stations of the first layer. More precisely:

1. For each manufacturing stage  $i$  ( $i=1, \dots, R-1$ ), queues  $PA_i$ ,  $A_{R,i}$ , and  $D_{R,i}$  are joined in a synchronization station. The supply of stage- $i$  finished parts for the assembly operation can occur only when there are at least: a pair  $(p_i, a_i)$  in  $PA_i$ , an authorization  $a_{R,i}$  in  $A_{R,i}$ , a demand  $d_{R,i}$  in  $D_{R,i}$ . When these conditions are met, then,
  - the kanban  $a_i$  is detached from  $p_i$  and is transferred upstream to  $A_i$ ,
  - the kanban  $a_{R,i}$  is attached onto  $p_i$ , and together they are transferred downstream to  $B_i$  as a pair  $(p_i, a_{R,i})$ , and
  - the demand  $d_{R,i}$  is satisfied and is therefore discarded.
2. Queues  $B_i$  ( $i=1, \dots, R-1$ ), are joined in a synchronization station. When there is at least one pair  $(p_i, a_{R,i})$  in each  $B_i$ , the assembly process can begin and the following happens:
  - the pairs  $(p_i, a_{R,i})$ , are removed from queues  $B_i$  ( $i = 1, \dots, R-1$ ), the  $(R-1)$ -tuple  $(p_1, p_2, \dots, p_{R-1})$  is relabelled  $q_R$ , the kanbans  $(a_{R,1}, a_{R,2}, \dots, a_{R,R-1})$  are merged into a kanban  $a_R$ , and the pair  $(q_R, a_R)$  is transferred downstream to  $MP_R$ .

When a part  $q_R$  finishes its assembly process in  $MP_R$ , it is relabelled  $p_R$ , and, together with the kanban  $a_R$  that was attached onto it, they join  $PA_R$  as a pair  $(p_R, a_R)$ .

**Delivery of finished parts to the customer:**

Identical to the SEKCS except that when the kanban  $a_R$  is transferred back to the input of the assembly stage, it is split into  $R-1$  kanbans  $a_{R,1}, a_{R,2}, \dots, a_{R,R-1}$ , and kanban  $a_{R,i}$  joins queue  $A_{R,i}$ ,  $i=1, \dots, R-1$ .

#### 4. Properties of the SEKCS and the IEKCS

In this section, we present some basic properties of the SEKCS and IEKCS. It is indeed important to get a good understanding, as well as some insights, of the behavior of the two mechanisms. The purpose is twofold: 1) understand the behavior of each control mechanism and in particular the influence of their parameters (the  $K_i$ 's and the  $S_i$ 's); and 2) compare the behavior of the SEKCS and the IEKCS to emphasize the specificity of each one and how the behavior of one relates to the behavior of the other. We will establish some relations on the population of the queues which are always valid, independent of the time (section 4.1). Such relations are called invariants of the system, they express useful relationships between queues. Moreover, bounds will be derived which in particular imply the limitation of the WIP and of the number of finished parts in each stage (section 4.2). We will also show special cases for which the Extended Kanban Control System reduces to the traditional Kanban Control System and to the Base Stock Control System.

Both the SEKCS and the IEKCS can be modeled as Fork-Join Queuing Networks with Blocking (FJQN/B) as defined in [5]. FJQN/B are queueing networks composed of a set of servers and a set of buffers, such that each buffer has exactly one upstream server and one downstream server. Each server may have several input buffers and/or several output buffers, and some servers may have no input (sources) or no output (sinks). Figure 3-3 and Figure 3-4 show the FJQN/B models for the SEKCS and the IEKCS respectively.

For these FJQN/Bs we will prove results concerning

invariance properties related to the cycles of the FJQN,

conditions for deadlock freeness,

recursive evolution equations using only operators '+' and 'max'.

These results are similar to those in [2], [5] and [6]. They are based on the equivalence of FJQN/Bs to Strongly Connected Marked Graphs (SCMGs).

We will denote by  $M(Q)$  the current population of any queue  $Q^1$  in the system. We first state some basic relations for the SEKCS and the IEKCS.

By definition of the initial state of the SEKCS, queue  $A_i$  has  $(K_i - S_i)$  free kanbans ( $i=1, \dots, R$ ), where clearly  $K_i - S_i \geq 0$ . The two parameters of stage  $i$  ( $i=1, \dots, R$ ) are therefore constrained by:

$$K_i \geq S_i, \quad i=1, \dots, R.$$

By definition of a synchronization station, at all times, at least one of the queues in a synchronization station must be empty. The mathematical expression of this is that the product of the populations of the queues in a synchronization station is zero. For the synchronization stations in the SEKCS, this expression becomes:

$$\text{Eq. 1} \quad M(A_i) \cdot M(P_{0,i}) \cdot M(D_i) = 0 \quad i=1, \dots, R-1,$$

$$\text{Eq. 2} \quad M(A_R) \cdot \left( \prod_{i=1}^{R-1} M(PA_i) \right) \cdot M(D_R) = 0,$$

$$\text{Eq. 3} \quad M(PA_R) \cdot M(D_{R+1}) = 0.$$

Similarly, by the definition of the initial state of the IEKCS, queue  $A_i$  has  $(K_i - S_i)$  free kanbans ( $i=1, \dots, R-1$ ), and queue  $A_{R,i}$  has  $(K_R - S_R)$  free kanbans ( $i=1, \dots, R-1$ ). Therefore, we have:

$$K_i \geq S_i, \quad i=1, \dots, R,$$

Again by definition of a synchronization station, Eq. 1 and Eq. 3 that hold for the SEKCS, also hold for the IEKCS. In addition, in the IEKCS, the following expressions hold:

$$\text{Eq. 4} \quad M(A_{R,i}) \cdot M(PA_i) \cdot (D_{R,i}) = 0 \quad i=1, \dots, R-1,$$

$$\text{Eq. 5} \quad \prod_{i=1}^{R-1} M(B_i) = 0.$$

---

<sup>1</sup>  $M(Q)$  varies with time and should also be a function of time. However, for simplicity, and insofar as we are interested in invariants or instantaneous relations, we will omit this dependence on time.

## 4.1. Invariants

Next, we present properties in the form of invariants pertaining to the content of various queues of the queueing network models of the SEKCS and the IEKCS. Some of these invariants express the fact that within the queueing network model of the SEKCS and the IEKCS there exist several closed subnetworks with a constant population.

### 4.1.1. Invariants for the SEKCS

**Property 1:** In the SEKCS, the following holds:

$$\text{Eq. 6} \quad M(A_i) + M(MP_i) + M(PA_i) = K_i \quad i=1, \dots, R-1,$$

$$\text{Eq. 7} \quad M(A_i) - M(D_i) + M(D_R) = K_i - S_i \quad i=1, \dots, R-1,$$

$$\text{Eq. 8} \quad M(PA_i) - M(D_R) + M(MP_i) + M(D_i) = S_i \quad i=1, \dots, R-1,$$

$$\text{Eq. 9} \quad M(A_R) + M(MP_R) + M(PA_R) = K_R,$$

$$\text{Eq. 10} \quad M(A_R) + M(D_{R+1}) - M(D_R) = K_R - S_R,$$

$$\text{Eq. 11} \quad M(PA_R) - M(D_{R+1}) + M(MP_R) + M(D_R) = S_R.$$

**Proof:** When the SEKCS is in its initial state, there are  $(K_i - S_i)$  kanbans  $a_i$  in queue  $A_i$ ,  $S_i$  pairs  $(p_i, a_i)$  in queue  $PA_i$ , and  $MP_i$  is empty ( $i=1, \dots, R-1$ ). Therefore, Eq. 6 holds initially. By observing the events that can modify the contents of  $A_i$ ,  $MP_i$  and  $PA_i$ , it is clear that, as the SEKCS evolves starting from its initial state, Eq. 6 remains true, since:

- when a kanban leaves  $A_i$ , it is attached onto a part  $p_{0,i}$ , and together they join  $MP_i$  as a pair  $(q_i, a_i)$ ,
- when a pair  $(q_i, a_i)$  leaves queue  $MP_i$ , it is transferred to  $PA_i$  as a pair  $(p_i, a_i)$ ,
- when a pair  $(p_i, a_i)$  leaves queue  $PA_i$ , the kanban  $a_i$  is transferred to  $A_i$ .

When the SEKCS is in its initial state, there are  $(K_i - S_i)$  kanbans  $a_i$  in queue  $A_i$  ( $i=1, \dots, R-1$ ) and queue  $D_i$  is empty,  $i=1, \dots, R$ . Therefore, Eq. 7 holds initially. As the SEKCS evolves starting from its initial state, Eq. 7 remains true since:

- when a kanban is transferred to  $A_i$ , a demand leaves  $D_R$ ,
- when a kanban leaves  $A_i$ , a demand also leaves  $D_i$ ,
- when a demand joins  $D_i$ , a demand also joins  $D_R$ .

To prove Eq. 8, it suffices to substitute  $M(A_i)$  from Eq. 6 into Eq. 7.

Eq. 9, Eq. 10 and Eq. 11 can be proved using similar arguments. ■

### 4.1.2. Invariants for the IEKCS

**Property 2:** In the IEKCS, the following holds:

$$\text{Eq. 12} \quad M(A_i) + M(MP_i) + M(PA_i) = K_i \quad i=1, \dots, R-1,$$

$$\text{Eq. 13} \quad M(A_i) - M(D_i) + M(D_{R,i}) = K_i - S_i \quad i=1, \dots, R-1,$$

$$\text{Eq. 14} \quad M(PA_i) - M(D_{R,i}) + M(MP_i) + M(D_i) = S_i \quad i=1, \dots, R-1,$$

$$\text{Eq. 15} \quad M(A_{R,i}) + M(B_i) - M(A_{R,j}) - M(B_j) = 0 \quad i, j \in \{1, \dots, R-1\},$$

$$\text{Eq. 16 } M(A_{R,i}) + M(B_i) + M(MP_R) + M(PA_R) = K_R \quad i=1,\dots,R-1,$$

$$\text{Eq. 17 } M(A_{R,i}) + M(D_{R+1}) - M(D_{R,i}) = K_R - S_R \quad i=1,\dots,R-1,$$

$$\text{Eq. 18 } M(PA_R) - M(D_{R+1}) + M(B_i) + M(MP_R) + M(D_{R,i}) = S_R \quad i=1,\dots,R-1.$$

**Proof:** Eq. 12, Eq. 13, Eq. 14, are similar to Eq. 6, Eq. 7, Eq. 8 respectively, and can be proved in the same way.

When the IEKCS is in its initial state, queue  $A_{R,i}$  contains  $(K_R - S_R)$  kanbans, and  $B_i$  is empty ( $i=1,\dots,R-1$ ). Consequently, Eq. 15 holds at the initial state. By observing the events that can modify the state of queues  $A_{R,i}$  and  $B_i$  ( $i=1,\dots,R-1$ ), it is clear that, as the IEKCS evolves starting from its initial state, Eq. 15 remains true since:

- when a kanban  $a_R$  is released from  $PA_R$ , it is split into  $R-1$  kanbans which are simultaneously transferred to their respective queues  $A_{R,i}$ . In other words, arrivals in queues  $A_{R,i}$  are simultaneous, and
- departures from queues  $B_i$  ( $i=1,\dots,R-1$ ) are also simultaneous, and
- when a kanban  $a_{R,i}$  leaves  $A_{R,i}$ , it joins  $B_i$ .

When the IEKCS is in its initial state, there are  $(K_R - S_R)$  kanbans  $a_{R,i}$  in  $A_{R,i}$  ( $i=1,\dots,R-1$ ),  $S_R$  pair  $(p_R, a_R)$  in queue  $PA_R$ , and queues  $B_i$  ( $i=1,\dots,R-1$ ) and  $MP_R$  are empty. Therefore Eq. 16 is true at the initial state. It remains true thereafter since, as the IEKCS evolves starting from the initial state, we have:

- when a kanban  $a_{R,i}$  leaves  $A_{R,i}$ , it is attached onto a part  $p_i$  and transferred to  $B_i$ ,
- when a kanban leaves queue  $B_i$ , one pair  $(q_R, a_R)$  is transferred to  $MP_R$ ,
- when a pair  $(q_R, a_R)$  leaves  $MP_R$ , a pair  $(p_R, a_R)$  joins  $PA_R$ , and
- when a pair  $(p_R, a_R)$  leaves  $PA_R$ , a kanban  $a_R$  is split into  $R-1$  kanbans which join separately queues  $A_{R,i}$  ( $i=1,\dots,R-1$ ) and one part is delivered to the customer.

At the initial state, there are  $(K_R - S_R)$  kanbans  $a_{R,i}$  in each  $A_{R,i}$  ( $i=1,\dots,R-1$ ), and queues  $D_{R,i}$  ( $i=1,\dots,R-1$ ) and  $D_{R+1}$  are empty. Therefore Eq. 17 is true initially. It remains true since, as the IEKCS evolves starting from the initial state:

- when a kanban  $a_{R,i}$  leaves  $A_{R,i}$ , a demand also leaves  $D_{R,i}$ ,
- when a demand is transferred to  $D_{R,i}$ , a demand also arrives in  $D_{R+1}$ , and
- when a kanban arrives into  $A_{R,i}$  a demand is discarded from  $D_{R+1}$ .

To prove Eq. 18, it is enough to substitute  $M(A_{R,i})$  from Eq. 16 into Eq. 17. ■

## 4.2. Bounds

Next, we present bounds which express that the work in process (WIP) is limited in each stage.

**Property 3:** In the SEKCS, the following holds:

$$\text{Eq. 19 } \begin{cases} 0 \leq M(A_i) \leq K_i & i=1,\dots,R, \\ 0 \leq M(PA_i) \leq K_i & i=1,\dots,R, \\ 0 \leq M(MP_i) \leq K_i & i=1,\dots,R, \\ 0 \leq M(MP_i) + M(PA_i) \leq K_i & i=1,\dots,R. \end{cases}$$

**Proof:** Eq. 19 directly follows from Eq. 6 and Eq. 9 for the SEKCS since all the quantities in these equations are non-negative. ■

**Property 4:** In the IEKCS, the following holds for all manufacturing stages:

$$\text{Eq. 20} \quad \left\{ \begin{array}{l} 0 \leq M(A_i) \leq K_i \\ 0 \leq M(PA_i) \leq K_i \\ 0 \leq M(MP_i) \leq K_i \\ 0 \leq M(MP_i) + M(PA_i) \leq K_i \end{array} \right. \quad \begin{array}{l} i=1,\dots,R-1, \\ i=1,\dots,R-1, \\ i=1,\dots,R-1, \\ i=1,\dots,R-1. \end{array}$$

and at the assembly stage,

$$\text{Eq. 21} \quad \left\{ \begin{array}{l} 0 \leq M(B_i) \leq K_R \\ 0 \leq M(A_{R,i}) \leq K_R \\ 0 \leq M(MP_R) \leq K_R \\ 0 \leq M(PA_R) \leq K_R \\ 0 \leq M(B_i) + M(MP_R) + M(PA_R) \leq K_R \end{array} \right. \quad \begin{array}{l} i=1,\dots,R-1, \\ i=1,\dots,R-1, \\ \\ \\ i=1,\dots,R-1. \end{array}$$

**Proof:** Eq. 20 follows directly from Eq. 12, and Eq. 21 follows directly from Eq. 16, since all the quantities in these two equations are non-negative. ■

**Property 5:** In the SEKCS the following holds:

$$\text{Eq. 22} \quad M(PA_i) - M(D_R) \leq S_i \quad i=1,\dots,R-1,$$

$$\text{Eq. 23} \quad M(PA_R) - M(D_{R+1}) \leq S_R.$$

**Proof:** Eq. 22 follows from Eq. 8, and Eq. 23 follows from Eq. 11. ■

**Property 6:** In the IEKCS, the following holds:

$$\text{Eq. 24} \quad M(PA_i) - M(D_{R,i}) \leq S_i \quad i=1,\dots,R-1,$$

$$\text{Eq. 25} \quad M(PA_R) - M(D_{R+1}) \leq S_R.$$

**Proof:** Eq. 24 follows from Eq. 14 and Eq. 25 follows from Eq. 18. ■

### 4.3. Evolution equations

The purpose of this section is to provide the basic equations that describe the evolution of the SEKCS and the IEKCS. We show that the dynamics of the systems can be described by recursive evolution equations that utilize the operators "+" and "max" only. These evolution

equations are of interest because they will allow to establish some useful properties on the behavior of the SEKCS and the IEKCS (section 4.4) and of their comparison (section 5). Moreover, this approach is very general since it is a sample-path approach that does not require any assumption on the distribution of the random variables (processing times, interarrival times of demands).

For the sake of simplicity, we assume that there is an infinite supply of raw parts in  $P_{i,0}$ ,  $i=1,\dots,R-1$ . The results that follow, however, could be extended to incorporate external arrival processes of parts at the expense of more tedious derivations.

### 4.3.1. Evolution equations for the SEKCS

Let us introduce the following notation for the times of certain events:

$I_{i,n}$	the time of the $n^{\text{th}}$ arrival in $MP_i$ (Input),	$i=1,\dots,R,$
$I_{R+1,n}$	the time of the $n^{\text{th}}$ departure from the system,	
$O_{i,n}$	the time of the $n^{\text{th}}$ departure from $MP_i$ (Output),	$i=1,\dots,R,$
$D_n$	the time of the $n^{\text{th}}$ demand arrival (Demand).	

Finally, for the sake of simplicity, assume that  $MP_i$  consists of a single machine, and let  $\sigma_{i,n}$  be the processing time of the  $n^{\text{th}}$  part at the machine in  $MP_i$ ,  $i=1,\dots,R$ .

Clearly, the following holds<sup>2</sup>:

$$\begin{aligned} I_{i,n-m} &\leq I_{i,n} & i=1,\dots,R+1, n,m \in \{1,2,\dots\}, \\ O_{i,n-m} &\leq O_{i,n} & i=1,\dots,R, n,m \in \{1,2,\dots\}, \\ D_{n-m} &\leq D_n & n,m \in \{1,2,\dots\}. \end{aligned}$$

We now have the proposition below, which states the evolution equations for the SEKCS.

**Proposition 1:** In the SEKCS, the times of events are related by the following evolution equations,

$$\text{Eq. 26 } I_{i,n} = \max ( D_n, I_{R,n-(K_i-S_i)} ) \quad i=1,\dots,R-1,$$

$$\text{Eq. 27 } I_{R,n} = \max ( D_n, \max_{i=1,\dots,R-1} ( O_{i,n-S_i} ), I_{R+1,n-(K_R-S_R)} ),$$

$$\text{Eq. 28 } I_{R+1,n} = \max ( D_n, O_{R,n-S_R} ),$$

$$\text{Eq. 29 } O_{i,n} = \sigma_{i,n} + \max ( I_{i,n}, O_{i,n-1} ) \quad i=1,\dots,R .$$

**Proof:** Eq. 26 gives an expression for  $I_{i,n}$  which, by definition, represents the time at which the  $n^{\text{th}}$  pair  $(q_i, a_i)$  is released into  $MP_i$  ( $i=1,\dots,R-1$ ). Indeed, this release occurs only when two conditions are met:

- the  $n^{\text{th}}$  demand  $d_i$  has arrived in  $D_i$ ,
- the  $(n-(K_i-S_i))^{\text{th}}$  kanban has arrived in  $A_i$ , since there are initially  $(K_i-S_i)$  kanbans in  $A_i$ .

---

<sup>2</sup> Note that it is natural to assume that  $I_{i,n}$ ,  $O_{i,n}$  and  $D_n$  are zero for  $n \leq 0$ .

We recall that, in the SEKCS, a kanban  $a_i$  arrives in  $A_i$  when a pair  $(q_R, a_R)$  is released into  $MP_R$ .

Because of the assumption that there is an infinite supply of raw parts in  $P_{0,i}$ , no condition involving arrivals in  $P_{0,i}$  appears in Eq. 26.

To prove Eq. 27, we will use similar arguments, only now, arrivals in queues  $PA_i$  must be taken into account too.  $I_{R,n}$  is, by definition, the time at which the  $n^{\text{th}}$  pair  $(q_R, a_R)$  is released into  $MP_R$ . Indeed, this can occur only when three conditions are met:

- the  $n^{\text{th}}$  demand  $d_R$  has arrived in  $D_R$ ,
- the  $(n-S_i)^{\text{th}}$  stage- $i$  finished part with its attached kanban has arrived in  $PA_i$  ( $i=1, \dots, R-1$ ), since there are initially  $S_i$  pairs  $(p_i, a_i)$  in  $PA_i$ ,
- the  $(n-(K_R-S_R))^{\text{th}}$  kanban  $a_R$  has arrived in  $A_R$ , since there are initially  $(K_R-S_R)$  kanbans in  $A_R$ .

Eq. 28 gives an expression for  $I_{R+1,n}$  which is, by definition, the time when the  $n^{\text{th}}$  part is delivered to the customer. This event can occur when the two following conditions are met:

- the  $n^{\text{th}}$  demand has arrived in  $D_n$ ,
- the  $(n-S_R)^{\text{th}}$  finished part  $p_R$  with its attached kanban has been released in  $PA_R$ , since there are initially  $S_R$  pairs  $(p_R, a_R)$  in  $PA_R$ .

Eq. 29 gives an expression for  $O_{i,n}$  which is, by definition, the time at which the  $n^{\text{th}}$  pair  $(p_i, a_i)$  has completed processing in  $MP_i$  and is released in  $PA_i$ . This time is equal to the time at which the  $n^{\text{th}}$  pair  $(q_i, a_i)$  begins its processing in  $MP_i$  plus its processing time  $\sigma_{i,n}$ . The  $n^{\text{th}}$  pair  $(q_i, a_i)$  begins its processing when the two conditions below are satisfied:

- the  $n^{\text{th}}$  pair  $(q_i, a_i)$  has been released in  $MP_i$ ,
- the  $(n-1)^{\text{th}}$  part has completed its processing at  $MP_i$ .

■

### 4.3.2. Evolution equations for the IEKCS

In addition to the previous notation, let  $L_{i,n}$  be the time when the  $n^{\text{th}}$  pair  $(p_i, a_{R,i})$  arrives to queue  $B_i$  (that is the release time of the  $n^{\text{th}}$  kanban  $a_i$ ).

The following proposition states the evolution equations for the IEKCS.

**Proposition 2:** In the IEKCS, the times of events are related by the following evolution equations,

$$\text{Eq. 30 } I_{i,n} = \max ( D_n, L_{i,n-(K_i-S_i)} ) \quad i=1, \dots, R-1,$$

$$\text{Eq. 31 } I_{R,n} = \max_{i=1, \dots, R-1} ( L_{i,n} ),$$

$$\text{Eq. 32 } I_{R+1,n} = \max ( D_n, O_{R,n-S_R} ),$$

$$\text{Eq. 33 } L_{i,n} = \max ( D_n, O_{i,n-S_i}, I_{R+1,n-(K_R-S_R)} ) \quad i=1, \dots, R-1,$$

$$\text{Eq. 34 } O_{i,n} = \sigma_{i,n} + \max ( I_{i,n}, O_{i,n-1} ) \quad i=1, \dots, R.$$

**Proof:** Eq. 30 differs from Eq. 26 only in the condition for the release of kanbans  $a_i$ . Otherwise, the argument is similar to that for the SEKCS: the  $n^{\text{th}}$  pair  $(q_i, a_i)$  enters  $MP_i$  ( $i=1, \dots, R-1$ ) when the two conditions below are met:

- the  $n^{\text{th}}$  demand  $d_i$  has arrived in  $D_i$ ,
- the  $(n-(K_i-S_i))^{\text{th}}$  kanban has arrived in  $A_i$ , since there are initially  $(K_i-S_i)$  kanbans in  $A_i$ . In the IEKCS, a kanban  $a_i$  arrives in  $A_i$  when a pair  $(p_i, a_{R,i})$  is transferred to  $B_i$ .

As in the SEKCS, because of the assumption of an infinite supply of raw parts in  $P_{0,i}$ , no condition involving arrivals in  $P_{0,i}$  appears in Eq. 30.

Eq. 31 represents the time at which the  $n^{\text{th}}$  pair  $(q_R, a_R)$  is transferred to  $MP_R$ . This occurs when the  $n^{\text{th}}$  pair  $(p_i, a_{R,i})$  has arrived in  $B_i$ , for all  $i=1, \dots, R-1$ .

Eq. 32 is the same as Eq. 28.

In Eq. 33, we consider the time at which the stage- $i$   $n^{\text{th}}$  finished part is transferred to  $B_i$ . This event occurs as soon as the following three conditions are met:

- the  $n^{\text{th}}$  demand has arrived in  $D_{R,i}$ ,
- the  $(n-S_i)^{\text{th}}$  pair  $(p_i, a_i)$  has arrived in  $PA_i$ , since there are initially  $S_i$  pairs in  $PA_i$ ,
- the  $(n-(K_R-S_R))^{\text{th}}$  kanban  $a_{R,i}$  has arrived in  $A_{R,i}$ , since there are initially  $(K_R-S_R)$  kanbans in  $A_{R,i}$ .

Finally, Eq. 34 is the same as Eq. 29. ■

#### 4.4. Variation of the parameters

This section studies the influence of varying parameters  $K_i$  and  $S_i$  ( $i=1, \dots, R$ ) on the above mentioned event times and derives some monotonicity properties.

Proofs are similar to the proof of “Stochastic Monotonicity with Respect to the Initial Marking” in [1]. We will use the fact that the time when events occur in the system can be computed recursively according to the evolution equations. Therefore, there exists a total ordering on the times described by Proposition 1 and Proposition 2 allowing us to use proofs by induction for the following results.

We compare two systems: the nominal system denoted by  $\mathcal{S}$  and the modified system denoted by  $\tilde{\mathcal{S}}$ . These two systems differ only through their parameters: the number of kanbans and the base stock level in each stage. The parameters of the original systems are  $K_i$  and  $S_i$ , the parameters of the modified system are  $\tilde{K}_i$  and  $\tilde{S}_i$  ( $i = 1, \dots, R$ ). On the other hand, the two systems have the same sequence of customer demand times (denoted by  $D_n$  for  $\mathcal{S}$ , and  $\tilde{D}_n$  for  $\tilde{\mathcal{S}}$ ) and the same sequence of processing times (denoted by  $\sigma_{i,n}$  and  $\tilde{\sigma}_{i,n}$ ,  $i=1, \dots, R$ ).

Part 1 of Property 7 and of Property 8 states that increasing the number of kanbans in some stage decreases the arrival and departure times at each stage of the system.

Parts 2 and 3 state that increasing the base stock in some stage  $q$  ( $q=1, \dots, R$ ) decreases the arrival and departure times of all other stages. Moreover, the arrival time (respectively the departure time) of the  $n^{\text{th}}$  part from stage  $q$  decreases with respect to the arrival time

(respectively the departure time) of the  $(n + \tilde{S}_q - S_q)^{\text{th}}$  part from  $MP_q$ . This means that an increase in the base stock of stage  $q$  from  $S_q$  to  $\tilde{S}_q$  has the same effect as of having  $(\tilde{S}_q - S_q)$  extra parts enter the stage  $q$  and receive processing before the first demand arrives.

Property 7 and Property 8 give a way to improve the "speed" of a SEKCS or IEKCS by increasing the number of kanbans or the base stock level. We will see in section 4.6 that the number of kanbans is mainly related to the production capacity of the system while the base stock level is related to the customer demands satisfaction.

#### 4.4.1. Variation of the parameter of the SEKCS

**Property 7:** Consider the two systems  $\mathcal{S}$  and  $\tilde{\mathcal{S}}$  under the SEKCS. Then, we have:

1. If  $\tilde{K}_q > K_q$  for some  $q$  in  $\{1, \dots, R\}$ ,  $\tilde{K}_i = K_i$  for all  $i$  in  $\{1, \dots, R\} - \{q\}$ , and  $\tilde{S}_i = S_i$  for all  $i$  in  $\{1, \dots, R\}$ , then for all  $n$ ,

$$\text{Eq. 35} \quad \tilde{I}_{i,n} \leq I_{i,n} \quad i \in \{1, \dots, R+1\},$$

$$\text{Eq. 36} \quad \tilde{O}_{i,n} \leq O_{i,n} \quad i \in \{1, \dots, R\}.$$

2. If  $\tilde{K}_i = K_i$  for all  $i$  in  $\{1, \dots, R\}$ ,  $\tilde{S}_q > S_q$  for some  $q$  in  $\{1, \dots, R-1\}$ , and  $\tilde{S}_i = S_i$  for all  $i$  in  $\{1, \dots, R\} - \{q\}$ , then for all  $n$ ,

$$\text{Eq. 37} \quad \tilde{I}_{i,n} \leq I_{i,n} \quad i \in \{1, \dots, R+1\} - \{q\},$$

$$\text{Eq. 38} \quad \tilde{I}_{q,n} \leq I_{q,n+(\tilde{S}_q-S_q)},$$

$$\text{Eq. 39} \quad \tilde{O}_{i,n} \leq O_{i,n} \quad i \in \{1, \dots, R\} - \{q\},$$

$$\text{Eq. 40} \quad \tilde{O}_{q,n} \leq O_{q,n+(\tilde{S}_q-S_q)}.$$

3. If  $\tilde{K}_i = K_i$ ,  $i \in \{1, \dots, R\}$ ,  $\tilde{S}_i = S_i$ ,  $i \in \{1, \dots, R-1\}$ , and  $\tilde{S}_R \geq S_R$ , then for all  $n$

$$\text{Eq. 41} \quad \tilde{I}_{i,n} \leq I_{i,n+(\tilde{S}_R-S_R)} \quad i \in \{1, \dots, R\},$$

$$\text{Eq. 42} \quad \tilde{I}_{R+1,n} \leq I_{R+1,n},$$

$$\text{Eq. 43} \quad \tilde{O}_{i,n} \leq O_{i,n+(\tilde{S}_R-S_R)} \quad i \in \{1, \dots, R\}.$$

The proof is given in Appendix B.

#### 4.4.2. Variation of the parameters of the IEKCS

The influence of the variation of the parameters upon the event times for the IEKCS is basically the same as for the SEKCS. We will only state the corresponding property. Its proof is very similar to the proof of Property 7.

**Property 8:** Consider the two systems  $\mathcal{S}$  and  $\tilde{\mathcal{S}}$  under the IEKCS. Then, we have:

1. If  $\tilde{K}_q > K_q$  for some  $q$  in  $\{1, \dots, R\}$ ,  $\tilde{K}_i = K_i$ ,  $i \in \{1, \dots, R\} - \{q\}$ , and  $\tilde{S}_i = S_i$ ,  $i \in \{1, \dots, R\}$ , then for all  $n$ ,

$$\text{Eq. 44 } \tilde{I}_{i,n} \leq I_{i,n} \quad i \in \{1, \dots, R+1\},$$

$$\text{Eq. 45 } \tilde{O}_{i,n} \leq O_{i,n} \quad i \in \{1, \dots, R\}.$$

2. If  $\tilde{K}_i = K_i$  for all  $i$  in  $\{1, \dots, R\}$ ,  $\tilde{S}_q > S_q$  for some  $q$  in  $\{1, \dots, R-1\}$ , and  $\tilde{S}_i = S_i$  for all  $i$  in  $\{1, \dots, R\} - \{q\}$ , then for all  $n$ ,

$$\text{Eq. 46 } \tilde{I}_{i,n} \leq I_{i,n} \quad i \in \{1, \dots, R+1\} - \{q\},$$

$$\text{Eq. 47 } \tilde{I}_{q,n} \leq I_{q,n+(\tilde{S}_q-S_q)},$$

$$\text{Eq. 48 } \tilde{O}_{i,n} \leq O_{i,n} \quad i \in \{1, \dots, R\} - \{q\},$$

$$\text{Eq. 49 } \tilde{O}_{q,n} \leq O_{q,n+(\tilde{S}_q-S_q)}.$$

3. If  $\tilde{K}_i = K_i$ ,  $\tilde{S}_i = S_i$ ,  $i \in \{1, \dots, R-1\}$ , and  $\tilde{S}_R \geq S_R$ , then for all  $n$ :

$$\text{Eq. 50 } \tilde{I}_{i,n} \leq I_{i,n+(\tilde{S}_R-S_R)} \quad i \in \{1, \dots, R\},$$

$$\text{Eq. 51 } \tilde{I}_{R+1,n} \leq I_{R+1,n},$$

$$\text{Eq. 52 } \tilde{O}_{i,n} \leq O_{i,n+(\tilde{S}_R-S_R)} \quad i \in \{1, \dots, R\}.$$

#### 4.5. Special Cases

Property 9 and Property 10 that follow express two special cases where the SEKCS (respectively the IEKCS) is equivalent to the Simultaneous Kanban Control System (SKCS), and the Base Stock Control System (BCSC) (respectively to the Independent Kanban Control System (IKCS) and the BSCS), where the SKCS, the BSCS and the IKCS are briefly described in Appendix A.

**Property 9:** 1) The SEKCS with  $K_i = \infty$ ,  $S_i \geq 0$ , ( $i=1, \dots, R$ ) is equivalent to the BSCS having a base stock of  $S_i$  finished parts in stage  $i$ ,  $i=1, \dots, R$ .

2) The SEKCS with  $K_i = S_i$ , ( $i=1, \dots, R$ ) is equivalent to the SKCS having  $K_i$  kanbans in stage  $i$ ,  $i=1, \dots, R$ .

**Proof:** 1) Consider the SEKCS shown in Figure 3-3, with  $K_i = \infty$ ,  $S_i \geq 0$ ,  $i=1, \dots, R$ . Queues  $A_i$  have an infinite number of kanbans and therefore play no role in the synchronization station they belong to since they never block the transfer of parts through that synchronization station; hence they can be eliminated. Once queues  $A_i$  ( $i=1, \dots, R$ ) are eliminated from the network in Figure 3-3, the resulting network is the same as the queueing network model of the BSCS in Figure 6-1 and has the same initial conditions.

2) Consider now the SEKCS shown in Figure 3-3, with  $K_i = S_i$ ,  $i=1, \dots, R$ . In the initial state of the system, since  $K_i - S_i = 0$ , there are no available kanbans  $a_i$  in queues  $A_i$  and all kanbans  $a_i$  are attached to parts in  $PA_i$ . As in the case of the SKCS, a kanban  $a_i$  becomes available in  $A_i$  only when finished parts  $p_i$  are transferred to  $MP_R$  ( $i=1, \dots, R-1$ ), and a kanban  $a_R$  becomes available only when a finished part  $p_R$  is delivered to the customer. Also, since  $K_i - S_i = 0$ , Eq. 7 and Eq. 10 imply that  $M(D_i) \geq M(A_i)$ ,  $i = 1, \dots, R$ . Queues  $D_i$ , therefore, play no role in the synchronization station they belong to; hence they can be eliminated. Once queues  $D_i$  ( $i=1, \dots, R$ ), are eliminated from the network in Figure 3-3, the resulting network is the same as


the queueing network model of the SKCS in Figure 6-2, where queues  $A_i$  in Figure 3-3 play the same role as queues  $DA_i$  in Figure 6-2 ( $i=1,\dots,R$ ). ■

**Property 10:** 1) The IEKCS with  $K_i = \infty$ ,  $S_i \geq 0$ , ( $i=1,\dots,R$ ) is equivalent to the BSCS having a base stock of  $S_i$  finished parts in stage  $i$ ,  $i=1,\dots,R$ .

2) The IEKCS with  $K_i = S_i$ , ( $i=1,\dots,R$ ) is equivalent to the IKCS having  $K_i$  kanbans in stage  $i$ ,  $i=1,\dots,R$ .

**Proof:** 1) Consider the IEKCS shown in Figure 3-4, with  $K_i = \infty$ ,  $S_i \geq 0$ ,  $i=1,\dots,R$ . Queues  $A_i$  and  $A_{R,i}$  have an infinite number of kanbans and therefore play no role in the synchronization station they belong to since they never block the transfer of parts through that synchronization station; hence they can be eliminated. Once queues  $A_i$ ,  $A_{R,i}$  ( $i=1,\dots,R-1$ ) are eliminated from the network in Figure 3-4, the resulting network is shown in Figure 4-1. Arrivals in queues  $D_{R,i}$  are simultaneous, therefore assembly in  $MP_R$  occurs when there is one demand for this operation (which is split into  $R-1$  demands) and one finished part in queue  $PA_i$ ,  $i=1,\dots,R-1$ . Therefore the queueing network in Figure 4-1 is equivalent to the queueing network model of the BSCS shown in Figure 6-1 and has the same initial conditions.

2) Consider now the IEKCS shown in Figure 3-4, with  $K_i = S_i$ ,  $i=1,\dots,R$ . In the initial state of the system, since  $K_i - S_i = 0$ , there are no available kanbans  $a_i$  in queues  $A_i$  and all kanbans  $a_i$  are attached to parts in  $PA_i$ . As in the case of the IKCS, a kanban  $a_i$  becomes available in  $A_i$  when a finished part  $p_i$  is transferred to  $B_i$  ( $i=1,\dots,R-1$ ), and a kanban  $a_R$  becomes available only when a finished part  $p_R$  is delivered to the customer. Also, since  $K_i - S_i = 0$ , Eq. 13 implies that  $M(D_i) \geq M(A_i)$  ( $i=1,\dots,R-1$ ), and Eq. 17 implies  $M(D_{R,i}) \geq M(A_{R,i})$  ( $i=1,\dots,R-1$ ). Therefore queues  $D_i$  and  $D_{R,i}$ ,  $i=1,\dots,R-1$ , play no role in the synchronization station they belong to; hence they can be eliminated. Once queues  $D_i$  and  $D_{R,i}$  are eliminated from the network in Figure 3-4, the resulting network is the same as the queueing network model of the SKCS in Figure 6-3, where queues  $A_i$ ,  $i=1,\dots,R$ , in Figure 3-4 play the same role as queues  $DA_i$  in Figure 6-3. ■

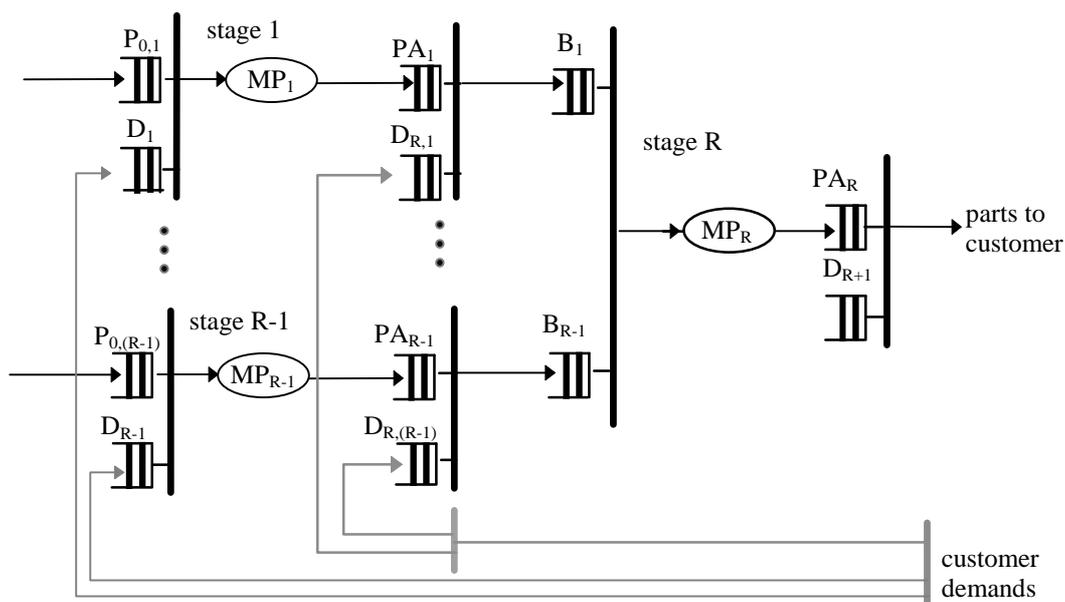

**Figure 4-1: Queueing Network Model for the IEKCS with  $K_i = \infty$ ,  $i = 1, \dots, R$**

## 4.6. Production Capacity

The *production capacity* of a pull control system is the maximum demand rate that the system can meet. To determine the production capacity of a pull control system, we study the *saturated* version of the system, that is the original system under the assumption that there are an infinite number of raw parts and customer demands. The production capacity of the original system is then the throughput of the saturated system.

Property 10 and Property 12 are important since they state that the production capacity depends only on one parameter, namely  $K_i$ . The role of parameters  $S_i$  (base stock level) and  $K_i$  (number of kanbans) is thus clearly separated. The parameters  $S_i$  are related to the satisfaction of demands whereas  $K_i$  are related to the production of new parts. Thus, parameters  $K_i$  should be designed first to obtain a desirable production capacity and then parameters  $S_i$  should be designed to obtain a desirable customer satisfaction level [7].


Property 12 and Property 14 state that in the saturated case, the SEKCS (respectively the IEKCS) and the SKCS (respectively the IKCS) are equivalent.

### 4.6.1. Production Capacity of the SEKCS

Figure 4-1 shows the queueing network model for the saturated SEKCS having  $R$  stages ( $R-1$  manufacturing stages and a single assembly stage). Figure 4-1 is obtained from Figure 3-3 as follows:

- By definition of the saturated SEKCS, queues  $P_{0,i}$ , ( $i=1,\dots, R-1$ ) have an infinite number of raw parts, and queues  $D_i$ , ( $i=1,\dots, R+1$ ) have an infinite number of demands.
- Therefore these queues play no role in the synchronization station they belong to since they never block the transfer of parts through that synchronization station, hence, they can be eliminated.
- Once  $P_{0,i}$  and  $D_i$  have been eliminated,  $A_i$  remains the only queue in the synchronization station at the entry of stage  $i$  ( $i=1,\dots,R-1$ ). Similarly, once  $D_{R+1}$  has been removed,  $PA_R$  remains the only queue in the synchronization station at the output of stage  $R$ . Clearly if there is only one queue feeding a synchronization station, this queue can be removed since any customer arriving at this queue immediately goes through the synchronization station. In the saturated SEKCS, queues  $A_i$  ( $i=1,\dots,R-1$ ) and  $PA_R$  may therefore be eliminated.

The queueing network model that results after these eliminations is shown in Figure 4-1.

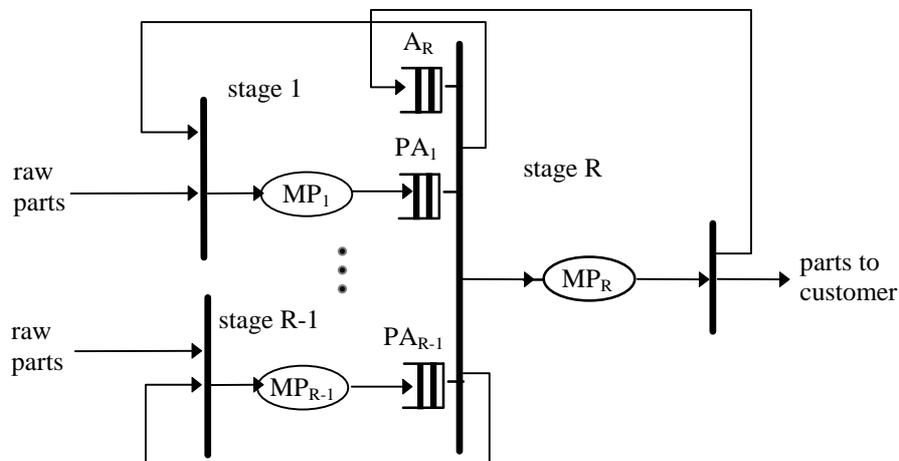

**Figure 4-1: Queueing network model for the saturated SEKCS**

We now have the following two properties.

**Property 11:** The production capacity of the SEKCS depends only on parameters  $K_i$  ( $i=1,\dots,R$ ), and is independent of  $S_i$  ( $i=1,\dots,R$ ).

The proof is based on the following result. The throughput of a basic FJQN/B containing  $N$  elementary closed subnetworks depends only on the fixed number of customers in each closed subnetwork, and not on the initial allocation of these customers along the queues of this closed subnetwork ([5], [6]). In the SEKCS,  $K_i$  is the fixed number of customers in the closed subnetwork that includes  $A_i$ ,  $MP_i$ , and  $PA_i$ , whereas  $S_i$  determines the initial allocation of customers in each of the queues of the closed subnetwork.


**Property 12:** The production capacity of the SEKCS, with parameters  $K_i$  and  $S_i$  ( $i=1,\dots,R$ ), is equal to the production capacity of the SKCS with the same parameters  $K_i$  ( $i=1,\dots,R$ ), as those in the SEKCS.

The queueing network model for the saturated SKCS is obtained from Figure 6-2 by performing similar eliminations as described previously for the SEKCS. By comparing Figure 4-1 and the queueing network model for the saturated SKCS, it is clear that the saturated SEKCS is equivalent to the saturated SKCS, and therefore their throughputs are equal to each other.

#### 4.6.2. Production Capacity of the IEKCS

Figure 4-2 shows the queueing network model for the saturated IEKCS having  $R$  stages ( $R-1$  manufacturing stages and a single assembly stage). Figure 4-2 can be obtained from the queueing network model in Figure 3-4 after eliminating:

- queues  $P_{0,i}$  and queues  $D_i$  and  $D_{R,i}$  ( $i=1,\dots,R-1$ ), using the fact that they contain an infinite number of entities,
- queues  $A_i$  ( $i=1,\dots,R-1$ ) and queue  $PA_R$ , using the fact that they are the only queues feeding a synchronization station.

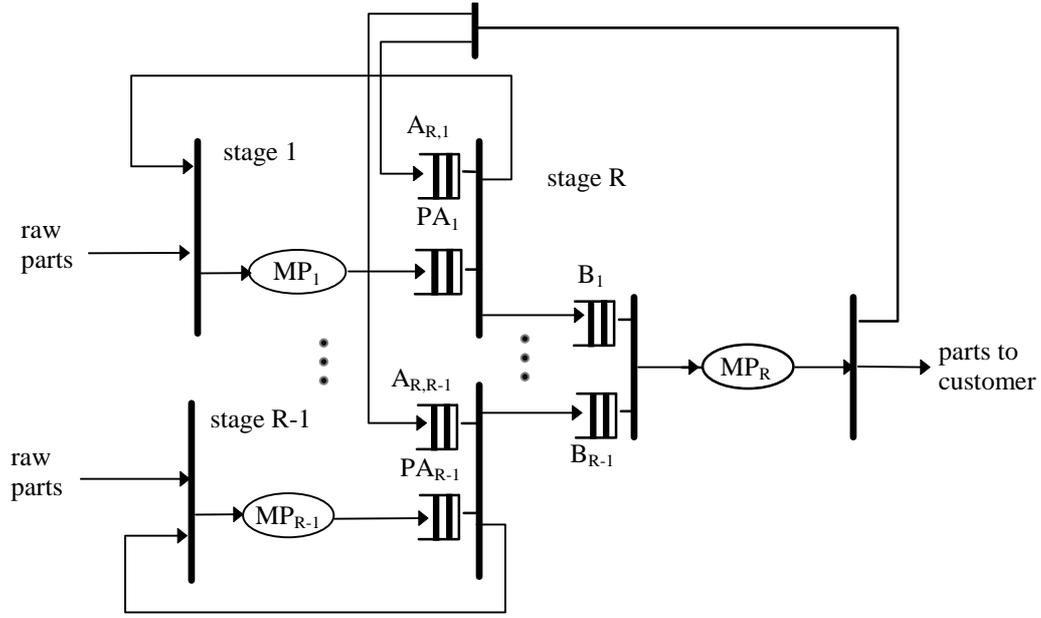

**Figure 4-2: Queuing network model for the saturated IEKCS**

We now have the following properties. The arguments for their proofs are similar to those used for the SEKCS and are therefore omitted.

**Property 13:** The production capacity of the IEKCS depends only on parameters  $K_i$  ( $i=1,\dots,R$ ), and is independent of  $S_i$  ( $i=1,\dots,R$ ).

**Property 14:** The production capacity of the IEKCS, with parameters  $K_i$  and  $S_i$  ( $i=1,\dots,R$ ), is equal to the production capacity of the IKCS with the same parameters  $K_i$  ( $i=1,\dots,R$ ), as those in the IEKCS.

## 5. Comparison between the SEKCS and the IEKCS

A visual comparison between the queuing network model of the SEKCS shown in Figure 3-3 and the queuing network model of the IEKCS shown in Figure 3-4 may lead to the conjecture that the IEKCS responds faster to customer demands than does the SEKCS with the same parameters. This is due to the relative independence of the manufacturing stages upstream the assembly stage and it is stated more precisely by Property 15 that follows.

To distinguish equivalent times in the two systems, let us introduce the following notation:

- $I_{i,n}^S$  and  $I_{i,n}^I$  ( $i=1,\dots,R$ ): the time of the  $n^{\text{th}}$  arrival in  $MP_i$ , in the SEKCS and the IEKCS, respectively,
- $I_{R+1,n}^S$  and  $I_{R+1,n}^I$ : the time of the  $n^{\text{th}}$  departure from the system, in the SEKCS and the IEKCS, respectively,
- $O_{i,n}^S$  and  $O_{i,n}^I$  ( $i=1,\dots,R$ ): the time of the  $n^{\text{th}}$  departure from  $MP_i$ , in the SEKCS and the IEKCS, respectively,

- $D_n^S$  and  $D_n^I$ : the time of the  $n^{\text{th}}$  demand, in the SEKCS and the IEKCS, respectively.

**Property 15:** Consider two systems, the SEKCS and the IEKCS, having the same parameters  $K_i$  and  $S_i$ , the same sequence of service times  $\sigma_{i,n}$  and the same customer demand times  $D_n$  for all  $i$  in  $\{1, \dots, R\}$ . Then,

$$\text{Eq. 53} \quad I_{i,n}^I \leq I_{i,n}^S, \quad i \in \{1, \dots, R+1\},$$

$$\text{Eq. 54} \quad O_{i,n}^I \leq O_{i,n}^S, \quad i \in \{1, \dots, R\}.$$

**Proof:** The proof is similar to the proof of Property 7. Let us assume that Eq. 53 and Eq. 54 hold up to  $n-1$ , that is:

$$I_{i,n-m}^I \leq I_{i,n-m}^S \quad i \in \{1, \dots, R+1\}, m=1,2,\dots$$

$$O_{i,n-m}^I \leq O_{i,n-m}^S \quad i \in \{1, \dots, R\}, m=1,2,\dots$$

- Let us first consider the case  $i=1, \dots, R-1$ . We have,

$$\begin{aligned} I_{i,n}^S &= \max \left( D_n^S, I_{R,n-(K_i-S_i)}^S \right) && \text{by Eq. 26,} \\ &= \max \left( D_n^S, \max \left( D_{n-(K_i-S_i)}^S, \max_{j=1 \dots R-1} \left( O_{j,n-(K_i-S_i)-S_j}^S, I_{R+1,n-(K_i-S_i)-(K_R-S_R)}^S \right) \right) \right) && \text{by Eq. 27,} \\ &= \max \left( D_n^S, \max_{j=1 \dots R-1} \left( O_{j,n-(K_i-S_i)-S_j}^S, O_{R,n-(K_i-S_i)-K_R}^S \right) \right) && \text{by Eq. 28,} \end{aligned}$$

and,

$$\begin{aligned} I_{i,n}^I &= \max \left( D_n^I, L_{i,n-(K_i-S_i)}^I \right) && \text{by Eq. 30,} \\ &= \max \left( D_n^I, \max \left( D_{n-(K_i-S_i)}^I, O_{i,n-(K_i-S_i)-S_i}^I, I_{R+1,n-(K_R-S_R)-(K_i-S_i)}^I \right) \right) && \text{by Eq. 33,} \\ &= \max \left( D_n^I, O_{i,n-K_i}^I, \max \left( D_{n-(K_R-S_R)-(K_i-S_i)}^I, O_{R,n-(K_R-S_R)-(K_i-S_i)-S_R}^I \right) \right) && \text{by Eq. 32,} \\ &= \max \left( D_n^I, O_{i,n-K_i}^I, O_{R,n-(K_i-S_i)-K_R}^I \right) \end{aligned}$$

To prove Eq. 53 for  $i=1, \dots, R-1$ , it suffices to show that the terms inside the parenthesis in the definition of  $I_{i,n}^S$  above are greater than or equal to their equivalent term in the definition of  $I_{i,n}^I$ . Clearly, we have  $\max_{j=1 \dots R-1} \left( O_{j,n-(K_i-S_i)-S_j}^S \right) \geq O_{i,n-(K_i-S_i)-S_i}^S = O_{i,n-K_i}^S \geq O_{i,n-K_i}^I$ , where the first inequality holds by definition and the second inequality holds by the induction

hypothesis. Also,  $D_n^S = D_n^I$  by definition. Finally  $O_{R,n-(K_i-S_i)-K_R}^S \geq O_{R,n-(K_i-S_i)-K_R}^I$  by the induction hypothesis. Therefore  $I_{i,n}^I \leq I_{i,n}^S$ ,  $i=1,\dots,R-1$ .

- For  $i=R$ , we have,

$$I_{R,n}^S = \max \left( D_n^S, \max_{i=1,\dots,R-1} \left( O_{i,n-S_i}^S \right), I_{R+1,n-(K_R-S_R)}^S \right) \quad \text{by Eq. 27,}$$

$$I_{R,n}^I = \max_{i=1,\dots,R-1} (L_{i,n}) \quad \text{by Eq. 31,}$$

$$= \max \left( D_n^I, \max_{i=1,\dots,R-1} \left( O_{i,n-S_i}^I \right), I_{R+1,n-(K_R-S_R)}^I \right) \quad \text{by Eq. 33.}$$

By definition,  $D_n^S = D_n^I$ . Also, by the induction hypothesis,  $\max_{i=1,\dots,R-1} \left( O_{i,n-S_i}^S \right) \geq \max_{i=1,\dots,R-1} \left( O_{i,n-S_i}^I \right)$  and  $I_{R+1,n-(K_R-S_R)}^S \geq I_{R+1,n-(K_R-S_R)}^I$ . Therefore,  $I_{R,n}^S \geq I_{R,n}^I$ .

- For  $i=R+1$ , we have,

$$I_{R+1,n}^S = \max \left( D_n^S, O_{R,n-S_R}^S \right) \quad \text{by Eq. 28,}$$

$$I_{R+1,n}^I = \max \left( D_n^I, O_{R,n-S_R}^I \right) \quad \text{by Eq. 32.}$$

Clearly,  $D_n^S = D_n^I$  and  $O_{R,n-S_R}^S \geq O_{R,n-S_R}^I$  by the induction hypothesis. Therefore  $I_{R+1,n}^S \geq I_{R+1,n}^I$ .

- Finally, we have,

$$O_{i,n}^S = \sigma_{i,n}^S + \max \left( I_{i,n}^S, O_{i,n-1}^S \right) \quad \text{by Eq. 29,}$$

$$O_{i,n}^I = \sigma_{i,n}^I + \max \left( I_{i,n}^I, O_{i,n-1}^I \right) \quad \text{by Eq. 34.}$$

To prove Eq. 54 it suffices to show that the terms inside the parenthesis in the definition of  $O_{i,n}^S$  above are greater than or equal to their equivalent terms in the definition of  $O_{i,n}^I$ , since  $\sigma_{i,n}^S = \sigma_{i,n}^I$ . Indeed,  $I_{i,n}^S \geq I_{i,n}^I$  by Eq. 53 and  $O_{i,n-1}^S \geq O_{i,n-1}^I$  by the induction hypothesis. ■

Property 15 states that the time at which the  $n^{\text{th}}$  part begins its processing (respectively finishes its processing) in  $MP_i$  in the IEKCS is smaller than the time when the  $n^{\text{th}}$  part begins its processing (respectively finishes its processing) in  $MP_i$  in the SEKCS. Therefore, customer demands are satisfied earlier in the IEKCS than they are in the SEKCS. This does not necessarily mean that the IEKCS has an overall better performance than the SEKCS, since the inventory storage costs are not taken into account. In fact, the IEKCS is likely to incur higher inventory storage than the SEKCS does.

## 6. Appendix A : Base Stock and Kanban Control Systems for Assembly


### 6.1. Base Stock Control System for Assembly

The Base Stock Control System (BSCS) is a simple pull control mechanism for coordinating multi-stage manufacturing systems [4]. Figure 6-1 shows the queueing network model of a BSCS for an assembly systems. For the sake of simplicity, we represent the case of  $R-1$  manufacturing stages supplying one assembly stage.

We use the same notations as in section 3. The contents and initial values of the queues, or network of queues in the case of  $MP_i$ , are described in Table 6-1.

Queue	Contents	Initial value
$MP_i \quad i=1, \dots, R$	$q_i$	0
$P_i \quad i=1, \dots, R$	$p_i$	$S_i$
$D_i \quad i=1, \dots, R+1$	$d_i$	0

**Table 6-1: Contents and initial values of the queues in the BSCS**

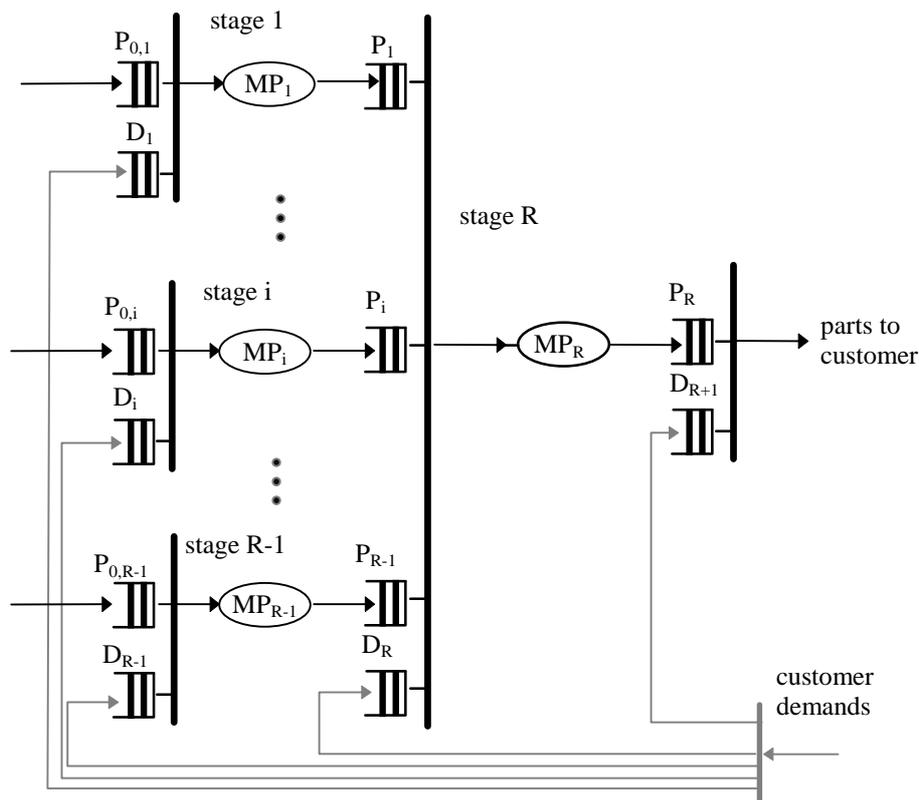

**Figure 6-1: Queueing Network model for the BSCS**

When a customer demand arrives to the system, it is immediately transmitted to all stages (queues  $D_i, i=1, \dots, R+1$ ).

The behavior of the BSCS can be described as follows.

**Release of parts into the manufacturing stage:**

At the  $i^{\text{th}}$  manufacturing stage, queues  $P_{0,i}$  and  $D_i$  are joined in a synchronization station ( $i=1, \dots, R-1$ ). This means that stage- $i$  can begin the production of a part only when there are at least: a raw part  $p_{0,i}$  in  $P_{0,i}$  and a demand  $d_i$  in  $D_i$ . When these conditions are met, then,

- the raw part  $p_{0,i}$  is relabelled  $q_i$  and is transferred to  $MP_i$ ,
- the demand  $d_i$  is satisfied and is therefore discarded.

When the part  $q_i$  finishes its processing in  $MP_i$ , it is relabelled  $p_i$  and it joins  $P_i$ .

**Release of parts into the assembly stage:**

At the assembly stage  $R$ , queues  $P_i$  ( $i=1, \dots, R-1$ ) and  $D_R$  are joined in a synchronization station. This means that the assembly operation can begin only when there are at least: a part  $p_i$  in  $P_i$  (for all  $i=1, \dots, R-1$ ) and a demand  $d_R$  in  $D_R$ . When these conditions are satisfied, then,

- $(p_1, p_2, \dots, p_{R-1})$  is relabelled  $q_R$  and is transferred downstream to  $MP_R$ ,
- the demand  $d_R$  is satisfied and is therefore discarded.

When a part  $q_R$  finishes its assembly process in  $MP_R$ , it is relabelled  $p_R$  and it joins  $P_R$ .

**Delivery of finished parts to the customer:**

Queues  $P_R$  and  $D_{R+1}$  are joined in a synchronization station. The delivery of a finished part occurs when there are at least: a part  $p_R$  in  $P_R$  and a demand  $d_{R+1}$  in  $D_{R+1}$ . Then,

- $p_R$  is released to the customer,
- the demand  $d_{R+1}$  is satisfied and is therefore discarded.

Note that the BSCS depends only on one parameter per stage, namely  $S_i$ .

**6.2. Kanban Control System for Assembly (KCS)**

We briefly describe the KCS for assembly systems (see [8] for details). Two systems are defined, depending on the mechanism for the release of kanbans: the Simultaneous Kanban Control System (SKCS) and the Independent Kanban Control System (IKCS).

**6.2.1. Simultaneous Kanban Control System (SKCS)**

Figure 6-2 shows the queueing network model of a Simultaneous Kanban Control System (SKCS) for an assembly system. Once again, for the sake of simplicity, we represent the case of  $R-1$  manufacturing stages supplying one assembly stage.

In addition to the notation of the section 3, we use the following bold notation:

$\mathbf{d}_i$   $i=1, \dots, R+1$  an  $i$ -element vector  $(d_1, d_2, \dots, d_i)$ ; note that  $\mathbf{d}_1 = (d_1)$ .

Table 6-2 describes the contents and initial values of the queues, or, in the case of  $MP_i$ , network of queues:

Queue	Contents	Initial value
$MP_i$ $i=1, \dots, R$	$(q_i, a_i)$	0
$PA_i$ $i=1, \dots, R$	$(p_i, a_i)$	$K_i$
$DA_i$ $i=1, \dots, R-1$	$(d_i, a_i)$	0
$\mathbf{DA}_R$	$(\mathbf{d}_R, a_R)$	0
$\mathbf{D}_{R+1}$	$\mathbf{d}_{R+1}$	0

**Table 6-2: Contents and initial values of the queues in the SKCS**

When a customer demand arrives it joins queue  $\mathbf{D}_{R+1}$  as a vector  $\mathbf{d}_{R+1} = (d_1, d_2, \dots, d_{R+1})$ . Each manufacturing stage  $i$  has  $K_i$  kanbans  $a_i$  that authorize the production of new stage- $i$  finished parts. Initially, all these kanbans are attached onto an equal number of parts  $p_i$  and are stored as pairs  $(p_i, a_i)$  in queue  $PA_i$ . As in the case of the extended kanban control system, queue  $P_{0,i}$  ( $i=1, \dots, R-1$ ) represents the raw parts buffers supplying the manufacturing stage  $i$ . The initial number of raw parts in  $P_{0,i}$  and the arrival of new parts into  $P_{0,i}$  fall outside the scope of the control mechanism and are considered as given.

The behavior of the BSCS can be described as follows.

**Release of parts into the manufacturing stage:**

Queues  $P_{0,i}$  and  $DA_i$  ( $i=1, \dots, R-1$ ) are joined in a synchronization station. If there are a pair  $(d_i, a_i)$  in  $DA_i$  and a part  $p_{0,i}$  in  $P_{0,i}$  then,

- the kanban  $a_i$  is attached onto  $p_{0,i}$  which is relabelled  $q_i$  and together they are transferred downstream into  $MP_i$ ,
- the demand  $d_i$  is satisfied and is therefore discarded.

When the part  $q_i$  finishes its processing in  $MP_i$  it is relabelled  $p_i$  and together with the kanban  $a_i$  that is attached onto it, they join queue  $PA_i$  as a pair  $(p_i, a_i)$ .

**Release of parts into the assembly stage:**

At the assembly stage  $R$ , queues  $PA_i$  ( $i=1, \dots, R-1$ ) and  $\mathbf{DA}_R$  are joined in a synchronization station. This means that the assembly operation can begin only when there are at least: a pair  $(p_i, a_i)$  in  $PA_i$  (for all  $i=1, \dots, R-1$ ) and a pair  $(\mathbf{d}_R, a_R)$  in  $\mathbf{DA}_R$ . When these conditions are satisfied, then,

- the kanban  $a_i$  is detached from  $p_i$ ,  $i=1, \dots, R-1$ ,
- $(p_1, p_2, \dots, p_{R-1})$  is relabelled  $q_R$  and, together with the kanban  $a_R$  they are transferred downstream to  $MP_R$ ,
- the kanban  $a_i$  is attached onto the demand  $d_i$ , and together they are transferred upstream into  $DA_i$  as a pair  $(d_i, a_i)$ ,  $i=1, \dots, R-1$ ,
- the demand  $d_R$  is satisfied and is therefore discarded.

When a part  $q_R$  finishes its assembly process in  $MP_R$ , it is relabelled  $p_R$  and, together with the kanban  $a_R$  that is attached onto it, they join queue  $PA_R$ .

**Delivery of finished parts to the customer:**

Queues  $PA_R$  and  $\mathbf{D}_{R+1}$  are joined in a synchronization station. The delivery of a finished assembled part occurs when there are at least: a pair  $(p_R, a_R)$  in  $PA_R$ , a demand vector  $\mathbf{d}_{R+1}$  in  $\mathbf{D}_{R+1}$ . Then,

- the kanban  $a_R$  is detached from  $p_R$ ,
- $p_R$  is released to the customer,
- the demand  $d_{R+1}$  is satisfied and is therefore discarded,
- the kanban  $a_R$  is attached onto the demand vector  $\mathbf{d}_R$ , and together they are transferred upstream into  $\mathbf{DA}_R$ .

Note that the SKCS depends only on one parameter per stage, namely  $K_i$ .

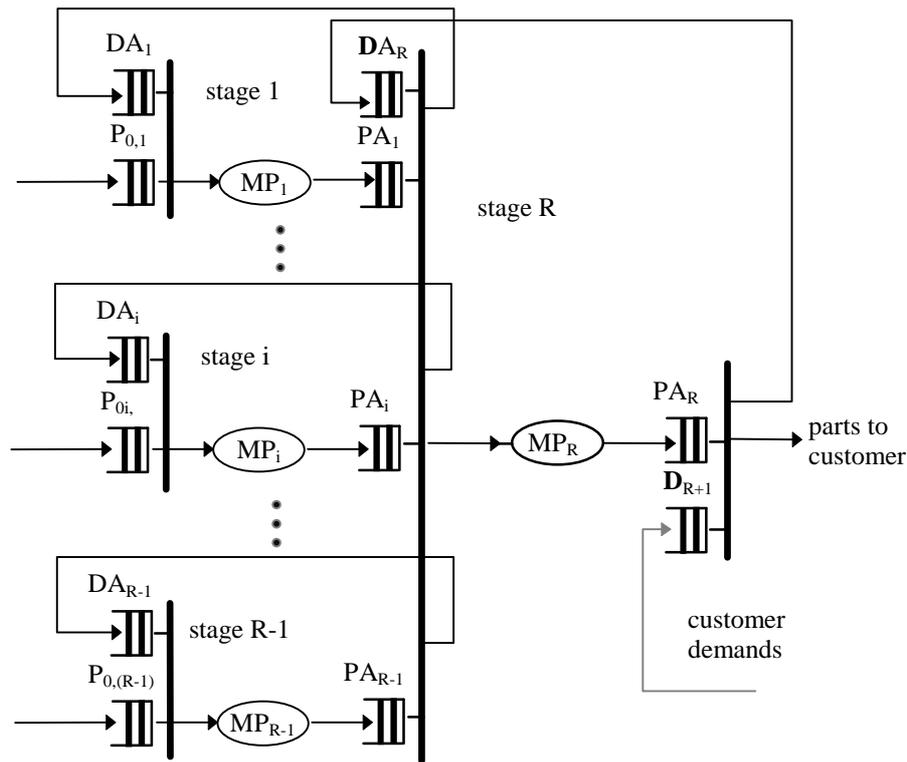


Figure 6-2: Queueing Network model for the SKCS

### 6.2.2. Independent Kanban Control System (IKCS)

Figure 6-3 shows the queueing network model of the Independent Kanban Control System (IKCS) for an assembly systems. We use the same notations as in section 3. Concerning the customer demands, let us introduce the following notations,


- $d_{R+1}$  a demand for a assembled part,
- $d_R$  a demand for an assembly operation,
- $d_i \quad i=1, \dots, R-1$  a demand for the production of a new  $p_i$ ,
- $d_{R,i} \quad i=1, \dots, R-1$  a demand for the assembly of a new  $p_R$  using a stage- $i$  finished part  $p_i$ ,
- $\mathbf{d}_{R+1}$  a vector demand  $(d_1, d_2, \dots, d_{R+1})$ .

Table 6-2 describes the contents and initial values of the queues, or network of queues in the case of  $MP_i$ :

Queue	Contents	Initial value
$MP_i \quad i=1, \dots, R$	$(q_i, a_i)$	0
$PA_i \quad i=1, \dots, R$	$(p_i, a_i)$	$K_i$
$DA_i \quad i=1, \dots, R-1$	$(d_i, a_i)$	0
$\mathbf{DA}_{R,i}$	$((d_i, d_{R,i}), a_{R,i})$	0
$\mathbf{D}_{R+1}$	$\mathbf{d}_{R+1}$	0

Table 6-3: Contents and initial values of the queues in the IKCS

When a customer demand arrives it joins queue  $\mathbf{D}_{R+1}$  as a vector  $\mathbf{d}_{R+1} = (d_1, d_2, \dots, d_{R+1})$ . Each demand  $d_R$  for an assembly operation is split into  $R-1$  demands  $d_{R,i}$  ( $i=1, \dots, R-1$ ). In the same way, each kanban is split into  $R-1$  kanbans  $a_{R,i}$ .

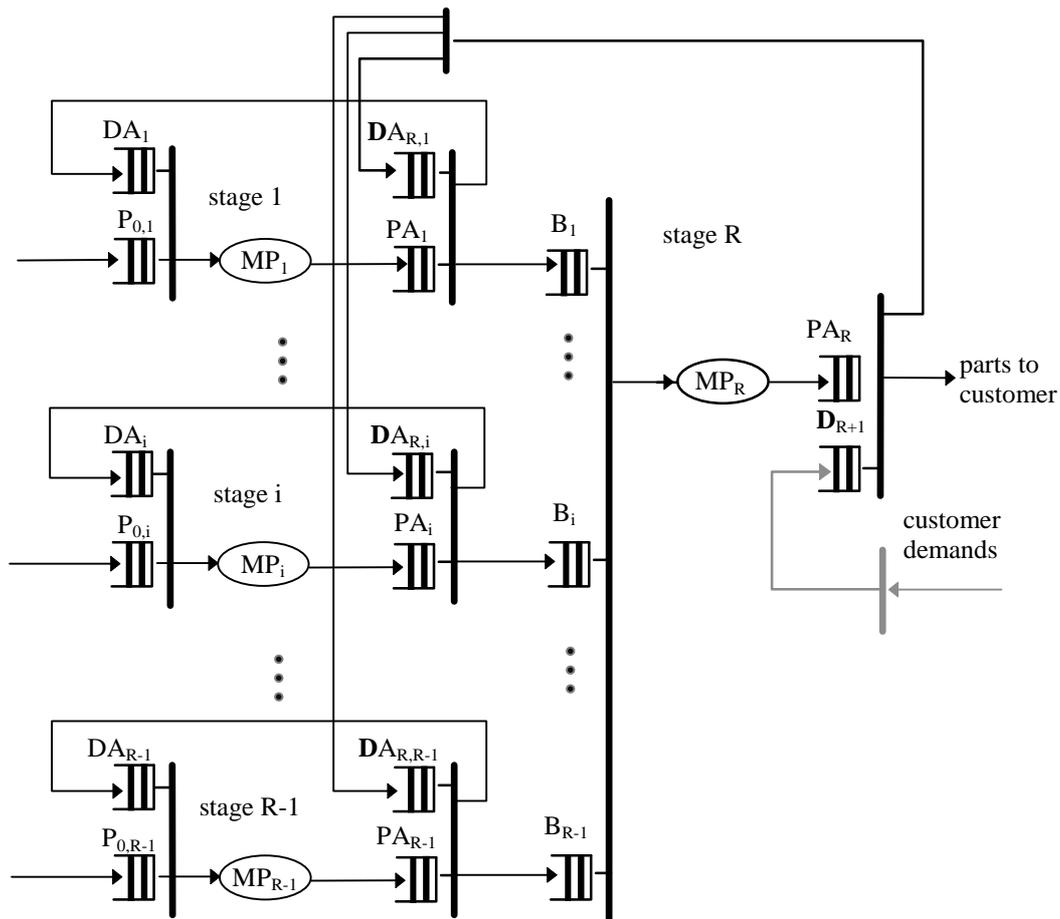

**Figure 6-3: Queuing Network model for the IKCS**

The behavior of the IKCS can be described as follows.

**Release of parts into the manufacturing stage:** It is identical to the SKCS.

**Release of parts into the assembly stage:**

The difference between the SKCS and the IKCS is in the way kanbans are transferred in stages 1,...,R-1. In the SKCS kanbans are transferred in stages 1,...,R-1 simultaneously, whereas in the IKCS they are transferred independently of each other.

The entry of the assembly stage R is composed by R synchronization stations:

- for each stage  $i$  ( $i=1, \dots, R-1$ ), queues  $PA_i$  and  $DA_{R,i}$  are joined in a synchronization station,
- queues  $B_i$  are joined in a synchronization station.

The supply of stage- $i$  finished parts for the assembly operation can occur only when there are at least: a pair  $(p_i, a_i)$  in  $PA_i$ , a pair  $((d_i, d_{R,i}), a_{R,i})$  in  $DA_{R,i}$ . When these conditions are satisfied, then,

- the kanban  $a_i$  is detached from  $p_i$ ,
- the kanban  $a_{R,i}$  is attached onto  $p_i$  and together they are transferred downstream to  $B_i$ ,
- the kanban  $a_i$  is attached onto the demand  $d_i$ , and together they are transferred upstream into  $DA_i$  as a pair  $(d_i, a_i)$ ,  $i=1, \dots, R-1$ ,
- the demand  $d_{R,i}$  is satisfied and is therefore discarded.

When there is at least one pair  $(p_i, a_{R,i})$  in each  $B_i$  the assembly process can begin, then,

– the pairs  $(p_i, a_{R,i})$ , are removed from queues  $B_i$  ( $i=1, \dots, R-1$ ), the  $(R-1)$ -tuple  $(p_1, p_2, \dots, p_{R-1})$  is relabelled  $q_R$ , the kanbans  $(a_{R,1}, a_{R,2}, \dots, a_{R,R-1})$  are merged into a kanban  $a_R$ , and the pair  $(q_R, a_R)$  is transferred downstream to  $MP_R$ .

When a part  $q_R$  finishes its assembly process in  $MP_R$ , it is relabelled  $p_R$ , and, together with the kanban  $a_R$  that was attached onto it, they join  $PA_R$  as a pair  $(p_R, a_R)$ .

### Delivery of finished parts to the customer:

Queues  $PA_R$  and  $D_{R+1}$  are joined in a synchronization station. There is no need for an authorization to release a finished part to the customer. Therefore, the delivery of a finished part can occur as soon as there are a pair  $(p_R, a_R)$  in  $PA_R$  and a demand vector  $d_{R+1}$  in  $D_{R+1}$ . When these conditions are satisfied, then,

- the kanban  $a_R$  is detached from  $p_R$  and is split into  $R-1$  kanbans  $a_{R,i}$ ,
- the demand  $d_R$  is split into  $R-1$  demands  $d_{R,i}$  which are transferred to queues  $DA_{R,i}$  together with the demand  $d_i$  and the kanban  $a_{R,i}$  as a pair  $((d_i, d_{R,i}), a_{R,i})$ ,  $i=1, \dots, R-1$ ,
- $p_R$  is released to the customer,
- the demand  $d_{R+1}$  is satisfied and is therefore discarded.

Note that the SKCS depends only on one parameter per stage, namely  $K_i$ .

## 7. Appendix B : Proof of Property 7

The proofs are based on expressing the times on either side of the inequality sign in Eq. 35-Eq. 43 in terms of the max-plus expressions Eq. 26-Eq. 29, and then showing that each term inside the "max" parenthesis on the left hand side of the inequality sign is smaller than or equal to the equivalent term on the right hand side of the inequality sign.

Let us recall some facts which are essential along these proofs :

- there exists a total ordering on the event times:

$$\begin{aligned} I_{i,n-m} &\leq I_{i,n} \text{ and } \tilde{I}_{i,n-m} \leq \tilde{I}_{i,n} & i=1, \dots, R+1, \quad n, m \in \{1, 2, \dots\}, \\ O_{i,n-m} &\leq O_{i,n} \text{ and } \tilde{O}_{i,n-m} \leq \tilde{O}_{i,n} & i=1, \dots, R, \quad n, m \in \{1, 2, \dots\}, \\ D_{n-m} &\leq D_n \text{ and } \tilde{D}_{n-m} \leq \tilde{D}_n & n, m \in \{1, 2, \dots\}. \end{aligned}$$

- initial values are fixed:  $I_{i,n}$ ,  $\tilde{I}_{i,n}$ ,  $O_{i,n}$ ,  $\tilde{O}_{i,n}$ ,  $D_n$  and  $\tilde{D}_n$  are zero for  $n \leq 0$  (first step for the induction we use bellow),
- systems  $\mathcal{S}$  and  $\tilde{\mathcal{S}}$  are submitted to the same sequence of customer demands ( $D_n = \tilde{D}_n$ ,  $\forall n$ ),
- sequences of processing times ( $\sigma_{i,n}$  and  $\tilde{\sigma}_{i,n}$ ) are the same in systems  $\mathcal{S}$  and  $\tilde{\mathcal{S}}$ .

1. We assume that  $\tilde{K}_q > K_q$  for some  $q$  in  $\{1, \dots, R\}$ ,  $\tilde{K}_i = K_i$  for all  $i$  in  $\{1, \dots, R\} - \{q\}$ ,  $\tilde{S}_i = S_i$  for all  $i$  in  $\{1, \dots, R\}$ . In addition, we assume that Eq. 35 and Eq. 36 hold up to  $n-1$  (induction hypothesis), that is:

$$\begin{aligned} \tilde{I}_{i,n-m} &\leq I_{i,n-m} & i=1, \dots, R+1, \quad m=1, 2, \dots, \\ \tilde{O}_{i,n-m} &\leq O_{i,n-m} & i=1, \dots, R, \quad m=1, 2, \dots \end{aligned}$$

- For  $i=1, \dots, R-1$ , we prove Eq. 35 for  $n$ , by Eq. 26, the induction hypothesis and the fact that  $\tilde{K}_i - \tilde{S}_i \geq K_i - S_i$  :

$$\begin{aligned} \tilde{I}_{i,n} &= \max \left( \tilde{D}_n, \tilde{I}_{R,n-(\tilde{K}_i - \tilde{S}_i)} \right) \\ &\leq \max \left( D_n, I_{R,n-(K_i - S_i)} \right) = I_{i,n} . \end{aligned}$$

Eq. 35 is therefore proved for  $i=1, \dots, R-1$ .

- For  $i=R$ , by Eq. 27, the induction hypothesis, and the fact that  $S_i = \tilde{S}_i$  and  $\tilde{K}_R - \tilde{S}_R \geq K_R - S_R$  :

$$\begin{aligned} \tilde{I}_{R,n} &= \max \left( \tilde{D}_n, \max_{i=1 \dots R-1} \left( \tilde{O}_{i,n-\tilde{S}_i} \right), \tilde{I}_{R+1,n-(\tilde{K}_R - \tilde{S}_R)} \right) \\ &\leq \max \left( D_n, \max_{i=1 \dots R-1} \left( O_{i,n-S_i} \right), I_{R+1,n-(K_R - S_R)} \right) = I_{R,n} . \end{aligned}$$

Eq. 35 is therefore proved for  $i=R$ .

- For  $i=R+1$ , by Eq. 28, the induction hypothesis and the fact that  $S_R = \tilde{S}_R$  :

$$\tilde{I}_{R+1,n} = \max \left( \tilde{D}_n, \tilde{O}_{R,n-\tilde{S}_R} \right) \leq \max \left( D_n, O_{R,n-S_R} \right) = I_{R+1,n} .$$

Eq. 35 is therefore proved for  $i=R+1$ .

- For  $i=1, \dots, R$ , by Eq. 29, Eq. 35, the induction hypothesis, and the fact that  $\sigma_{i,n} = \tilde{\sigma}_{i,n}$  :

$$\tilde{O}_{i,n} = \tilde{\sigma}_{i,n} + \max \left( \tilde{I}_{i,n}, \tilde{O}_{i,n-1} \right) \leq \sigma_{i,n} + \max \left( I_{i,n}, O_{i,n-1} \right) = O_{i,n} .$$

Eq. 36 is therefore proved for  $i=1, \dots, R$ .

2. Let us now assume that  $\tilde{K}_i = K_i$  for all  $i$  in  $\{1, \dots, R\}$ ,  $\tilde{S}_q > S_q$  for some  $q$  in  $\{1, \dots, R-1\}$  and  $\tilde{S}_i = S_i$  for all  $i$  in  $\{1, \dots, R\} - \{q\}$ . In addition, we will assume that Eq. 37, Eq. 38, Eq. 39, and Eq. 40 hold up to  $n-1$  (induction hypothesis).

- For  $i \in \{1, \dots, R-1\} - \{q\}$ , by Eq. 26, the induction hypothesis, and the fact that  $\tilde{K}_i - \tilde{S}_i = K_i - S_i$ :

$$\begin{aligned} \tilde{I}_{i,n} &= \max \left( \tilde{D}_n, \tilde{I}_{R,n-(\tilde{K}_i - \tilde{S}_i)} \right) \\ &\leq \max \left( D_n, I_{R,n-(\tilde{K}_i - \tilde{S}_i)} \right) \leq \max \left( D_i, I_{R,n-(K_i - S_i)} \right) = I_{i,n} . \end{aligned}$$

Eq. 37 is therefore proved for  $i \in \{1, \dots, R-1\} - \{q\}$ .

- For  $i=R$ , by Eq. 27, the induction hypothesis and the hypotheses  $\tilde{K}_R - \tilde{S}_R = K_R - S_R$  and  $\tilde{S}_i \geq S_i$  for  $i=1, \dots, R-1$ :

$$\tilde{I}_{R,n} = \max \left( \tilde{D}_n, \max_{i=1 \dots R-1} \left( \tilde{O}_{i,n-\tilde{S}_i} \right), \tilde{I}_{R+1,n-(\tilde{K}_R - \tilde{S}_R)} \right)$$

$$\leq \max \left( D_n, \max_{i=1, \dots, R-1} \left( O_{i,n-S_i} \right), I_{R+1,n-(K_R-S_R)} \right) = I_{R,n}.$$

Eq. 37 is therefore proved for  $i=R$ .

- For  $i=R+1$ , by Eq. 55 and the same arguments as previously:

$$\tilde{I}_{R+1,n} = \max \left( \tilde{D}_n, \tilde{O}_{R,n-\tilde{S}_R} \right) \leq \max \left( D_n, O_{R,n-S_R} \right) = I_{R+1,n}.$$

Eq. 37 is therefore proved for  $i=R+1$ .

- For  $i=q$ , by the Eq. 26, Eq. 37, the assumption on the parameters  $\tilde{S}_q-S_q > 0$  and the induction hypothesis:

$$\begin{aligned} \tilde{I}_{q,n} &\leq \tilde{I}_{q,n+(\tilde{S}_q-S_q)} = \max \left( \tilde{D}_n, \tilde{I}_{R,n+(\tilde{S}_q-S_q)-(K_q-\tilde{S}_q)} \right) \\ &\leq \max \left( \tilde{D}_n, \tilde{I}_{R,n+(\tilde{S}_q-S_q)} \right) \\ &\leq \max \left( D_n, I_{R,n+(\tilde{S}_q-S_q)} \right) = I_{q,n+(\tilde{S}_q-S_q)}. \end{aligned}$$

Eq. 38 is therefore proved.

To prove Eq. 39 and Eq. 40, we first observe that the processing time in all  $MP_i$  ( $i \neq q$ ) remains the same because the base stock is the same in the two systems. For  $MP_q$  for which the base stock is increased, however, we will assume that the  $\tilde{S}_q-S_q$  supplementary parts have been previously produced by the stage. In other words:

$$\begin{aligned} \tilde{\sigma}_{i,n} &= \sigma_{i,n} \quad \text{for } i \neq q, \\ \tilde{\sigma}_{q,n} &= \sigma_{q,n+(\tilde{S}_q-S_q)}. \end{aligned}$$

- For  $i \in \{1, \dots, R\} - \{q\}$ , by Eq. 29, Eq. 37 and the induction hypothesis:

$$\tilde{O}_{i,n} = \tilde{\sigma}_{i,n} + \max \left( \tilde{I}_{i,n}, \tilde{O}_{i,n-1} \right) \leq \sigma_{i,n} + \max \left( I_{i,n}, O_{i,n-1} \right) = O_{i,n}.$$

Eq. 39 is therefore proved for  $i \in \{1, \dots, R\} - \{q\}$ .

- For  $i=q$ , by Eq. 29, Eq. 38, the assumption on the parameters  $\tilde{S}_q-S_q > 0$ ,  $\tilde{\sigma}_{i,n} = \sigma_{i,n+(\tilde{S}_q-S_q)}$  and the induction hypothesis:

$$\begin{aligned} \tilde{O}_{q,n} &= \tilde{\sigma}_{q,n} + \max \left( \tilde{I}_{q,n}, \tilde{O}_{q,n-1} \right) \\ &\leq \sigma_{q,n+(\tilde{S}_q-S_q)} + \max \left( I_{q,n+(\tilde{S}_q-S_q)}, O_{q,n-1+(\tilde{S}_q-S_q)} \right) = O_{q,n+(\tilde{S}_q-S_q)}. \end{aligned}$$

Eq. 40 is therefore proved.

3. Let us assume now that  $\tilde{K}_i = K_i$  ( $i=1, \dots, R$ ) and  $\tilde{S}_i = S_i$  ( $i=1, \dots, R-1$ ) and  $\tilde{S}_R \geq S_R$ . In addition, we assume that Eq. 41, Eq. 42 and Eq. 43 hold up to  $n-1$  (induction hypothesis).

- For  $i=1, \dots, R-1$ , by Eq. 26, the hypothesis on the parameters and the induction hypothesis:

$$\begin{aligned} \tilde{I}_{i,n} &= \max \left( \tilde{D}_n, \tilde{I}_{R,n-(\tilde{K}_i-\tilde{S}_i)} \right) \\ &\leq \max \left( D_{n+(\tilde{S}_R-S_R)}, I_{R,n-(K_i-S_i)+(\tilde{S}_R-S_R)} \right) = I_{i,n+(\tilde{S}_R-S_R)}. \end{aligned}$$

Eq. 41 is therefore proved for  $i=1, \dots, R-1$ .

- For  $i=R$ , by Eq. 27,  $D_n = \tilde{D}_n$ , the assumption on the parameters, and the induction hypothesis:

$$\begin{aligned} \tilde{I}_{R,n} &= \max \left( \tilde{D}_n, \max_{i=1 \dots R-1} \left( \tilde{O}_{i,n-\tilde{S}_i} \right), \tilde{I}_{R+1,n-(\tilde{K}_R-\tilde{S}_R)} \right) \\ &\leq \max \left( D_{n+(\tilde{S}_R-S_R)}, \max_{i=1 \dots R-1} \left( O_{i,n-S_i+(\tilde{S}_R-S_R)} \right), I_{R+1,n-(K_R-S_R)+(\tilde{S}_R-S_R)} \right) \\ &= I_{R,n+(\tilde{S}_R-S_R)}. \end{aligned}$$

Eq. 41 is therefore proved for  $i=R$ .

- For  $i=R+1$ , by Eq. 28, and induction hypothesis:

$$\begin{aligned} \tilde{I}_{R+1,n} &= \max \left( \tilde{D}_n, \tilde{O}_{i,n-\tilde{S}_R} \right) \\ &\leq \max \left( D_n, O_{i,n-\tilde{S}_R+(\tilde{S}_R-S_R)} \right) = \max \left( D_n, O_{i,n-S_R} \right) = I_{R+1,n}. \end{aligned}$$

Eq. 42 is therefore proved.

- To prove Eq. 43, we first observe that as the base stock in  $PA_R$  has been increased, we can consider that the  $\tilde{S}_R-S_R$  supplementary parts in the second system have been previously produced. In other words:

$$\tilde{\sigma}_{i,n} = \sigma_{i,n+(\tilde{S}_R-S_R)}, \text{ for } i=1, \dots, R.$$

Now, by Eq. 29, Eq. 41 and the induction hypothesis,

$$\begin{aligned} \tilde{O}_{i,n} &= \tilde{\sigma}_{i,n} + \max \left( \tilde{I}_{i,n}, \tilde{O}_{i,n-1} \right) \\ &\leq \sigma_{i,n+(\tilde{S}_R-S_R)} + \max \left( I_{i,n+(\tilde{S}_R-S_R)}, O_{i,n-1+(\tilde{S}_R-S_R)} \right) = O_{i,n+(\tilde{S}_R-S_R)}. \end{aligned}$$

Eq. 43 is therefore proved for  $i=1, \dots, R$ . ■

## 8. References

- [1] F. Baccelli, Z. Liu, *Comparison Properties of Stochastic Decision Free Petri Nets*, IEEE Transactions on Automatic Control, Vol.37, No.12, Dec.1992.
- [2] F. Baccelli, G. Cohen, G.J. Olsder, J-P. Quadrat, *Synchronization and Linearity: An Algebra for Discrete Event Systems*, John Wiley & Sons, 1992.
- [3] J.A. Buzacott, *Queueing Models of Kanban and MRP Controlled Production Systems*, Engineering Cost and Production Economics, 1989.
- [4] J.A. Buzacott and J.G. Shanthikumar, *Stochastic Models of Manufacturing Systems*, Prentice-Hall, 1993.
- [5] Y. Dallery, Z. Liu, D. Towsley, *Properties of Fork/Join Queueing Networks with Blocking under Various Operating Mechanisms*, IEEE Transactions on Robotics and Automation, Vol.13, N°4, pp 503-518, 1997.
- [6] Y. Dallery, Z. Liu, D. Towsley, *Equivalence, Reversibility, Symmetry and Concavity in Fork/Join Queueing Networks with Blocking*, Journal of the ACM, Vol.41, N°5, Sept.1994, pp.903-942.
- [7] Y. Dallery and G. Liberopoulos, *Extended Kanban Control System: A New Kanban-type Pull Control Mechanism for Multistage Manufacturing Systems*, Technical Report, MASI, January 1996.
- [8] M. Di Mascolo and Y. Dallery, *Performance Evaluation of Kanban Controlled Assembly Systems*, Symposium on Discrete Events and Manufacturing Systems of the Multiconference IMACS-IEEE/SMC CCESA'96, Lille, France, July 1996.