



Comparison of the Von Kármán and Kirchhoff models for the post-buckling and vibrations of elastic beams

Sébastien Neukirch, Morteza Yavari, Noël Challamel, Olivier Thomas

► To cite this version:

Sébastien Neukirch, Morteza Yavari, Noël Challamel, Olivier Thomas. Comparison of the Von Kármán and Kirchhoff models for the post-buckling and vibrations of elastic beams. 2021. hal-02957425v2

HAL Id: hal-02957425

<https://hal.science/hal-02957425v2>

Preprint submitted on 2 Apr 2021 (v2), last revised 19 May 2021 (v3)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Comparison of the Von Kármán and Kirchhoff models for the post-buckling and vibrations of elastic beams

Sébastien Neukirch^{a,*}, Morteza Yavari^b, Noël Challamel^c, Olivier Thomas^d

^a*Sorbonne Université, CNRS, Institut Jean Le Rond d'Alembert UMR 7190, Paris, France*

^b*Department of Physics, Islamic Azad University, Kashan Branch, Kashan, Iran*

^c*Université de Bretagne-Sud, CNRS, Institut de Recherche Dupuy de Lôme UMR 6027, F-56321 Lorient, France*

^d*Arts et Metiers Institute of Technology, LISPEN, HESAM Université, F-59046 Lille, France*

Abstract

We compare different models describing the buckling, post-buckling and vibrations of elastic beams in the plane. Focus is put on the first buckled equilibrium solution and the first two vibration modes around it. In the incipient post-buckling regime, the classic Woinowsky-Krieger non-linear model is known to grasp the behavior of the system. It is based on the von Kármán approximation, a 2nd order expansion in the rotation and vertical displacement of the buckled beam. But as the rotation and the vertical displacement in the beam become larger, the Woinowsky-Krieger model starts to show limitations and we introduce a 3rd order model, derived from the geometrically-exact Kirchhoff model. We discuss and quantify the shortcomings of the Woinowsky-Krieger model and the contributions of the 3rd order terms in the new model, and we compare them both to the Kirchhoff model. Furthermore, we show that the limit in the validity range of the Woinowsky-Krieger model is only marginally affected by the slenderness ratio of the beam. Different ways to nondimensionalize the models are compared and we believe that, although this study is performed for specific boundary conditions, the present results have a general scope and can be used as abacuses to estimate the validity range of the simplified models.

Keywords: nonlinearities, postbuckling, natural frequencies

1. Introduction

Every model is wrong [1], but a good model is both accurate and easy to handle. In mechanical engineering, a trade-off is usually made between accuracy and computability. When looking at the deformation of elastic structures, simplification in the kinematics or constitutive relations are for example performed

*Corresponding author

Email address: `sebastien.neukirch@upmc.fr` (Sébastien Neukirch)

to ease calculations. Here, we investigate the post-buckling and vibration behavior of elastic beams using both geometrically exact and approximate models. In particular, we question the validity of semi-linearized models and their efficiency to capture the nonlinear response of elastic beams. The equations of motion for
10 extensible, geometrically-exact beams have been established by Kirchhoff [2] and generalized by Reissner [3] to include shear effects. There are several recent textbooks devoted to nonlinear structural models, see e.g. [4, 5, 6, 7], [8] for a nice historical analysis, and [9, 10, 11] for recent reviews on finite elements approaches and continuation methods for elastic beams. Here, we deal with
15 nonlinear beam problem and account for both bending and extensional deformations (while neglecting shear and rotational inertia). Due to the difficulties to find exact solutions in the nonlinear case, approximate engineering models have been formulated. These models rely on simplified kinematics, either linearized or weakly nonlinear, and include a coupling between axial and bending
20 motions. The so-called Woinowsky-Krieger model [12, 13, 14, 15] assumes a linearized curvature calculation and a von Kármán-type axial strain measure, first introduced for the buckling of elastic plates [16, 17]. This model has been widely used in the literature and has shown its efficiency for computing approximate amplitude-frequency dependence of extensible elastic beams in the
25 weakly nonlinear regime, see for example [18, 19, 20, 21, 22, 10] and references therein. Furthermore, exact solutions have been derived for the Woinowsky-Krieger model [23]. However, as mentioned in [24], it is based on a linearization of the transverse displacement equation, so that computations of the nonlinear behavior of beams are only valid under certain conditions and for small deflec-
30 tions. For the geometrically exact case, Kirchhoff's equations for the extensible beam have been reformulated by Pflüger [25] who gave the exact buckling load of the extensible column. Moreover, exact solutions for the equilibrium of extensible columns in term of elliptic integrals have been derived, see for instance [26].

35 In this paper, we investigate the range of validity of the Woinowsky-Krieger beam model by comparing it to the geometrically exact Kirchhoff model. We consider clamped-clamped boundary conditions and analytically and numerically compute the planar equilibrium and vibrations of a beam in a displacement-controlled loading. We use the Kirchhoff extensible model in Section 2, and the
40 Woinowsky-Krieger model in Section 3, to compute equilibrium and vibrations in the post-buckling regime, and we then compare results from the two models in Section 4. As the Woinowsky-Krieger model is only 2nd order, we derive in Section 5 a new model, comprising 3rd order terms, and we compare it to the two previous models. We discuss our findings and conclude in Section 6.

45 2. The Kirchhoff model

We look at the planar equilibrium and vibrations of a beam in the post-buckling domain. The beam has length L , with a homogeneous cross-section of area A and second moment of area I , cast from a homogeneous and isotropic

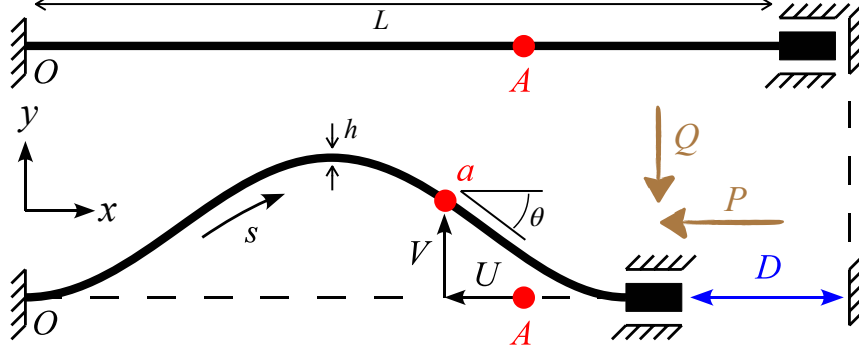


Figure 1: Clamped-clamped beam with imposed axial displacement D . Note that $V = Y$ and $U = X - S$. The external force at the right end has horizontal $P(T) = -N_x(L, T)$ and vertical $Q(T) = -N_y(L, T)$ components, with T the physical time.

material of Young's modulus E and density ρ . An important parameter is the

50

$$\eta = \frac{I}{AL^2}, \quad (1)$$

that becomes $\eta = 1/12(h/L)^2$ in the case of a rectangular cross-section of width w and thickness h . We adopt the Euler-Bernoulli assumptions, that is we neglect shear deformations and rotational inertia, which only become important in the

55 high frequency domain [27]. However, we keep extensional deformations because in displacement-controlled setups, extension plays a crucial role to describe the vibrations of the beam [28, 29]. The beam is naturally flat, the reference configuration being along the horizontal axis. We use the arc-length S of the beam in its reference configuration as a Lagrangian variable, that is $S \in [0, L]$ always.

60 The beam is clamped horizontally at its left end ($S = 0$), which lies at the origin. The right end ($S = L$) is constrained to lie on the horizontal axis, with a horizontal tangent, see Figure 1. An axial displacement D is imposed and we compute the equilibrium shape and the vibrations around this shape. We then study how equilibrium and vibrations vary as D is changed.

In this section, we present the extensible Kirchhoff model, which we tend to regard as the reference with which we are going to compare the models of the subsequent sections. Kirchhoff's framework uses the current position (X, Y) and inclination angle θ as kinematical variables, and the internal bending moment M and force vector (N_x, N_y) as stress variables. Linear bending $M = EI \, d\theta/dS$ and stretching $N_\theta = EAe$ constitutive relations are used, where $e(S, T)$ is the extension of the beam and $N_\theta = N_x \cos \theta + N_y \sin \theta$ is the tension in the beam.

The motion of the beam is given by

$$X' = (1 + e) \cos \theta \quad N'_x = \rho A \ddot{X} \quad (2a,b)$$

$$Y' = (1 + e) \sin \theta \quad N'_y = \rho A \ddot{Y} \quad (2c,d)$$

$$EI\theta' = M \quad M' = N_x Y' - N_y X' \quad (2e,f)$$

$$EA e = N_x \cos \theta + N_y \sin \theta \quad (2g)$$

Every variable depends on both the arc-length S and the time T with the notations $()' = d()/dS$ and $(\dot{}) = d()/dT$. Unless otherwise stated, from now on, we work with non-dimensionalized variables, that is we use L as unit length, EI/L^2 as unit force, and $\tau = L^2 \sqrt{\rho A / (EI)}$ as unit time. Non-dimensionalized variables are written in lower case, e.g. $x = X/L$, or $n_x = N_x L^2 / (EI)$. The non-dimensionalized version of system (2) is simply obtained by setting $EI = 1$, $L = 1$, $\rho A = 1$, and $EA = 1/\eta$:

$$x' = (1 + e) \cos \theta \quad n'_x = \ddot{x} \quad (3a,b)$$

$$y' = (1 + e) \sin \theta \quad n'_y = \ddot{y} \quad (3c,d)$$

$$\theta' = m \quad m' = n_x y' - n_y x' \quad (3e,f)$$

$$e = \eta (n_x \cos \theta + n_y \sin \theta) \quad (3g)$$

65 with $()' = L d()/dS$ and $(\dot{}) = \tau d()/dT$, see [28, 29] for more details. We stress that this beam model (3), and thus its solution, only depends on one parameter: the slenderness ratio η , defined in (1).

The equilibrium solution $(x_E, y_E, \theta_E, m_E, n_{xE}, n_{yE}, e_E)$ is found by solving (3) with $\ddot{x} = 0$ and $\ddot{y} = 0$. Once the equilibrium is known, we compute vibrations by using the ansatz

$$x(s, t) = x_E(s) + \delta \bar{x}(s) \cos \omega t \quad (4a)$$

$$y(s, t) = y_E(s) + \delta \bar{y}(s) \cos \omega t \quad (4b)$$

...

with $\delta \ll 1$. Injecting (4) into system (3) and keeping only 1st order terms in δ yields the following linear differential system for the vibration modes \bar{x} , \bar{y} , $\bar{\theta}$, \bar{m} , \bar{n}_x , \bar{n}_y :

$$\bar{n}'_y = -\omega^2 \bar{y} \quad (5a)$$

$$\bar{n}'_x = -\omega^2 \bar{x} \quad (5b)$$

$$\bar{\theta}' = \bar{m} \quad (5c)$$

$$\bar{m}' = \bar{n}_x y'_E - \bar{n}_y x'_E + n_{xE} \bar{y}' - n_{yE} \bar{x}' \quad (5d)$$

$$\bar{y}' = (1 + e_E) \cos \theta_E \bar{\theta} + \bar{e} \sin \theta_E \quad (5e)$$

$$\bar{x}' = -(1 + e_E) \sin \theta_E \bar{\theta} + \bar{e} \cos \theta_E \quad (5f)$$

with

$$\bar{e} = \eta \left[\bar{n}_y \sin \theta_E + \bar{n}_x \cos \theta_E + (n_{yE} \cos \theta_E - n_{xE} \sin \theta_E) \bar{\theta} \right].$$

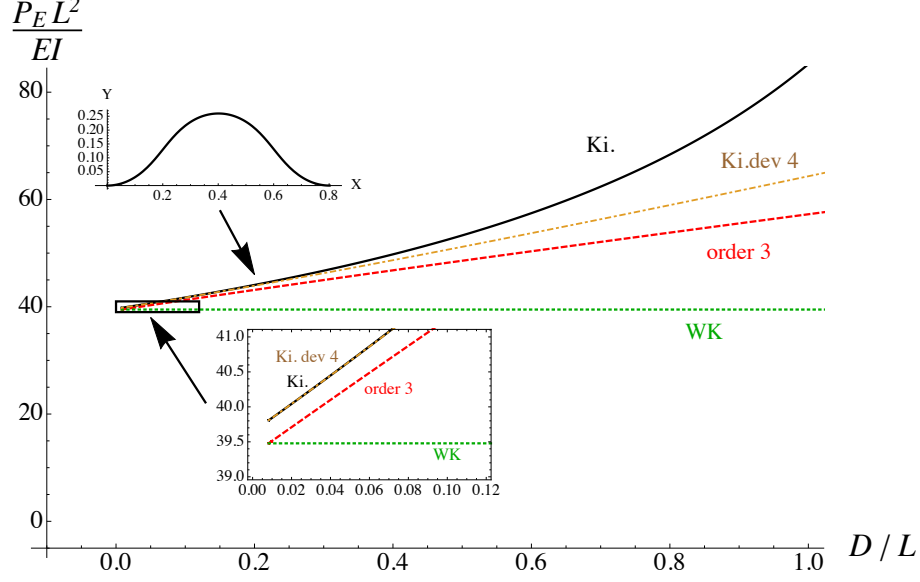


Figure 2: Post-buckled equilibrium of clamped-clamped beam. We here plot the axial load p_E vs the axial displacement d , for $\eta = 1/4800$. The curves for the Kirchhoff model (noted Ki.), the Woinowsky-Krieger model (noted WK), the order 3 model of Section 5 (noted order 3), and the 4th order development of p_E and d (noted Ki. dev 4) are shown. The plotted equilibrium shape has $d = 0.2$. Please note that the order 3 and Woinowsky-Krieger models both tend to the classical Euler value $P_E L^2 / (EI) = 4\pi^2 \simeq 39.5$ at $D/L = 4\pi^2 \eta$.

Clamped-clamped boundary conditions read

$$y_E(0) = 0 = y_E(1), \quad \theta_E(0) = 0 = \theta_E(1), \quad x_E(0) = 0 = x_E(1) - 1 + d \quad (6a)$$

$$\bar{y}(0) = 0 = \bar{y}(1), \quad \bar{\theta}(0) = 0 = \bar{\theta}(1), \quad \bar{x}(0) = 0 = \bar{x}(1) \quad (6b)$$

where $d = D/L$ is the non-dimensionalized axial displacement. We note that in this displacement-controlled setup, the position $x_E(1)$ is fixed, but the applied axial $p(t)$ and shear $q(t)$ forces vary with time, and we have $n_x(1, t) = -p(t)$ and $n_y(1, t) = -q(t)$, see Figure 1.

We are eventually left with a nonlinear boundary value problem (3) (5) (6) that we solve numerically for a beam with $\eta = 1/4800$ (that is $L = 20h$ in the case of a rectangular cross-section). We focus on the first buckling mode, which has $n_{yE} = 0$ [30, 29], and on the first two vibration modes around it. We used the ordinary differential equations integrator of the Mathematica software, coupled with a shooting technique, to solve the boundary value problem, and a pseudo arc-length continuation procedure to compute the evolution of the solution as the parameter D/L is varied. Curves of figures (2), (3), (4), and (5) were generated in few minutes.

We plot in Figure 2 the external axial force p_E as a function of the axial displacement d . We plot in Figure 3 the transverse displacement at midspan

85 $y_E(1/2)$ as a function of the axial displacement d . We plot in Figures 4 and 5 the angular frequency ω of the first two vibration modes, as a function of the axial displacement d . These plots will be analyzed in Section 4. Please see supplementary material for plots with different values of η .

3. The Woinowsky-Krieger model

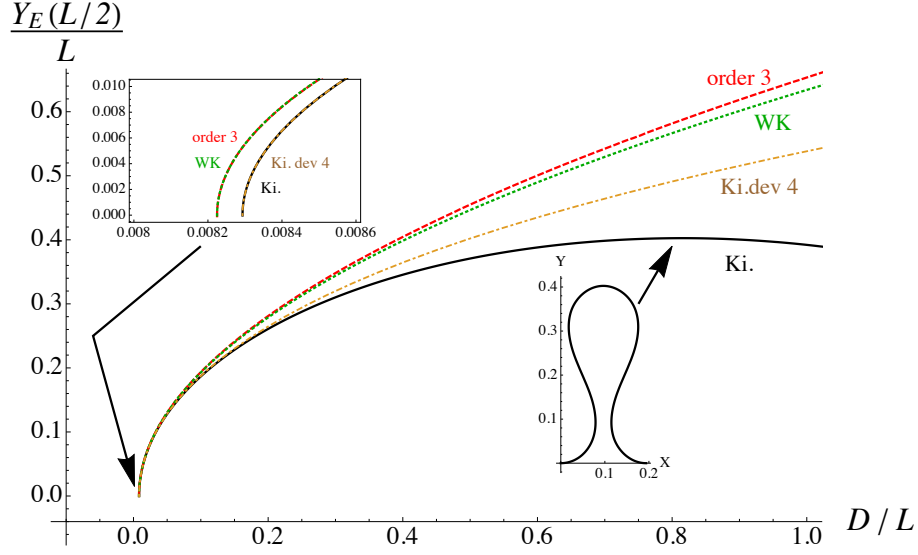


Figure 3: Post-buckled equilibrium of clamped-clamped beam. We here plot the transverse displacement at midspan $y_E(1/2)$ vs the axial displacement d , for $\eta = 1/4800$. The curves for the Kirchhoff model (noted Ki.), the Woinowsky-Krieger model (noted WK), the order 3 model of Section 5 (noted order 3), and the 4th order development of $y_E(1/2)$ and d (noted Ki. dev 4) are shown. The plotted equilibrium shape has $d = 0.8$.

90 We now turn to a simplified model to describe the same equilibrium and vibrations experiment. This model, which was introduced in [12] to correct the fully linear approach, includes the axial/bending coupling that arises when the transverse displacement of the beam becomes finite. It is based on the same assumption as the one used by von Kármán for the statics of plates [16], which
 95 consists in keeping only the first nonlinear term in the expansion of the axial strain e as a function of the cross-section rotation θ . Namely, the term $\cos \theta$ in Eq. (3a) is treated up to the second order, leading to

$$e = U' + \frac{1}{2} \theta^2, \quad (7)$$

with $U(S, T) = X(S, T) - S$ being the axial displacement of the cross-section. This assumption is energetically consistent with the approximation which replaces Eq. (3f) with $N_y = -M' + N_x Y'$ (see Appendix C.2 for a variational

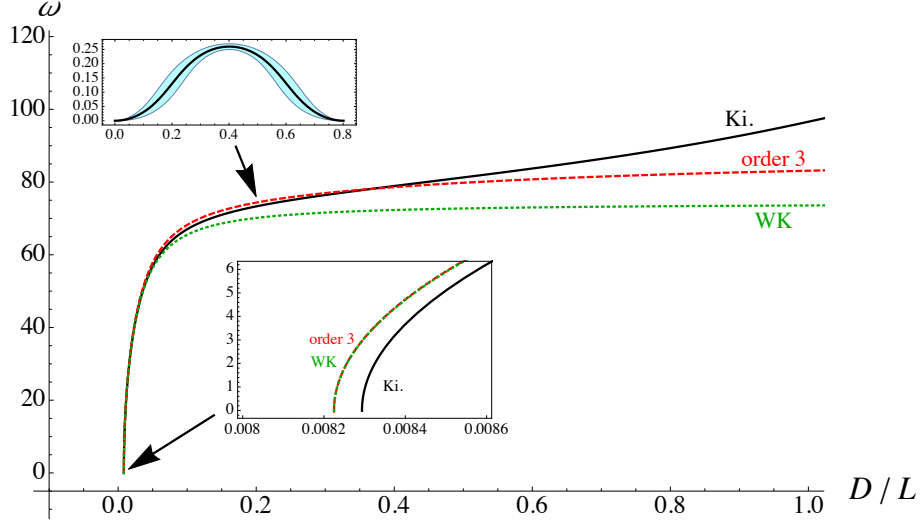


Figure 4: Vibration curve showing the frequency ω vs axial displacement d for the first vibration mode around the post-buckled equilibrium solution, for $\eta = 1/4800$. The curves for the Kirchhoff model (noted Ki.), the Woinowsky-Krieger model (noted WK), the order 3 model of Section 5 (noted order 3) are shown. (Inset) The equilibrium shape is plotted with the first vibration mode, for $d = 0.2$. Note that $\Omega = \omega / (L^2 \sqrt{\rho A / (EI)})$ is the physical angular frequency in radians per second.

approach to this model). As a second assumption, the axial inertia is neglected in this model. From Eq. (3b), this omission leads to a uniform axial force, $N_x(S, T) = N_x(T) = -P(T)$. Consequently, Eq. (3c) is treated linearly in θ and e is neglected with respect to 1, yielding to $Y' = \theta$. Finally, Eq. (3g) is truncated to the zero-th order in θ , that is $EAe = N_x$. Combining all these equations and keeping only $U(S, T)$ and $Y(S, T)$ as unknowns leads to

$$EIY(S, T)^{''''} + \rho A \ddot{Y}(S, T) + P(T)Y(S, T)'' = 0 \quad (8a)$$

$$EA \left[U'(S, T) + \frac{1}{2} Y'^2(S, T) \right] = -P(T) \quad (8b)$$

From here, we have two ways to write these equations in a dimensionless form. The first way consists in using the same dimensionless variables as for the Kirchhoff model of Section 2, and yields

$$\ddot{y} + y^{''''} + py'' = 0 \quad (9a)$$

$$u' + \eta p + \frac{1}{2} y'^2 = 0 \quad (9b)$$

with $u = U/L$. In this case, the behaviour of the beam depends solely on the slenderness ratio η (Eq. 1).

The second way to introduce dimensionless variables is to scale the transverse displacement Y with the radius of gyration $r = \sqrt{I/A} = L\sqrt{\eta}$ and the axial displacement U with r^2/L , one order of magnitude smaller. The physical meaning of r is a characteristic thickness of the cross-section. In particular, for a rectangular cross section, $r = h/\sqrt{12}$. Writing $\hat{y} = Y/r = y/\sqrt{\eta}$ and $\hat{u} = UL/r^2 = u/\eta$ recasts Eqs. (9) in

$$\ddot{\hat{y}} + \hat{y}'''' + p\hat{y}'' = 0 \quad (10a)$$

$$\hat{u}' + p + \frac{1}{2}\hat{y}'^2 = 0 \quad (10b)$$

which does not depend on any geometrical or material parameter. This shows that any beam modelled by the Woinowsky-Krieger model exhibits the same mechanical behaviour. However, this scaling cannot be applied to the Kirchhoff model for which the dependence on the slenderness ratio η cannot be avoided. Consequently, in the following, when comparing models we will use the set of dimensionless variables of the Kirchhoff model and thus Eqs. (9). The equilibrium

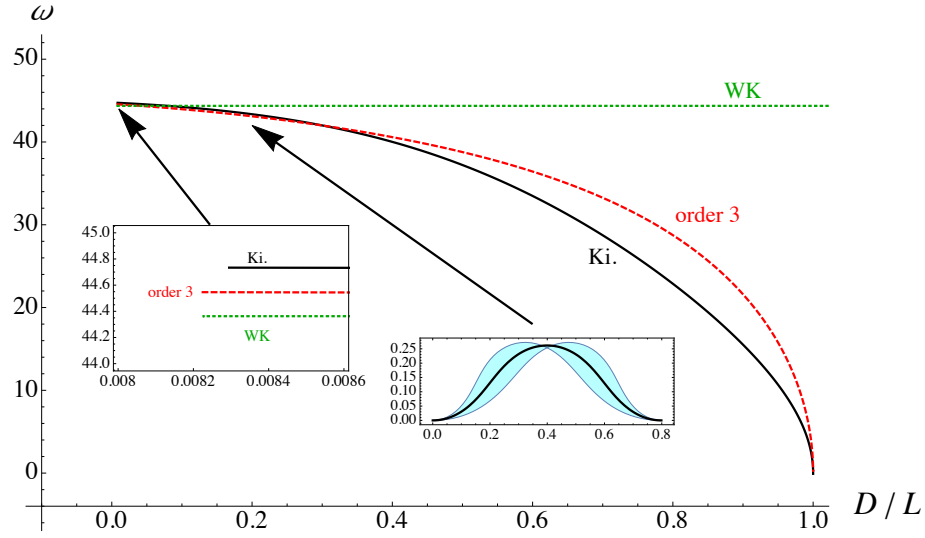


Figure 5: Vibration curve showing the frequency ω vs axial displacement d for the second vibration mode, for $\eta = 1/4800$. The curves for the Kirchhoff model (noted Ki.), the Woinowsky-Krieger model (noted WK), the order 3 model of Section 5 (noted order 3) are shown. (Inset) The equilibrium shape is plotted with the second vibration mode, for $d = 0.2$. Note that $\Omega = \omega / (L^2 \sqrt{\rho A / (EI)})$ is the physical angular frequency in radians per second.

version of Eqs. (9) is

$$y_E'''' + p_E y_E'' = 0 \quad (11a)$$

$$x_E' - 1 + \eta p_E + \frac{1}{2}y_E'^2 = 0 \quad (11b)$$

which is completed by

$$\bar{y}'''' + p_E \bar{y}'' + \bar{p} y_E'' = \omega^2 \bar{y} \quad (12a)$$

$$\bar{x}' + \eta \bar{p} + y_E' \bar{y}' = 0 \quad (12b)$$

for the vibrations. The great advantage of this model is that, although nonlinear, it can be solved analytically [23, 31]. The equilibrium solution is

$$y_E(s) = \frac{\epsilon}{2} (1 - \cos 2\pi s) \quad \Rightarrow \quad y_E(1/2) = \epsilon \quad (13a)$$

$$x_E(s) = s(1 - \eta 4\pi^2) + \frac{\epsilon^2 \pi}{16} (\sin 4\pi s - 4\pi s) \quad \Rightarrow \quad d = \eta 4\pi^2 + \frac{\pi^2}{4} \epsilon^2 \quad (13b)$$

$$p_E = 4\pi^2 \quad (13c)$$

where the amplitude ϵ of the linear solution $y_E(s)$ is defined in equation (16). The solution for the vibrations is

$$\bar{y}(s) = c_1 \sin ns + c_2 \cos ns + c_3 \sinh ms + c_4 \cosh ms + \frac{2\bar{p}\pi^2\epsilon}{\omega^2} \cos 2\pi s \quad (14)$$

with $n = [\sqrt{\omega^2 + 4\pi^4} + 2\pi^2]^{1/2}$ and $m = [\sqrt{\omega^2 + 4\pi^4} - 2\pi^2]^{1/2}$. Boundary conditions (6) yield a solvability condition which reads

$$0 = 8(m^2 + n^2)\pi^4\epsilon^2 R_1(n, m) - 2mn(2\pi^4\epsilon^2 - \eta\omega^2) R_2(n, m) \quad (15a)$$

with

$$R_1(n, m) = n(\cosh m - 1) \sin n + m(\cos n - 1) \sinh m \quad (15b)$$

$$R_2(n, m) = mn(\cos n \cosh m - 1) + 2\pi^2 \sin n \sinh m \quad (15c)$$

which is in fact an equation for the frequency ω . We plot p_E , $y_E(1/2)$, and ω in Figures 2, 3, and 4 to compare with the results from Kirchhoff's model.

As reported in [23, 31], we remark on Figure 5 that the second vibration mode in this model has an angular frequency that does not depend on d : it stays the same throughout the whole post-buckling regime. All the even vibration modes share this property. For these modes, Eq. (15a) is in fact fulfilled through a common zero of the functions $R_1(\omega)$ and $R_2(\omega)$. These common zeros do not depend on ϵ , hence do not depend on d . See Appendix B for a study of the common zeros of $R_1(\omega)$ and $R_2(\omega)$.

Finally, we re-plot in Appendix E Figures 2, 3, 4, and 5 with the load p_E (instead of D/L) on the horizontal axis.

4. Models comparison and validity range of the Woinowsky-Krieger model

4.1. Limit in term of axial displacement

We first remind that, as explained in section 2 and 3, with suitable choices of dimensionless variables, the Woinowsky-Krieger model does not depend on

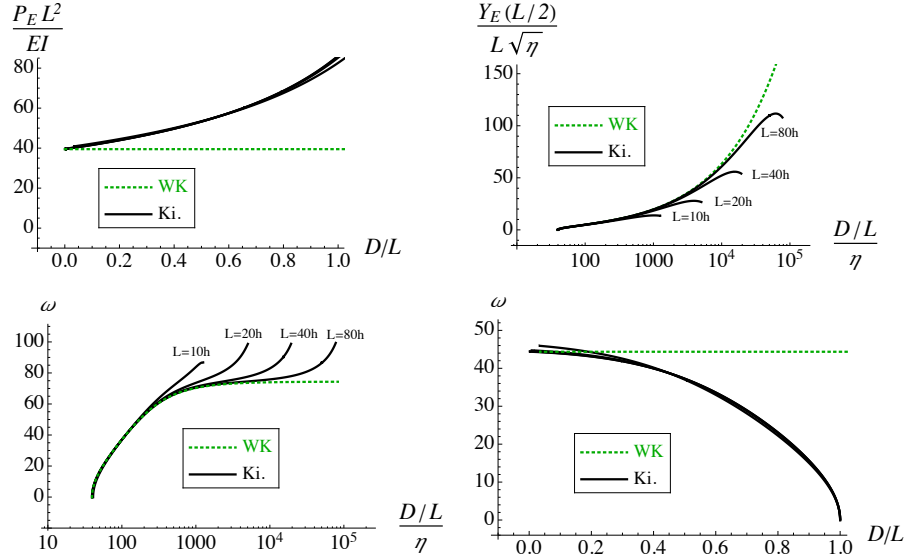


Figure 6: Comparison of the Woinowsky-Krieger and Kirchhoff models for various values of the parameter $\eta \in \{1/1200, 1/4800, 1/19200, 1/76800\}$, respectively corresponding to $L/h \in \{10, 20, 40, 80\}$ for a rectangular cross-section. The x -axis is either $d = D/L$ or $\hat{d} = d/\eta = D/(L\eta)$.

any parameter, but the Kirchhoff (reference) model depends on the slenderness ratio η . This is illustrated in Fig. 6 which shows the plots of figures 2, 3, 4, and 5 with rescaled axes. As expected, on each of the four plots the curves for the Woinowsky-Krieger model fall into a single master curve, while the curves for the Kirchhoff model are seen to depend on η . For the transverse displacement at midspan $Y_E(L/2)$ and the natural frequency ω of the first mode, the Woinowsky-Krieger curves agree with the Kirchhoff curves until limiting values, that depend on η . We plot in Figure 7 the curves for $Y_E(L/2)$ and ω as functions of $d = D/L$, and the relative error of Woinowsky-Krieger model (as compared to the Kirchhoff model) for several values of the slenderness ratio η . It is observed that all relative error curves are almost superimposed, meaning that the error as a function of $d = D/L$ is almost independent of η , see also Appendix F. This result is interesting since most of the literature about geometrical nonlinearities traditionally gives the validity limit of the Woinowsky-Krieger model in term of $\hat{y}_E(1/2) = Y_E(L/2)/r = Y_E(L/2)/(L\sqrt{\eta})$, usually around $\hat{y}_E(1/2) \approx 2$ or 3. Here, we prove that a correct validity limit should be given in terms of $y_E(L/2) = Y_E(L/2)/L$ (or in terms of $d = D/L$) and thus that the correct scaling of Y for the validity limit is not the radius of gyration r but the length L of the beam. In particular, an axial displacement of $D/L = 0.1$ (or equivalently a transverse displacement $Y_E(L/2)/L \approx 0.2$), gives errors of less than 4% on Y and less than 3% on ω . We then conclude that the Woinowsky-Krieger model

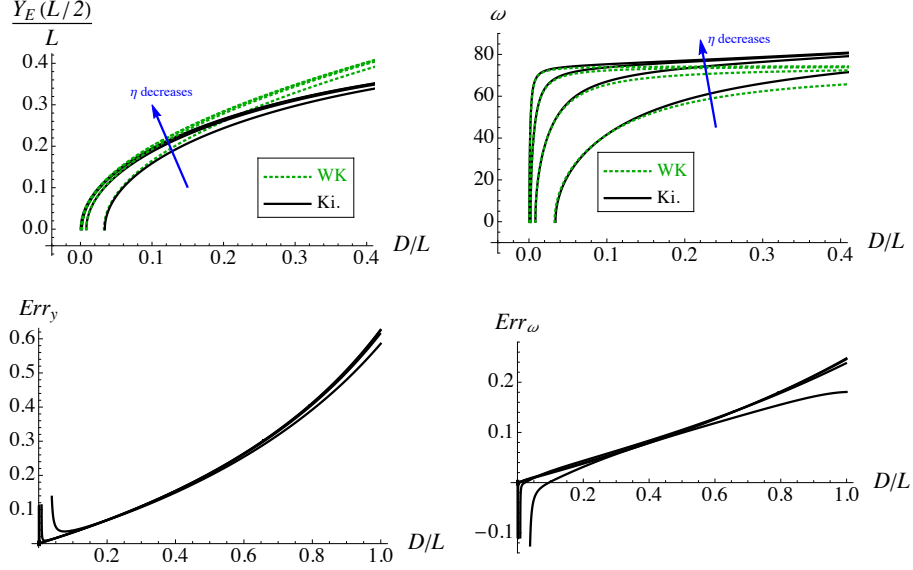


Figure 7: Comparison of the Woinowsky-Krieger and Kirchhoff models for various values of the parameter $\eta \in \{1/1200, 1/4800, 1/19200, 1/76800\}$, respectively corresponding to $L/h \in \{10, 20, 40, 80\}$ for a rectangular cross section. First line: transverse displacement and frequency of the first mode as a function of $d = D/L$. Second line: relative error of the Woinowsky-Krieger model (as compared to the Kirchhoff model), for the transverse displacement and the frequency of the first mode. The relative errors are defined as $Err_y = \frac{y_{WK}(1/2) - y_{Ki}(1/2)}{y_{Ki}(1/2)}$ and $Err_\omega = \frac{\omega_{Ki}(1/2) - \omega_{WK}(1/2)}{\omega_{Ki}(1/2)}$ with WK meaning Woinowsky-Krieger and Ki meaning Kirchhoff.

tends to depart from the reference Kirchhoff model as soon as 10% of axial displacement or 20% of transverse displacement, and this for any slenderness ratio. Equivalently, in terms of $\hat{y}_E(1/2)$, for $\eta \in \{1/1200, 1/4800, 1/19200, 1/76800\}$ (that is $L/h \in \{10, 20, 40, 80\}$ in the case of a rectangular cross-section), the limit of the Woinowsky-Krieger model is then $\hat{y}_E(1/2) \approx \{7, 14, 28, 55\}$, which is larger than $\hat{y}_E(1/2) \approx 2$ or 3, as often claimed.

Another interesting result is that these errors are roughly linear functions of D/L , as long as $D/L < 0.5$. Finally, we note that, for each of the plots of Fig. 7, one of the curves lies slightly apart from the others. This curve is associated with the largest $\eta = 1/1200$, corresponding to a beam with a thickness only ten times smaller than the length ($L/h = 10$). Such a case has to be considered with caution since the validity of the Euler-Bernoulli kinematics is then questionable.

4.2. Offset in the critical load

Moreover, looking at the results for small d , we detect an offset between Woinowsky-Krieger and Kirchhoff curves, see insets in Figs. 2, 3, 4 and 5. This

offset exists right from buckling and to disclose it analytically we proceed to construct a series expansion in powers of ϵ , a small parameter measuring the mean transverse displacement of the buckled solution [32]. We find it convenient to use

$$\epsilon = -4 \int_0^1 y_E(s) \cos 2\pi s \, ds \quad (16)$$

In the case of the Woinowsky-Krieger model, ϵ is exactly equal to $y_E(L/2) = Y_E(L/2)/L$, see Eq. (13a). We inject the following expansions

$$x_E(s) = x_{E0}(s) + \epsilon x_{E1}(s) + \epsilon^2 x_{E2}(s) + \epsilon^3 x_{E3}(s) + O(\epsilon^4) \quad (17a)$$

$$y_E(s) = \epsilon y_{E1}(s) + \epsilon^2 y_{E2}(s) + \epsilon^3 y_{E3}(s) + O(\epsilon^4) \quad (17b)$$

$$\theta_E(s) = \epsilon \theta_{E1}(s) + \epsilon^2 \theta_{E2}(s) + \epsilon^3 \theta_{E3}(s) + O(\epsilon^4) \quad (17c)$$

$$-n_{xE} = p_E = p_{E0} + \epsilon p_{E1} + \epsilon^2 p_{E2} + \epsilon^3 p_{E3} + O(\epsilon^4) \quad (17d)$$

$$d = d_0 + \epsilon d_1 + \epsilon^2 d_2 + \epsilon^3 d_3 + O(\epsilon^4) \quad (17e)$$

into the Kirchhoff equilibrium system, and solve the equations at each order of ϵ . At order ϵ^0 , we find $x_{E0}(s) = s(1 - \eta p_{E0})$, with p_{E0} still unknown. At order ϵ^1 , we solve

$$x'_{E1} = -\eta p_{E1} \quad \text{with} \quad x_{E1}(0) = 0 \quad (18a)$$

$$y'_{E1} = (1 - \eta p_{E0}) \theta_{E1} \quad \text{with} \quad y_1(0) = 0 = y_1(1) \quad (18b)$$

$$\theta''_{E1} = -p_{E0} (1 - \eta p_{E0}) \theta_{E1} \quad \text{with} \quad \theta_1(0) = 0 = \theta_1(1) \quad (18c)$$

and find that the solution is

$$x_{E1} = -\eta p_{E1} s \quad (19a)$$

$$y_{E1} = \frac{1}{2} (1 - \cos 2\pi s) \Rightarrow \theta_{E1} = \frac{\pi \sin 2\pi s}{1 - \eta p_{E0}} \quad (19b)$$

$$p_{E0} = \frac{1 - \sqrt{1 - 16\pi^2 \eta}}{2\eta} \quad (19c)$$

where we see that p_{E1} is not defined at order ϵ^1 and will only be selected when solving order ϵ^2 . In the same manner, finding p_{E2} requires to solve order ϵ^3 . We shall come back to this remark when discussing the Woinowsky-Krieger model. We note that the same shift occurs for $x_E(s)$ (hence d) and ω . Conducting the

expansion up to order ϵ^3 (included) yields

$$p_E = p_{E0} + \epsilon^2 \frac{p_{E0}^3(16\pi^2 - 3p_{E0})}{128\pi^2(8\pi^2 - p_{E0})} + p_{E3} \epsilon^3 + O(\epsilon^4) \quad (20a)$$

$$= 4\pi^2 + 16\pi^4\eta + O(\eta^2) + \epsilon^2 \left(\frac{\pi^4}{2} + 2\pi^6\eta + O(\eta^2) \right) + p_{E3} \epsilon^3 + O(\epsilon^4) \quad (20b)$$

$$y_E(1/2) = \epsilon + p_{E0}^2 \frac{16\pi^2 - 3p_{E0}}{4096\pi^4} \epsilon^3 + O(\epsilon^4) \quad (20c)$$

$$= \epsilon + \frac{\pi^2}{64} [1 - 4\pi^2\eta + O(\eta^2)] \epsilon^3 + O(\epsilon^4) \quad (20d)$$

$$d = \eta p_{E0} + \epsilon^2 p_{E0} \frac{2\pi(p_{E0}^2 + 4p_{E0}\pi^2 - 64\pi^4)}{256\pi^3(8\pi^2 - p_{E0})} + d_3 \epsilon^3 + O(\epsilon^4) \quad (20e)$$

$$= 4\pi^2\eta + O(\eta^2) + \epsilon^2 \frac{\pi^2}{4} [1 + 2\pi^2\eta + O(\eta^2)] + d_3 \epsilon^3 + O(\epsilon^4) \quad (20f)$$

The solutions $x_E(s)$, $y_E(s)$, and $\theta_E(s)$ are listed in [Appendix A](#). Please note that, as explained in [Appendix A](#), further calculations lead to $p_{E3} = 0$ and $d_3 = 0$. A similar expansion for the 1st mode of vibrations (with $\omega_0 = 0$) leads to

$$\omega = \epsilon \frac{p_0}{8\pi^2} \sqrt{\frac{(64\pi^4 - p_0^2 - 4\pi^2 p_0)}{12\eta}} + \omega_3 \epsilon^3 + O(\epsilon^4) \quad (21a)$$

$$= \epsilon \pi^2 \sqrt{\frac{2}{3\eta}} [1 + O(\eta)] + \omega_3 \epsilon^3 + O(\epsilon^4) \quad (21b)$$

Please note that the results noted 'Ki. dev 4' in the figures involve expansions of the solutions up to order ϵ^4 included. These expansions are given in the supplementary materials.

Comparing Woinowsky-Krieger and Kirchhoff solutions for p_E , $y_E(1/2)$, and d , listed in (13) and (20), reveals the nature of the offset mentioned earlier: as soon as order ϵ^0 , p_E is not computed exactly in the Woinowsky-Krieger model which, strictly speaking, is then not a rigorous expansion of Kirchhoff's model. In this matter, the Woinowsky-Krieger model is equivalent to the traditional linear beam model (see *e.g.* [33]), and predicts the critical buckling load to be the classical Euler value $p_E = 4\pi^2$, see Eq. (13c). On the contrary, Kirchhoff's model predicts this buckling load to be $p_E = 4\pi^2(1 + 4\pi^2\eta + O(\eta^2))$, see Eq. (20b) with $\epsilon = 0$. The offset, though non-zero, is in most practical cases negligible as $\eta \ll 1$ for slender beams. The physical explanation of this offset is that the Woinowsky-Krieger model neglects the small shortening of the beam before the critical load. Following Eq. (3a), this shortening is $(1 + e)$ for an infinitesimal axial element when $\theta \ll 1$ (that is $dx = (1 + e)ds$). This axial shortening is neglected in the Woinowsky-Krieger model which writes Eq. (3c) as $y' = \theta$. To (artificially) correct the Woinowsky-Krieger model, one could use $y' = (1 + e)\theta$ and keep all other approximations. In doing this, Eq. (3e) would become $m = y''/(1 + e)$

and since $e = -\eta p$, this would lead to replace p by $p(1 - \eta p)$ in equation (11a). Solving this equation would yield $p_E(1 - \eta p_E) = 4\pi^2$, which is the exact buckling load, Eq. (19c). Please note nevertheless that it would not cure all Woinowsky-Krieger shortcomings.

Finally, we can also compare the two models in their prediction of the curvature of the curve $y_E(L/2) = f(d)$ just after the buckling point. For the Kirchhoff model, combining (20d) and (20f), we have

$$d \simeq 4\pi^2\eta + y_E^2(1/2) \frac{\pi^2}{4} [1 + 2\pi^2\eta] \text{ for small } \eta \text{ and } y_E \quad (22)$$

while for the Woinowsky-Krieger model, combining (13a) and (13b), we have

$$d = 4\pi^2\eta + y_E^2(1/2) \frac{\pi^2}{4} \quad (23)$$

Here also, the Woinowsky-Krieger model is wrong by a small term, proportional to η .

4.3. Second order in the axial load

There is yet another, more important, flaw in Woinowsky-Krieger approach: there is no order ϵ^2 in the solution for p_E . Indeed, computing p_{E2} would require an order 3 in its equation for transverse displacement (11a). In this sense, the Woinowsky-Krieger model does not yield a proper order 2 expansion of Kirchhoff's solutions. This implies that the Woinowsky-Krieger model predicts a constant load p_E along the post-buckling path, see Figure 2, and is therefore unable to deal with load-controlled experiments. Nevertheless, in (11b) the load p_E is multiplied by the small parameter η , which tends to weaken the absence of the p_{E2} term.

Another way to test for the order 2 conformity of the Woinowsky-Krieger equation is to take Kirchhoff's solutions $x_E(s)$, $y_E(s)$, and p_E (see Appendix A) and inject them in equations (11). We obtain

$$y_E'''' + p_E y_E'' = 2\pi^2 p_{E0}^2 \eta \epsilon \cos 2\pi s + 0 \epsilon^2 + O(\epsilon^3) \quad (24a)$$

$$x_E' - 1 + \eta p_E + \frac{1}{2} y_E'^2 = \frac{\eta^2 p_{E0}^4}{32\pi^2} \epsilon^2 \sin^2 2\pi s + 0 \epsilon^3 + O(\epsilon^4) \quad (24b)$$

where we see that, strictly speaking, the transverse displacement equation is not fulfilled at order ϵ^1 and the axial displacement equation is not fulfilled at order ϵ^2 .

For the vibrations, the picture is very much the same: if we make an expansion of the solution of (15) in powers of ϵ , we find

$$\omega = \epsilon\pi^2 \sqrt{\frac{2}{3\eta}} + 0 \epsilon^2 + O(\epsilon^3) \quad (25)$$

which misses an $O(\eta)$ term, but is the leading η order of Kirchhoff's result, see (21b).

5. An order 3 model

The motivation for a third order model is theoretical: following up on the
 215 remark of the previous section about the necessity of having an order 3 in the
 transverse displacement equation (8a), we set on investigating what precisely
 third order terms are bringing to the solution. Doing this, we keep in mind the
 elastic plates application: the (second order) Von Kármán assumption (7) is
 widely used in plate models and one is tempted to know what would third order
 220 terms bring to such plate models, and how they would compare to geometrically-
 exact approaches, as for example Naghdi's model [34, 35].

We start from Kirchhoff's system (3) and proceed to derive an order 3 model.
 Owing to the remark that the parameter η is small and that the Woinowsky-
 Krieger model is only exact in the limit $\eta \rightarrow 0$, we settle on removing η as
 225 much as possible since this makes derivation much easier. Nevertheless, it has
 been shown [28, 29] that in displacement-controlled experiments, η should at
 least remain in the axial displacement equation (3a). This equation $x' = (1 +$
 $\eta n_x \cos \theta + \eta n_y \sin \theta) \cos \theta$ is then simplified to

$$x' = 1 + \eta n_x - \frac{1}{2} \theta^2 \quad (26)$$

This resembles Woinowsky-Krieger (9b), with the difference that we keep the
 230 s dependence in the load $n_x(s, t)$. For the transverse displacement, we know
 extension is only playing a minor role and we readily set $\eta = 0$. We then start
 with $y' = \sin \theta$ and proceed to develop the sinus up to order 3, $y' = \theta - (1/6) \theta^3$.
 Inverting this relation yields

$$235 \quad \theta = y' + \frac{1}{6} y'^3 \quad \Rightarrow \quad \theta'' = y''' + y' y''^2 + \frac{1}{2} y'^2 y''' \quad (27)$$

which is injected into (3f). We end up with a system for the axial and transverse
 displacement (x, y) and forces (n_x, n_y) :

$$x'(s, t) = 1 + \eta n_x(s, t) - \frac{1}{2} y'^2(s, t) \quad (28a)$$

$$n'_x(s, t) = \ddot{x}(s, t) \quad (28b)$$

$$y(s, t)''' + f_3 = n_x(s, t) y'(s, t) - n_y(s, t) x'(s, t) \quad (28c)$$

$$n'_y(s, t) = \ddot{y}(s, t) \quad (28d)$$

with

$$f_3 = y'(s, t) y''(s, t)^2 + \frac{1}{2} y'(s, t)^2 y'''(s, t) \quad (29)$$

To readily compare this new system with the Woinowsky-Krieger model, one
 has to differentiate (28c) and find

$$240 \quad y'''' - n_x y'' + \ddot{y} = -y''^3 - 3y' y'' y''' - \frac{1}{2} y'^2 y'''' + \ddot{x} y' - n_y x'' - \ddot{y} \left(\eta n_x - \frac{1}{2} y'^2 \right) \quad (30)$$

which in contrast to (8a) has order 3 terms on the right-hand side.

Equilibrium equations for x_E, y_E, n_{xE}, n_{yE} are obtained by setting $\ddot{x} = 0 = \ddot{y}$ in (28) and vibration equations are then derived by injecting (4) into (28). We obtain

$$\bar{x}' = \eta \bar{n}_x - y_E' \bar{y}' \quad (31a)$$

$$\bar{n}_x' = -\omega^2 \bar{x} \quad (31b)$$

$$\bar{y}''' + \bar{f}_3 = \bar{n}_x y' + n_{xE} \bar{y}' - \bar{n}_y x' - n_{yE} \bar{x}' \quad (31c)$$

$$\bar{n}_y' = -\omega^2 \bar{y} \quad (31d)$$

with

$$\bar{f}_3 = \bar{y}' y_E'^2 + 2y_E' \bar{y}'' y_E'' + \bar{y}' y_E' y_E''' + \frac{1}{2} y_E'^2 \bar{y}''' \quad (32)$$

We solve this system numerically and compare the results to the two previous models in Figures 2, 3, 4, and 5. A first remark is that this new model suffers from the same offset as the Woinowsky-Krieger model: right from buckling a small shift exists in the curves. As explained earlier it arises from the setting of $\eta = 0$ in the transverse displacement equation. Next we see that the load curve is no longer flat (Figure 2), nor is the frequency of the 2nd vibration mode (Figure 4).

In order to make sure we indeed came up with a model exhibiting the correct terms up to order 3, we perform the expansion (17) and compute

$$y_E(s) = \frac{\epsilon}{2} (1 - \cos 2\pi s) + \epsilon^3 \frac{\pi^2}{64} \sin^2 3\pi s + O(\epsilon^4) \quad (33a)$$

$$x_E(s) = s(1 - 4\pi^2 \eta) - \epsilon^2 \frac{\pi}{16} (4\pi s + 8\pi^3 \eta s - \sin 4\pi s) + O(\epsilon^4) \quad (33b)$$

$$p_E = 4\pi^2 + \epsilon^2 \frac{\pi^4}{2} + O(\epsilon^4) \quad (33c)$$

$$d = 1 - x_E(1) = 4\pi^2 \eta + \epsilon^2 \frac{\pi^2}{4} (1 + 2\pi^2 \eta) + O(\epsilon^4) \quad (33d)$$

$$y_E(1/2) = \epsilon + \epsilon^3 \frac{\pi^2}{64} + O(\epsilon^4) \quad (33e)$$

which indeed is correct up to order 3 when compared to Kirchhoff's results, see Eqs. (20) and Appendix A. For the 1st mode of vibrations (with $\omega_0 = 0$) we find

$$\omega = \epsilon \pi^2 \sqrt{\frac{2}{3\eta} \frac{1 + 2\pi^2 \eta}{1 - 4\pi^2 \eta}} + O(\epsilon^3) \quad (34)$$

which corresponds to the first η order of (21). See supplementary material for detailed calculations.

The interest of the present order 3 model lies in the fact that it efficiently corrects the Woinowsky-Krieger model for the axial load and the second natural frequency, in the small η limit. Moreover, it is the extension of a well known order 3 model, commonly used for nonlinear vibrations of inextensible cantilever beams and first introduced by Crespo da Silva and Glynn [36] (see [10] for a list

of other references): as shown in [Appendix D](#), the present order 3 model reduces to the Crespo da Silva model in the case of clamped-free boundary conditions and inextensible beams. However, contrary to the Crespo da Silva model, which
265 elegantly involves a single equation for the unique variable $y(s, t)$, the present order 3 model consists of a system of 4 equations and 4 variables, system (28), which might be complex to use in practice.

6. Conclusion

We have studied the range of validity of the Woinowsky-Krieger equations for
270 the planar equilibrium and vibrations of post-buckled beams. The Woinowsky-Krieger equations are useful and widely used, especially when dealing with non-linear vibrations, but are only valid in the weakly nonlinear regime and under displacement-controlled setups. We have shown that these equations are not a rigorous 2nd order development of Kirchhoff's equations, but that they
275 nevertheless capture faithfully the post-buckling behavior of the beam up to 10% ($D = 0.1L$) of axial displacement and/or 20% of transverse displacement ($Y(L/2) = 0.2L$), and that these limits only weakly depend on the slenderness ratio of the beam. If the transverse displacement $Y(L/2)$ is written in units of the beam thickness h , we have shown that the validity limit of the Woinowsky-Krieger model then depends on the slenderness ratio of the beam and that it
280 can be large: $Y(L/2)/h < 4$ for a thickness to length ratio of $h/L = 1/20$ and $Y(L/2)/h < 16$ for $h/L = 1/80$. Incidentally, we have also rigorously proved that every other vibration frequency in the Woinowsky-Krieger model is load-independent in the entire post-buckling regime. Finally, we have introduced a
285 3rd order model capable of coping with load-controlled setups and more accurately predicting vibration modes in the moderate post-buckling regime.

Appendix A. Expansions for the solution of the Kirchhoff model

In the clamped-clamped case, buckling happens in a symmetrical pitchfork bifurcation. Consequently, with the chosen definition of ϵ in (16), the developments of the axial variables x_E , $p_E = -n_{xE}$, and e_E only comprise even terms in ϵ , while the developments of the transverse variables y_E , θ_E , m_E , and n_{yE} only comprise odd terms in ϵ . Please see supplementary material for detailed

calculations leading to

$$\begin{aligned}
\theta_E(s) &= \epsilon \frac{p_0}{4\pi} \sin 2\pi s + \epsilon^3 \frac{p_0^3(16\pi^2 - 3p_0)[96\pi^2 \sin(2\pi s) - (8\pi^2 - p_0) \sin(6\pi s)]}{48 \cdot (4\pi)^5 (8\pi^2 - p_0)} + O(\epsilon^5) \\
&= \epsilon \pi \sin 2\pi s [1 + 4\pi^2 \eta + O(\eta^2)] + \epsilon^3 \pi^3 \frac{25 + 2 \cos 4\pi s + 96\pi^2 \eta + O(\eta^2)}{192} \sin 2\pi s + O(\epsilon^5) \\
y_E(s) &= \frac{\epsilon}{2} (1 - \cos 2\pi s) + \epsilon^3 p_0^2 \frac{16\pi^2 - 3p_0}{4096\pi^4} \sin^2(3\pi s) + O(\epsilon^5) \\
&= \frac{\epsilon}{2} (1 - \cos 2\pi s) + \epsilon^3 \frac{\pi^2}{64} [1 - 4\pi^2 \eta + O(\eta^2)] \sin^2(3\pi s) + O(\epsilon^5) \\
x_E(s) &= s(1 - \eta p_0) - \epsilon^2 p_0 \frac{2\pi(p_0^2 + 4p_0\pi^2 - 64\pi^4)s + (8\pi^2 - p_0)^2 \sin 4\pi s}{256\pi^3(8\pi^2 - p_0)} + O(\epsilon^4) \\
&= [s - 4\pi^2 \eta s + O(\eta^2)] + \left[\frac{\pi}{16} (\sin 4\pi s - 4\pi s) - \frac{\pi^4}{2} s \eta + O(\eta^2) \right] \epsilon^2 + O(\epsilon^4)
\end{aligned}$$

Appendix B. Common zeros of R_1 and R_2

We replace $n = 2\pi\beta$, $m = 2\pi\alpha$, $R_1 = 4\pi\hat{R}_1$, and $R_2 = 4\pi^2\hat{R}_2$ to obtain

$$\hat{R}_1(\alpha, \beta) = \beta \sin(2\pi\beta) \sinh^2(\pi\alpha) - \alpha \sin^2(\pi\beta) \sinh(2\pi\alpha) \quad (\text{B.1a})$$

$$\hat{R}_2(\alpha, \beta) = 2\alpha\beta (\cos(2\pi\beta) \cosh(2\pi\alpha) - 1) + \sin(2\pi\beta) \sinh(2\pi\alpha) \quad (\text{B.1b})$$

$$\beta^2 = 1 + \alpha^2 \quad (\text{B.1c})$$

with $\beta = \frac{1}{2\pi} [\sqrt{\omega^2 + 4\pi^4} + 2\pi^2]^{1/2}$ and $\alpha = \frac{1}{2\pi} [\sqrt{\omega^2 + 4\pi^4} - 2\pi^2]^{1/2}$. We work
 290 with $n > 2\pi$ and $m > 0$, that is

$$\beta > 1 \text{ and } \alpha > 0 \quad (\text{B.2})$$

We show in this section that:

(i) $\hat{R}_1(\omega)$ and $\hat{R}_2(\omega)$ have common zeros,

(ii) but also have separate zeros, with

295 (iia) $\hat{R}_1(\omega) = 0$ and $\hat{R}_2(\omega) \neq 0$ when $\beta = 2, 3, 4, \dots$,

(iib) $\hat{R}_2(\omega) = 0$ and $\hat{R}_1(\omega) \neq 0$ when $\hat{A} - 1/\hat{A} = \hat{B} - 1/\hat{B}$ with $\hat{A} \neq \hat{B}$.

where \hat{A} and \hat{B} are defined in [Appendix B.3](#)

Appendix B.1. Individual zeros of \hat{R}_1

To prove (iia), we start by factorizing \hat{R}_1

$$300 \quad \hat{R}_1 = 2 \sinh(\pi\alpha) \sin \pi\beta [y \cos(\pi\beta) \sinh(\pi\alpha) - \alpha \sin(\pi\beta) \cosh(\pi\alpha)] \quad (\text{B.3})$$

and see that, with (B.2), $\hat{R}_1(\omega) = 0$ for $\beta = 2, 3, 4, \dots$. In such cases $\hat{R}_2 = 2\alpha\beta[\cosh(2\pi\alpha) - 1] > 0$, hence we have zeros of \hat{R}_1 which are not zeros of \hat{R}_2 .

Appendix B.2. Common zeros of \hat{R}_1 and \hat{R}_2

We first remark that the zeros of \hat{R}_1 or \hat{R}_2 are such that $\cos(\pi\beta) \neq 0$: If $\beta = 3/2, 5/2, 7/2, \dots$ then $\hat{R}_1 = -\alpha \sinh(2\pi\alpha) \neq 0$ and $\hat{R}_2 = -2\alpha\beta [\cosh(2\pi\alpha) + 1] \neq 0$. We may then divide by α , β , $\cos(\pi\beta)$, and $\cosh(\pi\alpha)$ without any trouble and rewrite

$$\hat{R}_1(\alpha, \beta) = 2\alpha\beta \sin(\pi\beta) \cos(\pi\beta) \sinh(\pi\alpha) \cosh(\pi\alpha) \left[\frac{\tanh(\pi\alpha)}{\alpha} - \frac{\tan(\pi\beta)}{\beta} \right] \quad (\text{B.4a})$$

$$\hat{R}_2(n, m) = 4\alpha\beta \cos^2(\pi\beta) \cosh^2(\pi\alpha) \left(\tanh^2(\pi\alpha) - \tan^2(\pi\beta) + \frac{\tanh(\pi\alpha)}{\alpha} \frac{\tan(\pi\beta)}{\beta} \right) \quad (\text{B.4b})$$

We then see that if $\beta \neq 2, 3, 4, \dots$ and $\hat{R}_1 = 0$, we have $\frac{\tanh(\pi\alpha)}{\alpha} = \frac{\tan(\pi\beta)}{\beta}$ and
 305 $\tanh^2(\pi\alpha) - \tan^2(\pi\beta) + \frac{\tanh(\pi\alpha)}{\alpha} \frac{\tan(\pi\beta)}{\beta} = 0$, i.e. $\hat{R}_2 = 0$. This proves (i).

Appendix B.3. Individual zeros of \hat{R}_2

If we have $\hat{R}_2 = 0$ and $\beta \neq 2, 3, 4, \dots$, we have (using (B.1c))

$$\frac{\tan(\pi\beta)}{\tanh(\pi\alpha)} - \frac{\tanh(\pi\alpha)}{\tan(\pi\beta)} = \frac{\beta}{\alpha} - \frac{\alpha}{\beta} \quad (\text{B.5})$$

which is $\hat{A} - 1/\hat{A} = \hat{B} - 1/\hat{B}$ with $\hat{A} = \tan(\pi\beta)/\tanh(\pi\alpha)$ and $\hat{B} = \beta/\alpha$.
 310 Solutions are either $\hat{A} = \hat{B}$ in which case we have a common zero of \hat{R}_1 and \hat{R}_2 ,
 or solutions with $\hat{A} < 0$ and $\hat{B} > 0$ in which case we have a zero of \hat{R}_2 such that
 $\hat{R}_1 \neq 0$. This proves (iib).

Appendix B.4. Summary

In table B.1 we see that each common zero is followed by an individual zero
 315 of \hat{R}_2 , then by an individual zero of \hat{R}_1 .

ω	α	β	\hat{R}_1	\hat{R}_2	\hat{A}	\hat{B}	$\hat{A} - 1/\hat{A}$	$\hat{B} - 1/\hat{B}$
44.4	0.85	1.31	0	0	1.54	1.54	0.89	0.89
103.5	1.47	1.78	$-7.6 \cdot 10^3$	0	-0.83	1.21	0.38	0.38
136.8	1.73	2	0	$9.2 \cdot 10^4$	0	1.15	∞	0.29
182.1	2.03	2.27	0	0	1.11	1.11	0.22	0.22
280.6	2.57	2.76	$-1.4 \cdot 10^7$	0	-0.93	1.07	0.14	0.14
334.9	2.83	3	0	$2.2 \cdot 10^8$	0	1.06	∞	0.12

Table B.1: Six lowest zeros of \hat{R}_1 and \hat{R}_2 . Please note that $\omega = 4\pi^2\alpha\beta$, but that only common roots correspond to actual vibration frequencies of the beam.

Appendix C. Energies for the different models

We present a variational approach for the three different models used in this paper. We list the kinetic \mathcal{T} and potential \mathcal{V} energies and compute the first variation of the Action $\mathcal{S} = \int_{t_1}^{t_2} \mathcal{L} dT$ where the Lagrangian $\mathcal{L} = \mathcal{T} - \mathcal{V}$.

320 Appendix C.1. The Kirchhoff model

In this model the kinetic energy is computed as if the mass of each section were concentrated on the centerline, that is no rotational inertia is involved. We have

$$\mathcal{T} = \frac{1}{2} \rho A \int_0^L (\dot{X}^2 + \dot{Y}^2) dS \quad (\text{C.1})$$

325 The potential energy comprises bending and extension deformations

$$\mathcal{V} = \frac{1}{2} \int_0^L (EI \theta'^2 + EA e^2) dS \quad (\text{C.2})$$

with boundary conditions (6) valid at all time T

$$X(0, T) = 0 = X(L, T) - L + D \quad (\text{C.3a})$$

$$Y(0, T) = 0 = Y(L, T) \quad (\text{C.3b})$$

$$\theta(0, T) = 0 = \theta(L, T) \quad (\text{C.3c})$$

The Action \mathcal{S} is then a functional of $q = (X, Y, \theta, e)$ and the principle of least Action then selects the dynamical evolution $q(S, T)$ of the system. This principle reads

$$330 \quad \mathcal{S}(q + \epsilon \bar{q}) \geq \mathcal{S}(q) \quad \text{for all small } \epsilon \text{ and for all admissible } \bar{q} \quad (\text{C.4})$$

under the pointwise kinematic constraints

$$\phi_x = X' - (1 + e) \cos \theta = 0 \text{ and } \phi_y = Y' - (1 + e) \sin \theta = 0 \quad (\text{C.5})$$

We introduce Lagrange multipliers to deal with constraints (C.5). We anticipate the multipliers to be the components N_x and N_y of the force vector and use
335 $\mathcal{L} = \mathcal{T} - \mathcal{V} - N_x \phi_x - N_y \phi_y$ as the Lagrangian. The first order necessary condition for (C.4) to hold is then

$$\bar{\mathcal{S}}(q, \bar{q}) = \lim_{\epsilon \rightarrow 0} \frac{\mathcal{S}(q + \epsilon \bar{q}) - \mathcal{S}(q)}{\epsilon} = 0 \quad \text{for all admissible } \bar{q} \quad (\text{C.6})$$

with

$$\begin{aligned} -\bar{\mathcal{S}} = & \int_{t_1}^{t_2} \int_0^L \left\{ -\rho A (\dot{\bar{X}} \dot{\bar{X}} + \dot{\bar{Y}} \dot{\bar{Y}}) + EI \bar{\theta}' \bar{\theta}' + EA e \bar{e} \right. \\ & + N_x (\bar{X}' - \bar{e} \cos \theta + (1 + e) \bar{\theta} \sin \theta) \\ & \left. + N_y (\bar{Y}' - \bar{e} \sin \theta - (1 + e) \bar{\theta} \cos \theta) \right\} dS dT \end{aligned} \quad (\text{C.7})$$

Using (C.3), boundary conditions for the test functions \bar{q} read

$$\bar{X}(0, T) = 0 = \bar{X}(L, T) \quad (\text{C.8a})$$

$$\bar{Y}(0, T) = 0 = \bar{Y}(L, T) \quad (\text{C.8b})$$

$$\bar{\theta}(0, T) = 0 = \bar{\theta}(L, T) \quad (\text{C.8c})$$

Using (C.8) and $\bar{X}(S, t_1) = 0 = \bar{X}(S, t_2)$, $\bar{Y}(S, t_1) = 0 = \bar{Y}(S, t_2)$ for all S , we perform integration by parts on S and T to find

$$\begin{aligned} -\bar{\mathcal{S}} = & \int_{t_1}^{t_2} \int_0^L \left\{ \rho A \left(\ddot{X} \bar{X} + \ddot{Y} \bar{Y} \right) - EI \theta'' \bar{\theta} + EA e \bar{e} \right. \\ & - N'_x \bar{X} - N_x \bar{e} \cos \theta + N_x (1 + e) \bar{\theta} \sin \theta \\ & \left. - N'_y \bar{Y} - N_y \bar{e} \sin \theta - N_y (1 + e) \bar{\theta} \cos \theta \right\} dS dT \end{aligned} \quad (\text{C.9})$$

Finally, imposing that $\bar{\mathcal{S}} = 0$ for all test functions $\bar{X}(S, T)$, $\bar{Y}(S, T)$, $\bar{\theta}(S, T)$, and $\bar{e}(S, T)$ yields system (3).

340 Appendix C.2. The Woinowsky-Krieger model

See also [37] for an energy approach of the Woinowsky-Krieger equations. In this model, the kinetic energy only comprises the transverse displacement term

$$\mathcal{T} = \frac{1}{2} \rho A \int_0^L \dot{Y}^2 dS \quad (\text{C.10})$$

Moreover, a linear formula is used for the curvature in the potential energy

$$345 \quad \mathcal{V} = \frac{1}{2} \int_0^L (EI Y''^2 + EA e^2) dS \quad (\text{C.11})$$

and the kinematic constraint (C.5) reads

$$\phi_x = U' + \frac{1}{2} Y'^2 - e = 0 \quad (\text{C.12})$$

to which we associate a continuous Lagrange multiplier which we call $N_x(S, T)$. The Action \mathcal{S} is then a functional of $q = (Y, U, e)$ and the first variation reads, after several integrations by parts

$$\begin{aligned} -\bar{\mathcal{S}} = & \int_{t_1}^{t_2} \int_0^L \left\{ \rho A \ddot{Y} \bar{Y} + EI Y'''' \bar{Y} + EA e \bar{e} \right. \\ & \left. - N'_x \bar{U} - N_x \bar{e} - N'_x Y' \bar{Y} - N_x Y'' \bar{Y} \right\} dS dT \end{aligned} \quad (\text{C.13})$$

Imposing $\bar{\mathcal{S}} = 0$ for all test functions $\bar{U}(S, T)$, $\bar{Y}(S, T)$, and $\bar{e}(S, T)$ yields system (8) with $P(T) = -N_x(T)$.

350 *Appendix C.3. The order 3 model*

The kinetic and potential energies take the same form as in the Kirchhoff model, see (C.1) and (C.2). As we aim at an order 3 model, we need to use expansions at order 4 for the kinematic constraints (C.5)

$$X' = 1 + e - \frac{1}{2}\theta^2 + \frac{1}{24}\theta^4 \quad (\text{C.14a})$$

$$Y' = \theta - \frac{1}{6}\theta^3 \quad (\text{C.14b})$$

where, as explained in Section 5, we only kept the lowest order in the small extension e limit in (C.14a) and completely removed it from (C.14b). The Action \mathcal{S} is then a functional of $q = (X, Y, \theta, e)$ and the first variation reads, after integration by parts

$$\begin{aligned} -\bar{\mathcal{S}} = & \int_{t_1}^{t_2} \int_0^L \left\{ \rho A \left(\ddot{X} \bar{X} + \ddot{Y} \bar{Y} \right) - EI \theta'' \bar{\theta} + EA e \bar{e} \right. \\ & - N'_x \bar{X} - N_x \bar{e} + N_x \theta \bar{\theta} - \frac{1}{6} N_x \theta^3 \bar{\theta} \\ & \left. - N'_y \bar{Y} - N_y \bar{\theta} + \frac{1}{2} N_y \theta^2 \bar{\theta} \right\} dS dT \end{aligned} \quad (\text{C.15})$$

Imposing that $\bar{\mathcal{S}} = 0$ for all test functions \bar{X} , \bar{Y} , \bar{e} , and $\bar{\theta}$ respectively yields

$$N'_x = \rho A \ddot{X} \quad (\text{C.16a})$$

$$N'_y = \rho A \ddot{Y} \quad (\text{C.16b})$$

$$N_x = EA e \quad (\text{C.16c})$$

$$EI \theta'' = N_x \left(\theta - \frac{1}{6} \theta^3 \right) - N_y \left(1 - \frac{1}{2} \theta^2 \right) \quad (\text{C.16d})$$

Injecting (C.16c) into (C.14a), we obtain (26). Using (C.14) and (27), we rewrite (C.16d) as

$$EI \left(y''' + y' y''^2 + \frac{1}{2} y'^2 y''' \right) = N_x Y' - N_y \left(X' - e - \frac{1}{24} \theta^4 \right) \quad (\text{C.17})$$

which is (28c) in the small e limit and up to order 3.

355 **Appendix D. The order 3 model for a cantilever beam**

The system (31) in an order 3 approximation of the planar dynamics of an extensible beam with general boundary conditions. In the special case where one end is free and where the beam is considered inextensible ($\eta = 0$), we show here that system (31) reduces to the Crespo da Silva equation [36]. We start from (28a) and express $x(s, t)$ with $y(s, t)$

$$x(s, t) = \int_0^s \left(1 - \frac{1}{2} y'^2 \right) ds \Rightarrow \ddot{x}(s, t) = - \int_0^s \frac{1}{2} (y''^2) ds \quad (\text{D.1})$$

Next we use the free-end condition at $s = 1$ to integrate (28b) and write

$$n_x(s, t) = - \int_s^1 \ddot{x} \, ds \quad (\text{D.2})$$

We then inject (D.1) and (D.2) into (28c) and we isolate $n_y(s, t)$

$$n_y(s, t) = - \frac{y''' + f_3}{1 - \frac{1}{2}y'^2} - \frac{y'}{1 - \frac{1}{2}y'^2} \int_s^1 \ddot{x} \, ds \quad (\text{D.3})$$

Differentiating once more with respect to s , using (28d), and restricting to order 3 finally yields

$$\ddot{y}(s, t) + (y''' + y' y''^2 + y'^2 y''')' + \frac{1}{2} \left\{ y' \int_1^s \int_0^s (\ddot{y}^2) \, ds \, ds \right\}' = 0 \quad (\text{D.4})$$

which is Equation (61) of [10].

Appendix E. Bifurcation curves plotted with axial load

We plot in Figure E.8 the graphs of Figures 2, 3, 4, and 5 with the axial load p_E on the horizontal axis. This re-plotting puts light on the shortcomings of the Woinowsky-Krieger model, which fails to predict how the axial load p_E is evolving in the post-bucking regime. One must keep in mind that the frequencies of the first and second modes shown here are not the ones obtained in a load-controlled experiment, since frequencies depend on the axial boundary conditions. For the case considered in this text, the axial distance between the ends of the beam is constant during vibrations, whereas in a load-controlled experiment, this distance varies (i.e. vibrates) since the axial *load* is prescribed constant. This case is well documented in [29].

Appendix F. Error of Woinowsky-Krieger model as function of η

We plot in figure F.9 curves of constant relative error between the Woinowsky-Krieger and Kirchhoff models, in the plane $(1/\sqrt{\eta}, D/L)$. It is observed that the relative errors Err_y and Err_ω only weakly depend on the slenderness ratio η and grow steadily with the axial displacement D/L .

References

- [1] G. E. P. Box, Science and statistics, Journal of the American Statistical Association 71 (356) (1976) 791–799.
- [2] G. Kirchhoff, Vorlesungen über mathematische Physik, Mechanik, B.G. Teubner, Leipzig, 1876.

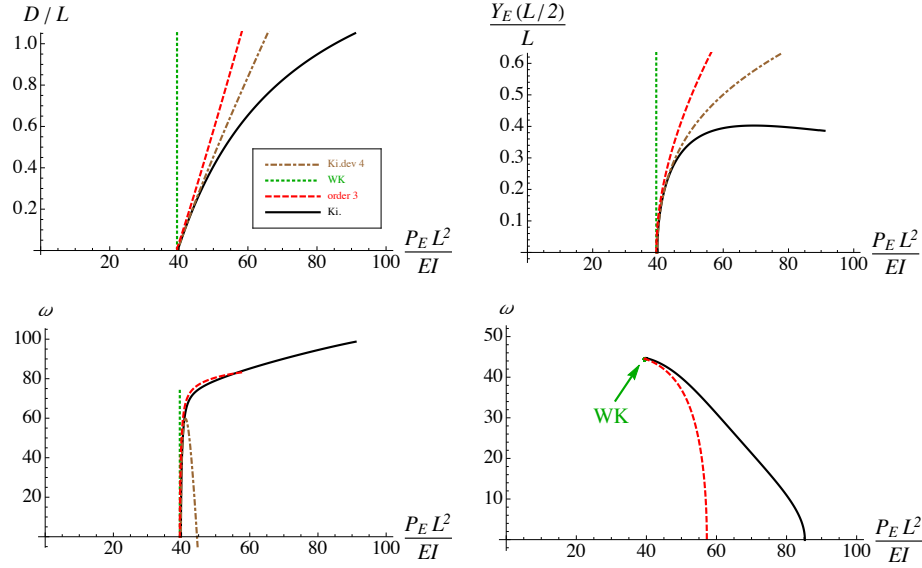


Figure E.8: The two upper graphs show post-buckled equilibrium curves for the axial displacement d and the transverse displacement at midspan $y(1/2)$ as function of the axial load p_E . The two lower graphs show the frequency ω of the 1st and 2nd vibration modes around the buckled equilibrium as function of the load p_E . The curves for the Kirchhoff model (noted Ki.), the Woinowsky-Krieger model (noted WK), the order 3 model of Section 5 (noted order 3), and the 4th order development of Kirchhoff model (noted Ki. dev 4) are shown. The curve 'Ki. dev 4' is not plotted for the 2nd vibration mode. Note that $\Omega = \omega / \left(L^2 \sqrt{\rho A / (EI)} \right)$ is the physical angular frequency in radians per second. Here $\eta = 1/4800$.

- [3] E. Reissner, On one-dimensional finite-strain beam theory: The plane problem, *Zeitschrift für Angewandte Mathematik und Physik (ZAMP)* 23 (1972) 795–804.
- [4] A. H. Nayfeh, P. F. Pai, *Linear and Nonlinear Structural Mechanics*, Wiley, 2004.
- [5] W. Lacarbonara, *Nonlinear Structural Mechanics: Theory, Dynamical Phenomena and Modeling*, Springer, 2013.
- [6] A. Luongo, D. Zulli, *Mathematical Models of Beams and Cables*, Wiley, 2013.
- [7] B. Audoly, Y. Pomeau, *Elasticity and Geometry: From hair curls to the non-linear response of shells*, Oxford University Press, 2010.
- [8] E. H. Dill, Kirchhoff's theory of rods, *Archive for History of Exact Sciences* 44 (1) (1992) 1–23.

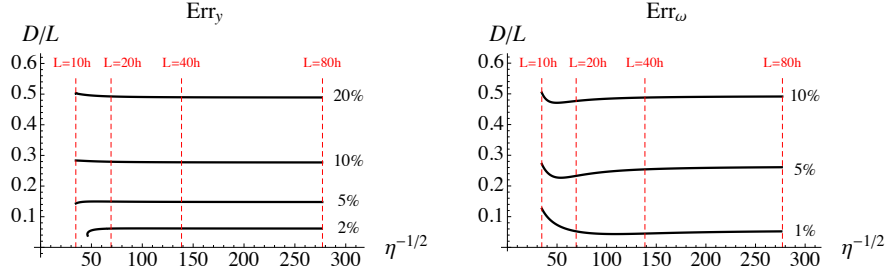


Figure F.9: Relative error of the Woinowsky-Krieger model, when compared to Kirchhoff's model, for the transverse displacement (left) and the frequency of the first vibration mode (right). Curves of constant error are shown, in the plane $(1/\sqrt{\eta}, D/L)$, for $Err_y = 0.02, 0.05, 0.1$, and 0.2 (left), and $Err_\omega = 0.01, 0.05$, and 0.1 (right). The relative errors are defined as $Err_y = \frac{y_{WK}(1/2) - y_{Ki}(1/2)}{y_{Ki}(1/2)}$ and $Err_\omega = \frac{\omega_{Ki}(1/2) - \omega_{WK}(1/2)}{\omega_{Ki}(1/2)}$ with WK meaning Woinowsky-Krieger and Ki meaning Kirchhoff.

- [9] C. Meier, A. Popp, W. A. Wall, Geometrically exact finite element formulations for slender beams: Kirchhoff–love theory versus simo–reissner theory, Archives of Computational Methods in Engineering 26 (1) (2019) 163–243.
- [10] O. Thomas, A. S  n  chal, J.-F. De  , Hardening/softening behavior and reduced order modeling of nonlinear vibrations of rotating cantilever beams, Nonlinear Dynamics 86 (2) (2016) 1293–1318.
- [11] E. Cottanceau, O. Thomas, P. V  ron, M. Aloch  t, R. Deligny, A finite element/quaternion/asymptotic numerical method for the 3D simulation of flexible cables, Finite Elements in Analysis and Design 139 (2017) 14–34.
- [12] S. Woinowsky-Krieger, The effect of an axial force on the vibration of hinged bars, Journal Applied Mechanics 17 (1950) 35–36.
- [13] E. Mettler, Zum problem der stabilit  t erzwungener schwingungen elastischer k  rper, ZAMM - Journal of Applied Mathematics and Mechanics 31 (8-9) (1951) 263–264.
- [14] A. C. Eringen, On the non-linear vibration of elastic bars, Quarterly of Applied Mathematics 9 (4) (1952) 361–369.
- [15] D. Burgreen, Free vibrations of a pin ended column with constant distance between ends, Journal Applied Mechanics 18 (1951) 135–139.
- [16] T. von K  rm  n, Festigkeitsprobleme im Maschinenbau, Encyklop  die der Mathematischen Wissenschaften 4 (4) (1910) 311–385.

- 425 [17] J. G. Easley, Nonlinear vibration of beams and rectangular plates, *Zeitschrift für angewandte Mathematik und Physik ZAMP* 15 (2) (1964) 167–175.
- [18] J. D. Ray, C. W. Bert, Nonlinear vibrations of a beam with pinned ends, *Journal of Engineering for Industry* 91 (4) (1969) 997–1004.
- 430 [19] C. Lou, D. Sikarskie, Nonlinear vibration of beams using a form-function approximation, *Journal of Applied Mechanics* 42 (1) (1975) 209–214.
- [20] P. H. McDonald, Nonlinear motion of a beam, *Nonlinear Dynamics* 2 (1991) 187–198.
- [21] A. H. Nayfeh, D. T. Mook, *Nonlinear Oscillations*, Wiley, New York, 1995.
- 435 [22] A. Nayfeh, S. Emam, Exact solution and stability of postbuckling configurations of beams, *Nonlinear Dynamics* 54 (4) (2008) 395–408.
- [23] A. Nayfeh, W. Kreider, T. Anderson, Investigation of natural frequencies and mode shapes of buckled beams, *AIAA Journal* 33 (6) (1995) 1121–1126.
- 440 [24] D. Y. Gao, Finite deformation beam models and triality theory in dynamical post-buckling analysis, *International Journal of Non-Linear Mechanics* 35 (2000) 103–131.
- [25] A. Pflüger, *Stabilitätsprobleme der Elastostatik*, 2nd Edition, Springer-Verlag, 1964.
- 445 [26] Y. Goto, T. Yoshimisu, M. Obata, Elliptic integral solutions of plane elastica with axial and shear deformations, *International Journal of Solids and Structures* 26 (4) (1990) 375–390.
- [27] S. P. Timoshenko, On the correction for shear of the differential equation for transverse vibrations of prismatic bars, *Philosophical Magazine* 41 (1921) 744–746.
- 450 [28] S. Neukirch, J. Frelat, A. Goriely, C. Maurini, Vibrations of post-buckled rods: The singular inextensible limit, *Journal of Sound and Vibration* 331 (3) (2012) 704–720.
- 455 [29] S. Neukirch, A. Goriely, O. Thomas, Singular inextensible limit in the vibrations of post-buckled rods: Analytical derivation and role of boundary conditions, *Journal of Sound and Vibration* 333 (3) (2014) 962–970.
- [30] G. Domokos, Global description of elastic bars, *Z. Angew. Math. Mech* 74 (1994) T289–T291.
- 460 [31] A. Mamou-Mani, J. Frelat, C. Besnainou, Prestressed soundboards: Analytical approach using simple systems including geometric nonlinearity, *Acta Acustica united with Acustica* 95 (2009) 915–928.

- [32] J. Arbocz, M. Potier-Ferry, J. Singer, V. Tvergaard, Buckling and Post-Buckling, Vol. 288 of Lectures Notes in Physics, Springer-Verlag, 1985.
- [33] Z. J. Bažant, L. Cedolin, Stability of Structures, Oxford University Press, 1991.
- 465 [34] P. Naghdi, A new derivation of the general equations of elastic shells, International Journal of Engineering Science 1 (4) (1963) 509–522.
- [35] P. Naghdi, Further results in the derivation of the general equations of elastic shells, International Journal of Engineering Science 2 (3) (1964) 269–273.
- 470 [36] M. R. M. Crespo da Silva, C. C. Glynn, Nonlinear Flexural-Flexural-Torsional Dynamics of Inextensional Beams. I. Equations of Motion, Journal of Structural Mechanics 6 (4) (1978) 437–448.
- [37] M. I. Younis, A. H. Nayfeh, A study of the nonlinear response of a resonant microbeam to an electric actuation, Nonlinear Dynamics 31 (2003) 91–117.