



**HAL**  
open science

# Accurate estimations of sea-ice thickness and elastic properties from seismic noise recorded with a minimal number of geophones: from thin landfast ice to thick pack ice

Ludovic Moreau, Jérôme Weiss, David Marsan

## ► To cite this version:

Ludovic Moreau, Jérôme Weiss, David Marsan. Accurate estimations of sea-ice thickness and elastic properties from seismic noise recorded with a minimal number of geophones: from thin landfast ice to thick pack ice. *Journal of Geophysical Research. Oceans*, 2020, 10.1029/2020JC016492. hal-02986579

**HAL Id: hal-02986579**

**<https://hal.science/hal-02986579>**

Submitted on 3 Nov 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

1 **Accurate estimations of sea-ice thickness and elastic properties**  
2 **from seismic noise recorded with a minimal number of**  
3 **geophones: from thin landfast ice to thick pack ice**

4 **Ludovic Moreau<sup>1</sup>, Jérôme Weiss<sup>1</sup>, David Marsan<sup>2</sup>**

5 <sup>1</sup>Institut des Sciences de la Terre, UMR CNRS 5275, Université Grenoble Alpes, Grenoble, France

6 <sup>2</sup>Institut des Sciences de la Terre, UMR CNRS 5275, Université de Savoie, Le Bourget du Lac, France

7 **Key Points:**

- 8 • The Young's modulus and Poisson's ratio of sea ice are estimated from seismic noise  
9 interferometry  
10 • Bayesian inference is applied to icequake recordings for a simultaneous inversion of  
11 the icequake position and sea ice thickness  
12 • In comparison with our previous work, where about 50 sensors were required, the num-  
13 ber of stations is reduced by one order of magnitude

---

Corresponding author: Ludovic Moreau, ludovic.moreau@univ-grenoble-alpes.fr

## Abstract

Despite their high potential for accurate sea ice properties estimation, seismic methods are still limited by the difficulty of access and the challenging logistics of polar environments. Conventional seismic methods generally require tens of geophones together with active seismic sources for monitoring applications. While this is not an issue for mainland environment, it is restrictive for sea ice and prevents long-term monitoring. We introduce a method to estimate sea ice thickness and elastic properties from passive recordings of the ambient seismic field with a minimal number of geophones. In comparison with our previous work (Moreau et al, 2020), where about 50 sensors were used, the number of geophones is reduced by one order of magnitude, thanks to a new strategy of inversion of the passive seismic data. The method combines noise interferometry for estimating the elastic properties, with a Bayesian inversion of the dispersion in the waveforms of icequakes for inferring ice thickness, based on passive recordings from only 3 to 5 geophones, depending on the signal to noise ratio. We demonstrate its potential both on data recorded on thin landfast ice in Svalbard, and on data recorded on thick pack ice in the Arctic ocean.

## Plain Language Summary

Seismic methods have high potential for monitoring important properties of sea ice, such as its thickness of rigidity. Such data are essential for improving climate models. However, the use of seismic methods is limited by the difficulty of access and the challenging logistics of polar environments. It is therefore essential to reduce as much as possible the instruments required for their application. Conventional seismic methods generally require tens of geophones together with active seismic sources for monitoring applications. We introduce a method to estimate sea ice properties based on the recordings of seismic noise with only three seismic stations, and demonstrate its potential on data recorded in a frozen fjord in Svalbard, as well as on data collected on drifting sea ice in the Arctic Ocean. The method is shown to have very promising potential for long-term and accurate monitoring of the properties of sea ice.

## 1 Introduction

The propagation of seismic waves guided in sea ice has been exploited for decades to develop methods for the monitoring of the ice properties (Anderson, 1958; Marsan et al, 2012; Moreau et al, 2020; Stein et al, 1998), which are ingredients for climate and sea ice models. These methods exploit the dispersion characteristics of the guided modes that compose the wavefield. With appropriate forward modeling, an inverse problem can be defined to infer the ice thickness and elastic properties, based on a fit between the dispersion of the guided modes in the model and in the data. Such approaches are quite common, not only in geophysics, but also at the ultrasonic scale for nondestructive testing (Mitra and Gopalakrishnan, 2016) or medical acoustics (Bochud et al, 2017) applications. As far as sea ice applications are concerned, the main challenge with such monitoring methods are the in situ logistics, which require the deployment of seismic antennae with many geophones, as well as the use of active sources. Given the hostile conditions and the difficulty to access polar environments, these are considered to be the main limitations of such methods, despite their potential for accurate sea ice properties estimations. Therefore, the long-term monitoring of sea ice with seismic methods remains unlikely as long as autonomous systems with minimal deployment logistics can be used.

Thanks to rapid technological and methodological progress, these constraints are less and less limiting. For example, current technology allows miniature triaxial autonomous geophones to record continuously the seismic wavefield in polar conditions for more than 30 days, at a sampling frequency of 500 Hz. The next generations is expected to record for several months while continuously transmitting the data via satellite communication. Moreover, the need of active sources was recently made unnecessary thanks to analyses based on seismic noise interferometry (Marsan et al, 2012; Marsan et al, 2019; Moreau et al, 2020).

64 In Moreau et al (2020), a passive seismic experiment was performed to prove the con-  
 65 cept of accurately measuring sea ice thickness and elastic properties with seismic noise. An  
 66 array of 247 geophones was deployed at the surface of the frozen Van Mijen fjord in Sval-  
 67 bard (Norway), to record the ambient seismic field between 1 and 26 March 2019. The frequency-  
 68 wavenumber dispersion curves of the guided modes propagating in the ice cover were extracted  
 69 from both icequakes and the noise correlation function (NCF). These dispersion curves were  
 70 inverted for sea ice thickness, Young’s modulus and Poisson’s ratio, yielding very accurate and  
 71 robust estimates when compared with active seismic acquisitions. With this approach, the wave-  
 72 field must be spatially sampled. This requires a seismic array with stations spacing that meets  
 73 Nyquist’s sampling criterion, with typically  $\sim 50$  stations. Although it is expected that about  
 74 20-30 stations can be sufficient to apply this technique (Moreau, Lachaud et al, 2017), devel-  
 75 oping new methods able to achieve similar results with even fewer sensors is desirable to re-  
 76 duce in-situ logistics.

77 We here introduce a different approach where fewer than 5 stations are sufficient to ob-  
 78 tain accurate estimates of sea ice thickness and elastic properties. The method combines noise  
 79 interferometry for estimating the elastic properties, with a Bayesian inversion of the disper-  
 80 sion in the waveforms of icequakes for inferring ice thickness. It takes advantage of the one-  
 81 to-one relationship that exists between the time-frequency spectrum of the waveforms on the  
 82 one hand, and ice thickness and propagation distance on the other hand.

83 The method is first applied to thin landfast ice. Based on a very rich dataset recorded  
 84 in 2019 in the Van Mijen fjord, in Svalbard (Moreau et al, 2020), we demonstrate its robust-  
 85 ness, stability and accuracy by processing waveforms from many active sources and from ice-  
 86 quakes (section 3.1). Then, the method is applied to icequakes recorded on thick pack ice in  
 87 the Arctic ocean in 2007 (Gascard et al, 2008; Vihma et al, 2014), indicating ice thickness  
 88 values that are consistent with in situ measurements and field observations (section 3.2).

## 89 2 Material and Methods

90 In a layer of ice floating on water, the elastic wavefield contains at least four fundamen-  
 91 tal guided modes: the quasi-Scholte ( $QS$ ), quasi- $S_0$  ( $QS_0$ ), quasi- $A_0$  ( $QA_0$ ) and  $SH_0$ . When  
 92 the product of the frequency by the thickness of the ice remains under 50 Hz·m, the  $QA_0$  mode  
 93 is not propagative and the wavefield can be approximated with the combination of the flex-  
 94 ural wave, the axial wave, and the shear-horizontal wave (Stein et al, 1998). These are essen-  
 95 tially the asymptotic behavior of the guided modes, when the displacement field across the ice  
 96 thickness is considered linear for the  $QS$  mode and constant for the  $QS_0$  mode (Moreau et  
 97 al, 2020).

98 For a homogeneous waveguide, modal dispersion depends only on the product between  
 99 the frequency and the thickness of the waveguide. In particular, for sea ice, the only disper-  
 100 sive mode under 50 Hz·m is the  $QS$  mode. The following thickness estimation procedure re-  
 101 lies on a time-frequency analysis of this dispersion. More specifically, we minimize the mis-  
 102 fit between the dispersion of this mode in recorded and synthetic signals. This inversion pro-  
 103 cedure is described thereafter.

### 104 2.1 Forward Problem: Phase-Shift-Based Propagation Model

105 Given a Young’s modulus,  $E$ , and Poisson’s ratio,  $\nu$ , the dispersion of the  $QS$  mode is  
 106 characterized by a time-frequency spectrum which shape corresponds theoretically to a unique  
 107 combination of ice thickness and propagation distance. A larger propagation distance results  
 108 in more distorted signals with a dispersion that is specific to the ice thickness. This is illus-  
 109 trated in figure 1 that shows the synthetic waveforms of the  $QS$  at a distance of 80 m (figure  
 110 1a) and 250 m (figure 1c) from the source, together with their associate short-time Fourier trans-  
 111 form (STFT), shown in figures 1b and 1d. Here the source is assumed to produce a 1.5-cycle  
 112 toneburst with a gaussian shape, and with a centre frequency of 10 Hz, which is representa-

113 tive of the dominant frequency observed in most of the icequakes in our data. The ice layer  
 114 has a thickness  $h = 0.65$  m, Young’s modulus  $E = 4$  GPa and Poisson’s ratio  $\nu = 0.33$ ,  
 115 which is representative of the ice near the seismic array in the Van Mijen fjord (Moreau et al,  
 116 2020).

117 To simulate the propagation of the *QS* mode, we use a very basic and efficient model  
 118 which applies, in the Fourier domain, the appropriate phase-shift to each frequency compo-  
 119 nent of the spectrum. This phase-shift depends on the frequency and is equal to  $k(f) \times L$ , where  
 120  $k(f)$  is the wavenumber of the *QS* mode at frequency  $f$  and  $L$  is the propagation distance. To  
 121 compute the wavenumber of the *QS* mode, we use the asymptotic low-frequency model in-  
 122 troduced by Stein et al (1998), that gives the phase velocity of a time-harmonic flexure wave  
 123 in an ice layer floating on an infinite water column.

124 It is noteworthy that sources in the field have complex and varied mechanisms, which  
 125 have an influence on wave polarization, azimuthal directivity and signals amplitude. This re-  
 126 sults in signals that are generally quite different from a toneburst. The above-mentioned model  
 127 by Stein et al (1998) is only for calculating phase velocities, which are not dependent on source  
 128 mechanisms. Hence, source mechanisms are not accounted for in this model. Moreover, the  
 129 amplitude information can also be modified along the propagation, for instance if the wave  
 130 encounters a lead or a ridge. Such field-dependent features cannot be accounted for either, in  
 131 our basic model. Therefore, in order to mitigate their effect through the inversion procedure,  
 132 the signal in the model is modified as follows:

- 133 1. generate a 1.5-cycle toneburst with a gaussian shape and a center frequency of 10 Hz;
- 134 2. Fourier transform this signal;
- 135 3. replace the amplitude of the spectrum with that of the signal recorded at the geophone;
- 136 4. inverse Fourier-transform the modified spectrum.

137 This results in a pseudo-impulsive, broadband signal with a spectrum which amplitude is more  
 138 representative of that from the recorded signal. This signal is then propagated between the source  
 139 position and the receiver via the above-mentioned phase-shifting operation. In comparison with  
 140 a non-modified toneburst, the modified propagated waveform will have a reduced misfit with  
 141 the STFT of the recorded signal.


## 142 2.2 Parameterization of the Problem and Cost Function

In the following, we assume that  $E$  and  $\nu$  can be estimated a priori, and we define a cost  
 function between the data,  $\mathbf{d}$ , and the output of the model,  $\mathbf{m}(\mathbf{X})$ , based on the time-frequency  
 analysis of the flexural wave, such that

$$f(\mathbf{d}, \mathbf{X}) = 1 - \frac{1}{N} \sum_{n=1}^N \text{corr}(\text{STFT}\{\mathbf{d}_n\}, \text{STFT}\{\mathbf{m}_n(\mathbf{X})\}) \quad (1)$$

143 where  $\text{corr}$  denotes the correlation coefficient between matrices  $\text{STFT}\{\mathbf{d}_n\}$  and  $\text{STFT}\{\mathbf{m}_n(\mathbf{X})\}$ .  
 144  $\mathbf{d}_n$  is the temporal signal recorded on the vertical channel at station  $n$  ( $n = 1, 2, \dots, N$ ) when  
 145 an impulsive seismic source is activated, for example an icequake.  $\mathbf{m}_n(\mathbf{X})$  is the temporal sig-  
 146 nal simulated at station  $n$ , based on the input parameters,  $\mathbf{X}$ . The parameters are representa-  
 147 tive of the wave propagation problem:

- 148 • source latitude
- 149 • source longitude
- 150 • ice-thickness,  $h$
- 151 • a time-shifting parameter,  $\Delta t$ , that accounts for the unknown activation time of the source  
 152 during the recordings. The aim of this parameter is to "align" the simulated and recorded  
 153 waveforms. It is the same for all stations.

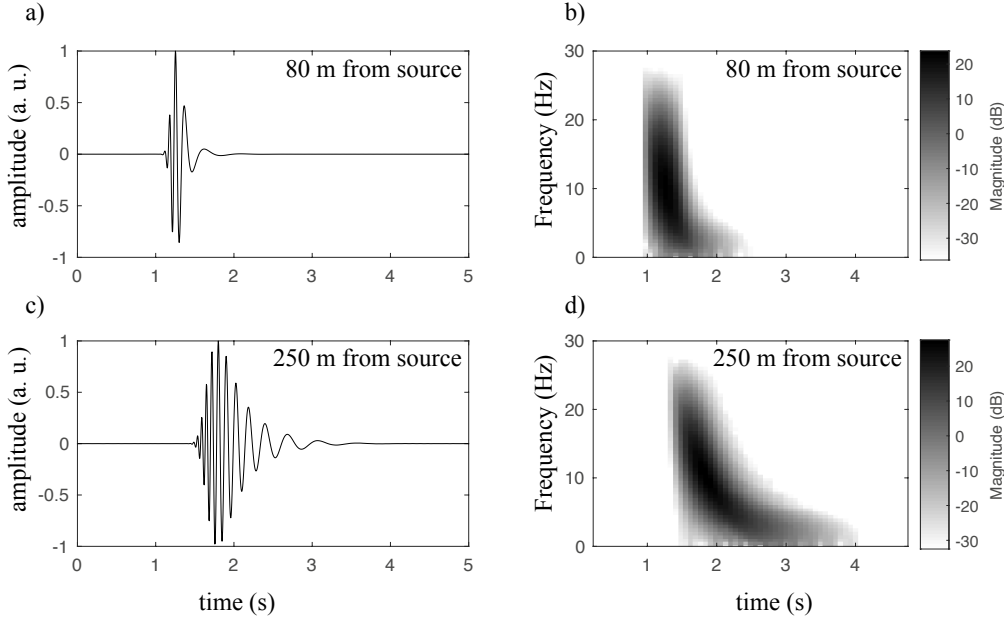

**Figure 1.** (a) Synthetic waveform of the  $QS$  mode received by a geophone located 80 m away from an impulsive source in a floating layer of ice with thickness 0.65 m. (b) Short-time Fourier transform of the waveform. (c) and (d): same as (a) and (b) for a geophone located 250 m away from the source.

154 This problem is very well-constrained because there is a one-to-one relationship between  
 155 the model parameters and the global minimum of the cost function. Hence in theory it should  
 156 be possible to estimate sea ice thickness based on a single signal recorded by a unique seis-  
 157 mic station. In practice, however, this can hardly be achieved because the waveforms are cor-  
 158 rupted by ice heterogeneity, thickness variations, the presence of a snow layer, anisotropy of  
 159 elastic properties etc. Nonetheless, the impact of these uncertainties can be mitigated by in-  
 160 cluding data from a few more seismic stations. This significantly improves source localiza-  
 161 tion, which simultaneously also improves thickness estimation. The resulting inferred ice thick-  
 162 ness corresponds to an average over all the direct paths between the source and the stations.

### 163 2.3 Inverse Problem

To solve the inverse problem, we proceed with Bayesian inference, which provides an ensemble of solutions that fit the data with an acceptable level of likelihood, given the data uncertainty. This ensemble of solutions is represented by the posterior distribution of the model parameters, such that

$$P(\mathbf{X}|\mathbf{d}) = \frac{P(\mathbf{d}|\mathbf{X})P(\mathbf{X})}{P(\mathbf{d})}. \quad (2)$$

164  $P(\mathbf{X}|\mathbf{d})$  is the likelihood function,  $P(\mathbf{X})$  is the prior distribution and  $P(\mathbf{d})$  is the marginal like-  
 165 lihood function, or the model evidence. The posterior distribution expresses the conditional  
 166 probability of the parameter values based on evidence from measurements, expressed by the  
 167 likelihood function, and from prior assumptions, expressed by the prior distribution.

168 The Markov Chain Monte Carlo (MCMC) algorithm is one of several methods that can  
 169 be used to evaluate the Bayesian posterior distribution by realizing a Markov chain in the pa-  
 170 rameter search space. This random walk satisfies the ergodic theorem, which allows the al-  
 171 gorithm to converge toward a stationary state that approximates the probability density func-  
 172 tion (PDF) of the parameters (Andrieu and Moulines, 2006). A recurrent problem in Bayesian

173 inference is the difficulty to calculate the marginal likelihood, which is essentially a normal-  
 174 ization factor. However, because it is the same for all probabilities, its determination is not nec-  
 175 ecessary in practice, since it can be cancelled by comparing ratios of probabilities rather than  
 176 absolute probabilities. This is one of the motivations for using methods based on stochastic  
 177 sampling such as MCMC.

In the present problem, it is assumed that measurement errors are uncorrelated and ran-  
 dom, and thus that they can be modeled by a normal distribution. A zero-mean Gaussian like-  
 hood function with variance  $\sigma^2$  is therefore prescribed:

$$P(\mathbf{d}|\mathbf{X}) = \exp\left(-\frac{(f(\mathbf{d}, \mathbf{X}))^2}{2\sigma^2}\right), \quad (3)$$

178 where  $\sigma^2$  is the variance associated to the measurement errors. This is a typical likelihood func-  
 179 tion used in many data fitting problems (Tarantola, 2005). Moreover, it is also assumed for  
 180 the prior distribution that the model parameters have equal probability over a finite range of  
 181 values:

- 182 • the position of sources, which mainly originate from leads, ridges, or the shore line,  
 183 is within a distance of 2 km around the centre of the arrays.
- 184 • ice-thickness is comprised between 0.1 m and 5 m.
- 185 • the phase-shift adjustment parameter is between  $-t_{max}$  and  $+t_{max}$ , where  $t_{max}$  is the size  
 186 of the time window where the signals to invert are recorded.

187 MCMC methods generally require a burn-in phase before reaching the posterior distri-  
 188 bution. For improved convergence, we precede the MCMC algorithm by a Simulated Anneal-  
 189 ing (SA) global optimization. The number of iterations is set to 10000 in the SA and to 100000  
 190 in the MCMC algorithm. To approximate the PDF of the parameters, we sample 1000 can-  
 191 didates from the posterior distribution of each parameter. Thanks to the ergodic theorem, the  
 192 mean of the PDF returns the expectation of the parameters, which is also considered here to  
 193 be the estimated value, because the PDF should be centered around the zone with the high-  
 194 est probability in the parameter space. Another interest of the MCMC algorithm is to provide  
 195 a confidence in the solution, based on the shape of the PDF.


## 196 3 Results

### 197 3.1 Landfast Ice in the Van Mijen Fjord in Svalbard

198 The data processed in this section were recorded in the Van Mijen fjord near Sveagruva,  
 199 in Svalbard (Moreau et al, 2020). Figure 2a shows the location of the deployment in the fjord.  
 200 The array is located near Sveagruva in a part of the fjord that is surrounded by a moraine and  
 201 connected to the fjord by a channel (figure 2b). The array contains a total of 247 FairFieldNodal  
 202 Zland geophones (flat frequency response down to the cutoff frequency of 10 Hz for 1C in-  
 203 struments and 5 Hz for 3C instruments, and an attenuation of -20 dB per decade below), as  
 204 shown in red and blue in figure 2c.


#### 205 3.1.1 Elastic Properties of the Ice

206 Prior to applying the inversion procedure to the data, the Young's modulus and Poisson's  
 207 ratio of the ice must be determined. To this end, we evaluate the velocity of the guided  $QS_0$   
 208 and  $SH_0$  modes from the noise correlation function (NCF). In passive seismology, the NCF  
 209 is calculated by correlating the ambient seismic noise (or ambient seismic field) recorded be-  
 210 tween pairs of stations. It can be shown that it converges toward the impulse response, or Green's  
 211 function, of the medium (Sabra et al., 2005; Shapiro and Campillo, 2004). As shown in Moreau  
 212 et al (2020), this approach can be applied to seismic noise recorded on sea ice to recover the  
 213 Green's function of the wavefield propagating between the stations of a seismic array.

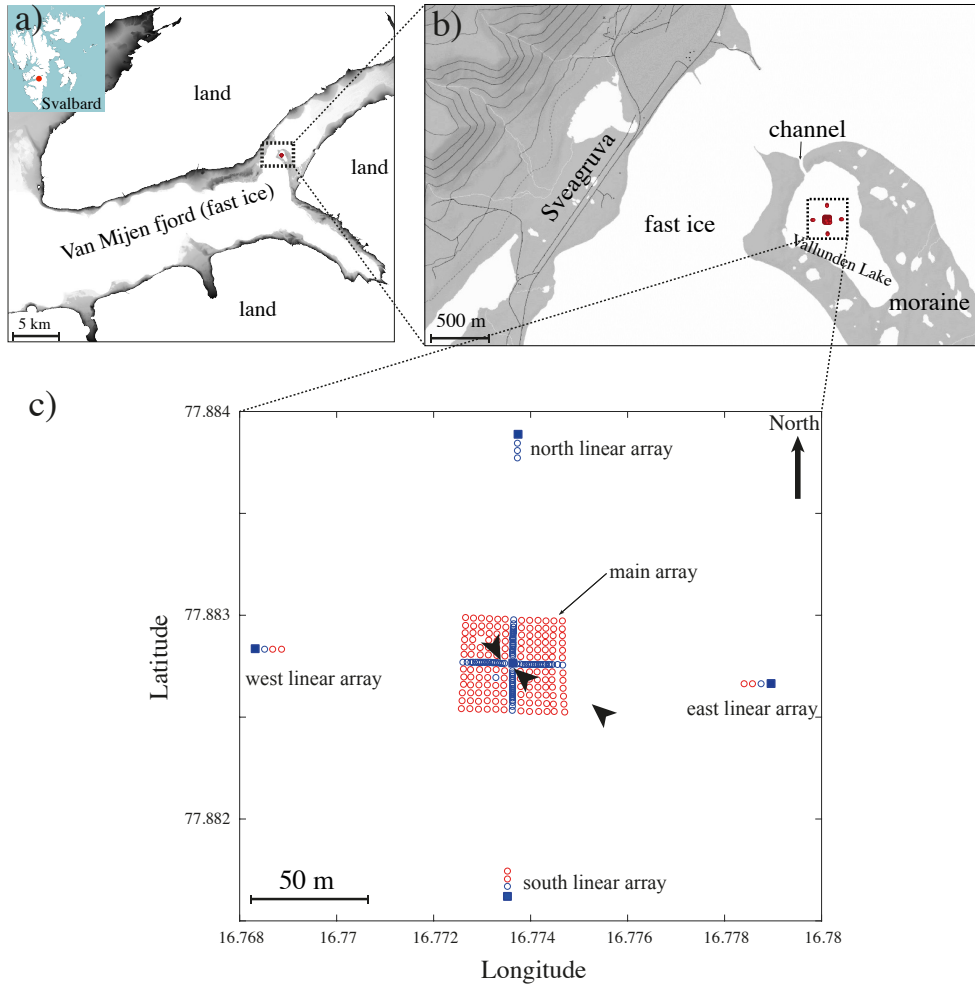

**Figure 2.** (a) Location of the seismic array in the Van Mijen fjord near Sveagrøva (Svalbard), with (b) a zoom around the array area near Vallunden Lake, a part of the fjord that is surrounded by a moraine and connected to the fjord by a channel. The greyscale shows land which altitude is less than 25 m. All land above 25 m is shown in white to emphasize the shore line. (c) The 247 stations of the array, including the main central array, and the four linear arrays to the north, east, south and west. Red circles are for 1C stations and blue circles for 3C stations. The 5 blue squares indicate the stations used in section 3.1 to calculate the NCF. The large arrowheads indicate the positions of ice thickness measurements.



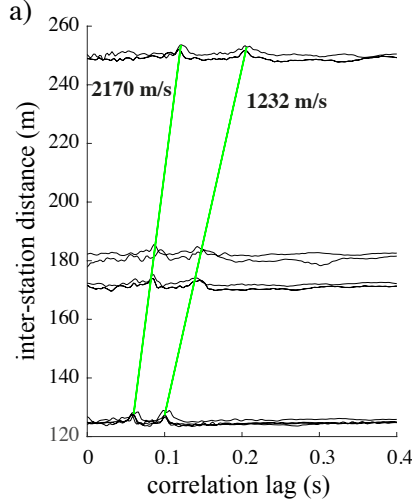

**Figure 3.** (a) NCF from 8 hrs of seismic noise recorded between 0h00 and 8h00 on 5 March 2019 in the Van Mijlen Fjord, at the stations of the array shown as black squares in figure 2c, versus the distance between the stations. The green lines indicate the arrival time of the  $QS_0$  and  $SH_0$  modes, which propagate at a velocity of 2170 m/s and 1232 m/s, respectively.


214 When the product of the wavefield by the thickness of the ice remains low, typically up  
 215 to 200 Hz-m, the  $QS_0$  and  $SH_0$  modes guided in the ice produce a displacement that is dom-  
 216 inant on the horizontal components of the wavefield. Hence we compute the NCF from am-  
 217 bient noise recorded on the horizontal channels of the five geophones shown as squares in fig-  
 218 ure 2c. The noise was recorded between 0h00 and 8h00 on 5 March 2019. Recordings were  
 219 first truncated in 5 mn-long time windows and spectral whitening was applied in the [1-20]  
 220 Hz frequency band. The cross-correlations were then calculated between each station pair, for  
 221 all 96 time windows. To obtain the final NCF, the filter introduced in Moreau, Stehly, et al  
 222 (2017) was applied to each set of cross-correlations, which were finally stacked.

These NCF are shown in figure 3 for the 10 combinations of station pairs as a function  
 of the distance between the stations. They indicate an average velocity of 2170 m/s for the  $QS_0$   
 mode and 1235 m/s for the  $SH_0$  mode. These can be related to Young’s modulus and Pois-  
 son’s ratio such that (Stein et al, 1998):

$$\nu = 1 - 2 \left( \frac{c_{QS_0 H_0}}{c_{QS_0}} \right)^2, \quad \text{and} \quad E = \rho \times (c_{QS_0})^2 (1 - \nu^2). \quad (4)$$

223 This gives  $E = 3.8$  GPa and  $\nu = 0.35$ , which is consistent with the values reported in Moreau  
 224 et al (2020),  $E = 3.9 \pm 0.2$  GPa and  $\nu = 0.34 \pm 0.02$ , which were estimated from a frequency-  
 225 wavenumber analysis based on the recordings of 52 geophones. The density is set to  $900 \text{ kg/m}^3$ ,  
 226 a common value for sea ice. From a rheological point of view, it would be of interest to mon-  
 227 itor the evolution of these mechanical properties between 1 and 26 March. Preliminary results  
 228 indicate that Poisson’s ratio keeps a conservative value between 0.32 and 0.33, and Young’s  
 229 modulus remains stable between 3.8 and 4.5 GPa. However this is out of the scope of this pa-  
 230 per and is left for separate study.

231 Next, we apply the inversion method to both active sources (jumps from 1-m height onto  
 232 the ice), and passive sources (icequakes). The active sources are ideal for a preliminary inves-  
 233 tigation of the accuracy of the inverted parameters, because they produce signals with a bet-  
 234 ter signal to noise ratio, and also because their exact location is known. We present inversions  
 235 for these two types of sources, based on signals recorded with 3 and 5 stations.

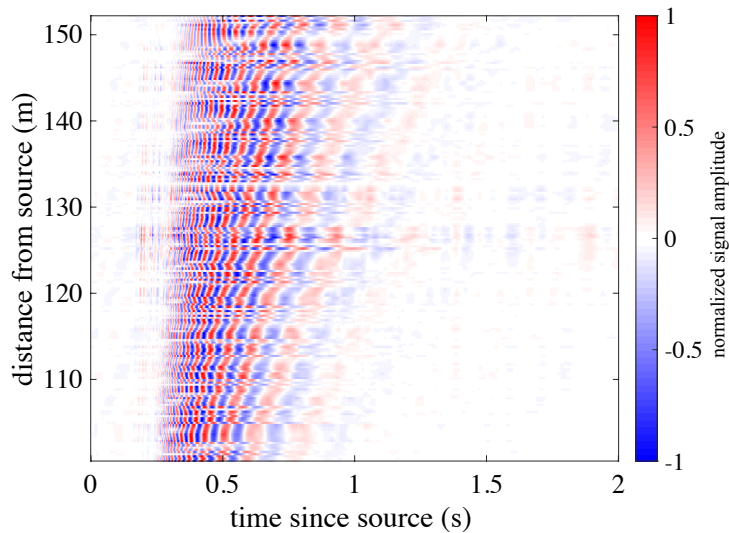

**Figure 4.** Normalized signals received at all stations of the main array, versus the distance from an impulsive source located in the north linear array. Depending on propagation direction, the moveout of the waveforms is not increasing monotonically, revealing an apparent anisotropy of the wave propagation.

236

### 3.1.2 Inversions of Active Sources For Ice Thickness

237

238

239

240

241

242

243

244

245

On 1 and 26 March 2019, a series of active acquisitions were performed by jumping directly onto the ice from a one-meter height, near the linear arrays to the north, east, south and west of the main array (figure 2c). In total, 16 jumps were performed on both dates, each at a distance of about 0.5 m from the geophones in the linear arrays. Signals were extracted from the continuous recordings in a 5 s time window following the jumps. We refer the reader interested in the exact jumps time to Moreau et al (2020), where they are all listed. The inversion relies on a forward model that is valid when the product of the frequency by the thickness of the ice remains under 50 Hz-m. Since the ice thickness in the fjord was less than one meter, the extracted signals were band-pass filtered in the [1-50] Hz frequency band.

246

247

248

249

250

251

252

253

254

255

256

257

Although the landfast ice in the fjord is more regular than drifting ice in the open sea, it exhibits significant heterogeneities of mechanical properties through the thickness, as well as local thickness variations by up to 20 cm Moreau et al (2020). These heterogeneities and thickness variations induce an apparent anisotropy in the propagation of the guided waves. For example, figure 4 shows the waveforms recorded at the main array in the two seconds following a jump at the north linear array. The waveforms are sorted with respect to the increasing distance between the stations and the jump location. The 231 stations of the main array are distributed on a square grid. Hence this sorting implies that from one waveform to the next, the propagation direction can be very different ( $\pm 15^\circ$ ) while the propagation distance is almost the same. Although the overall moveout exhibits an increasing arrival time, there are also patterns where arrival times are not increasing monotonically, which does not happen when choosing stations that are all in a same line. This is typical of an apparent anisotropy.

258

#### • Robustness of the Inversion

259

260

261

262

In order to check the robustness of our inversion procedure with regard to these uncertainties, we performed 30 successive inversions of the same source (jump near the northernmost geophone) at two different dates on 1 and 26 March 2019. Each inversion was performed with a different set of geophones that were randomly selected amongst the 247 available. The

263 results of the inversions are given in table 1 when using 3 and 5 stations for the inversions.  
 264 These results show that the method is very robust to the apparent anisotropy, with accurate lo-  
 265 cation of the sources, and thickness estimates with a standard deviation of less than 6.5 cm.  
 266 It is also noteworthy that when using 3 stations, we identified two cases where the position  
 267 of the source was less constrained. This occurred in cases where the three stations were close  
 268 one another (less than 15 m away), thus creating artificial far field conditions which prevent  
 269 the azimuthal direction to be constrained. Such configurations were not encountered with 5  
 270 stations.

271 **Table 1.** Results of the 30 inversions of the active source near the northmost geophone (125 m away from  
 272 center of main array)

date	1 March 2019	1 March 2019	26 March 2019	26 March 2019
number of stations for inversion	5 stations	3 stations	5 stations	3 stations
average error on source position	4.6 m	5.2 m	6.5 m	6.3 m
ice thickness estimation	$50 \pm 3$ cm	$52 \pm 4.5$ cm	$67 \pm 6.5$ cm	$68 \pm 6.6$ cm

275

• **Stability of the Inversion**

276

277

278

279

280

281

282


283

284

285

286

Next, we also check the stability of the thickness estimations when applied to sources located nearby each other. To this end, once again the four sources at each linear array are used on both dates. Inversions are performed with 3 or 5 stations (figure 5). When using 5 stations, sources to the north, east, south and west are located very accurately, as shown in figure 5a. At both dates, the ice thickness estimates are all within a 4 cm range for each of the four source areas (figure 5b). When using 3 stations, results have comparable source location accuracies. In terms of ice thickness estimation, the values remain within a range of 6 cm, which is slightly larger than with 5 stations, but still very accurate, especially when considering that part of the variability is most likely due to the direction of propagation, and thus to actual spatial variations of thickness. Overall, the inversion can therefore be considered very stable since estimations from sources located in the same area give very similar values.

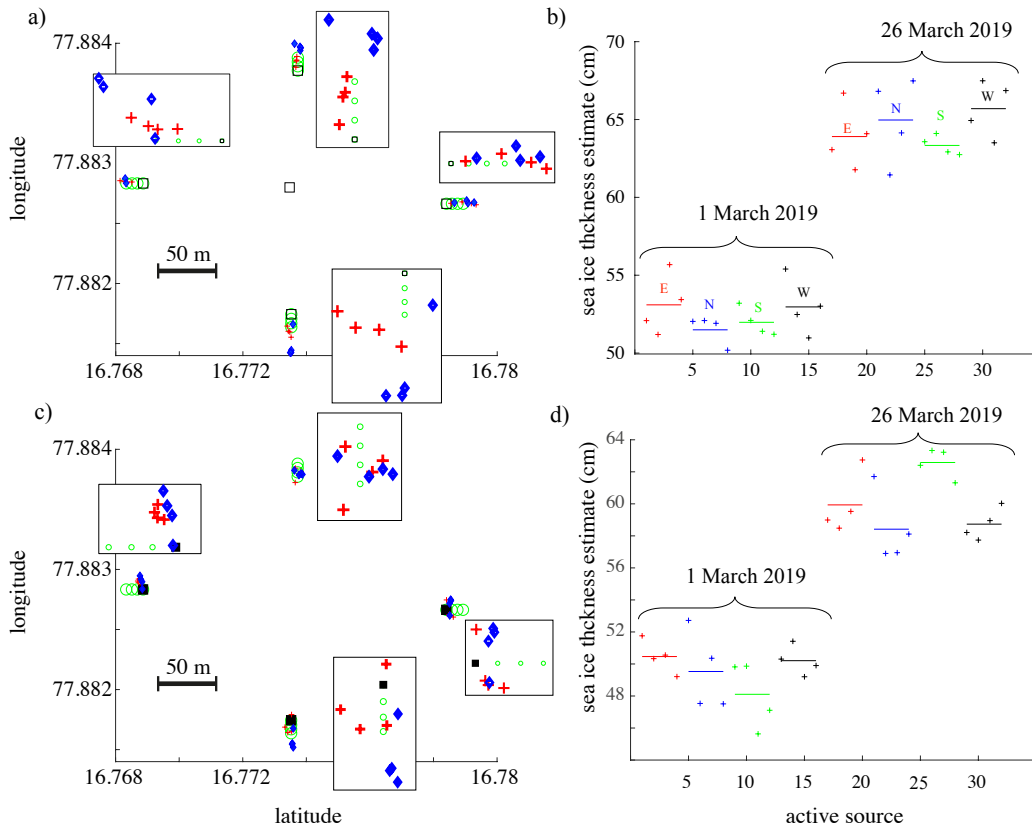

**Figure 5.** (a) Inverted position of all active sources on 1 March (+) and 26 March (◆) 2019. Green circles represent the sources positions and black squares the stations used for the inversions. The four boxes show a zoom of the localized sources near each linear array. (b) Ice thickness estimates from these inversions. (c) and (d) Same as (a) and (b) with 3 stations only

287

288

289

290

291

292


Note the increase of thickness between March 1 and March 26. This was also observed in the field from ice drillings and ground penetrating radar acquisitions, which indicated an increase of 10-15 cm. Moreover, the thickness estimates are consistent with the values found when applying the method introduced in Moreau et al (2020). This method is based on a simultaneous inversion of the frequency-wavenumber spectrum of the  $QS$ ,  $QS_0$  and  $SH_0$  modes. This gave  $h = 54$  cm with a standard deviation of 3 cm on 1 March, and  $h = 74$  cm with a

293 standard deviation of 5 cm on 26 March. The slight differences between the two methods are  
294 due to the fact that, on the one hand, the inversion in Moreau et al (2020) averages thickness  
295 variations along a short line of 50 stations ( $\sim 50$  m) via a spatial Fourier transform. On the  
296 other hand, the present method averages wave propagation on larger propagation paths ( $\sim 250$   
297 m), each with very different directions between the source and the stations.


### 298 *3.1.3 Inversions of Icequakes For Ice Thickness*

299 The main objective is to achieve accurate thickness estimations from passive data only,  
300 so that long-term monitoring is made possible without the need of human intervention in the  
301 field, other than the deployment of the geophones. Therefore, the method is now applied to  
302 icequakes recorded on 5 and 24 March 2019. We attribute these icequakes to the presence of  
303 cracks that were observed in the field all along the shore line of the fjord. They are most likely  
304 produced by the mechanical stress induced by tidal forcing, and they were either closed or par-  
305 tially open, depending on the tidal phase. The waveforms of these icequakes are shown in fig-  
306 ure 6 for three stations,  $S_1$ ,  $S_2$  and  $S_3$  (see figure 7), together with the corresponding synthetic  
307 waveforms resulting from the inversion with these stations. The average misfit after inversion  
308 is of the order of 1% for both icequakes, indicating that the data can be explained remarkably  
309 well with the simple forward model based on 4 parameters only.

310 The results of the inversions are shown in figure 7, when using 5 stations (figure 7a) or  
311 3 stations (figure 7b), both indicating identical locations of the icequakes. The PDF is slightly  
312 more dispersed when only 3 stations are used. This was expected, since the more stations for  
313 the inversion, the better constrained the location parameters. The icequake on March 5 is lo-  
314 cated along the shore to the east of the array, and that on March 24 is located along the shore  
315 to the west of the array. This is consistent with the directions found from linear beamform-  
316 ing of the data using all stations of the main seismic array. This beamforming is shown in fig-  
317 ures 7c and 7d as slowness of the waveforms versus azimuthal direction. Regarding the thick-  
318 ness, on March 5 the estimated value is 55 cm with a standard deviation of 2.5 cm in the PDF  
319 when using 5 stations, and 57 cm with a standard deviation of 3 cm in the PDF when using  
320 3 stations. On March 24, the estimated thickness is 63 cm with a standard deviation of 2.7 cm  
321 in the PDF when using 5 stations, and 65 cm with a standard deviation of 3 cm in the PDF  
322 when using 3 stations. These values are consistent with those found when using active sources,  
323 as well as with estimations from the same icequakes when applying the method introduced  
324 in Moreau et al (2020), based on an inversion of the wavenumbers of the modes.

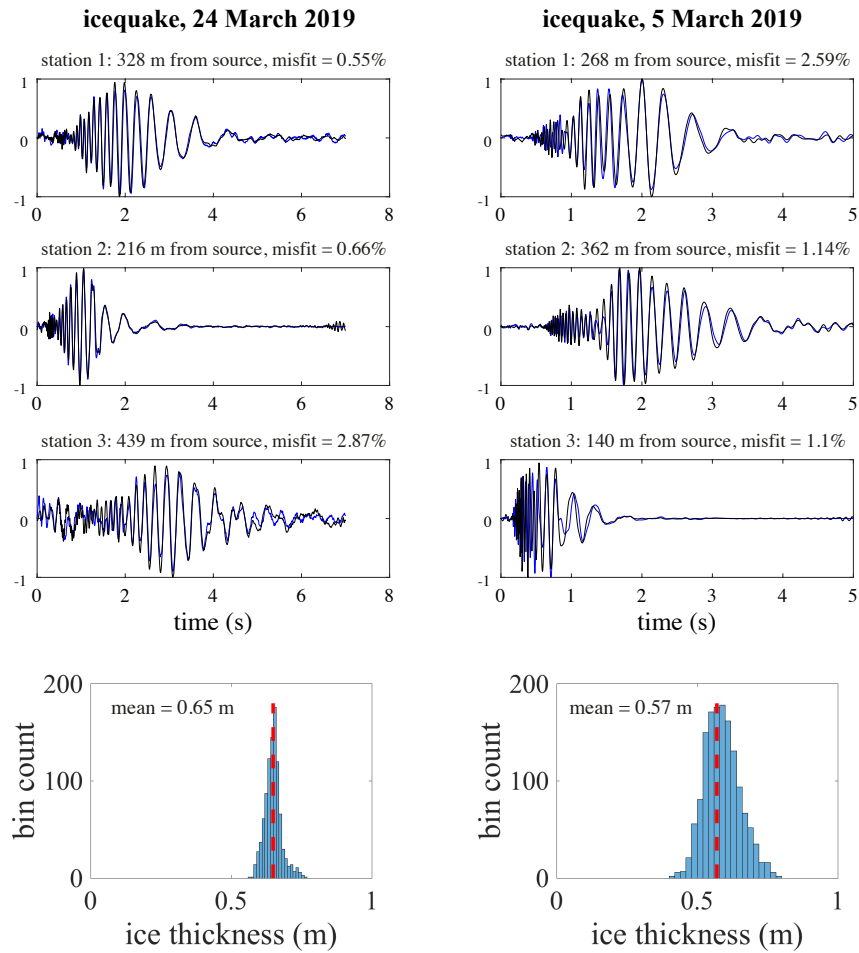

**Figure 6.** Top: waveforms of the icequakes recorded in the Van Mijen fjord (black) and the corresponding synthetic waveforms (blue), resulting from the inversion with 3 stations ( $S_1$ ,  $S_2$  and  $S_3$ : see figure 7). Bottom: PDF of the ice thickness, with the mean value shown as dashed line.

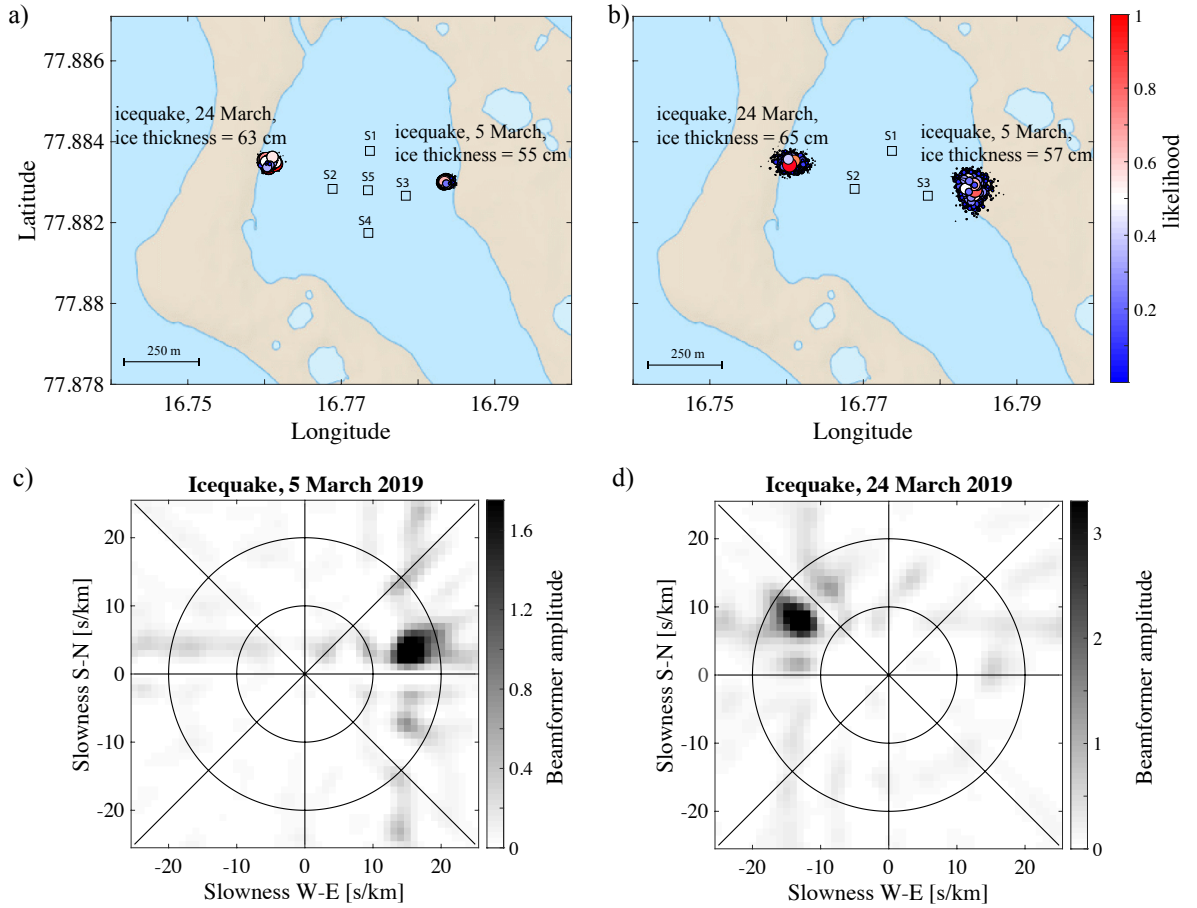

**Figure 7.** Top: Map showing the result of inversions for icequakes recorded at the Van Mijen fjord. The diameter and color of the circles are proportional to the likelihood in the posterior distribution of the parameters. The squares indicate the stations used for the inversions. Inversion of the icequakes was performed with (a) 5 stations and (b) 3 stations. Stations are labelled  $S_i$ ,  $i = 1, 2, \dots, 5$ . Bottom: Slowness vs azimuth linear beamforming of the icequakes recorded on 5 March (c) and 24 March (d). The beamforming was computed in the 7-9 Hz frequency band, using the 231 stations of the main array. Some slight aliasing is visible.

325

### 3.2 Pack ice within the Arctic ocean

326

327

328

329

330

331

332

333

334

335

336

337

338


The seismic data analyzed in this section were already described in Marsan et al (2011): a seismic network was deployed in April 2007 as part of the measurement campaign at the Tara drifting station operating in the framework of the DAMOCLES (Developing Arctic Modeling and Observing Capabilities for Long-term Environmental Studies) project (Gascard et al, 2008). Figure 8a shows a part of this network made of four seismic antennae labelled Tromso, Paris, Tartu and Helsinki. Each antenna contains four short-period (1 Hz) vertical seismometers and one broadband Guralp CMG-3ESPC seismometers, installed in a diamond-shaped geometry with the triaxial seismometer in the centre. Figure 8b shows an approximate map of the situation in the field, with many leads around the four antennae, as well as the ice drilling and electromagnetic sounding positions relative to the antennae. The corresponding thickness profile between antennae Tromso and Tartu are shown in figure 8c, together with an histogram of thickness values (figure 8d), which indicates that the average thickness of the level ice is about 2 m.

339

340

341

For our analyses, we use one hour of continuous recordings on 1 May 2007 between 0:00 and 1:00, at antenna Helsinki (figures 8a and 8b). One of these recordings is shown in figure 9a, with a zoom between 0:30:30 and 0:36:00 (figure 9b) and the corresponding spectrogram

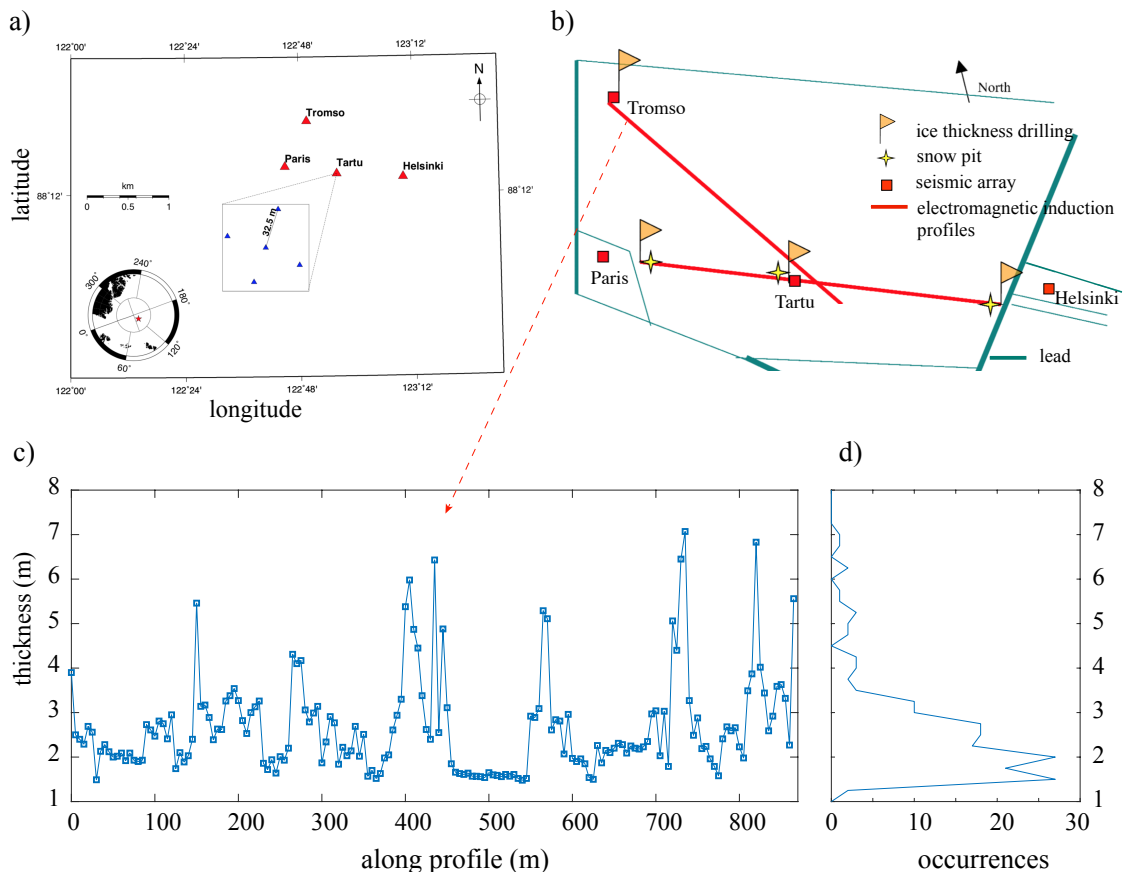

**Figure 8.** (a) Sketch of four the seismic antennae Tromso, Paris, Tartu and Helsinki, installed at the Tara ice station. The inset shows the geometry of one array, with typical inter-sensor distance. (b) Approximate map showing the situation in the field, with the position of the antennae relative to the leads, as reported by the Tara's onboard crew. (c) Ice thickness profile from drilled holes and electromagnetic induction between stations Tromso and Tartu. (d) Histogram of the thickness values.



342 (figure 9c). Hundreds of icequakes with energy up to 25 Hz are visible. In order to satisfy the  
 343 validity criterion of the forward model, signals are low-pass filtered under 10 Hz. This allows  
 344 thicknesses up to  $\sim 5$  m to be tested while keeping frequency-thickness values under the up-  
 345 per limit of 50 Hz-m.

### 346 **3.2.1 Elastic Properties of the Ice**

347 Because only one station of the Helsinki antenna is a 3C instrument, the method used  
 348 in section 3.1 to evaluate Young's modulus and Poisson's ratio from noise interferometry is  
 349 not possible here. We tried to exploit the horizontal channels of this station by including, in  
 350 the cost function, the arrival times of the  $QS_0$  and  $SH_0$  modes. This would allow the veloc-  
 351 ity of the modes to be evaluated, based on the propagation time and the distance from the source,  
 352 which could be used in turn for a joint inversion of ice thickness and elastic properties. How-  
 353 ever, this approach was not conclusive due to poor SNR in the data, which prevented the ar-  
 354 rival times of these modes to be picked accurately. A potential solution consists in looking for  
 355 icequakes originating from identical sources (also known as repeaters), via template match-  
 356 ing methods. Stacking those waveforms could help tackle the SNR issue. However, the goal  
 357 here is to demonstrate the potential of the inversion method when applied to a dataset acquired  
 358 with the appropriate instruments, and there is no doubt that the elastic properties of the ice  
 359 could be determined from the NCF, for example if the same geophones as those used on land-  
 360 fast ice had been used too. Hence, such ad hoc solutions are not investigated further here, since  
 361 they are out of the scope of this paper.


362 For thick pack ice, reports in the literature give Young's moduli that vary between 6.1  
 363 GPa and 8.6 GPa, while values for Poisson's ratio are more conservative around  $\nu = 0.33$   
 364 (Hunkins, 1960; Stein et al, 1998). In absence of in situ evaluations of the elastic properties,  
 365 we use  $E = 7.2$  GPa and  $\nu = 0.33$ , following the recommendation in Marsan et al (2012),  
 366 and the density is set to  $900 \text{ kg/m}^3$ . Of course, choosing a different value of Young's mod-  
 367 ulus would change the value of the inferred ice thickness. However, this change would not be  
 368 significant because the ice thickness parameter is much more constrained by the curvature of  
 369 the STFT than it is by Young's modulus. Nonetheless, further investigations are required to  
 370 quantitatively evaluate this sensitivity. This is left for a separate study, as this represents a con-  
 371 siderable amount of inversions and analyses that are out of the scope of this paper.

### 372 **3.2.2 Inversion of Icequakes For Ice Thickness**

373 The vast majority of the recorded icequakes are not resolved in time, as shown in fig-  
 374 ure 9b, where one can see that the waveforms are partly superposed. This prevents a clear  
 375 dispersion to be extracted from the time-frequency spectrum (figure 9c). The waveforms are also  
 376 much noisier than those recorded in the Van Mijen fjord. We suggest that this is due to i) in-  
 377 strumentation issues, because SNR varies significantly between the stations, and to ii) a nois-  
 378 ier environment, as shown in figure 9c where a low-frequency seismic noise with energy be-  
 379 tween 0.5 and 3 Hz is always present. Unfortunately, this is a frequency band where part of  
 380 the useful dispersion information is present as well. This reduces the amount of icequakes suit-  
 381 able for an inversion to less than 1%. Yet, this should not be considered a fundamental prob-  
 382 lem, given the thousands of icequakes that trigger every day. Moreover, the thickness profile  
 383 shown in figure 8c indicates significant local variations between 1.6 m and 7 m, due to de-  
 384 formed ice and pressure ridges (Haas et al, 2011). Such large variations likely modify the seis-  
 385 mic wave propagation and cause scattering. With all the above-mentioned difficulties, this dataset  
 386 represents the main challenge for our proof of concept.

387 To select icequakes suitable for an inversion, the following heuristic criteria were used:

- 388 1. the waveforms are clearly resolved in time and well-separated from those of other ice-  
 389 quakes.

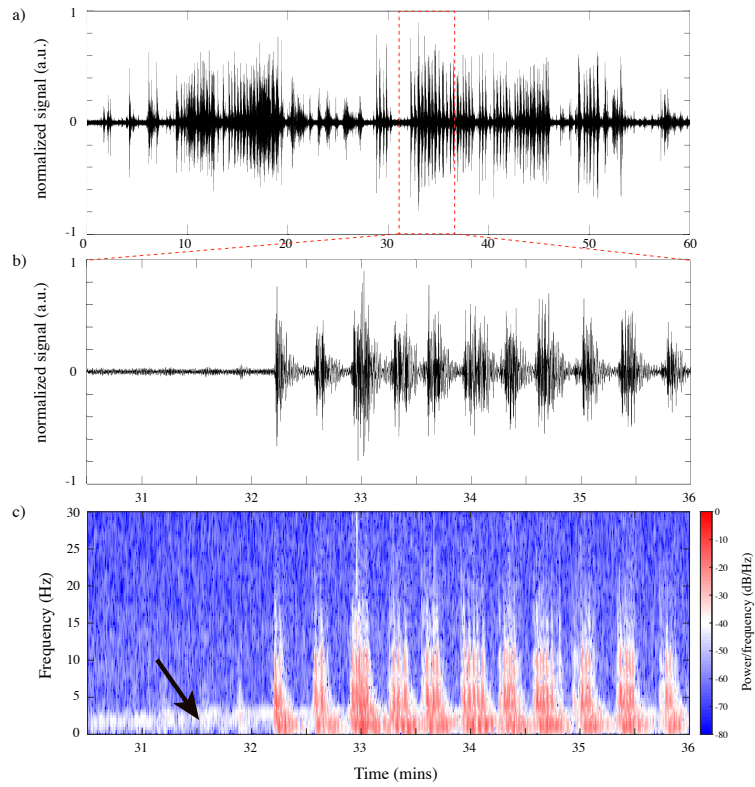

**Figure 9.** (a) One hour of seismic recording at one station of the HELSINKI antenna. (b) Zoom between 0:30:30 and 0:36:00 and (c) the corresponding short-time Fourier transform. The black arrow indicates a systematic seismic noise with energy between 0.5 and 3 Hz.

- 390 2. the SNR in the time-frequency spectrum allows the dispersion to be quantified between  
391 0.5 and 20 Hz.


392 Based on these criteria, three icequakes were selected. The waveforms of two of these  
393 icequakes are shown in figure 10, together with the corresponding synthetic waveforms result-  
394 ing from the inversion with 5 stations. The average misfit after inversion is of the order of 5%  
395 to 10%. This indicates that the data can be explained reasonably well with the forward model.  
396 Figure 11 shows the corresponding inversions, performed with 5 stations (figure 11a) and less  
397 (figure 11b). The posterior distributions are shown in terms of the icequakes position relative  
398 to the array. They all indicate that the icequakes originate from the main lead located to the  
399 west of the array. With 5 stations, the estimated thickness was:

- 400 • 2.02 m for the icequake recorded at 0:02:06 with a standard deviation of 33 cm in the  
401 PDF;
- 402 • 2.06 m for the icequake recorded at 0:02:19 with a standard deviation of 32 cm in the  
403 PDF;
- 404 • 2.04 m for the icequake recorded at 0:28:47 with a standard deviation of 35 cm in the  
405 PDF. Note the non-gaussian shape of the PDF. This suggests a local minimum, in the  
406 cost function, that is associated to a thickness with relatively high likelihood around 2.5  
407 m.


408 And with less than 5 stations:

- 409 • the inversion for the icequake recorded at 0:02:06 was not conclusive;
- 410 • 2.08 m for the icequake recorded at 0:02:19 with a standard deviation of 37 cm in the  
411 PDF, with 4 stations;
- 412 • 2.03 m for the icequake recorded at 0:28:47 with a standard deviation of 39 cm in the  
413 PDF, with 3 stations, although the icequake was not located exactly at the same posi-  
414 tion as when using 5 stations. Moreover, the PDF of the position parameters exhibits  
415 a wider spread. This is most likely a consequence of poor SNR combined with fewer  
416 stations used for the inversion.

417 In absence of thickness measurements around the array, we cannot give a definitive an-  
418 swer regarding the accuracy of these estimates. However, they are consistent with the mea-  
419 surements shown in figures 9b 9c which indicate an average thickness of  $\sim 2$ m for the level  
420 ice, west of the main lead. These results are very encouraging, since we demonstrate that, de-  
421 spite poor SNR and significant local thickness variations that scatter wave propagation, ice-  
422 quakes can be located and ice thickness inferred with very good confidence. The standard de-  
423 viation in the PDF are of the order of 30 cm, which indicates that the confidence in the so-  
424 lution is not as good as for the estimations from the previous dataset. This is a consequence  
425 of the larger misfit value ( $\sim 5$ -10% instead of  $\sim 1$ %). We are confident that this misfit could  
426 be reduced by i) using instruments of the latest generation (for example those used on land-  
427 fast ice), and ii) using a forward model able to account for the local variations in ice prop-  
428 erties, such as a finite element model, but at the cost of significantly increased computational  
429 resources. However, we suggest that the actual standard deviation of the ice thickness estima-  
430 tion is much less than that in the PDF, since all inferred values remain within a 6 cm margin.

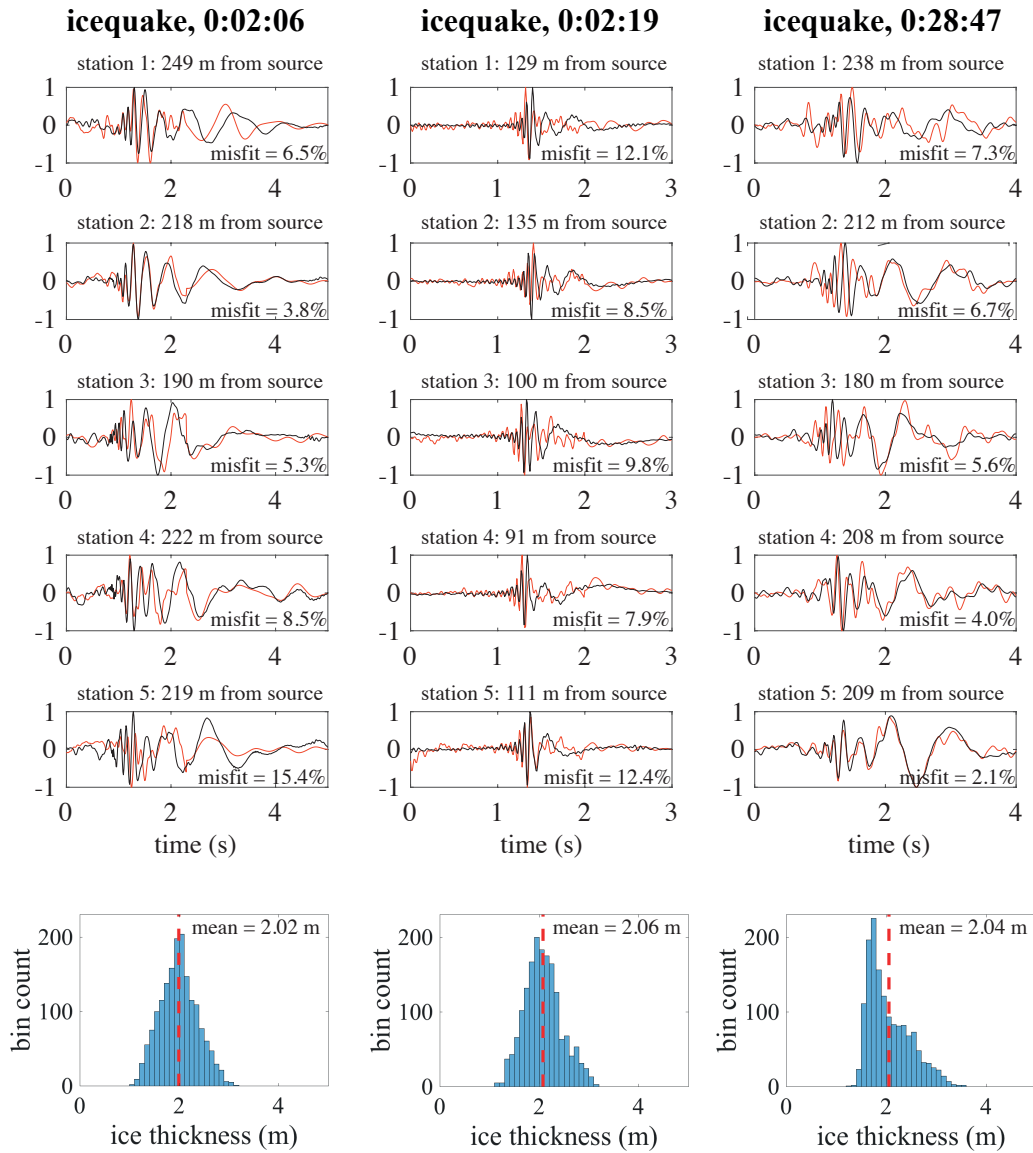

**Figure 10.** Top: Waveforms of the icequakes recorded on pack ice (black) and the corresponding synthetic waveforms (red), resulting from the inversion with 5 stations. Bottom: PDF of the ice thickness, with the mean value shown as dashed line.

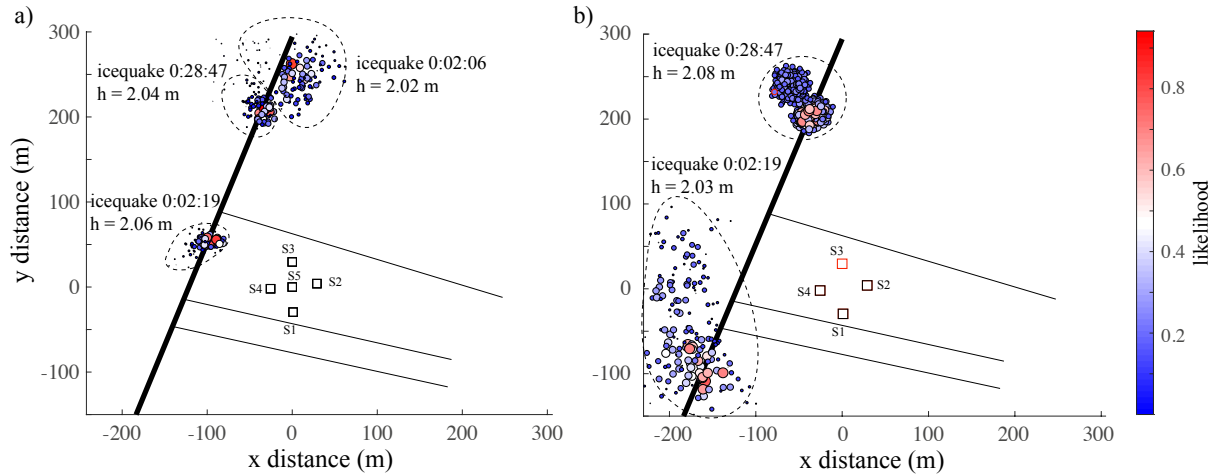

**Figure 11.** Map showing the result of inversions for icequakes recorded on drifting sea ice at the Helsinki antenna. The diameter and color of the circles are proportional to the likelihood in the posterior distribution of the parameters. The squares indicate the stations used for the inversions. Solid lines show the approximative position of the leads relative to the stations. (a) Inversion of three icequakes with 5 stations. (b) Inversion of the icequake at i) 0:02:19 with 3 stations (black squares), and ii) 0:28:47 with 4 stations (black and red squares). The black dashed curves delimit the PDF of the icequakes position. The dashed curves separate the PDF of icequakes position.

431

#### 4 Concluding Remarks

432

433

434

435

436

437

438

439

440

441

442

443

A method was introduced to estimate the elastic properties of sea ice from seismic noise interferometry, as well as the ice thickness from the time-frequency dispersion of the flexural wave. This approach only requires passive recordings of seismic noise on 3 to 5 triaxial seismic stations (depending on SNR), to provide accurate and robust estimations of sea ice properties, while simultaneously relocating the icequakes. In thin landfast ice, we found an ice thickness between  $\sim 55$  cm at the beginning of March and  $\sim 65$  cm at the end of March, with a standard deviation less than 5 cm in the posterior distribution of the thickness parameter. In thick pack ice, we found an ice thickness of  $\sim 2.05$  m and a standard deviation of  $\sim 30$  cm in the PDF, but the values found from all inversions remain within a 6 cm interval, which suggests that the actual standard deviation is significantly less. All thickness estimations are consistent with measures made directly in the field (ice drillings, electromagnetic induction, ground penetrating radar).

444

445

446

447

448

449

450

451

452

453

454

455

Our investigations indicate that the proposed monitoring procedure exhibits similar performances when using 3 or 5 geophones, as long as the SNR allows a clear dispersion to be extracted from the waveforms of the icequakes. For example, thickness estimations remain within a 2 cm range in both cases. Of course, in configurations where 5 geophones are used instead of 3, the icequake location is better constrained, and consequently so is the ice thickness. However, the accuracy of the inferred parameters is comparable. Moreover, from the 60 array configurations tested in section 3.1.2, it appears that different array geometries lead to similar results, so long as the stations in the array are not all near one another. In data where SNR is poorer and the extraction of the dispersion is more difficult, using 3 geophones may not always be sufficient for a successful inversion. Hence for optimal monitoring results, we prescribe the deployment of arrays of 4 to 5 geophones per  $1 \text{ km}^2$  areas, where the stations configuration is such that it maximizes spatial coverage.

456 Despite the demonstrated accuracy and robustness of our approach, reducing the mis-  
457 fit between synthetic and field data is essential to reduce the uncertainty in the solution. For  
458 this reason, future works should focus on two main directions. The first one is the improve-  
459 ment of SNR, for example via the automatic selection and denoising of icequake waveforms  
460 for optimal results. To this end, machine learning-based approaches such as clustering or tem-  
461 plate matching, have proved very promising. The second one is the use of efficient forward  
462 models able to account for local variations of ice properties while keeping the computational  
463 cost to an acceptable level.

464 Our estimations of the ice thickness correspond to an average over the propagation paths  
465 between the icequake origin and the seismic stations. It is therefore expected to be applica-  
466 ble at all scales of icequake propagation, that is, any distance up to a few kilometers in the  
467 frequency range of the present study. However, an interesting perspective of this work is the  
468 study of remote rupture sources, potentially hundreds of kilometers away, by investigating wave  
469 propagation at much lower frequency with stations spaced by  $\sim 100$  km. Most of what is known  
470 about sea ice deformation and fracturing comes from large-scale ( $> 10$  km) satellite observa-  
471 tions, such as the RGPS (RADARSAT Geophysical Processor System) dataset (Kwok, 1998)  
472 or from the analysis of Lagrangian trajectories (buoys) (Rampal et al, 2008). Satellite imagery  
473 allows to highlight that large scale deformation is mostly accommodated at the scale of a few  
474 days by linear structures of large dimensions (up to the scale of the basin). These structures  
475 are likely to be brittle (Marsan et al, 2004). The temporal resolution of how the rupture oc-  
476 curs along such long structures is still lacking, but could be analyzed by exploiting similar meth-  
477 ods as exposed here.

478 The use of icequakes presents the advantage of being a completely passive approach, with-  
479 out the need of active sources. Given the very large number recorded every hour ( $>500$  both  
480 in pack ice and landfast ice), one can fairly expect them to originate from a large range of di-  
481 rections and distances around the stations. This would open the way towards exhaustive, time-  
482 dependent thickness tomographies of the ice, similar to the velocity tomographies of the crust.  
483 Moreover, the exploitation of the horizontal channels may pave the way towards simultane-  
484 ous inversions of the ice thickness and elastic properties, potentially with only two stations.  
485 This can be achieved by including, in the cost function, the waveforms of the other two fun-  
486 damental modes ( $SH_0$  and  $QS_0$ ).

487 A complementary perspective of this work is to apply the present method to the noise  
488 correlation function instead of icequakes. As shown in Moreau et al (2020), the correlation  
489 of seismic noise recorded at two stations for a few hours quickly converges towards the im-  
490 pulse response of sea ice between these stations. Since the relative position of the stations is  
491 known from GPS coordinates, the source-receiver station distance would be perfectly constrained,  
492 allowing for an even more accurate inversion of the ice thickness. The noise correlation func-  
493 tion also integrates the contribution of all seismic sources, impulsive or more stationary. It nat-  
494 urally results in more energetic waveforms than those from icequakes, which has potential to  
495 extend the scales at which ice thickness can be inferred.

## Acknowledgments

The metadata of the dataset recorded in Svalbard are available at the following doi: <http://dx.doi.org/10.15778/RESIF.XG2019>. The full dataset (total size = 3.2 Tb) is available upon request to the corresponding author. A subset can be accessed instantly via a direct download link (25 Gb in size for each day). To request this link, please send an e-mail to [resif-dc@ujf-grenoble.fr](mailto:resif-dc@ujf-grenoble.fr) with your affiliation and IP address. This subset contains the continuous recordings of all stations on 1 and 5 March 2019, from which part of the results presented in this paper were obtained (with 3C stations data downsampled at 500 Hz). The dataset recorded on pack ice in the Arctic Ocean (a few Mb in size) is available upon request to the corresponding author.

ISTerre is part of Labex OSUG@2020. This research was funded by the Agence Nationale de la Recherche (ANR, France), and by the Institut Polaire Français Paul-Emile Victor (IPEV).

The authors would like to thank the associate editor and reviewers for the useful and constructive comments.

## References

- Anderson, D. L. (1958), Preliminary results and review of sea ice elasticity and related studies, *Trans. Eng. Inst. Canada* 2:116-122
- Andrieu, C. and E. Moulines (2006) On the ergodicity properties of some adaptive MCMC algorithms, *The Annals of Applied Probability* 16(3), 1462–1505, doi: 10.1214/105051606000000286
- Bochud, N, Q. Vallet, J.G. Minonzio and P. Laugier (2017), Predicting bone strength with ultrasonic guided waves, *Sci Rep* 7, 43628, doi: 10.1038/srep43628
- Gascard, J.-C, H. le Goff, M. Weber, B. Bruemmer, M. Offermann, M. Doble, P. Wadhams, R. Forsberg, S. Hanson, H. Skourup, S. Gerland, M. Nicolaus, J.-P. Metaxian, J. Grangeon, J. Haapala, E. Rinne, C. Haas, A. Wegener, G. Heygster, E. Jakobson, T. Palo, J. Wilkinson, L. Kaleschke, K. Claffey, B. Elder and J. Bottenheim (2008), Exploring Arctic transpolar drift during dramatic sea ice retreat, *Eos*, 89(3): 21–23, doi: 10.1029/2008EO030001
- Hass, C., H. Le Goff, S. Audrain, D. Perovich and J. Haapala (2011), Comparison of seasonal sea-ice thickness change in the Transpolar Drift observed by local ice-mass balance observations and floe-scale EM surveys, *Ann. Glac.* 52:97–102, doi: 10.3189/172756411795931778
- Hunkins, K. (1960), Seismic studies of sea ice, *J. Geophys. Res.* 65(10):3459-3472, doi: 10.1029/JZ065i010p03459.
- Kwok, R., (1998) The RADARSAT Geophysical Processor System. In: Analysis of SAR Data of the Polar Oceans, *Springer, Berlin, Heidelberg*: 235-257, doi: 10.1007/978-3-642-60282-5\_11
- Marsan, D., H. Stern, R. Lindsay and J. Weiss (2004), Scale Dependence and Localization of the Deformation of Arctic Sea Ice, *Phys. Rev. Lett.* 93(17): 178501, doi: 10.1103/PhysRevLett.93.178501
- Marsan, D., J. Weiss, J.-P. Métaxian, J. Grangeon, P.-F. Roux and J. Haapala (2011) Low frequency bursts of horizontally-polarized waves in the Arctic sea-ice cover, *J. Glaciol.* 57(202): 231–237, doi: 10.3189/002214311796405834
- Marsan, D., J. Weiss, E. Larose, and J.-P. Métaxian (2012) Sea-ice thickness measurement based on the dispersion of ice swell, *J. Acoust. Soc. Am.*, 131(1):80–91, doi: 10.1121/1.3662051
- Marsan, D., J. Weiss, L. Moreau, F. Gimbert, M. Doble, E. Larose and J. Grangeon (2019), Characterizing horizontally-polarized shear and infragravity vibrational modes in the Arctic sea ice cover using correlation methods, *J. Acoust. Soc. Am.*, 145(3):1600–1608, doi: 10.1121/1.5094343

- 547 Mitra, M. and S. Gopalakrishnan (2016) Guided wave based structural health monitoring: A  
 548 review *Smart Mater. Struc.*, 14(5):0964–1726, doi: 10.1088/0964-1726/25/5/053001
- 549 Moreau, L., C. Lachaud, R. Théry, M. V. Predoi, D. Marsan, J. Weiss and M. Montagnat  
 550 (2017), Monitoring ice thickness and elastic properties from the measurement of leaky  
 551 guided waves: A laboratory experiment *J. Acoust. Soc. Am.*, 142(5):2873–2880, doi:  
 552 10.1121/1.5009933
- 553 Moreau, L., L. Stehly, P. Boué, Y. Lu, E. Larose, and M. Campillo (2017-b), Improving  
 554 ambient noise correlation functions with an svd-based Wiener filter, *Geophys. J. Int.*,  
 555 211(1):418–426, doi: 10.1093/gji/ggx306
- 556 Moreau, L., P. Boué, A. Serripierri, J. Weiss, D. Hollis, I. Pondaven, B. Vial, S. Garam-  
 557 bois, E. Larose, A. Helmstetter, L. Stehly, G. Hillers, and O. Gilbert (2020), Sea  
 558 ice thickness and elastic properties from the analysis of multimodal guided wave  
 559 propagation measured with a passive seismic array, *J. Geophys. Res.-Oceans*,  
 560 125(4):e2019JC015709, doi: 10.1029/2019JC015709
- 561 Rampal, P., J. Weiss, D. Marsan, R. Lindsay and H. Stern (2008), Scaling properties of sea  
 562 ice deformation from buoy dispersion analyses, *J. Geophys. Res.*, 113: C03002, doi:  
 563 10.1029/2007JC004143.
- 564 Sabra, K.G., P. Gerstoft, P. Roux, W.A. Kuperman and M.C. Fehler (2005), Extracting time-  
 565 domain Green’s function estimates from ambient seismic noise, *Geophys. Res. Lett* 32,  
 566 79–84, doi:10.1029/2004GL021862
- 567 Shapiro, N. M. and M. Campillo (2004), Emergence of broadband Rayleigh waves  
 568 from correlations of the ambient seismic noise, *Geophys. Res. Lett.*, 31:L07614.  
 569 doi:10.1029/2004GL019491
- 570 Stein, P. J., S. E. Euerle, , and J. C. Parinella (1998), Inversion of pack ice elastic wave data  
 571 to obtain ice physical properties, *J. Geophys. Res.* 103(C10):21783-21796
- 572 Tarantola, A. (2005), *Inverse Problem Theory and Methods for Model Parameter Estimation*,  
 573 Society for Industrial and Applied Mathematics, Philadelphia, Pennsylvania.
- 574 Vihma, T., R. Pirazzini, I. Fer, I. A. Renfrew, J. Sedlar, M. Tjernström, C. Lüpkes, T. Nygård,  
 575 D. Notz, J. Weiss, D. Marsan, B. Cheng, G. Birnbaum, S. Gerland, D. Chechin, and  
 576 J. C. Gascard (2014) Advances in understanding and parameterization of small-scale  
 577 physical processes in the marine Arctic climate system: a review, *Atmos. Chem. Phys.*  
 578 14: 9403–9450, doi: 10.5194/acp-14-9403-2014