



**HAL**  
open science

# A discrete-to-continuum approach to frequency bangaps in 1D biatomic metamaterials

L. Placidi, A. Amendola, M. Miniaci, F. Fraternali

► **To cite this version:**

L. Placidi, A. Amendola, M. Miniaci, F. Fraternali. A discrete-to-continuum approach to frequency bangaps in 1D biatomic metamaterials. XI International Conference on Structural Dynamic, EURO-DYN 2020, Nov 2020, Athens, Greece. pp.604-611, 10.47964/1120.9047.21606 . hal-03135964

**HAL Id: hal-03135964**

**<https://hal.science/hal-03135964v1>**

Submitted on 23 Nov 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## A DISCRETE-TO-CONTINUUM APPROACH TO FREQUENCY BANGAPS IN 1D BIATOMIC METAMATERIALS

L. Placidi<sup>1</sup>, A. Amendola<sup>2\*</sup>, M. Miniaci<sup>3</sup> and F. Fraternali<sup>2</sup>

<sup>1</sup>International Telematic University Uninettuno,  
00186 Rome  
Italy  
e-mail: luca.placidi@uninettunouniversity.net

<sup>2</sup> Dept. of Civil Engineering  
University of Salerno  
Salerno, Italy  
e-mail: {adaamendola1, f.fraternali}@unisa.it

<sup>3</sup> CNRS-UMR 8520  
Institute of Electronics, Microelectronics and Nanotechnology  
Lille, FR  
e-mail: marco.miniaci@gmail.com

**Keywords:** Discrete-to-continuum, frequency bandgaps, lattice metamaterials, tensegrity structures.

**Abstract.** *We formulate a discrete-to-continuum approach to the dispersion relation of one-dimensional lattice metamaterials. With reference to a generic lattice structure that can be described as a biatomic mass-spring chain, we formulate a higher order gradient continuum theory of the competent dynamical problem using a homogenization approach. The proposed theory allows us to obtain an analytic description of the bandgap-type response of the homogenized chain, and to estimate the frequency boundary region that is affected by the full transmission of mechanical waves. Numerical applications of the proposed discrete-to-continuum approach are given with reference to tensegrity metamaterials, which exhibit a prestress-tunable bandgap response over a wide range of frequencies.*

## 1 Introduction

Recently, researchers have focused on exploring the bandgap-type response of lattice meta-materials, e.g. [1–4]. These materials are artificial periodic structures with potential variations in density and/or geometry (refer, e.g., to [4], [5], [6] and references therein). They are characterized by unusual mechanical properties. It has been shown that such systems support phononic bandgaps, and have frequency ranges with inhibited wave propagation.

This study refers to mass-spring tensegrity lattices for which it has been demonstrated that the dispersion relation can be tuned by varying the applied internal self-stress induced by prestretching the cables forming the tensegrity units, and/or the global prestress induced by the application of compression forces to the terminal bases [7]. This paper addresses the bandgap-type response of the homogenized chain. Previous homogenization methods have been illustrated for both low and high frequency regimes, e.g. in [8], [9], in [10] and [11]. In contrast to these studies, the present work approaches the problem from the point of view of the theory of mixtures. The sense is that, for thermodynamic reason, the existence of bandgap in elastic continuum materials, at least two kinematical descriptors are necessary. The first is that on which it is evident the attenuation in the prohibited frequency band. The second is that on which the energy is stored. Thus, in a bi-atomic chain the kinematical descriptors correspond to the position of those masses and one side of the stiffer spring and on the same side of the softer spring. It is a matter of facts that if the springs have the same rigidity, no band gap is possible.

In the first part of the paper, we develop a discrete-to-continuum approach to the dispersion relation of 1D periodic arrays, both for monoatomic and biatomic chains. Then, we apply the developed theory to tensegrity metamaterials, and we compare the results with those obtained using the discrete approach [7]. Our key findings are summarized in Sect. 4, where we also propose future research lines for the manufacturing and testing of bandgap metamaterials with tensegrity architecture.

## 2 Discrete-to-continuum models of bandgap systems

The present section studies continuous mathematical models able to describe the behavior of both monoatomic and biatomic systems. It is a matter of facts that a standard continuous model is not sufficient to represent an intrinsically discrete system. The reason is inside the continuous approximation, that is however attenuated by the use of non standard models. In order to provide a well-posed system of Partial Differential Equations for such models, the use of variational procedure is suggested, see e.g. [12]. Thus, an Action functional  $\mathcal{A}$  is defined in terms of kinetic  $\mathcal{K}$ , internal  $\mathcal{U}_{int}$  and external  $\mathcal{U}_{ext}$  energies,

$$\mathcal{A} = \int_{t_1}^{t_2} \mathcal{K} - \mathcal{U}_{int} + \mathcal{U}_{ext}, \quad (1)$$

where  $t_1$  and  $t_2$  are two instants of time and where the action  $\mathcal{A}$  is a functional of the fundamental kinematical fields of the continuum. We will see in Subsection 2.1 that for the continuous model of monoatomic chain we need only a single placement field  $\chi$  and in Subsection 2.2 that for the continuous model of biatomic chain we need two placement fields  $\chi_1$  and  $\chi_2$ . For the sake of simplicity, we consider for both cases a one dimensional continuous body of length  $L$  and an abscissa  $X$ , in the straight reference configuration, such that  $X \in [0, L]$ .

Once the set of kinematical fields and their admissible variation have been defined, the equation of motion are achieved by imposing that the variation of the action, among all the admissible variation of the kinematical fields, is null, i.e.,  $\delta\mathcal{A} = 0$

## 2.1 Monoatomic systems

Kinetic energy of the microstructural continuum representing the monoatomic chain contains not only the standard contribution in terms of the mass density  $\rho$  but also a non standard one in terms of the microinertia  $\eta$ ,

$$\mathcal{K} = \int_0^L \frac{1}{2} \rho \dot{\chi}^2 + \frac{1}{2} \eta \dot{\chi}'^2, \quad (2)$$

where dot  $\dot{a}$  and prime  $a'$  represents, respectively, the derivatives with respect to time  $t$  and position  $X$ .

Analogously, the internal energy contains not only the standard contribution in terms of the strain  $\epsilon = u'$  but also in terms of the strain gradient  $\epsilon' = u''$ , where  $u = \chi - X$  is the displacement field,

$$\mathcal{U}_{int} = \int_0^L \frac{1}{2} k_{el1} u'^2 + \frac{1}{2} k_{el2} u''^2, \quad (3)$$

and where  $k_{el1}$  is the standard axial stiffness and  $k_{el2}$  is the non-standard strain gradient axial stiffness.

The definition of an external energy should provide the necessary ingredients for solving boundary value problems. For the sake of simplicity, here we assume no external energy, i.e.  $\mathcal{U}_{ext} = 0$ .

Both standard arguments for the derivation of the variation of the action and imposing that its variation among all the admissible variation  $\delta\chi$  of the fundamental kinematical field  $\chi$  is null, i.e.  $\delta\mathcal{A} = 0$ , yields the Partial Differential Equation of the problem,

$$\rho \ddot{u} - \eta \ddot{u}'' = k_{el1} u'' - k_{el2} u'''' . \quad (4)$$

By assuming a plane wave solution for the displacement field  $u$  in terms of the real part (i.e.  $Re$ ) of complex exponential form,

$$u = Re (u_0 \exp i (\omega t - kX)), \quad (5)$$

where  $u_0$ ,  $\omega$  and  $k$  are, respectively, the complex amplitude, the angular frequency and the wave number, we obtain the following dispersion relation

$$\omega = \omega_c(k) = k \sqrt{\frac{k_{el1} + k_{el2} k^2}{\rho + \eta k^2}}, \quad (6)$$

where the function  $\omega_c(k)$  has been introduced for the present continuous system. A comparison between the dispersion relations for discrete [7] and for continuous (18) systems can be done only for large wave length  $\lambda = 2\pi/k$ , that means for small wave number  $k$ . Thus, it is reasonable to perform a Taylor's series expansion of both functions  $\omega_d(k)$  and  $\omega_c(k)$ ,

$$\omega_d(k) = ka \sqrt{\frac{K_{el}}{M}} \left( 1 - \frac{(ka)^2}{24} \right) + o(k^3). \quad (7)$$

$$\omega_c(k) = k \sqrt{\frac{k_{el1}}{\rho}} + k^3 \sqrt{\frac{k_{el1}}{\rho}} \frac{k_{el1} \eta - k_{el2} \rho}{2k_{el1} \rho} + o(k^3), \quad (8)$$

An identification of the two dispersion relations (7) and (8) yields

$$\rho = \frac{M}{a}, \quad k_{el1} = aK_{el}, \quad \eta = \rho \left( \frac{a^2}{12} + \frac{k_{el2}}{k_{el1}} \right) = \frac{M}{a} \left( \frac{a^2}{12} + \frac{k_{el2}}{aK_{el}} \right) \quad (9)$$

Eqns. (27)<sub>1</sub> and (27)<sub>2</sub> are the standard and intuitive identifications of both continuous mass density  $\rho$  and standard axial rigidity  $k_{el1}$  in term of the constitutive parameters of the discrete model  $M$ ,  $K_{el}$  and  $a$ . Eq. (27)<sub>3</sub> gives a relation between the two strain gradient parameters  $\eta$  and  $k_{el2}$ . It is worth to be noted that the identification of null microinertia  $\eta = 0$  is forbidden by the thermodynamic assumption  $k_{el2} \geq 0$ , that is implied by positive definiteness of the internal energy (3).

## 2.2 Biatomic systems

We now examine a continuous model for biatomic chains. As we have already pointed out, the fundamental kinematical fields of the continuum model of biatomic systems are the two placements  $\chi_1$  and  $\chi_2$ .

Kinetic energy of such a continuum is not only the standard contribution in terms of a quadratic form of the two velocity fields  $\dot{\chi}_1$  and  $\dot{\chi}_2$  but also a non standard one in terms of a quadratic form of the two velocity gradient fields  $\dot{\chi}'_1$  and  $\dot{\chi}'_2$ ,

$$\mathcal{K} = \int_0^L \frac{1}{2} \begin{pmatrix} \dot{\chi}_1 & \dot{\chi}_2 \end{pmatrix} A \begin{pmatrix} \dot{\chi}_1 \\ \dot{\chi}_2 \end{pmatrix} + \frac{1}{2} \begin{pmatrix} \dot{\chi}'_1 & \dot{\chi}'_2 \end{pmatrix} B \begin{pmatrix} \dot{\chi}'_1 \\ \dot{\chi}'_2 \end{pmatrix}, \quad (10)$$

where the two matrixes  $A$  and  $B$ ,

$$A = \begin{pmatrix} \rho_1 & \rho_{12} \\ \rho_{12} & \rho_2 \end{pmatrix}, \quad B = \begin{pmatrix} \eta_1 & \eta_{12} \\ \eta_{12} & \eta_2 \end{pmatrix}, \quad (11)$$

are positive defined.

Analogously, the internal energy contains not only the standard contribution in terms of a quadratic form of the two axial strains  $\epsilon_1 = u'_1$  and  $\epsilon_2 = u'_2$  but also in terms of the two axial strain gradient  $\epsilon'_1 = u''_1$  and  $\epsilon'_2 = u''_2$ , where the two displacements  $u_1 = \chi_1 - X$  and  $u_2 = \chi_2 - X$  are defined. Besides, a contribution in terms of the square of the difference between the two displacements  $u_1$  and  $u_2$  is objective and is conceived as follows,

$$\mathcal{U}_{int} = \int_0^L \frac{1}{2} k_{el0} (u_1 - u_2)^2 + \frac{1}{2} \begin{pmatrix} u'_1 & u'_2 \end{pmatrix} C \begin{pmatrix} u'_1 \\ u'_2 \end{pmatrix} + \frac{1}{2} \begin{pmatrix} u''_1 & u''_2 \end{pmatrix} D \begin{pmatrix} u''_1 \\ u''_2 \end{pmatrix}, \quad (12)$$

where the two matrixes  $C$  and  $D$ ,

$$C = \begin{pmatrix} k_{el1} & k_{el12} \\ k_{el12} & k_{el2} \end{pmatrix}, \quad D = \begin{pmatrix} k_{2el1} & k_{2el12} \\ k_{2el12} & k_{2el2} \end{pmatrix}, \quad (13)$$

are positive defined. For the sake of simplicity we assume  $D = 0$ . Besides, we assume no external energy, i.e.  $\mathcal{U}_{ext} = 0$ .

Both standard arguments for the derivation of the variation of the action and imposing that its variation among all the admissible variation  $\delta\chi_1$  and  $\delta\chi_2$  of the fundamental kinematical fields  $\chi_1$  and  $\chi_2$  are null, i.e.  $\delta\mathcal{A} = 0$ , yields the following system of Partial Differential Equations of the problem,

$$\rho_1 \ddot{u}_1 + \rho_{12} \ddot{u}_2 - \eta_1 \ddot{u}'_1 - \eta_{12} \ddot{u}'_2 = k_{el1} u''_1 + k_{el12} u''_2 - k_{el0} (u_1 - u_2) = 0 \quad (14)$$

$$\rho_2 \ddot{u}_2 + \rho_{12} \ddot{u}_1 - \eta_2 \ddot{u}'_2 - \eta_{12} \ddot{u}'_1 = k_{el2} u''_2 + k_{el12} u''_1 + k_{el0} (u_1 - u_2) = 0 \quad (15)$$

By assuming plane wave solutions for the displacement fields  $u_1$  and  $u_2$  in terms of the real part of complex exponential form,

$$u_1 = Re(u_{10} \exp i(\omega t - kX)), \quad u_2 = Re(u_{20} \exp i(\omega t - kX)), \quad (16)$$

where  $u_{10}$  and  $u_{20}$  are the complex amplitudes, we obtain the following dispersion relation

$$\det \begin{pmatrix} \rho_1 \omega^2 + \eta_1 k^2 \omega^2 - k_{el1} k^2 - k_{el0} & \rho_{12} \omega^2 + \eta_{12} k^2 \omega^2 - k_{el12} k^2 + k_{el0} \\ \rho_{12} \omega^2 + \eta_{12} k^2 \omega^2 - k_{el12} k^2 + k_{el0} & \rho_2 \omega^2 + \eta_2 k^2 \omega^2 - k_{el2} k^2 - k_{el0} \end{pmatrix} = 0, \quad (17)$$

that in the explicit form is

$$\omega = \omega_{cc}(k) = \frac{E(k) \pm \sqrt{E(k)^2 - 4F(k)}}{2G(k)}, \quad (18)$$

where

$$E(k) = k^4 (k_{el1} \eta_2 + k_{el2} \eta_1 - 2k_{el12} \eta_{12}) + \quad (19)$$

$$k^2 (k_{el1} \rho_2 + k_{el2} \rho_1 - 2k_{el12} \rho_{12} + k_{el0} (\eta_1 + \eta_2 + 2\eta_{12})) + k_{el0} (\rho_1 + \rho_2 + 2\rho_{12})$$

$$F(k) = k^2 (k_{el0} (k_{el1} + k_{el2} + 2k_{el12}) + k^2 (k_{el1} k_{el2} - k_{el12}^2)) G(k) \quad (20)$$

$$G(k) = k^4 (\eta_1 \eta_2 - \eta_{12}^2) + k^2 (\rho_1 \eta_2 + \rho_2 \eta_1 - 2\eta_{12} \rho_{12}) + \rho_1 \rho_2 - \rho_{12}^2 \quad (21)$$

and the function  $\omega_{cc}(k)$  has been introduced for the present continuous system. A comparison between the dispersion relations for discrete and for continuous systems can be done only for large wave length  $\lambda = 2\pi/k$ , that means for small wave number  $k$ . Thus, it is reasonable to perform a Taylor's series expansion of both functions  $\omega_{dd}(k)$  and  $\omega_{cc}(k)$ , that we perform with the assumption

$$\rho_1 = \rho, \quad \rho_2 = \rho, \quad \eta_1 = \eta, \quad \eta_2 = \eta, \quad (22)$$

that yields,

$$\omega_{dd1}(k)^2 = (ka)^2 \frac{K_1 K_2}{2M(K_1 + K_2)} \quad (23)$$

$$\omega_{dd2}(k)^2 = 2 \frac{K_1 + K_2}{M} - (ka)^2 \frac{K_1 K_2}{2M(K_1 + K_2)} \quad (24)$$

$$\omega_{cc1}(k)^2 = k^2 \frac{k_{el1} + k_{el2} + 2k_{el12}}{2(\rho + \rho_{12})}, \quad (25)$$

$$\omega_{cc2}(k)^2 = 2 \frac{k_{el0}}{\rho - \rho_{12}} + k^2 \left[ \frac{k_{el1} + k_{el2} - 2k_{el12}}{2(\rho - \rho_{12})} - 2 \frac{k_{el0}(\eta - \eta_{12})}{(\rho - \rho_{12})^2} \right] \quad (26)$$

An identification of the four dispersion relations (23), (24), (25) and (26) yields

$$\rho = \frac{M}{a}, \quad k_{el0} = \frac{K_1 + K_2}{a}, \quad k_{el1} + k_{el2} = a \frac{K_1 K_2}{K_1 + K_2}, \quad \eta = \frac{Ma K_1 K_2}{2(K_1 + K_2)^2} \quad (27)$$

with the assumption

$$\rho_{12} = \eta_{12} = k_{el12} = 0 \quad (28)$$

### 3 Numerical results

We shall now apply the theory outlined above to a biatomic tensegrity chain modeled as a mass-spring chain and featuring linear springs with two alternating stiffness constants  $K_1$  and  $K_2$  (where  $K_1 < K_2$ ) [7]. This section includes a numerical validation of the approach

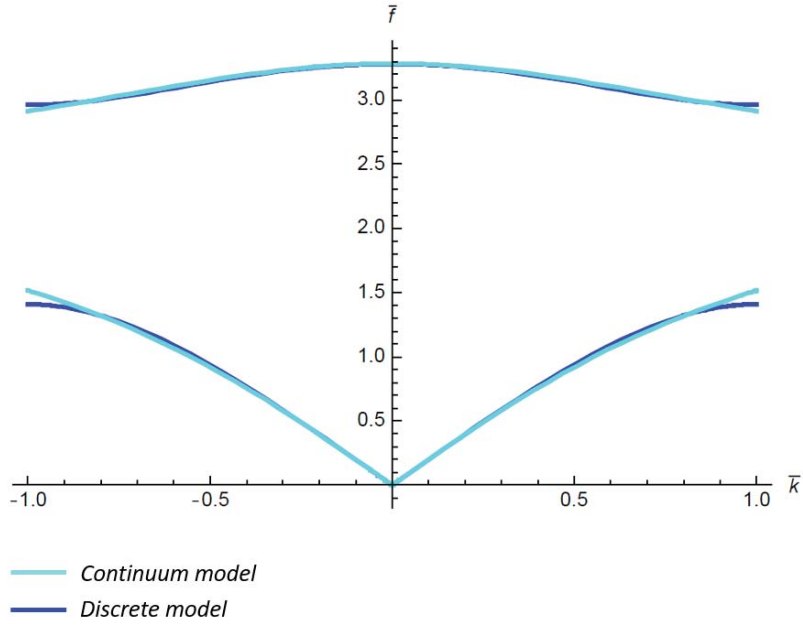


Figure 1: Dispersion relation in the first Brillouin zone for a biatomic chain under  $F_0 = 4.21$  N and  $\bar{p} = 0.00$ , obtained by applying the discrete and continuous models.

presented in Section 2. Our results are compared with those obtained by applying Bloch-Floquet theory to a biatomic tensegrity chain, as illustrated in [7], Subsection 2.2.

We focus on a chain that is uniformly axially loaded with an initial static precompression force  $F_0 = 4.21$  N applied to the terminal bases of the structure. Each unit presents an initial self-stress (internal prestress)  $\bar{p} = 0.00$ .

Fig. 1 compares the dispersion relation of a biatomic tensegrity chain obtained via the discrete model [7] and the continuous model (Section 2), highlighting a good overall agreement between the two approaches.

Here,  $\bar{f}$  denotes the normalized frequency  $\bar{f} = f \sqrt{\frac{M}{K^*}}$  where  $K^*$  is the tangent stiffness of Unit 1 (taken as a reference) in the globally prestressed configuration and  $M$  is the total mass of a unit cell. Meanwhile,  $\bar{k}$  denotes the normalized wavenumber  $\bar{k} = \kappa \pi / a$  where  $a$  is the unit cell size.

It is worth noticing that the identification of the constitutive parameters of the continuum model in (27-28) has been done assuming small values of the wave number  $\kappa$  and therefore for large wave length  $\lambda = 2\pi/\kappa$ . Thus, from one hand this is the range in which the continuum approximation is possible and the comparison that is done in Fig. 1 is reliable. From the other hand, an investigation in other ranges of wave length for the continuum model still need to be done.

#### 4 Concluding remarks

In this paper, we have analyzed the frequency band structure of a 1D monoatomic and biatomic mass-spring chain. The study led us to formulate a continuum model for these structures based on a higher order gradient continuum theory. In contrast to standard continuous models, this theory allows us to efficiently describe intrinsic discrete systems.

A numerical application of the proposed discrete-to-continuum approach has been presented with reference to tensegrity metamaterials, which exhibit a prestress-tunable bandgap response

over a wide range of frequencies while the material properties of the unit cells remain unchanged. A comparison was made between the dispersion relations for discrete and continuous systems in order to validate the mathematical homogenization theory presented.

Possible engineering applications of tensegrity metamaterials may include bandgap systems [13, 14], waveguiding [15, 16], impact protection gear [6, 17], and/or acoustic lenses [18, 19].

This study paves the way for a number of relevant extensions and generalizations that we will address in future work. These may include, for example, the 3D printing [20] and experimental dynamic analysis of tensegrity metamaterial structures at different scales.

### Acknowledgements

FF acknowledges financial support from the Italian Ministry of Education, University and Research (MIUR) under the P.R.I.N. 2017 National Grant ‘Multiscale Innovative Materials and Structures’ (Project Code 2017J4EAYB).

### References

#### REFERENCES

- [1] Lu, M.H., Feng, L., Chen, Y.F., 2009. Phononic crystals and acoustic metamaterials. *Mater. Today* 12, 34-42.
- [2] Maldovan, M., 2013. Sound and heat revolution in phononics. *Nature* 503, 209-217.
- [3] Theocharis, G., Boehler, N., and Daraio C., 2013. Nonlinear phononic structures and metamaterials. P.A. Deymier (ed.) *Acoustic Matematerials and Phononic Crystals*. Springer Series in Solid State Sciences. 173, 217-251. doi: 10.1007/978-3-642-31232-8 7.
- [4] Phani, A.S., Hussein, M.I., (eds) 2017. *Dynamics of Lattice Materials*, John Wiley & Sons, Ltd, Chichester, UK.
- [5] Fraternali, F., Senatore, L., Daraio, C., 2012. Solitary waves on tensegrity lattices. *J. Mech. Phys. Solids*. 60, 1137-1144. doi: 10.1016/j.jmps.2012.02.007.
- [6] Fraternali, F., Carpentieri, G., Amendola, A., Skelton, R.E., Nesterenko, V.F., 2014. Multi-scale tunability of solitary wave dynamics in tensegrity metamaterials. *Appl. Phys. Lett.* 105, 201903. doi: 10.1063/1.4902071.
- [7] Amendola, A., Krushynska A., Daraio C., Pugno N.M., Fraternali F., 2018. Tuning frequency band gaps of tensegrity metamaterials with local and global prestress, *Int. J. Solids Struct.*, 155, 47–56.
- [8] Modeling phononic crystals via the weighted relaxed micromorphic model with free and gradient micro-inertia A Madeo, M Collet, M Miniaci, K Billon, M Ouisse, P Neff *Journal of Elasticity* 130 (1), 59-83 (2018)
- [9] Comi, C., Marigo, J.J., 2020. Homogenization approach and Bloch-Floquet theory for band-gap prediction in 2D locally resonant metamaterials, *Jù. Elast.* 139, 61–90.
- [10] El Sherbiny, M.G., Placidi, L., 2018. Discrete and continuous aspects of some metamaterial elastic structures with band gaps *Arch. Appl. Mech.* 88:1725–1742.



- [11] High-frequency homogenization for periodic media, R. V. Craster, J. Kaplunov and A. V. Pichugin, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 466, 2120, 2010
- [12] Dell’Isola, Francesco, and Luca Placidi. ”Variational principles are a powerful tool also for formulating field theories.” *Variational models and methods in solid and fluid mechanics*. Springer, Vienna, 2011. 1-15.
- [13] Theocharis, G., Boechler, N., Daraio, C., 2013. Nonlinear phononic structures and metamaterials, in P.A. Deymier (ed.) *Acoustic Metamaterials and Phononic Crystals*, Springer Series in Solid State Sciences, 173, Springer-Verlag, Berlin-Heidelberg, Germany.
- [14] Herbold, E. B., Kim, J. , Nesterenko, V. F., Wang, S. Y., Daraio, C., 2009. Pulse propagation in a linear and nonlinear biatomic periodic chain: effects of acoustic frequency band-gap. *Acta Mech* 205, 85-103. DOI 10.1007/s00707-009-0163-6.
- [15] Ruzzene, M., Scarpa, F., 2005. Directional and band gap behavior of periodic auxetic lattices. *Phys. Status Solidi B* 242(3), 665-680.
- [16] Casadei, F., Rimoli, J. J., 2013. Anisotropy-induced broadband stress wave steering in periodic lattices. *Int. J. Solids Struct.* 50(9), 1402-1414.
- [17] Fraternali, F., Porter, M., Daraio, C., 2010. Optimal design of composite granular protectors. *Mech. Adv. Mat. Struct.* 17. 1-19.
- [18] Spadoni, A., Daraio, C., 2010. Generation and control of sound bullets with a nonlinear acoustic lens. *Proc. Natl. Acad. Sci. U.S.A.* 107(16), 7230-7234. doi: 10.1073/pnas.1001514107.
- [19] Donahue, C., Anzel, P.W.J., Bonanomi, L., Keller, T.A., Daraio, C., 2014. Experimental realization of a nonlinear acoustic lens with a tunable focus. *Appl. Phys. Lett.* 104, 014103. doi: 10.1063/1.4857635.
- [20] Amendola A., Hernández-Nava E., Goodall R., Todd I., Skelton R.E., Fraternali, F. (2015). On the additive manufacturing, post-tensioning and testing of bi-material tensegrity structures. *Compos. Struct.*, 131, 66–71.