



**HAL**  
open science

# Environmental performance of shared micromobility and personal alternatives using integrated modal LCA

Anne de Bortoli

► **To cite this version:**

Anne de Bortoli. Environmental performance of shared micromobility and personal alternatives using integrated modal LCA. *Transportation Research Part D: Transport and Environment*, 2021, 93, pp.102743. 10.1016/j.trd.2021.102743 . hal-03154453

**HAL Id: hal-03154453**

**<https://hal.science/hal-03154453v1>**

Submitted on 1 Mar 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## **Environmental performance of shared micromobility and personal alternatives using integrated modal LCA**

Anne de Bortoli<sup>a\*</sup>

<sup>a</sup> *University Paris-East, ENPC/Université Gustave Eiffel, Lab. City Mobility, Transportation, 6-8 Avenue Blaise Pascal, 77420 Champs-sur-Marne, France*

\* *Corresponding author, [anne.de-bortoli@enpc.fr](mailto:anne.de-bortoli@enpc.fr)*

### **Abstract**

The environmental performance of shared micromobility services compared to private alternatives has never been assessed using an integrated modal Life Cycle Assessment (LCA) relying on field data. Such an LCA is conducted on three shared micromobility services in Paris – bikes, second-generation e-scooters, and e-mopeds - and their private alternatives. Global warming potential, primary energy consumption, and the three endpoint damages are calculated. Sensitivity analyses on vehicle lifespan, shipping, servicing distance, and electricity mix are conducted. Electric micromobility ranks between active modes and personal ICE modes. Its impacts are globally driven by vehicle manufacturing. Ownership does not affect directly the environmental performance: the vehicle lifetime mileage does. Assessing the sole carbon footprint leads to biased environmental decision-making, as it is not correlated to the three damages: multicriteria LCA is mandatory to preserve the planet. Finally, a major change of paradigm is needed to eco-design modern transportation policies.

*Keywords:* Environmental performance; Shared mobility; micromobility; Bike; E-scooter; Moped;

# 1. Introduction

## 1.1. Context

With food and buildings, transportation is one of the three key human activity sectors to environment preservation: it accounted for 14% of the global greenhouse gas (GHG) emissions in 2010 [1] on a scope 2 perimeter [2], i.e. excluding the impacts coming from vehicle manufacturing, maintenance and end-of-life as well as those from the infrastructure life cycle. In France, on the same perimeter, transportation accounted for 31% of the GHG emissions in 2019 [3], as well as 55% of the NOx emissions in 2018 [4]. As a strategic sector for planet preservation, transportation is the subject of numerous policy-driven and business-driven changes. Urban mobility systems have been strongly shaken these last fifteen years by new services, but also by specific crises.

Ten years ago in France, most Parisians moved on foot (60% of total trips) or used public transportation (27% of total trips), while cycling represented only 2% of the trips traveled [5]. Within a decade, shared mobility systems have emerged, such as the bike-sharing system Velib', running since 2007 [6], accounting in summer 2019 for around 12 000 bikes and 1300 stations [7]. While the cycling modal share expanded by 30% in the Parisian region between 2010 and 2018 [8], Velib' probably generated a drop in bike ownership: from 270 bikes per thousand of Parisians [5], the personal fleet dropped by 15% according to the first data of the 2018-2020 French mobility survey [8]. After a rapid expansion in the United States (US) [9], e-scooters (ES) have also boomed in Paris since June 2018: within one year, twelve free-floating electric scooter (FFES) operators emerged in the city, for a fleet volume estimated around 20 000 ES in the entire city in May 2019 [10], before the number of operators and vehicles being limited to respectively three and 15 000 by the City in 2020 [11]. Probably as a ripple effect, ES became the first micromobility market [12], the shared services impacting private acquisitions.

In 2020, 17% of the French big city's households are equipped with one or more personal standing scooters, two-thirds of these scooters being electric, and one-third being less than one year old [13]. The COVID-19 pandemic also made the FFES usage rise by 230% [14]. Shared e-mopeds appeared in Paris

1 in 2015, but this new service usage rose by 27% during the pandemic [15], while the massive French  
2 public transportation strike in winter 2019-2020 also changed the modal share status quo, with 42% of  
3 the public transportation users switching for other modes: 17% for walking, 11% for the private car, 6%  
4 for car-sharing and 4% for cycling [14]. Vélib' recorded a 10% rise in memberships when the strike was  
5 announced [14]. Globally, shared mobility services tended to expand this last decade, despite a relative  
6 failure of free-floating bikes in Paris [16]. But while the sharing economy can be seen as a systematic  
7 way to promote sustainable societies [17], this belief can be easily challenged [18, 19].

## 9 **1.2. Meta-objectives**

10 The first objective of this study is to contribute to this belief challenge, specifically in the case of Paris  
11 but also in a worldwide context, by comparing the environmental performance of shared versus private  
12 micromobility modes. The second objective is to provide reference figures on the environmental  
13 performance of such modes including the impacts coming from the infrastructure and the complete  
14 vehicle life cycle, and to compare these modes with standard modes. The third objective is to appraise  
15 the contribution of the infrastructure and other components on the modal impacts, in order to give  
16 recommendations on the system boundary to be considered to design unbiased eco-friendly  
17 transportation policies; the system boundary being the selection of the components of a system to be  
18 considered in an LCA [20]. The fourth objective is to understand the implication for the planet  
19 preservation of supporting transportation policies through the sole spectrum of climate change and to  
20 rethink the "criteria scope" of mobility LCAs for environmental decision-making.

## 22 **1.3. Paper's organization**

23 After a literature review conducted on shared and/or micromobility environmental performance (section  
24 2), the method and calculation process - including scenario analyses - to assess the environmental  
25 performance of the micromobility modes are presented (section 3). The data collection to develop Life  
26 Cycle Inventories (LCIs) in the case of Paris is detailed in section 4. Section 5 is dedicated to the  
27 environmental assessment results of shared and private micromobility modes in the case of Paris and

1 the scenario analyses generalizing the results. Finally, section 6 discusses the carbon ranking of  
2 micromobilities compared with other modes in Paris and the US, before answering the question about  
3 the novel system boundary and criteria scope to choose to unbiasedly eco-design modern transportation  
4 policies.

5

## 6 **2. Literature review**

### 7 **2.1. Cycling environmental performance**

8 In the literature, a few studies address the environmental performance of micromobility and/or shared  
9 mobility. A comparative LCA was made on mechanical versus electric bicycles on a set of seven impact  
10 categories in a Swiss context with CML2001, CED, CExD, and IPCC 2007 characterization factors [21],  
11 but this approach did not consider the environmental impact from the infrastructure. Another study was  
12 conducted on bike-sharing systems and their climate change contribution in eight cities in the (US) [22].  
13 The servicing distances lack reliability and regionalization, as they are based on an interview of one  
14 large US metropolitan area operator which is made anonymous and then extrapolated for the eight cities.  
15 Furthermore, the system boundary includes the shared stations but not the pavement. Bonilla-Alicea et  
16 al. [23] recently focused on the environmental impact of technological improvements on bike-sharing  
17 stations and shared bikes, looking at the three endpoint indicators (human health, resources, and  
18 ecosystems) as well as the climate change contribution, but again, the pavement impact is not accounted  
19 for. Dave conducted a hybrid LCA to assess few transportation modes in the US including mechanical  
20 and e-bikes but considering CO<sub>2</sub> exhaled by bikers, which is unusual, and mostly using environmental  
21 input-output LCA [24]. The environmental impact due to the infrastructure has been accounted for using  
22 the PaLATE tool, also based on a non-process based LCA and considering a generic pavement and not  
23 a cycle lane, as well as the allocation factors calculated by Chester for automobiles rather than bikes  
24 [25]. Her assessment leads to a carbon footprint of 33g of CO<sub>2</sub>eq per passenger-kilometer traveled (pkt)  
25 both for cycling and walking, which is higher than other studies' assessments [19, 21].

26

## 1    **2.2. E-scooter environmental performance**

2    The impact of FFES on climate change – excluding the impact from the infrastructure - has been  
3    estimated by Hollingworth et al. in US conditions, based on local surveys and a material inventory of  
4    the microvehicle developed through the dismantling of a popular Chinese e-scooter model: the Xiaomi  
5    M365. The study includes an uncertainty analysis with a Monte Carlo simulation applied with assumed  
6    parameter distributions. Results show an average carbon footprint equal to 126g CO<sub>2</sub>eq/pkt [26].  
7    Dockless and private ES were also assessed for the city of Brussels on four midpoint indicators, using  
8    attributional LCA and the ReCiPe2016 characterization factors, reporting 131g of CO<sub>2</sub>eq/pkt for the  
9    shared version and 67g of CO<sub>2</sub>eq/pkt for the private version [27]. Even though the infrastructure is not  
10    integrated to the assessment of these two transportation modes, an integrated modal FFES LCA made  
11    in Paris reported smaller impacts – respectively 109 and around 60g of CO<sub>2</sub>eq/pkt - with the same IPCC  
12    2013 factors but using the consequential version of the ecoinvent database [19]. The previous FFES  
13    analyzed were first-generation ES, originally not designed for intensive use, and which will be called  
14    "entry-level ES". The impact of more robust ES, for private or shared used, has not been studied yet,  
15    while FFES operators now design their own stronger ES.

16

## 17    **2.3. Motorcycle environmental performance**

18    The assessment of shared motorcycles, either electric or with an internal combustion engine (ICE), are  
19    rare. Leuenberger and Frischknecht developed seminal LCIs for combustion and sitting electric scooters  
20    that are implemented in the ecoinvent database [28]. Interesting scenarios were developed to model the  
21    environmental performance of different kinds of motorcycles - including internal combustion and  
22    battery electric motorcycles – in 1990, 2017, and 2030, based on the World Harmonized Motorcycle  
23    Test Cycle model and European electricity mixes [29]. The smaller private e-motorcycle category can  
24    be used as a comparison to the shared e-mopeds in this Parisian study, on the full ReCiPe 2008 set of  
25    indicators. Electric mopeds and their energy consumption and GHG emissions were also assessed with  
26    a very fine dynamic consumption approach, restricted to the use stage of the mode [30]. Another

1 publication restrained to the use stage estimates the energy consumption and carbon footprint of a 94-  
2 kg e-moped in Calcutta, India [31].

3

## 4 **2.4. Synthesis**

5 Finally, most of the shared and/or micromobility LCAs are incomplete: mostly in the life cycle stages  
6 and components of the transportation modes included in the system boundary, but also in the  
7 environmental issues addressed, often focused on climate change and potentially energy consumption.  
8 For instance, transportation LCA is known for a decade to need the inclusion of the infrastructure in the  
9 system boundary to perform unbiased analyses [32]. Nevertheless, excluding in one study [19], such an  
10 integrated approach has not been adopted yet for microvehicles. Moreover, field data from operators are  
11 still scarce, e.g. data on lifetime mileage, vehicle and infrastructure materials, consumption, and fleet  
12 management. With such data from the Paris' case, we propose to compare three shared micromobility  
13 modes and their private alternatives on the two most popular midpoint indicators as well as on the three  
14 endpoint indicators, before generalizing the shared micromobility results through extensive scenario  
15 analyses based on country-specific and non-country-specific parameters.

16

## 17 **3. Method and calculation**

### 18 **3.1. Overview of the methodological choices**

19 LCA is a method whose general framework and guidelines are established in ISO standards 14 040 and  
20 14 044 [33, 34]. It is used to calculate the potential environmental impacts of a product, service, or  
21 system during its life cycle, related to a functional unit to allow system comparisons based on a similar  
22 unitary "quantity of function" provided. Initially developed and formalized for manufactured products,  
23 its application to transportation modes is more recent and has given rise to many studies and questions  
24 [25]. In this study, we perform a process-based LCA, using the OpenLCA open-source software and the  
25 consequential LCIs from the Ecoinvent V3.2 database. Ecoinvent is the most widespread and  
26 comprehensive background database to conduct LCA. It contains international industrial data

1 quantifying the inputs and outputs flows (substances or energy) along the life cycle of industrial products  
2 or activities from the sectors of energy, manufacturing, transportation, chemistry, agriculture, etc.


3

### 4 **3.2. Goal and scope definition**

5 The “goal and scope definition” is the first step of any LCA following the ISO standards 14040 [35].  
6 This LCA first aims to compare the environmental impact of three different shared micro-mobility  
7 services with their private alternatives in Paris: bikes, e-scooters, and mopeds. Then, it aims to generalize  
8 the environmental results of the three shared micromobility modes through sensitivity analyses. The  
9 functional unit in this study is “To carry one person over one kilometer”, i.e. the pkt. We want to perform  
10 an integrated modal LCA approach, i.e. considering the environmental impacts coming from both the  
11 infrastructure and the vehicle life cycles: the system boundaries considered are illustrated in Figure 1.  
12 The life cycle of the vehicle includes manufacturing, use stage, servicing if any, maintenance, and end-  
13 of-life (EoL). The life cycle of the infrastructure includes the production, usage, maintenance, and EoL.  
14 Besides the specific infrastructure dedicated to bike-sharing systems that are described below, this  
15 modal LCA must consider the impacts of using the pavements and cycle lanes. The environmental  
16 performance of each mode will be calculated on Global Warming Potential (GWP), primary energy  
17 consumption, and damages on resources, human health, and ecosystems, respectively using the  
18 characterization methods IPCC 2013 GWP 100a (V1.03), Cumulative Energy Demand (V1.11), and  
19 ReCiPe Endpoint (E) (V1.10). The primary energy consumption is calculated by summing the different  
20 sources of energy consumption (fossil, nuclear, etc.). LCA indicator selection is always subjective. This  
21 set has been selected to cover all the environmental impact categories with a reduced number of  
22 indicators through the three aggregating endpoint indicators. We added the two most popular  
23 environmental indicators, e.g. GWP and energy consumption, to allow for literature comparisons. The  
24 calculation principle of these indicators based on ecoinvent data is described by Frischknecht et al. [36].

25



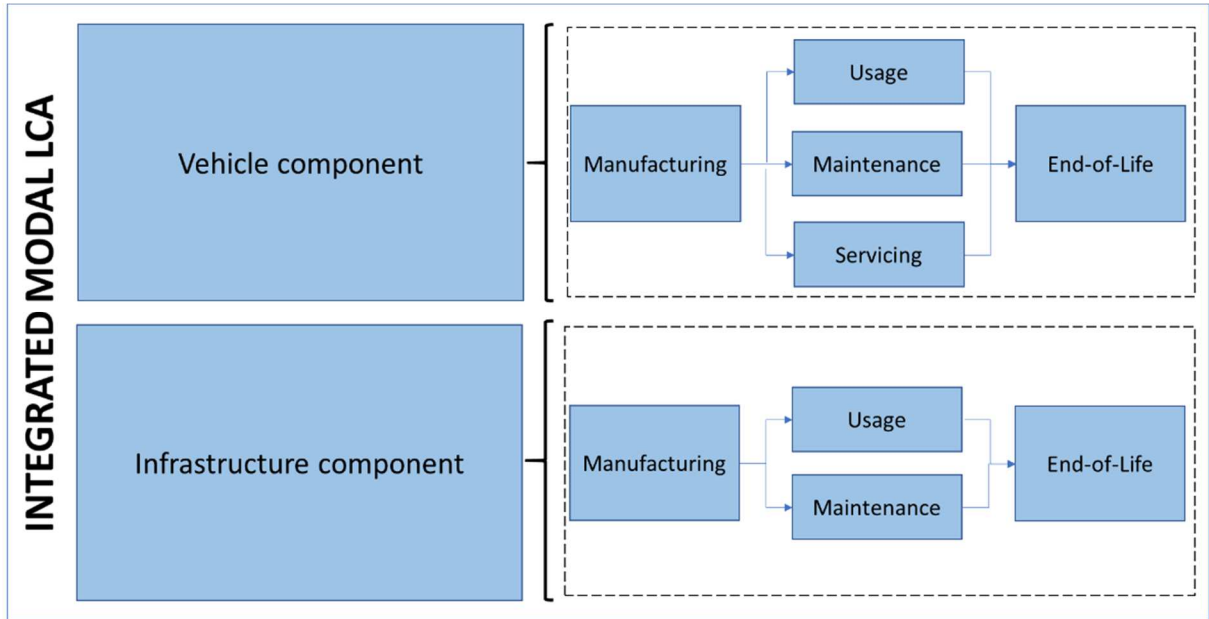

1

2 **Figure 1 Components and life cycle stages of the integrated modal LCA approach for**  
 3 **transportation activities**

4

5 **3.3. Calculation**

6 **Integrated modal LCA**

7 Equation (1) calculates the environmental impact per pkt  $EI_i$  of each transportation mode  $i,j$  – using a  
 8 vehicle type  $i$  and potentially different types of infrastructure, allocating the environmental impact of  
 9 the infrastructure equally between the vehicles using it when the infrastructure is shared :

10 
$$EI_i = EI_{veh\ i} + \sum_j EI_{i,infra\ j} = \frac{EI_{1veh\ i}}{PKT_{1veh\ i}} + EI_{usage\ veh\ 1pkt\ i} + EI_{servicing\ veh\ 1pkt\ i} +$$
  
 11 
$$\sum_j \frac{1}{occupancy_i} \cdot \frac{1}{VKT_j} \cdot q_j \cdot EI_{1u\ j} \quad (1)$$

12 with  $EI_{veh\ i}$  the environmental impact from the vehicle component of the mode  $i$  per pkt,  $EI_{i,infra\ j}$  the  
 13 environmental impact from the infrastructure component  $j$  of the mode  $i$  per pkt,  $EI_{1veh\ i}$  the  
 14 environmental impact for the manufacturing, maintenance and EoL of one average vehicle of the mode  
 15  $i$  over its life cycle,  $PKT_{1veh\ i}$  the number of pkt over the lifespan of the vehicle  $i$ ,  $EI_{usage\ veh\ 1pkt\ i}$   
 16 the environmental impact from the energy consumption of the vehicle for one pkt,  $EI_{servicing\ veh\ 1pkt\ i}$   
 17 the environmental impact from the servicing of the vehicle for one pkt (only for shared vehicles),

1 **occupancy**<sub>*i*</sub> the average number of passenger per vehicle type *i*, **VKT**<sub>*j*</sub> the annual number of vehicle-  
 2 kilometers traveled (vkt) using the infrastructure *j*, **q**<sub>*j*</sub> the number of units (surface, length, or item) of  
 3 the infrastructure *j* used by the mode *i*, **EI**<sub>1u*j*</sub> the annual environmental impact of one unit of the  
 4 infrastructure *j*.

5  
 6 In this study, we will consider the microvehicle occupancy equal to 1. The term  $q_j \cdot EI_{1u_j}$  in Equation  
 7 (1) represents the annual environmental impact of the entire type *j* infrastructural network used in the  
 8 perimeter studied. In the case study, the perimeter is set for the city of Paris. The network size *q<sub>j</sub>* of each  
 9 infrastructure type *j* is indicated in the supplementary material.

10 **Infrastructure allocation factors**

11 We recall the infrastructure allocation factors  $\frac{1}{VKT_j}$  in the case of Paris' pavements and cycle lanes and  
 12 their calculation parameters in Table 1. These infrastructure allocation factors mean that 4.39E-10 share  
 13 of the pavement annual environmental impact is allocated to one vkt by motorcycle and 1.73E-9 share  
 14 of the cycle lane environmental impact is attributed to one vtk by bike or ES. No allocation  
 15 discrimination was made between vehicles based on mechanical damage or space consumption.  
 16 Allocation discrimination is a methodological choice that is especially important in the case of low-  
 17 trafficked pavements: in this case, the pavement environmental contribution can be substantial on the  
 18 environmental impact of the mod, which is not the case in Paris [19].

19

20 Table 1 Annual road traffic and infrastructure allocation factor in Paris inner-city

Mode	VKT per vehicle type	Source	Infrastructure type	Infrastructure allocation factor $\frac{1}{VKT_j}$
Bus	4,71E+07	[37]	Road pavement	4,39E-10
Private car	1,85E+09	[5]		
Taxi and ride-hailing				
Shared motor scooter				
Private motor scooter	3,74E+08			
Truck	7,40E+05	[38]		
Commercial vehicle	4,80E+06			
Shared e-scooter		[19]		

	2,41E+08		Cycle lane	1,73E-09
Other two-wheeler (bike, personal ES)	3,37E+08	[5]		

1

## 2 **LCA computational structure**

3 The computational structure of LCA and especially the calculation of **EI** using the matrix model for  
4 inventory analysis is explained in detail by Heijungs et al. [39, 40], and accounts for loops in the  
5 consumption (e.g. the consumption of steel to produce steel). The life cycle inventory of a system lists  
6 the quantity of each input and output flow **flow<sub>j</sub>** over the life cycle; these flows being product flows  
7 (e.g. the consumption of 1kg of steel), elementary flows (e.g. the emission of 2kg of fossil CO<sub>2</sub> in the  
8 atmosphere), or waste flows (e.g. the emission of 1m<sup>3</sup> of wastewater). The environmental impact **EI<sub>k</sub>** of  
9 the system assessed on the impact category *k* is calculated, as presented in Equation 2, as the sum of the  
10 product of each flow **flow<sub>j</sub>** by the characterization factor **CF<sub>j,k</sub>** of the flow type *j* on the impact category  
11 *k*. This characterization factor represents the unitary environmental impact of **flow<sub>j</sub>** on the impact  
12 category *k* based on a specific characterization method, such as ReCiPe.

$$13 \quad EI_k = \sum_k flow_j \cdot CF_{j,k} \quad (2)$$

### 14 **3.4. Variability analyses**

#### 15 **Choice of parameters**

16 To assess the shared micromobility performance range, we will conduct scenario analyses. We choose  
17 to perform one-at-a-time sensitivity analyses rather than Monte Carlo simulations as some authors  
18 consider it is misleading to use it without perfectly known input distributions [41]. The vehicle lifespan  
19 and servicing were proved to be the key factors of the carbon performance of the shared first-generation  
20 ES in France and the US [19, 26]: we will conduct analyses on these non-country specific parameters.  
21 Moreover, the objective of the study is to estimate the environmental performance of micromobility  
22 from an international perspective. The shared micromobility market is expected to come mainly from  
23 the US, then from Europe and finally from China. The base-case scenario is focused on Paris, France.  
24 As vehicles - ES, bikes and motorcycles - are considered for the average global market, vehicle

1 manufacturing impacts do not depend on the operating country. On the contrary, the electricity mix and  
2 vehicle shipping are two country-specific parameters to investigate.

3

#### 4 **Vehicle lifespans**

5 The lifetime mileage is supposed to be reached when the vehicle breaks, or all the parts have been  
6 replaced. Four scenarios are proposed: worst-case, pessimistic, base-case, and optimistic. Figures are  
7 shown in Table 2. The base-case assumptions are explained in section 4. For the shared ES, the worst-  
8 case scenario is based on Quartz’s day-lifespan estimate [42] multiplied by a factor 3 to reflect the new  
9 ES’s stronger design, and average daily kilometers traveled in the study by Hollingsworth et al. [26].  
10 For the other scenarios, as no data are available in the literature, we made assumptions based on users’  
11 forums, technical expertise, and operator declarations.

12 **Table 2 Lifetime mileage per vehicle type and scenario**

Scenario	Worst-case	Pessimistic	Base-case	Optimistic
Shared bike	2 000	7 000	12 500	20 000
Shared e-scooter	1000	2 000	7 300	13 650
Shared e-moped	8 000	20 000	48 000	65 000

13

#### 14 **Servicing**

15 For the shared bikes, the optimistic scenario is set according to JC Decaux declaration, while the  
16 pessimistic and worst-case scenarios are taken from Luo et al. [22] for station-based bikes in the US.  
17 For the shared ES, servicing needs depend on the kind of batteries - swappable or not – and the  
18 warehouse location. In the case of Paris, warehouses are located outside the city and the batteries are  
19 not swappable: we consider the worst-case and pessimistic scenarios’ assumptions based on a previous  
20 study of ES in Paris [19]. The base-case scenario is set according to the Parisian shared e-moped  
21 operator’s declaration, as we are in the case of swappable batteries and a warehouse outside the city.  
22 The optimistic scenario estimates the reduction for swappable-battery vehicles and inner-city  
23 warehouse: instead of traveling from the suburbs to the city (average trip of 7 km), the average servicing  
24 can be cut by a factor two. This servicing distance will also be used for the optimistic scenario for shared

1 e-mopeds, while the worst-case and pessimistic scenarios respectively consider twice and three times  
 2 these distances.

Scenario	worst-case	Pessimistic	Base-case	Optimistic
Shared bike (km/vkt)	58	28	11	5
Shared e-scooter (km/vkt)	90	45	20	10
Shared e-moped (km/vkt)	60	40	20	10

3

#### 4 **Electricity mixes**

5 We select regions where shared micromobility is used and which display a wide range of electricity  
 6 environmental performances: average USA, China, Spain, the UK, Germany, Norway, the Netherlands,  
 7 Australia, Denmark, Italy, and Canada.

8

#### 9 **Shipping scenarios**

10 We want to test the environmental consequence of vehicle shipping, and propose the following scenarios  
 11 according to options proposed by suppliers: sea + road, rail + road or air freight for Europe, sea + road,  
 12 sea + rail or air freight for the US, and road or rail freight for China. Shipping distances are synthesized  
 13 in Table 3. Air and sea shipping distances are estimated using the searates.com calculator. For sea  
 14 shipping, the port of Shanghai, as the main port in China, is considered as the departure. The considered  
 15 destination ports are Piraeus, Greece in Europe and Los Angeles, California in the US. Additional  
 16 shipping distances by road in Europe and train in the US are respectively considered over 1500 km and  
 17 2500 km. Air shipping distances are estimated around 9000 km to Europe and 11 000 km to the US. The  
 18 train + road shipping to Europe is modeled as follows: departure from Shenzhen by train (45% diesel  
 19 trains and 55% electric trains) to Alanshankou in China (4 500 km), then diesel trains from Alanshankou  
 20 to Troïskt, Russia (2 400 km), electric trains from Troïskt to Lodz, Poland (1 500 km), and 1000 km by  
 21 truck. In China, shipping is considered on 1500 km, by train ((45% diesel and 55% electric) or truck.

22 **Table 3 Shipping scenarios by micromobility market**

Market	Europe			USA			China	
Scenario code	UE 1	UE2	EU3	US1	US2	US3	CN1	CN2
Shipping scenario	sea + road	rail + road	air	sea + road	sea + rail	air	road	rail
Distances (km)	14 250 + 1500	8 400 + 1 000	9000	11 120 + 2 500	11 120 + 2 500	11 000	1 500	1 500

1

## 2 **4. Parisian data collection of Life Cycle Inventories**

3 In this section, the lifetime mileages and LCIs for vehicle manufacturing, use stage, and (if applicable)  
4 servicing in Paris are described in detail. Maintenance and EoL stages are also considered but not  
5 specified: the EoL is included in manufacturing and the maintenance directly modeled using ecoinvent  
6 processes, as presented in the supplementary material. The calculation of the infrastructural impact  
7  $EI_{i,infraj}$  uses LCIs that are extensively detailed in a previous study [19] and recalled in the  
8 supplementary material, excepting the impact from the bike-sharing system stations whose LCIs will be  
9 specified below in the bike LCIs section.

10

### 11 **4.1. Bike LCIs**

#### 12 **Bike-sharing system**

13 The LCIs for the Velib' - the docked shared bikes in Paris - were collected and provided by the current  
14 vehicle and station supplier.

15

#### 16 *Lifetime mileage*

17 The Velib' operator and supplier changed on January 1<sup>st</sup>, 2018, and data might not be consolidated. The  
18 annual mileage is estimated at around 10 000 km for each bike. 19 000 bikes are currently operated,  
19 while 40 000 bikes have been manufactured so far. We can then estimate an average lifespan of 31  
20 months/ $40\ 000 \cdot 19\ 000 = 14.7$  months, thus a lifetime mileage of  $10\ 000/12 \cdot 14.7 = 12\ 250$  km. This  
21 result must be underestimated due to bikes stolen, and their consequent second lives.

22

#### 23 *Manufacturing and end-of-life*

24 The mechanical bikes weigh 20.6 kg, while the e-bikes weigh 27 kg. Only the electric equipment differs  
25 between the two versions, with a 2.4-kg lithium-ion battery and a 4-kg motor. In summer 2020, the fleet  
26 consists of 40% e-bike and 60% mechanical bikes, but around 50% of the kilometers would be traveled

1 with the electric version according to the fleet manufacturer. The lithium-ion battery is under warranty  
2 for a 70% residual capacity after 500 charging cycles, representing 14 000 km traveled at a speed of 20  
3 km/h. Thus, no battery replacement is needed over the lifetime mileage.

4

#### 5 *Use stage*

6 The energy consumption depends on the trip topography and will be estimated at around 1 kWh/100 km  
7 [28]. Batteries are charged at low voltage.

8

#### 9 *Servicing*

10 The rebalancing distances were not provided by the Parisian operator, but are estimated based on data  
11 from a company operating in other French cities. Rebalancing relies on a 1180-kg tractor electric vehicle  
12 with a 380-kg trailer vehicle and a 376-kg lithium-ion battery. The distance traveled is estimated at  
13 around eleven meters per pkt: this operator owns 28 vehicles rebalancing 11 000 bikes by traveling each  
14 day 65 km, and its bikes travel 5 500 km a year.

15

#### 16 *Stations*

17 According to the bike provider, the 1400 Velib' stations represent a total surface of 92 000 m<sup>2</sup> in Paris.  
18 LCIs of the sidewalk life cycle come from a previous study [19] and are recalled in the supplementary  
19 material. Each station is equipped with : (a) one e-kiosk (for customers), whose LCIs are adapted and  
20 completed from Bonilla-Alicea et al. [23] and detailed in the supplementary material, and (b) a total of  
21 46 500 docks made of 23 kg of steel and 0.5kg of plastic each. The station lifespan is considered equal  
22 to 10 years, i.e. the duration of the operator's contract. There are different station technologies.  
23 According to the Parisian operator in 2005, a standard 20-dock station consumed 3651 kWh a year in  
24 Paris. Current stations in Paris counting around 46500/1400~33 docks, we will consider a prorate of  
25 6063 kWh/station.year, thus an annual consumption of 6064\*1400=8.49 MkWh/year. As a sensitivity  
26 analysis, we will consider the following alternative: according to the former Parisian operator, a 20-dock  
27 low-consumption station consumes as low as 879 kWh a year due to technological enhancement, thus a  
28 alternative total Parisian consumption of 2.04 MkWh/year. These stations are annually used by 19 000

1 bikes traveling 10 000 km a year, thus an allocation factor of  $1/(19000*10000)=5.29E-09$  of the annual  
2 station impact.

3

#### 4 **Personal bikes**

##### 5 *Lifetime mileage*

6 The personal bike lifetime mileage in France is estimated around 20 000 km, based on responses to a  
7 survey dedicated to the use of bikes and e-scooters and conducted in big French cities in 2020 [13] (see  
8 calculation in the supplementary material). This lifespan is 50% higher than the estimate for the shared  
9 bikes.

10

##### 11 *Manufacturing*

12 The personal bikes will be considered as a 17-kg mechanical bike, despite approximately 3% of the  
13 Paris region personal fleet were e-bikes in May 2020 [43], and possibly more today due to the effect of  
14 the Covid-19 pandemic on the Parisian mobility system [13]. The bike has an aluminum frame and  
15 additional equipment such as carriers and lights. It is manufactured in China and transported to Europe  
16 [28].

17

#### 18 **4.2. E-scooter LCIs**

19 Two e-scooters are considered: an entry-level model (first generation ES) and a mid-range model  
20 (second-generation ES). The personal ES can be either of them, while the shared version is a mid-range  
21 model.

22

##### 23 **Shared e-scooter**

##### 24 *Lifetime mileage*

25 The shared e-scooters are supposed to last 24 months, as declared by most of the operators equipped  
26 with second-generation e-scooters [44, 45], with a distance traveled a day equal to  $(100-66\%) \times 18$  miles  
27 [26], i.e. 10 km, thus a 7 300 km lifetime mileage.



1

2 *Manufacturing*

3 LCIs for the shared ES are adapted from a previous study [19]. For the production stage, from the first  
4 generation of e-scooters weighing 12 kg each, the quantities are estimated to represent the second-  
5 generation of shared e-scooters, weighing approximately 22 kg with a double-capacity battery, the same  
6 equipment and electronic components, and a rescaled frame weight and assembly consumptions  
7 calculated with a ratio between the remaining weight after removing similar components and the battery  
8 [44]. New LCIs are indicated in the supplementary material.

9

10 *Use stage*

11 The e-scooter consumption is considered equal to 0.335 kWh/20 km, according to a previous study [19]:  
12 we can consider that doubling the e-scooter weight do not change notably the consumption as it would  
13 represent  $(22-12) / (12+70) = 12\%$  additional weight with one average user weighing 70kg.

14

15 *Servicing*

16 We select the scenario considering Light Commercial Vehicles (LCV) traveling over 90 km with 100  
17 ES aboard from a previous study [19] but switching from an ICE vehicle to the same electric LCV used  
18 for the bike-sharing system. With the double capacity range of the batteries, we consider that the ES is  
19 picked up after having traveled 20 kilometers instead of 10, the servicing distance per pkt being 90  
20 km/100ES/20km, e.g. 45 m/pkt.

21

22 **Personal e-scooter**

23 *Lifetime mileage*

24 The lifetime mileage of the entry-level model is supposed to be 4 000 km based on web users'  
25 declarations. The personal mid-range e-scooter is assumed to last 10 000 km according to user feedback.

26

27 *Manufacturing*

1 Manufacturing LCIs of the entry-level model come from the same previous study [19]. The mid-range  
2 model manufacturing LCIs are the same as those of the shared ES.

3

4 *Use stage*

5 The consumption of the personal ES is supposed to equal the shared ES consumption.

6

### 7 **4.3. Moped LCIs**

#### 8 **Shared e-mopeds**

9 The data to model shared e-mopeds come from exchanges carried out in 2020 with the major company  
10 operating in Paris. This company owned 3750 e-mopeds in Paris in mid-2020, operating for almost 5  
11 years.

12

13 *Lifetime mileage*

14 The operator expects an 8-year lifespan, with an annual mileage of 6000 km, i.e. 48 000 km over the  
15 moped life cycle.

16

17 *Manufacturing*

18 The ecoinvent processes selected and their related quantities are indicated in the supplementary material.  
19 The mass of the e-moped is 98 kg, plus 28 kg of lithium-ion batteries (one fixed and one swappable  
20 batteries), for a total capacity of 4 kWh. Over the 48000-km e-moped lifespan, the battery must be  
21 changed once.

22

23 *Use stage*

24 The consumption is 3.3 kWh/100km, and the swappable batteries are charged with low-voltage  
25 electricity, in dedicated warehouses in the Parisian suburb.

26

27 *Servicing*

1 Servicing is done using electric LCV, weighing 1250 kg + 350 kg of lithium-battery, with an estimated  
2 lifespan of 150 000 km, and consuming 25 kWh/100km. The battery is changed once over the LCV  
3 lifespan. 25 LCV are in operation each day, traveling 50 km/day. Each kilometer traveled by an e-moped  
4 is then supported by a 20-m servicing, to maintain the whole moped and charge its swappable battery.

5

## 6 **Personal motorcycles**

### 7 *Lifetime mileage*

8 The average personal Parisian motorcycle is considered to have a 50000-km lifetime mileage [28].

9

### 10 *Manufacturing*

11 The average personal motorcycle is an ICE motorcycle. A Parisian mobility survey showed that, in  
12 2010, it was a combination of 65% of mopeds, 29% of heavier motorcycles, and 6% of other motorized  
13 two-wheelers [46]. We will consider a mix of 2/3 of a moped weighing 90 kg and 1/3 of a heavier  
14 motorcycle weighing 200 kg, for an average motorcycle weighing 127 kg.

15

### 16 *Use stage*

17 The use stage is modeled using the HBEFA 4.1 calculator [47], for an average motorcycle in France in  
18 2020. The simulated baseline consumption is equal to 39g of petrol per kilometer, i.e. 5.4 L/100km  
19 (gasoline density = 0.72) which seems to be overestimated for our average motorcycle. Indeed, a moped  
20 consumes around 2.3 L/100 km and a motorcycle 6.1 L/100km in urban areas in France [48]: a ratio of  
21  $(2/3*2.3+1/3*6.1)/5.4=0.66$  will be applied to correct linearly both the consumption and emissions. Fuel  
22 consumption and European regulated tailpipe emissions (HC, NO<sub>x</sub>, PM, CO, and CO<sub>2</sub>) per kilometer  
23 are indicated in the supplementary material. Other emissions are considered through the fuel production  
24 modeled with the ecoinvent process.

25

1 **4.4. Synthesis of the vehicle model main parameters**

2 The main characteristics of the parameters used in the vehicle models are presented in Table 4. It  
 3 highlights that all the shared vehicles studied present shorter lifespans than their private alternatives: -  
 4 4% for mopeds, -27% for the same model of ES, and -38% for bikes. The reliability of these estimates  
 5 could nevertheless be improved by specific surveys. The e-scooter lifespans are based on operator and  
 6 user declarations, and especially less reliable (or more variable) due to the novelty of emerging  
 7 technologies and services and consequential lack of data. The shared bikes and e-moped lifespans are  
 8 also based on operator self-declarations. In the case of the e-moped, it is a simple estimate, as the service  
 9 only runs in Paris for five years. In the case of the shared bikes, another operator estimates that the  
 10 10 000 km traveled a year might have been slightly overestimated. The shorter servicing distance for  
 11 the free-floating e-moped than for the shared ES is explained by the swappable batteries on the mopeds.  
 12

13 **Table 4 Synthesis of the main parameters of the vehicle modeling**

Vehicle	Ownership	Weight (kg)	Lifetime mileage (km)	Servicing vehicle	Servicing distance (m/pkt)	LCI source
<b>Bike</b>	Shared	21/27	12 500	Electric LCV	11	Author
	Personal	17	20 000	N/A		Ecoinvent
<b>e-scooter</b>	Shared	22	7 300	Electric LCV	45	Author
	Personal – entry-level model	12	4 000	N/A		Author
	Personal – mid-range model	22	10 000	N/A		
<b>Moped</b>	Shared	136	48 000	Electric LCV	20	Author
	Personal	127	50 000	N/A		Author

14 N/A=not applicable


15

## 1 **5. Results**

### 2 **5.1. Environmental comparison between micromobility modes**

3 Figure 2 is a spider chart that facilitates the multicriteria performance comparison of the different  
4 micromobility modes. It uses the results from Table 5, mathematically normalized based on the most  
5 impacting mode on each environmental indicator. It shows that the most efficient mode depends on the  
6 indicator considered: the average motorcycle is on average twice as much impacting as the other modes  
7 on all indicators except for damage to human health, where shared e-mopeds and e-scooters are more  
8 impacting (around  $2.3\text{-}2.5 \cdot 10^{-6}$  DALY/pkt). This is due to (a) the high contribution of the lithium-ion  
9 battery manufacturing to this damage category, and (b) the rather high ratio between the battery weight  
10 and the lifetime mileage for these modes compared to the other electric modes (between  $2.32 \cdot 10^{-4}$  and  
11  $1.17 \cdot 10^{-3}$  kg/pkt, against  $9.6 \cdot 10^{-5}$  kg/pkt for the shared bikes). The personal motorcycle does not include  
12 any lithium-ion battery, thus ranks fourth most efficient mode on this damage category, with the same  
13 impact as the mid-range private ES. The private bike is, by far, the most efficient mode on all indicators,  
14 followed by the shared bike on the three damage types, but ranked equal with the shared e-scooter in  
15 terms of carbon footprint and also equally-ranked with the mid-range private ES in terms of primary  
16 energy consumption. The primary energy consumption of all modes except the private motorcycle and  
17 private bike is included in a narrow range – between 0.938 and 1.31 MJeq/pkt. Entry-level personal ES  
18 and shared ES show very similar impacts on the five indicators. Except for the human health damage,  
19 the shared e-moped presents very good environmental performances considering its potential speed (50  
20 km/h), comfort, and safety, especially compared to ES and motorcycles. It is ranked second on the  
21 primary energy consumption performance and carbon footprint after the private bike, third on the  
22 ecosystem damage after shared and private bikes, and fourth on resource damage after the bikes and the  
23 mid-range private ES.

24

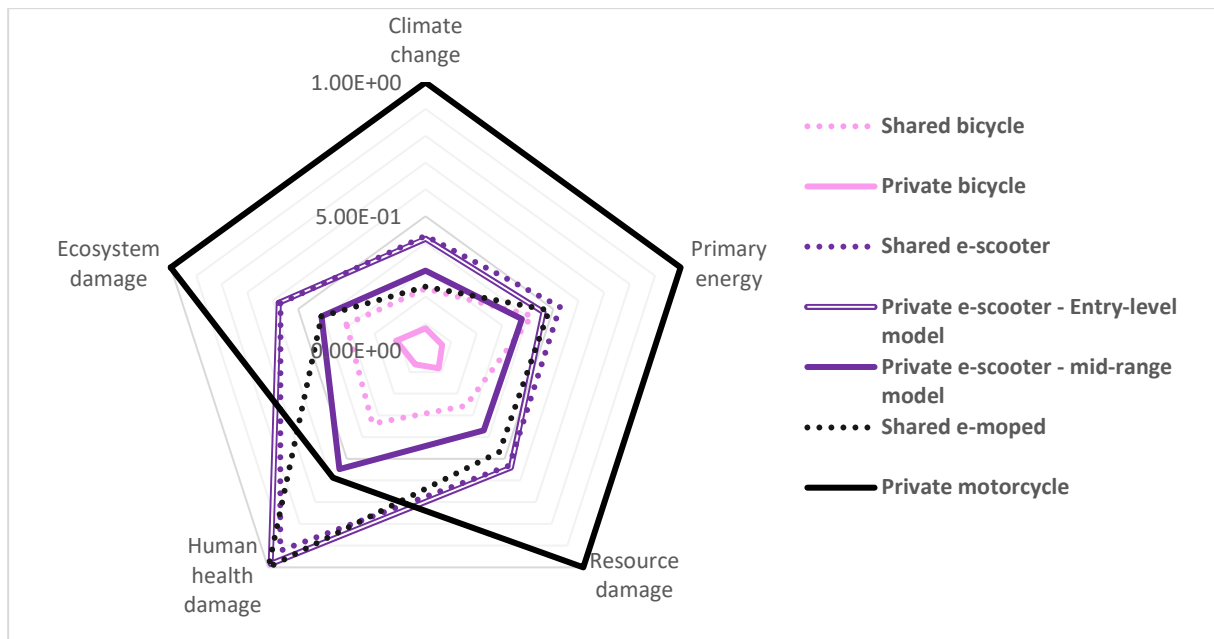

1  
 2 **Figure 2 Comparison of normalized environmental impacts of the Parisian micromobility modes**

3 **Table 5 Environmental impacts of the different shared and private micromobility modes in Paris**

Mode	Climate change (kgCO <sub>2</sub> eq/pkt)	Primary energy (MJeq/pkt)	Resource damage (\$/pkt)	Human health damage (DALY/pkt)	Ecosystem damage (species.year/pkt)
Shared bicycle	3.29E-02	1.04E+00	2.41E-03	8.31E-07	1.25E-09
Private bicycle	1.17E-02	1.59E-01	7.72E-04	1.61E-07	4.65E-10
Shared e-scooter	6.10E-02	1.31E+00	5.01E-03	2.28E-06	2.29E-09
Private e-scooter - Entry-level model	5.95E-02	1.15E+00	5.10E-03	2.43E-06	2.33E-09
Private e-scooter - mid-range model	4.24E-02	9.38E-01	3.48E-03	1.35E-06	1.65E-09
Shared e-moped	3.40E-02	1.20E+00	4.42E-03	2.47E-06	1.64E-09
Private motorcycle	1.43E-01	2.49E+00	9.44E-03	1.45E-06	4.03E-09

4  
 5 The GHG savings brought by the new station technology described in the bike LCIs and that diminishes  
 6 the electricity consumption saves 1g of CO<sub>2</sub>eq/pkt, i.e. a 3% drop in the carbon footprint of the mode.  
 7 Moreover, in the baseline Parisian study, the average bike frame is considered made of aluminum, a  
 8 material that is more harmful to the environment than steel. A steel bike emits 35kg of CO<sub>2</sub> over its life  
 9 cycle [49], while the personal aluminum bike in this study emits 212kg of CO<sub>2</sub>eq. Ceteris paribus,  
 10 personal bikes made of steel can cut the carbon footprint of the mode by a factor three, to 3.5g of  
 11 CO<sub>2</sub>eq/km.

12

## 1 **5.2. Life cycle stage and component contributions**

2 The contributions of each life cycle stage and component to the different impacts are presented in this  
3 subsection. Detailed figures focusing on GWP, primary energy consumption (EC), and the three areas  
4 of environmental protection - damage to resources (DR), human health (DHH), and ecosystems (DE) -  
5 can be found in the supplementary material. The contributions and influent flows are analyzed below,  
6 before discussing an extract of the results presented in Figure 3.

7

### 8 **Bikes**

9 For the shared bike mode, vehicle manufacturing accounts for 70% of the GWP. Surprisingly, the e-  
10 bike is only 24% more emitting than the mechanical version. The Velib stations account for 24% of the  
11 carbon footprint due to the electricity consumption (42%), the e-kiosk (32%) and the dock (26%)  
12 manufacturing, the cycle lane contribution being around 3.5%. The vehicle use stage is also negligible  
13 on the carbon footprint, accounting for 0.3% of the total life cycle emissions, while the servicing  
14 accounts for 2%. On EC, the infrastructure is the most impacting component, with 68% of the total  
15 impact, 95% due to the stations, and especially the direct electricity consumption (98%). 27% of the  
16 consumption is due to the vehicle life cycle, and only 2 and 3% are due to the use and servicing stages.  
17 The contribution to DE is also mostly carried by the vehicle (65%) and the Velib' stations (25%, half of  
18 that due to the electricity consumption), while the cycle lanes account for 7%, the servicing for 2.4%,  
19 and the electricity consumed by the bikes 0.4%. The contributions are quite similar on DHH, with 67%  
20 of the impact from the vehicle and 23% from the stations, but the servicing is more impacting (8%) and  
21 the cycle lanes contribution lower (2%). The electricity consumed by the bikes still brings a negligible  
22 contribution (0.5%). Finally, on DR, the vehicle manufacturing and station contributions are also major  
23 (65 and 27%) while the cycle lanes, stations, and use stage only account for respectively 5, 4, and 0.3%.  
24 The bike manufacturing and the station consumption are thus the two key parameters of the bike-sharing  
25 system environmental impacts.

26

1 In the case of the private bike, the vehicle is still the most impact component: respectively 93%, 82%,  
2 85%, 93%, and 89% of GWP, EC, DE, DHH, and DR. The cycle lanes account for the rest. Bike  
3 manufacturing carries most of the impacts, the maintenance contribution being below 10%. Let's notice  
4 the weight of the vehicle carbon footprint: 10.5g of CO<sub>2</sub>eq/pkt for a 17-kg bike lasting 20 000 km. The  
5 life cycle of a 27-kg e-bike emits around 320kg of CO<sub>2</sub>eq on its life cycle. It equals to 26g of CO<sub>2</sub>eq/pkt  
6 for a 12500-km lifespan and 16g of CO<sub>2</sub>eq for a 20000-km lifespan. Most of the impact (76%) comes  
7 from the production of the mechanical bike, the electric motor accounting for 18% of this impact, and  
8 the battery for only 3%. The maintenance accounts for 8% of the emissions.

9

## 10 **E-scooters**

11 For the shared second-generation ES, most of the impacts come from the vehicle life cycle too: for  
12 example, it represents 79% of the GWP, 50% being due to the aluminum alloy. The servicing, using e-  
13 vans and optimized routes, accounts for 9% of the carbon emissions on the life cycle. The pavement life  
14 cycle brings 10% of the GHG emissions. Electricity consumption contributes negligibly to climate  
15 change (2%). On the energy aspect, the vehicle life cycle accounts for 43% of the consumptions, while  
16 respectively 18% and 17% are due to the ES consumption and the servicing. The pavement brings 23%  
17 of the impact, due to the bitumen which represents 18% of the total life cycle impact. In the three areas  
18 of protection, the vehicle life cycle is also the key parameter, accounting respectively for 67%, 72%,  
19 and 64% of the DE, DHH, and DR. The aluminum alloy explains this phenomenon on DE and DR, but  
20 the printed wiring board and the battery cell production are more important (resp. 24 and 22%) on DHH,  
21 the aluminum accounting for 19% of the total DHH of the mode. The pavement accounts for 20 and  
22 22% of the total damages to DE and DR, due to the bitumen for DR, and to the aggregates for DE. On  
23 DHH, it contributes to 4% of the modal impact, while the servicing takes 21% of the total, mainly due  
24 to the e-van lithium-ion battery (15%).

25

26 For the personal entry-level ES mode, the vehicle life cycle accounts for 78% of DE, mainly due to the  
27 aluminum alloy production (41%). The pavement brings 20% of the impacts, and the ES electricity  
28 consumption is still marginal (2.5%). The contributions to DR are almost the same, but 24% of the



1 impact comes from the vehicle is explained by the aluminum, the rest mainly being due to the electronics  
2 (18% for the transistor, 12% for the battery, 8% for the charger, 8% for the printed wiring board, 7% for  
3 the electric motor). The vehicle contribution to DHH is even more important (94%), and mainly due to  
4 the electronic components (41% due to the printed wiring board, 18% to the battery). In terms of energy,  
5 the vehicle, infrastructure, and use stage accounts for respectively 54%, 26%, and 21% of the total EC.  
6 The carbon footprint is driven by the vehicle component (88%) and especially the aluminum alloy  
7 (50%). The battery contribution is marginal (3.5%). The pavement life cycle accounts for 10% of the  
8 total GHG emissions, and the use stage for 2%.

9

10 The personal mid-range ES mode is less impacting than the entry-level ES mode. The vehicle component  
11 brings respectively 83%, 44%, 68%, 90%, and 67% of GWP, EC, DE, DHH, and DR. Globally, the  
12 same sub-contribution explanations as for the other ES modes apply, but the vehicle contribution  
13 decreases as the lifetime mileage increases, while the use stage and infrastructure component take  
14 mechanically a higher share of the impact (25 and 31% on the primary energy indicator).

15

## 16 **Motorcycles**

17 The shared e-moped mode presents contributions rather different from the other modes: on EC, only  
18 28% of the impact comes from the vehicle, while the use stage represents 39%, the servicing 9%, and  
19 the pavement 25% of the total impact. On the GWP, the vehicle component still brings a large part of  
20 the impact (68%), the infrastructure accounting for 18%, the servicing and the use stage for 7% each.

21 On the vehicle component (excluding the use and servicing stages), 55% of the impacts are due to the  
22 scooter manufacturing plus 36% to the battery, 23% to the maintenance stage, the recycling of the battery  
23 canceling 15% of the vehicle life cycle. 85% of the servicing carbon footprint comes from the e-van  
24 production, with almost equal contributions from the van manufacturing, battery production, and van  
25 maintenance. Damage mainly comes from the vehicle (69 to 86% depending on the category). DHH is  
26 mainly due to battery manufacturing (73%), but also to the scooter manufacturing (28%). The toxicity  
27 midpoint impact accounts for 96% of the endpoint damage. The moped maintenance only accounts for

1 1% of the total damage. The pavement is the second most important contributor for DE (28%) and DR  
2 (25%). Servicing is second on DHH, with 9% of the impact.


3 Just as standard ICE modes, the main contributor of the personal ICE motorcycle mode impact is the  
4 use stage (80% on GWP, 74% on EC, between 61 and 70% for damages). 23% of the modal carbon  
5 footprint comes from the upstream GHG emissions to produce gasoline. 16% of the carbon footprint is  
6 explained by motorcycle manufacturing (11%) and maintenance (5%). The pavement only brings 4% of  
7 the total GHG emissions. We find the same order of magnitude for the three damage categories.

8

## 9 **Synthesis**

10 Globally, aluminum brings a high contribution to GWP, DE, and DR of micromobility modes.  
11 Electronics - and especially batteries and printed wiring board – are harmful to human health. Vehicle  
12 servicing with e-vans keeps the impact from this stage rather low in France. The pavement presents  
13 substantial contributions, around 10% to GWP and 20-30% to EC, DE, and DR depending on the mode.  
14 Bitumen is the major contributor to GWP and DR, while aggregates strongly contribute to DE. The use  
15 stage of e-micromobility shows a negligible contribution to the environmental impacts in France.

16 Figure 3 shows on three very different micromobility modes – the shared ES, the shared e-moped, and  
17 the private gasoline motorcycle – that the contribution pattern to the total impact of a mode depends on  
18 the type of mobility assessed and the environmental indicator considered. For the shared ES,  
19 contribution patterns are quite similar between GWP and DHH, while the contribution patterns are quite  
20 different for the e-moped and private motorcycle on these two indicators. The DR and DE contribution  
21 patterns are almost identical for the motorcycle mode, themselves not very different from the EC pattern.  
22 The same type of similarity is found between the DR and DE contribution patterns for the e-moped,  
23 although very different from the pattern for the motorcycle. This analysis highlights the importance of  
24 multicriteria integrated modal LCA to properly capture the environmental key performance factors of  
25 transportation modes, and design policies considering burden shifting.

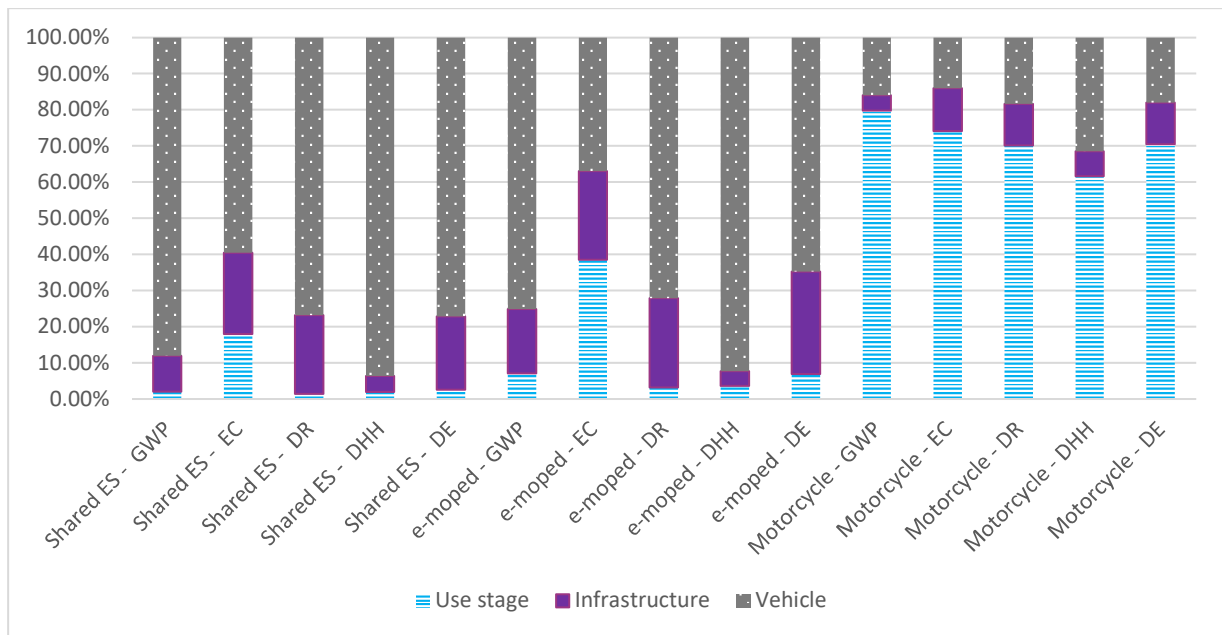

1


2 **Figure 3 Selected contribution analysis of the vehicle, infrastructure, and use stage to the five**  
 3 **environmental indicators on the total impact of three modes: shared ES, shared e-moped, and**  
 4 **private motorcycle**

5 **5.3. Sensitivity analyses**

6 **Vehicle lifespan**

7 Figure 4 presents the carbon footprint of the three shared modes depending on the lifespan scenarios  
 8 defined in section 2. Similar figures for the four other indicators are presented in the supplementary  
 9 material. These results highlight how environmental ranking relies on lifespan. For instance, the shared  
 10 e-scooter is less emitting in the optimistic scenario than the shared bike or e-moped in the pessimistic  
 11 scenario. Moreover, except for the shared e-scooter in the worst-case scenario, the carbon footprint of  
 12 shared micromobility is always lower than the one of car mobility (around 200g of CO<sub>2</sub>eq/pkt) [19].  
 13 More specifically, additional calculations set the minimal lifetime mileage to emit less than the average  
 14 car: 1500 km for the shared bike, 1800 km for the shared ES, and 6000 km for the shared e-moped.  
 15 Nevertheless, expanding the lifespan reaches a limit to lower the modal carbon footprint: an unrealistic  
 16 200 000-km lifespan leads to respectively 11g, 15g, and 16g for the shared bike, ES, and e-moped. Due  
 17 to the impacts from the other life cycle stages than vehicle manufacturing, only improving the lifespan  
 18 will not make micromobility less emitting than e-public transportation in Paris, accounting for less than

1 10g of CO<sub>2</sub>eq/pkt [19]. On other indicators, the ranking is quite similar, excepting for EC. On this  
 2 indicator, the shared bike's base-case scenario presents similar performance to the optimistic scenarios  
 3 for shared ES and e-mopeds. It can be explained by the fact that, with the shared bike, more than 50%  
 4 of the kilometers are fueled by food calories, an energy that is not accounting for in this LCA.  
 5 Finally, the shared bikes and e-mopeds perform generally better than the shared ES, while these latter  
 6 perform generally a bit better than the e-mopeds within one type of scenario.

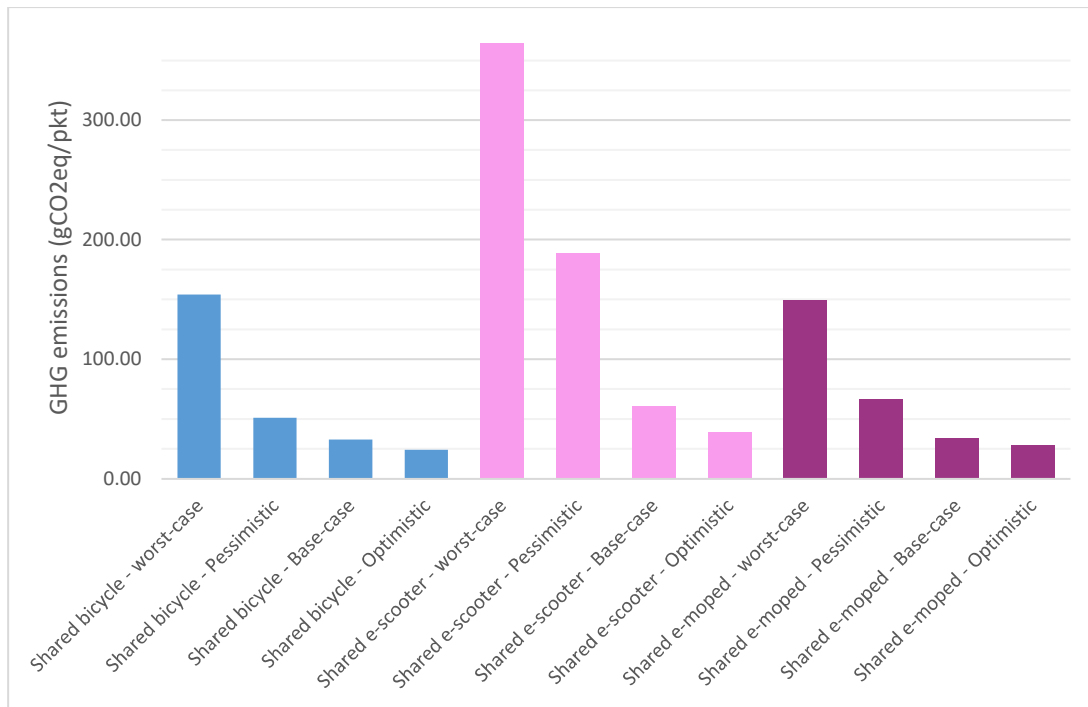


7  
 8 **Figure 4 Carbon footprint of the shared micromobility modes depending on the lifespan scenario**

9 The typical lifetime mileage considered for private bikes in the literature is 15 000 km [28]. In our study,  
 10 it is updated based on French recent data. An additional simulation shows that considering a 15 000-km  
 11 lifespan would increase the personal bike impacts by 20 to 25% on our five indicators. For instance, the  
 12 carbon footprint rises from 12 to 15g of CO<sub>2</sub>eq/km.

13 **Servicing distance**

14 Figure 5 presents the carbon footprint of the three shared modes depending on the servicing distance  
 15 scenarios defined in section 2. Similar figures for the four other indicators are presented in the  
 16 supplementary material. These results highlight the limited influence of servicing distances on the  
 17 environmental ranking when they are traveled with e-vans in countries with a low-carbon intensity

1 electricity. The environmental performance is particularly stable for bikes and mopeds, respectively  
 2 limited to 10 and 15% between the worst-case and the optimistic scenarios, depending on the indicator.  
 3 ES impact is more sensitive to the servicing distance, because the ES servicing distance also varies on  
 4 a wider range. This is due to (a) the higher demand in servicing - for maintenance, rebalancing, but also  
 5 charging, contrary to shared bikes only moved for maintenance and rebalancing - and (b) the variability  
 6 of the battery type (swappable or not), contrary to the e-mopeds which are heavier and thus require a  
 7 swappable battery. Between the worst-case (non-swappable battery and charging location far from the  
 8 city center) and the optimistic scenarios (swappable battery and charging location in the city center), the  
 9 carbon footprint varies by almost 30%, from 80g of CO<sub>2</sub>eq/km to 58g of CO<sub>2</sub>eq/km.

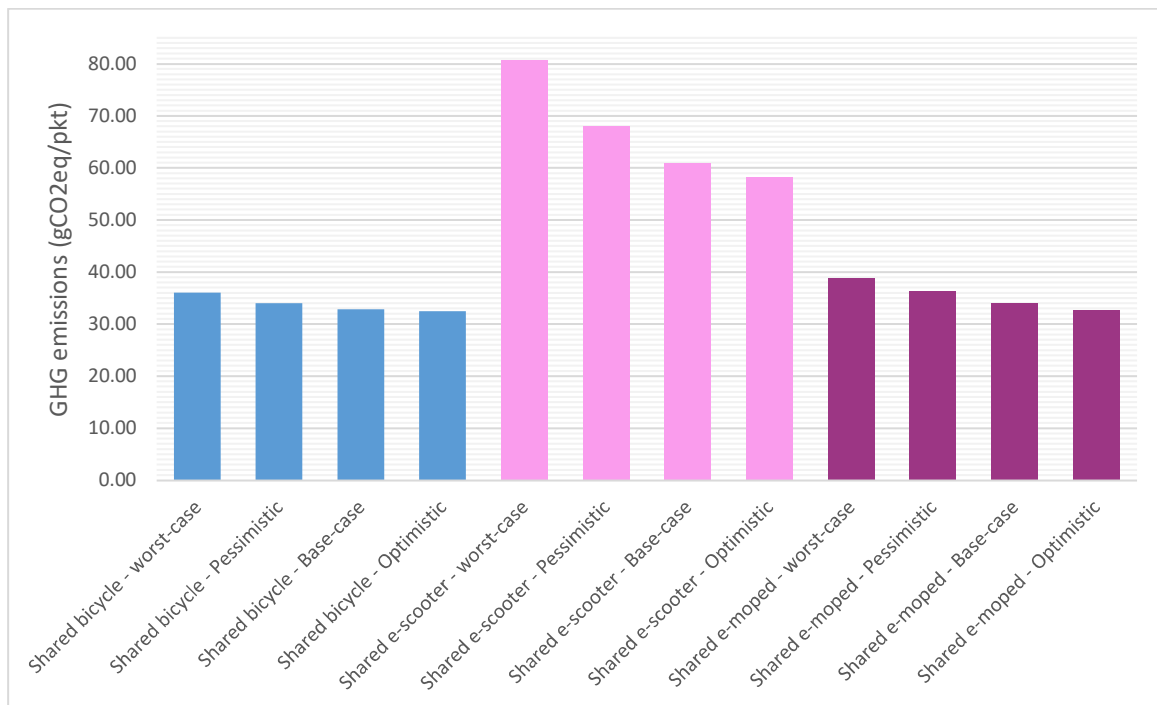


10

11 **Figure 5 Carbon footprint of the shared modes depending on the servicing distance**

12 **Shipping alternative**

13 No transportation is included in the vehicle LCIs from the assembly plant to the using location. Figure  
 14 6 presents the carbon footprint of the three shared modes depending on the servicing distance scenarios  
 15 defined in section 2. Similar figures for the four other indicators are presented in the supplementary  
 16 material. Results highlight that the shipping option is not very influential on the environmental  
 17 performance of the shared modes if it is done by sea + road or rail + road (scenarios UE1, UE2, US1,

1 US2, CN1, and CN2), whatever the environmental impact considered. For example, it increases the  
 2 modal carbon footprints by 2 to 3% to send the vehicles from China to Europe by ship and truck (between  
 3 +0.7 and 1.2g of CO<sub>2</sub>eq/pkt). But air shipping strongly deteriorates the performance of the mode: for  
 4 instance, it increases the carbon footprint of the shared bike mode by 57% in Europe (scenario EU3)  
 5 and by 69% in the US (scenario US 3) compared to a sea + road shipping (resp. scenario UE1 and US1).  
 6 In the case of the shared e-moped, the effect is even higher, with carbon footprints respectively increased  
 7 by 79 and 96%.

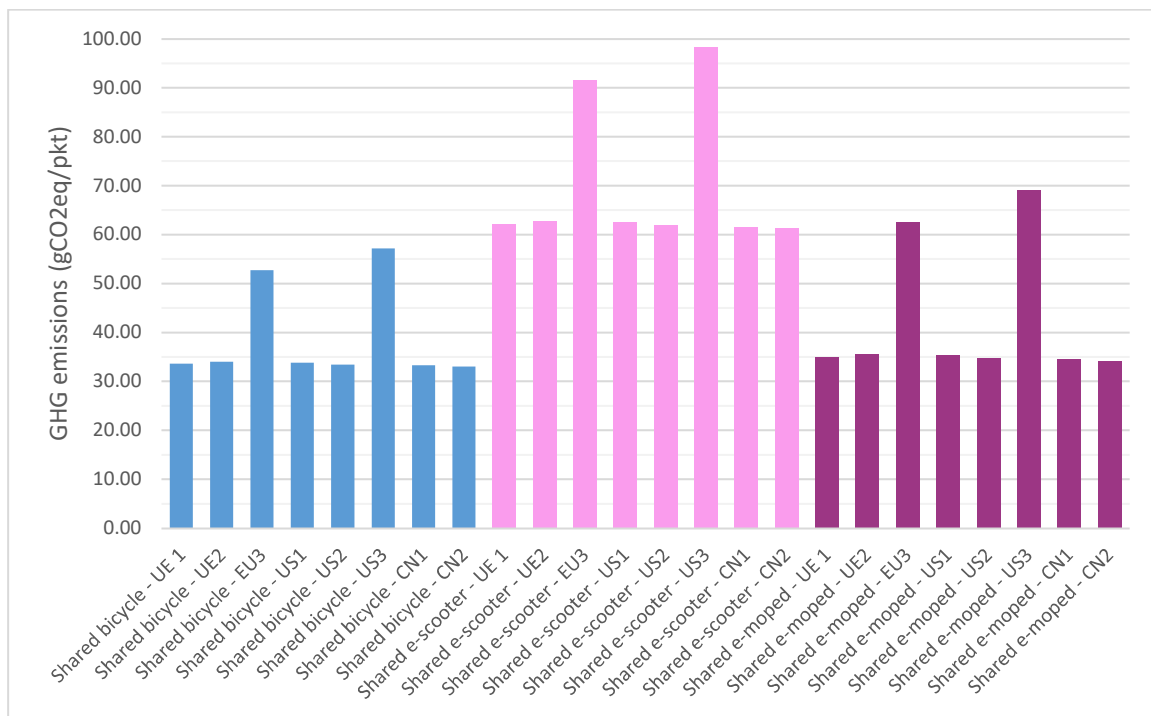

8

9 **Figure 6 Carbon footprint of the shared modes depending on shipping type**


10 **Electricity mix**

11 The electricity mix influences the impact of the use stage as well as the servicing stage, as electric  
 12 vehicles are assumed to be used to maintain, balance, and charge the vehicles. Figure 7 presents the  
 13 carbon footprint of the three shared modes depending on the electricity mix of twelve different countries,  
 14 selected in section 2. Similar figures for the four other indicators are presented in the supplementary  
 15 material. Results show that the environmental performances of shared bikes are not sensitive to the type  
 16 of electricity mix on the five indicators. This is due to (1) the low electricity consumption of e-bikes and  
 17 (2) the fact that the shared bike fleet is considered half electric and half mechanical, thus cutting the

1 electricity consumption by a factor of two. Such a bike-sharing system emits 36g of CO<sub>2</sub>eq/pkt in China  
2 - the country with the highest carbon intensity mix – while it emits 33g of CO<sub>2</sub>eq/pkt in Norway – the  
3 country with the lowest carbon intensity mix. Under the baseline assumptions, the carbon footprint of  
4 docked shared bikes is 34.5g of CO<sub>2</sub>eq/km +/- 5% worldwide.

5

6 On the contrary, the environmental performance of shared ES and shared e-mopeds is highly influenced  
7 by the electricity mix. A shared ES emits around 60g of CO<sub>2</sub>eq/pkt in Norway, Denmark, and France,  
8 when it can reach up to 92g of CO<sub>2</sub>eq/pkt in China, i.e. 50% more emissions. Shared e-mopeds are even  
9 more sensitive: while they emit 32g of CO<sub>2</sub>eq in Norway and Denmark, they reach 78g of CO<sub>2</sub>eq/pkt in  
10 China, i.e. +144%. In countries with a high-carbon intensity electricity, the contribution of the use and  
11 servicing stages of ES can reach between 29% and 41% of the modal impact, respectively on DR and  
12 GWP in China (see supplementary material). In this country, the ES use stage contributes to 22% of the  
13 carbon footprint of the mode, and the servicing to 19% (with e-vans). On DHH, these contributions are  
14 the lowest, with the use stage representing 8% of the impact and the servicing 23%. For the shared e-  
15 moped, the use stage contributes to 52% of the carbon footprint of the mode, and the servicing to 11%.  
16 These contributions are also the lowest on DHH: 12% for the use stage and 8% for the servicing.

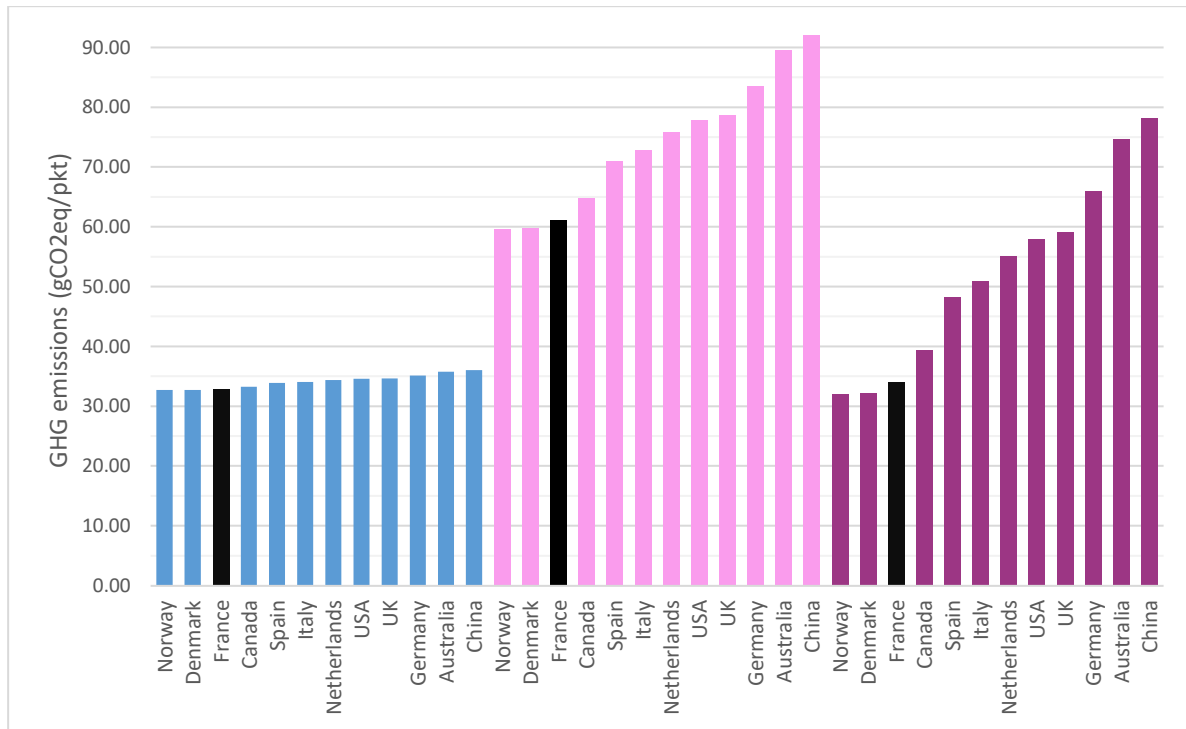

1

2 **Figure 7 Carbon footprint of the shared modes depending on the electricity mix: shared bikes in**  
 3 **blue, shared ES in pink, shared e-mopeds in purple, and French reference in black**

4 Under our assumptions, the three shared modes are in general ranked as follows, from the most to the  
 5 less climate-friendly mode: bike > e-mopeds > ES. For instance, in the US, a shared bike emits 35g of  
 6 CO<sub>2</sub>eq/km, a shared e-moped 58g, and a shared ES 78g. But in countries with a low-carbon intensity  
 7 electricity – like Norway, Denmark, and France, shared bikes and e-mopeds rank equally. This  
 8 performance ranking is stable on DR and DE, as well as on EC in many countries – France, Spain, the  
 9 Netherlands, the USA, the UK, Germany, Australia, and China. Nevertheless, ES are systematically  
 10 slightly better than e-mopeds in terms of DHH, and bikes rank between ES and e-mopeds in Norway,  
 11 Denmark, Canada, and Italy on EC.

12 **6. Discussion and recommendations**

13 **6.1. Changing the paradigm in environmental assessments of transportation policies**

14 The environmental contribution pattern of the different shared micromobility modes assessed in this  
 15 article can be divided into two groups: electric modes and ICE modes. The performance of the ICE  
 16 mode is driven by the use stage. On the contrary, the impact of electric micromobility is mainly driven



1 by the vehicle component and generally by vehicle manufacturing. The use stage is only influential for  
2 shared ES and shared e-mopeds consuming high-carbon intensity electricity and on GWP, DR, and DE.  
3 It is only a major contribution (52%) in the country with the highest carbon intensity electricity (China)  
4 for shared e-mopeds. The servicing stage using e-vans is limited to 23% maximum of the total impact  
5 (human health damage in China). This must be considered when designing simplified environmental  
6 methodologies to support transportation decision-making: the classical approach, constrained to the use  
7 stage assessment, is not an acceptable option anymore and must be replaced by a full life cycle approach.  
8 For instance, eco-designing microvehicles to minimize their modal impact mainly requires to (1)  
9 optimize their manufacturing impact per pkt by choosing durable materials with low environmental  
10 impacts – e.g. steel instead of aluminum, (2) optimize the maintenance, and (3) maximize the recycling  
11 of each component/material at its highest-quality potential.

## 12 **6.2. Infrastructure and servicing contributions**

13 Infrastructure and servicing have their role to play in the environmental sustainability of micromobility  
14 modes. A previous study showed the marginal GWP contribution from the infrastructure for road modes  
15 in Paris [19]. Consistently, for private motorcycles, our study shows a 4% contribution from the  
16 pavement life cycle to the total carbon footprint. But this is especially true for GWP, and less for EC,  
17 DR, and DE where the infrastructure accounts for 12% of the motorcycle carbon footprint. Additionally,  
18 as the contribution of the vehicle diminishes with well-managed ES and bikes allowing for longer  
19 lifespans, the contribution from the infrastructure rises on the integrated modal impact. Moreover,  
20 specific infrastructure for shared modes like bike-sharing stations can have a substantial impact: the  
21 infrastructure contributes to 68% of the modal impact on EC for the Velib' bike. Optimizing bike-  
22 sharing stations is thus necessary to ensure the best environmental performance of the system, as  
23 operators already started to do. Nevertheless, the best time to replace existing high-consuming stations  
24 must be assessed, as there is a trade-off to find between the environmental impact of a new station  
25 production and electricity savings during the use stage. The same considerations apply to wisely replace  
26 all kinds of preceding technologies with new technologies under an eco-friendly orientation [50].


27

1 The servicing stage, i.e. the fleet management, is also influential on the environmental performance of  
2 shared microvehicles. It was estimated to be responsible for half of the carbon footprint of Parisian and  
3 US first generation shared ES [19, 26]. Our results show lower contributions because operators mostly  
4 switched to e-vans. Some operators also opted for swappable batteries, allowing to reduce the size of  
5 the servicing vehicles, thus the kilometers traveled to charge one vehicle and the servicing impact. While  
6 the second option is indubitably environmentally virtuous as far as the fleet replacement has been well  
7 driven, the first option is questionable on a multicriteria approach, as previous comparisons between  
8 electric and ICE vehicles showed non-unanimous rankings amongst indicators in different national  
9 contexts [51].

### 10 **6.3. Carbon performance of micromobility versus other modes**

#### 11 **Paris's case**

12 Figure 8 shows the carbon footprint of most of the Parisian transportation modes in 2020, including the  
13 modes assessed in this study and other Parisian modes assessed with the same methodology in another  
14 study [19]. Carbon footprints are ranked from the less impacting – walking, which emits 2g of CO<sub>2</sub>eq/km  
15 - to the most emitting - taxis and ride-hailing, accounting for 300g of CO<sub>2</sub>eq/pkt. It highlights how  
16 electric micromobility ranks between ICE modes and electric public transportation/active modes in Paris  
17 on GWP. Actives modes – i.e. walking and cycling - are the less emitting modes with the metro and the  
18 RER train (light rail). Nevertheless, the shared bike is ranked sixth due to its shorter lifetime mileage  
19 compared to the personal bike, but also due to the impact of bike-sharing stations and servicing.

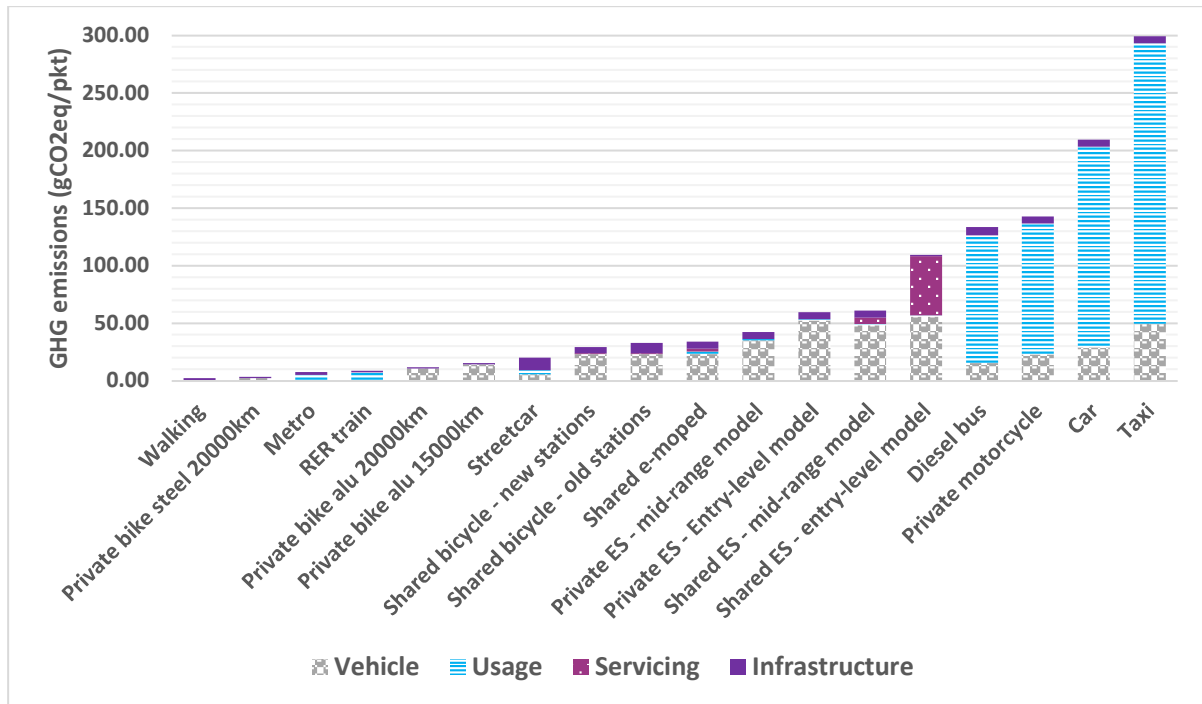


1

2 **Figure 8 Carbon footprint comparison of different transportation modes in Paris per pkt**

3 **US conditions**

4 To verify this carbon ranking in other conditions, we compare the carbon footprints of the shared modes  
 5 calculated with the average US electricity mix (subsection 5.3) to the performances calculated by  
 6 Chester and Horvath [32] in US conditions for public transportation and personal cars as well as the  
 7 impact of walking and cycling with a personal bike calculated in this study (in French conditions but  
 8 quite similar to the US for these modes). Results are presented in Figure 9 and show that, in the US,  
 9 shared micromobility modes globally rank between active modes and public transportation/private car  
 10 modes on GWP. Public transportation modes present higher carbon footprints in US conditions than in  
 11 Paris mainly due to a higher carbon intensity electricity and a lower vehicle occupancy rate. But the  
 12 carbon footprint from the infrastructure is also higher in the US. This can be explained by a more  
 13 intensive infrastructure usage in Paris, but also potentially by underestimated LCIs in theecoinvent  
 14 processes used in the Parisian study.

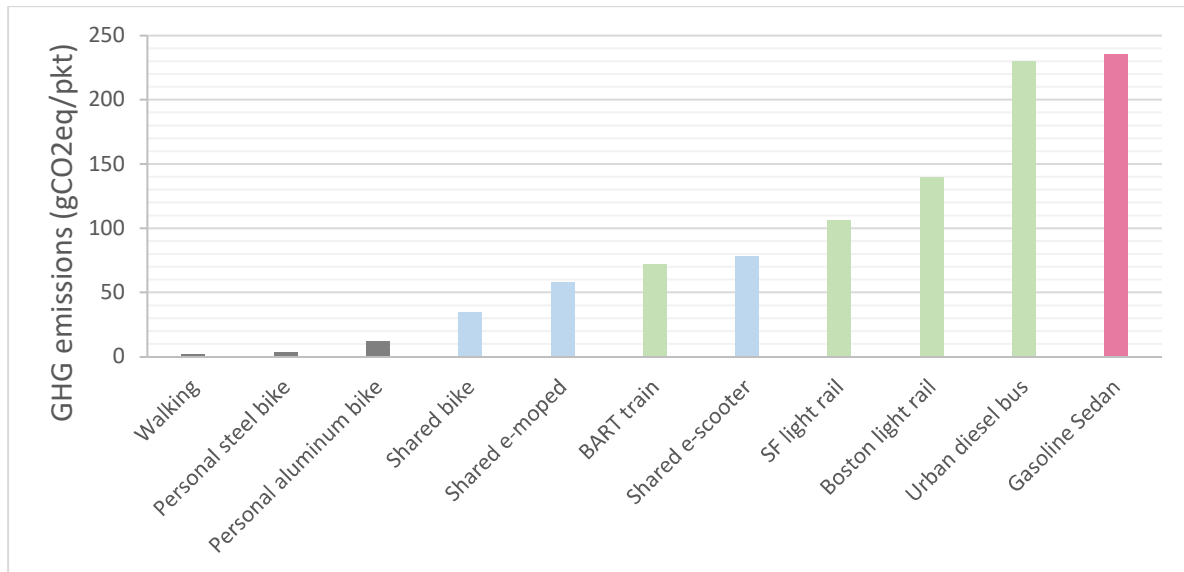

1

2 **Figure 9 Carbon footprint of US modes per passenger-kilometer traveled - in grey active modes,**  
 3 **in blue shared micromobility modes, in green public transportation and in red, private car**

#### 4 **7. Conclusion**

5 The environmental performance of micromobility is investigated within a large set of conditions, under  
 6 country-specific and non-country specific scenario analyses. Results show that personal micromobility  
 7 globally ranks better than shared micromobility due to higher vehicle lifespans, but lifetime mileages  
 8 need to be investigated further. Generally, the shared bike ranks better than the shared e-moped, itself  
 9 ranking better than the shared ES. Servicing is influential on shared ES performance. Vehicle shipping  
 10 does not affect the performance of the mode, unless done by aircraft. The electricity mix impacts ES  
 11 and e-moped performances except in countries with very low-carbon intensity electricity. Electric  
 12 micromobility globally ranks between active modes and personal ICE modes.

13

14 Moreover, our analysis highlights the importance of multicriteria integrated modal LCA to properly  
 15 capture environmental key performance factors and design eco-friendly transportation policies  
 16 considering potential burden-shifting and how they could jeopardize human well-being and planet  
 17 preservation. Considering such a system boundary and a complete scope of indicators – for instance, the  
 18 three endpoint indicators - is a change of paradigm compared to the most popular environmental

1 assessments. Indeed, they are, first, restrained to GHG emissions considerations, and, second, often  
2 limited to the use stage. Such an approach was an acceptable simplification to compare personal ICE  
3 modes but has become obsolete with the recent changes in mobility technologies, services, and  
4 behaviors.

5

## 6 **Declarations**

7 None

## 8 **Availability of data and material**

9 The authors declare that they have no competing interests.

## 10 **Funding**

11 No funding has been received for this study.

## 12 **Acknowledgments**

13 We want to thank the few brave operators and suppliers of shared mobility systems which accepted to  
14 share their private data to conduct an environmental assessment of quality: Cityscoot, Smove, DOTT,  
15 and JC Decaux.

## 16 **References**

- 17 1. IPCC (2014) Climate Change 2014: Synthesis Report. Contribution of Working Groups I, II and  
18 III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Core  
19 Writing Team, R.K. Pachauri and L.A. Meyer (eds.)]. IPCC, Geneva, Switzerland
- 20 2. World Business Council for Sustainable Development, World Resources Institute (2004) The  
21 greenhouse gas protocol: a corporate accounting and reporting standard, Rev. ed. World Business  
22 Council for Sustainable Development; World Resources Institute, Geneva, Switzerland :  
23 Washington, DC
- 24 3. CITEPA (2019) Données d'émissions de gaz à effet de serre dans l'air en France métropolitaine,  
25 avril 2018, format SECTEN
- 26 4. Citepa (2020) Inventaire des émissions de polluants atmosphériques et de gaz à effet de serre en  
27 France – Format Secten
- 28 5. DRIEA, STIF, IAU (2013) Enquête globale transport - la ville de Paris
- 29 6. Laporte G, Meunier F, Wolfler Calvo R (2018) Shared mobility systems: an updated survey. Ann  
30 Oper Res 271:105–126. <https://doi.org/10.1007/s10479-018-3076-8>
- 31 7. velib-metropole.fr (2019) Le service Vélib' en quelques chiffres

- 1 8. OMNIL, Île-de-France Mobilités (2019) La nouvelle enquête globale transport - Présentation des  
2 premiers résultats 2018
- 3 9. Clewlow RR (2018) The Micro-Mobility Revolution: The Introduction and Adoption of Electric  
4 Scooters in the United States. Populus.ai
- 5 10. 6t (2019) Usages et usagers des trottinettes electriques en free-floating en France. 6t-bureau de  
6 recherche
- 7 11. Ville de Paris (2020) Trois opérateurs de trottinettes autorisés à déployer leur flotte dans Paris
- 8 12. Smart Mobility lab, FP2M (2018) Baromètre Fédération FP2M/Smart Mobility Lab. Fédération  
9 FP2M
- 10 13. 6t-bureau de recherche (2020) Le développement du vélo et de la trottinette dans les grandes villes  
11 françaises - une tendance confrontée au stationnement dans l'espace public
- 12 14. 6t-bureau de recherche (2020) Enquête inédite sur la mobilité des actifs franciliens pendant la  
13 grève de décembre 2019
- 14 15. Vélo&Territoires (2020) Fréquentation vélo et déconfinement
- 15 16. Biosca L (2020) Paris : les vélos en free-floating sont de retour. In: CNEWS.  
16 <https://www.cnews.fr/france/2020-06-18/paris-les-velos-en-free-floating-sont-de-retour-968054>.  
17 Accessed 1 Oct 2020
- 18 17. Mi Z, Coffman D (2019) The sharing economy promotes sustainable societies. *Nat Commun*  
19 10:1214. <https://doi.org/10.1038/s41467-019-09260-4>
- 20 18. Martin CJ (2016) The sharing economy: A pathway to sustainability or a nightmarish form of  
21 neoliberal capitalism? *Ecol Econ* 121:149–159. <https://doi.org/10.1016/j.ecolecon.2015.11.027>
- 22 19. de Bortoli A, Christoforou Z (2020) Consequential LCA for territorial and multimodal  
23 transportation policies: method and application to the free-floating e-scooter disruption in Paris. *J*  
24 *Clean Prod* 122898. <https://doi.org/10.1016/j.jclepro.2020.122898>
- 25 20. International Organization for Standardization (2020) ISO 14050:2020 - Environmental  
26 management — Vocabulary
- 27 21. Del Duce A (2011) Life Cycle Assessment of conventional and electric bicycles
- 28 22. Luo H, Kou Z, Zhao F, Cai H (2019) Comparative life cycle assessment of station-based and dock-  
29 less bike sharing systems. *Resour Conserv Recycl* 146:180–189.  
30 <https://doi.org/10.1016/j.resconrec.2019.03.003>
- 31 23. Bonilla-Alicea RJ, Watson BC, Shen Z, et al (2020) Life cycle assessment to quantify the impact  
32 of technology improvements in bike-sharing systems. *J Ind Ecol* 24:138–148.  
33 <https://doi.org/10.1111/jiec.12860>
- 34 24. Dave S (2010) Life Cycle Assessment of Transportation Options for Commuters. Massachusetts  
35 Institute of Technology
- 36 25. Chester M (2008) Life-cycle Environmental Inventory of Passenger Transportation in the United  
37 States. Institute of Transportation Studies, UC Berkeley, Berkeley
- 38 26. Hollingsworth J, Copeland B, Johnson JX (2019) Are e-scooters polluters? The environmental

- 1 impacts of shared dockless electric scooters. *Environ Res Lett* 14:084031.  
2 <https://doi.org/10.1088/1748-9326/ab2da8>
- 3 27. Moreau H, de Jamblinne de Meux L, Zeller V, et al (2020) Dockless E-Scooter: A Green Solution  
4 for Mobility? Comparative Case Study between Dockless E-Scooters, Displaced Transport, and  
5 Personal E-Scooters. *Sustainability* 12:1803. <https://doi.org/10.3390/su12051803>
- 6 28. Leuenberger M, Frischknecht R (2010) Life Cycle Assessment of Two Wheel Vehicles  
7 implemented in ecoinvent data v2.2 (2010). ESU-services Ltd.
- 8 29. Cox BL, Mutel CL (2018) The environmental and cost performance of current and future  
9 motorcycles. *Appl Energy* 212:1013–1024. <https://doi.org/10.1016/j.apenergy.2017.12.100>
- 10 30. Bishop JDK, Doucette RT, Robinson D, et al (2011) Investigating the technical, economic and  
11 environmental performance of electric vehicles in the real-world: A case study using electric  
12 scooters. *J Power Sources* 196:10094–10104. <https://doi.org/10.1016/j.jpowsour.2011.08.021>
- 13 31. Majumdar D, Majumder A, Jash T (2016) Performance of Low Speed Electric Two-wheelers in  
14 the Urban Traffic Conditions: A Case Study in Kolkata. *Energy Procedia* 90:238–244.  
15 <https://doi.org/10.1016/j.egypro.2016.11.190>
- 16 32. Chester M, Horvath A (2009) Environmental assessment of passenger transportation should  
17 include infrastructure and supply chains. *Environ Res Lett* 4:024008.  
18 <https://doi.org/10.1088/1748-9326/4/2/024008>
- 19 33. AFNOR (2006) NF EN ISO 14040 Octobre 2006 - Management environnemental - Analyse du  
20 cycle de vie - Principes et cadre
- 21 34. AFNOR (2006) NF EN ISO 14044 Octobre 2006 - Management environnemental - Analyse du  
22 cycle de vie - Exigences et lignes directrices
- 23 35. International Organization for Standardization (2006) ISO 14040:2006 - Environmental  
24 management -- Life cycle assessment -- Principles and framework
- 25 36. Frischknecht R, Jungbluth N, Althaus H-J, et al (2007) Implementation of life cycle impact  
26 assessment methods. Data v2.0 (2007). Ecoinvent report No. 3. Ecoinvent Centre
- 27 37. OMNIL (2019) Ensemble des données du trafic annuel
- 28 38. AIRPARIF (2018) Zone à faibles émissions dans la Métropole du Grand Paris
- 29 39. Heijungs R, Suh S (2002) Chapter 2 - The basic model for inventory analysis. In: *The*  
30 *Computational Structure of Life Cycle Assessment*. Springer Netherlands, Dordrecht, pp pp11-31
- 31 40. Heijungs R, Suh S (2002) *The Computational Structure of Life Cycle Assessment*. Springer  
32 Netherlands, Dordrecht
- 33 41. Heijungs R (2020) On the number of Monte Carlo runs in comparative probabilistic LCA. *Int J*  
34 *Life Cycle Assess* 25:394–402. <https://doi.org/10.1007/s11367-019-01698-4>
- 35 42. Quartz (2019) Shared scooters don't last long. In: Quartz. [https://qz.com/1561654/how-long-does-](https://qz.com/1561654/how-long-does-a-scooter-last-less-than-a-month-louisville-data-suggests/)  
36 [a-scooter-last-less-than-a-month-louisville-data-suggests/](https://qz.com/1561654/how-long-does-a-scooter-last-less-than-a-month-louisville-data-suggests/). Accessed 1 Jul 2019
- 37 43. Delahaye O (2020) 7 chiffres sur le vélo en Île-de-France. Gd. Paris Métrop.
- 38 44. D.T. (2020) Lyon . Lime déploie 250 nouvelles trottinettes dans la ville. Le progrès

- 1 45. EY (2020) Micromobility: moving cities into a sustainable future
- 2 46. DRIEA - STIF (2013) Enquête globale transport - Les deux-roues motorisés
- 3 47. Matzer C, Weller K, Dippold M, et al (2019) Update of Emission Factors for HBEFA Version 4.1.  
4 TU Graz - IVT
- 5 48. ADEME (2019) Base carbone® - Bilans GES - Transport de personnes - Routier
- 6 49. Chen J, Zhou D, Zhao Y, et al (2020) Life cycle carbon dioxide emissions of bike sharing in China:  
7 Production, operation, and recycling. *Resour Conserv Recycl* 162:105011.  
8 <https://doi.org/10.1016/j.resconrec.2020.105011>
- 9 50. Schaubroeck S, Schaubroeck T, Baustert P, et al (2020) When to replace a product to decrease  
10 environmental impact?—a consequential LCA framework and case study on car replacement. *Int*  
11 *J Life Cycle Assess*. <https://doi.org/10.1007/s11367-020-01758-0>
- 12 51. ADEME, PE INTERNATIONAL, GINGKO 21 (2013) Élaboration selon les principes des ACV  
13 des bilans énergétiques, des émissions de gaz à effet de serre et des autres impacts  
14 environnementaux induits par l'ensemble des filières de véhicules électriques et de véhicules  
15 thermiques , VP de segment B (citadine polyvalente) et VUL à l'horizon 2012 et 2020
- 16