



Effect of prestress on phononic band gaps induced by inertial amplification

M. Miniaci, Matteo Mazzotti, Ada Amendola, Fernando Fraternali

► To cite this version:

M. Miniaci, Matteo Mazzotti, Ada Amendola, Fernando Fraternali. Effect of prestress on phononic band gaps induced by inertial amplification. International Journal of Solids and Structures, 2021, 216, pp.156-166. <10.1016/j.ijsolstr.2020.12.011>. <hal-03169381>

HAL Id: hal-03169381

<https://hal.science/hal-03169381v1>

Submitted on 9 Mar 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons CC BY 4.0 - Attribution - International License

Effect of prestress on phononic band gaps induced by inertial amplification

M. Miniaci,¹ M. Mazzotti,² A. Amendola,³ and F. Fraternali³

¹*CNRS, Centrale Lille, ISEN, Univ. Lille, Univ. Valenciennes, UMR 8520 - IEMN, F-59000 Lille, France*

²*Department of Mechanical Engineering, CU Boulder, 1111 Engineering Drive, UCB 427 Boulder, CO 80309, USA*

³*Department of Civil Engineering, University of Salerno, Via Giovanni Paolo II, 132, 84084 Fisciano (SA), Italy*

(Dated: 14 December 2020)

Phononic crystals and elastic metamaterials have recently received significant attention due to their potential for unconventional wave control. Despite this interest, one outstanding issue is that their band diagram is typically fixed, once the structure designed. To overcome this limitation, periodic structures with adaptive elastic properties have recently been proposed for Bragg- and local resonance-driven structures.

In this context, we report about the effect of an applied external mechanical load on a periodic structure exhibiting band gaps induced by inertial amplification mechanism. If compared to the cases of Bragg scattering and ordinary local resonant metamaterials, we observe here a more remarkable curve shift, modulated through large but fully reversible compression(stretch) of the unit cell, eventually triggering significant (up to two times) enlargement(reduction) of the width of a specific band gap. An important up(down)-shift of some dispersion branches over specific wavenumber values is also observed, showing that this selective variation may lead to negative group velocities over larger(smaller) wavenumber ranges. In addition, the possibility for a non-monotone trend of the lower limit of the first BG under the same type of external applied prestrain is found and explained through an analytical model, which unequivocally proves that this behaviour derives from the different unit cell effective mass and stiffness variations as the prestrain level increases. These peculiarities derive from the hinge-like behaviour of some regions of the unit cell, which is typical of structures exhibiting the inertial amplification mechanism.

The effect of the prestress on the dispersion diagram is investigated through the development of a 2-step calculation method: first, an Updated Lagrangian scheme, including a static geometrically nonlinear analysis of a representative unit cell undergoing the action of an applied external load is derived, and then the Floquet-Bloch decomposition is applied to the linearized equations of the acousto-elasticity for the unit cell in the deformed configuration.

Finally, the most evident consequence on the dispersion curves of the application of an external prestress, i.e. the band gap shift with respect to the unloaded structure, is demonstrated through nonlinear transient numerical simulations, clearly proving the capability of the structure to switch from a pass- to a stop-band behaviour over the same frequency range.

The results presented herein provide insights in the behaviour of band gaps induced by inertial amplification, and suggest new opportunities for real-time tunable wave manipulation.

39 I. INTRODUCTION

40 Phononic crystals and elastic metamaterials have proved to be powerful platforms to achieve a plethora of unconven-
 41 tional vibrational behaviours deriving from their peculiar dispersion diagrams, characterized by frequency band gaps
 42 (BGs) and pass-bands, i.e. frequency regions where the propagation of waves is inhibited or supported, respectively¹.
 43 This allowed to achieve frequency selective wave filtering², guiding³⁻⁵ and splitting^{6,7}, stimulating the conception of
 44 pioneering applications, such as ultra-sensitive devices⁸, large scale metamaterials for vibration shielding⁹⁻¹¹, sub-
 45 wavelength imaging¹², elastic wave cloaking / lensing¹³⁻¹⁵, etc.

46 In this context, an important issue is that phononic crystal and elastic metamaterial operational frequencies are typi-
 47 cally fixed once the structure has been designed and fabricated. In contrast, in the majority of practical applications,
 48 including the ones previously mentioned, it may be desirable to dynamically or adaptively tune the BGs (or some
 49 of the dispersion branches) in terms of frequency, also after the structure has been fabricated. To overcome this
 50 limitation, periodic systems with adaptive elastic properties have recently been proposed. For instance, BG tuning
 51 has been achieved by means of piezoelectric materials¹⁶⁻¹⁸, temperature variation¹⁹⁻²², magneto- and light-based ap-
 52 proaches²³⁻²⁷, as well as by the application of external mechanical loads²⁸. Among them, the latter approach can be
 53 easily implemented by imposing controlled displacements into specific portions of the structure.

54 In this context, Bigoni et al.²⁹ proposed for the first time the prestress as a practical way to reversibly alter the
 55 dispersion diagram of a periodic structure, including the possibility of shifting the BG position. The feasibility of
 56 the approach was confirmed formulating a theoretical model for an orthotropic, prestressed (compressible) elastic
 57 layer vibrating on an elastic half space and assuming long-wave asymptotics for the solution. Gei et al.³⁰ relaxed the
 58 hypothesis of perfect periodicity and investigated the effect of the prestress in quasi-periodic structures in the case of
 59 flexural vibrations. Amendola et al.³¹ studied the band structure of tensegrity mass-spring chains, and the possibility
 60 to tune the dispersion relation of such systems by suitably varying local and global prestress variables, given their
 61 remarkable softening / stiffening response under axial or compressive loading^{32,33}.

62 Periodic elastomeric structures, thanks to their capacity of repetitively undergoing large strain deformations in a
 63 fully reversible manner, brought to BG nucleation / annihilation mechanisms triggered by the application of external
 64 loads radically changing the unit cell geometry³⁴. Deformations in the linear and nonlinear regimes, as well as diverse
 65 geometrical topologies have been explored³⁵⁻³⁸.

66 Finally, it has been observed that also mechanical instabilities induced, for instance, by the application of external
 67 loads, may alter the propagation of elastic waves. Slesarenko et al. induced instabilities in soft composite materials
 68 achieving a significant decrease of the group velocity (up to going negative) of the transverse waves under specific
 69 micropolar conditions³⁹.

70 However, the majority of the aforementioned investigations are limited to the context of (i) Bragg- or (ii) ordinary
 71 resonance-induced BGs, whereas in the present paper, we report about the effects of an applied prestress on (iii) peri-
 72 odic structures exhibiting BGs induced by inertial amplification mechanisms. While in (i) the wave scattering derives
 73 from assemblages of periodic unit cells, requiring thus the wavelength of the incoming wave to be comparable to the
 74 structural periodicity⁴⁰, and in (ii) the dynamic behaviour is mainly governed by the eigenfrequencies of resonators
 75 included in the structure⁴¹, in (iii) large inertial forces are generated by amplifying the motion of a mass, which in
 76 turn increases the inertia of the overall system and lowers its resonance frequency, allowing thus for sub-wavelength

77 and broadband BGs, while keeping the structure lightweight^{42,43}.

78 If compared to the cases of Bragg scattering and ordinary local resonant metamaterials⁴⁴, we show that the inertial am-
 79 plification allows for a more remarkable curve shift, modulated through large but fully reversible compression(stretch)
 80 of the unit cell, eventually triggering significant enlargement(reduction) of a specific band gap width. We also observe
 81 a selective up(down)-shift of some dispersion branches, leading to negative group velocities over specific wavenumber
 82 ranges. In addition, a non-monotone trend of the lower limit of the first BG under the same type of external applied
 83 prestrain is found and explained through an analytical model, which shows that this behaviour derives from the differ-
 84 ent unit cell effective mass and stiffness variations as the prestrain level increases. Examining the deformed geometries
 85 consequent the application of the prestress highlights how the remarkable band shift is due to the hinge-like behaviour
 86 of some regions of the unit cell, typical of the inertial amplification mechanism and responsible for a large deformation
 87 state, i.e. change of the unit cell geometry. We consider the static deformation induced by the prestress to be in the
 88 linear elastic regime so to have a complete reversibility of the phenomena (tunability). The analysis is performed in
 89 terms of small amplitude motions superimposed on a deformed state once the desired load has been applied.

90 The paper is organized as follows: in section II, the 2-step Updated Lagrangian scheme, including (i) a static geo-
 91 metrically nonlinear analysis of a representative unit cell undergoing the action of an applied external load and (ii)
 92 the Floquet-Bloch decomposition applied to the linearized equations of the acousto-elasticity for the unit cell in the
 93 deformed configuration, is presented. Section III provides evidence for the dispersion band alteration induced by
 94 the application of the prestress in a periodic structure exhibiting BG induced by inertial amplification mechanism.
 95 Parametric dispersion curves for different values of prestress are presented and compared to the original structure
 96 (i.e., without the application of any prestress). Afterwards, a 2-step nonlinear transient numerical simulation confirms
 97 the BG shift induced by the prestress in a finite structure, proving its ability to switch from a pass- to a stop-band
 98 behaviour over the same frequency range. The prestress is easily implemented by applying prescribed displacement
 99 at specific edges of the structure prior to the wave propagation. The full tunability of the structure is guaranteed by
 100 the possibility of readily applying and removing the imposed deformations. Finally, section IV summarizes the main
 101 results of the present research and provides future perspectives, shedding light on the possibility of investigating the
 102 effect of an additional state of prestress, internal, cross-linking the fields of metamaterials and tensegrity structures.

103 II. FLOQUET-BLOCH ANALYSIS OF A PRESTRESSED PHONONIC CRYSTAL

104 In this work, the band structure diagrams are computed using a Floquet-Bloch finite element method formulated
 105 within an Updated Lagrangian scheme. As schematically presented in Fig. 1, the procedure consists of two main
 106 computational steps, namely (i) a nonlinear static analysis involving large strains and displacements, and (ii) a so
 107 called small-on-large dynamic analysis, in which small vibrations are superimposed on the statically deformed unit
 108 cell. The main computational aspects of the two steps are outlined in the following.

109 A. Static analysis

110 Following the application of a static volume load \mathbf{f}_{V0} , or surface load \mathbf{f}_{S0} , the unit cell Ω_0 identified by the position
 111 vector \mathbf{x} and represented by the lattice vector $\mathbf{r}_0 = \{r_{01}, 0\}^T$ and its reciprocal vector $\mathbf{g}_0 = \{g_{01}, 0\}^T = \{r_{01}/2\pi, 0\}^T$,

undergoes a displacement \mathbf{u}_0 that results in a change of configuration from the undeformed state C_0 to the static deformed state C (see Fig. 1). The deformed domain and matrix of the lattice vectors in the (deformed) configuration C are identified by Ω and $\mathbf{r} = \{r_1, 0\}^T$, respectively. The relation between \mathbf{r}_0 and \mathbf{r} can be expressed as $\mathbf{r} = \mathbf{F}_L \mathbf{r}_0$, where \mathbf{F}_L defines the affine component of the deformation gradient such that $\mathbf{F}_L = \mathbf{F}^{-1} \mathbf{F}_P$, being $\mathbf{F} = \nabla_{\mathbf{x}} \mathbf{u}_0 + \mathbf{I}$ the deformation gradient, \mathbf{F}_P a periodic non-affine deformation⁴⁵ and $\nabla_{\mathbf{x}} = \{\partial/\partial x_1, \partial/\partial x_2\}^T$. The equilibrium equations with respect to the undeformed configuration C_0 can be derived from the variational statement:

$$\int_{\Omega} (\mathbf{S}(\mathbf{x}) : \delta \mathbf{E}(\mathbf{x}) - \mathbf{f}_{V0} \cdot \delta \mathbf{u}_0) da = \int_{\partial\Omega} \mathbf{f}_{s0} \cdot \delta \mathbf{u}_0 ds, \quad (1)$$

subjected to the Dirichlet boundary conditions:

$$\mathbf{u}_0(\mathbf{x} + \mathbf{r}_0) = \mathbf{u}_0(\mathbf{x}), \quad (2)$$

in which $\mathbf{E} = \frac{1}{2}(\mathbf{F}^T)\mathbf{F} - \mathbf{I}$ is the Green-Lagrange strain tensor and $\mathbf{S} = \mathbf{D}_0 : \mathbf{E}$ the second Piola-Kirchhoff stress tensor. The tensor of tangential elastic moduli, \mathbf{D}_0 , is expressed by $\mathbf{D}_0 = 4\partial^2\psi/(\partial\mathbf{C}\partial\mathbf{C})$, being $\mathbf{C} = \mathbf{F}^T\mathbf{F}$ the right Cauchy-Green deformation tensor and ψ the elastic energy density. The material of the unit cell in C_0 is specified by the density ρ_0 while, assuming a hyperelastic material behavior described by the Murnaghan's model^{46–49}, the elastic energy density can be defined as:

$$\begin{aligned} \psi = & \frac{1}{2}(\lambda + 2\mu) I_1^2(\mathbf{E}) - 2\mu I_2(\mathbf{E}) + \frac{1}{3}(l + 2m) I_1^3(\mathbf{E}) \\ & - 2m I_1(\mathbf{E}) I_2(\mathbf{E}) + n I_3(\mathbf{E}), \end{aligned} \quad (3)$$

in which λ and μ denote the first and second Lamé parameters, respectively, (l, m, n) the third order Murnaghan parameters, and $I_1(\mathbf{E})$, $I_2(\mathbf{E})$ and $I_3(\mathbf{E})$ the first, second and third invariants of the Green-Lagrange strain tensor, respectively.

The application of a standard Galerkin approach to Eq. (1) results in the generalized system of equations:

$$[\mathbf{\Gamma}_0^T \mathbf{K}(\mathbf{Q}_0) \mathbf{\Gamma}_0] \mathbf{Q}_0(\mathbf{X}) = \mathbf{P}_0(\mathbf{X}), \quad (4)$$

where $\mathbf{K}(\mathbf{Q}_0)$ is the static stiffness matrix, \mathbf{P}_0 the global vector of nodal forces, \mathbf{Q}_0 the global vector of independent nodal displacements and $\mathbf{\Gamma}_0$ the mapping operator resulting from Eq. (2) and realizing the condition $\mathbf{U}_0 = \mathbf{\Gamma}_0 \mathbf{Q}_0$. \mathbf{U}_0 indicates the full vector of nodal displacements. In this work, the solution of Eq. (4) is carried out using Comsol Multiphysics 5.3⁵⁰.

Following the Updated Lagrangian scheme, once the displacements \mathbf{Q}_0 are obtained, the reference configuration is updated from C_0 to C by calculating the corresponding nodal coordinates $\mathbf{x} = \mathbf{x}_0 + \mathbf{\Gamma}_0 \mathbf{Q}_0(\mathbf{x}_0)$. The updated material properties in C are given by $\rho = \rho_0(\det \mathbf{F})^{-1}$ and $D_{ijkl} = (\det \mathbf{F})^{-1} F_{iI} F_{jJ} F_{kK} F_{lL} (D_0)_{IJKL}$, while the Cauchy stress tensor is obtained from the relation $\boldsymbol{\sigma} = (\det \mathbf{F})^{-1} \mathbf{F} \mathbf{S} \mathbf{F}^T$. The geometry of the unit cell in the configuration C is then re-meshed and used as the basis for the linear dynamic analysis described in the next section.

B. Dynamic Analysis Using the Floquet-Bloch Decomposition

Following the small-on-large analysis approach^{47,51–54}, in which C is the new reference configuration, the position vector for the unit cell in the dynamic deformed configuration C' (Fig. 1) is approximated as $\mathbf{x}' \approx \mathbf{x}$ while, from the

140 application of the Floquet-Bloch theorem, any small harmonic perturbation $\mathbf{u}(\mathbf{x})$ can be expressed as⁵⁵:

$$\mathbf{u}(\mathbf{x}) = \tilde{\mathbf{u}}(\mathbf{x})\exp(ikx)\exp(-i\omega t), \quad (5)$$

141 in which $\tilde{\mathbf{u}}(\mathbf{x})$ is a Ω -periodic displacement amplitude, t denotes the time, ω the angular frequency, and $k \in \Lambda$ the
142 Bloch wavenumber, being Λ the reciprocal unit cell defined in C by the reciprocal lattice vector $\mathbf{g} = \mathbf{F}_L^{-T} \mathbf{g}_0$.

143 By defining the k -shifted gradient of a generic Ω -periodic vector field $\tilde{\phi}(\mathbf{x})$ as:

$$\nabla_k \tilde{\phi}(\mathbf{x}) = \nabla_{\mathbf{x}} \tilde{\phi}(\mathbf{x}) + ik \tilde{\phi}(\mathbf{x}) \otimes (\mathbf{r} \|\mathbf{r}\|^{-1}), \quad (6)$$

144 the solution of the elastodynamic problem for free vibrations of the unit cell in C subjected to an initial stress $\boldsymbol{\sigma}_0$ can
145 be obtained from the variational statement:

$$\begin{aligned} & -\omega^2 \int_{\Omega} \rho(\mathbf{x}) \delta \tilde{\mathbf{u}}^*(\mathbf{x}) \cdot \tilde{\mathbf{u}}(\mathbf{x}) d\Omega \\ & + \int_{\Omega} \delta \tilde{\mathbf{e}}_k^*(\mathbf{x}, \vartheta) : \mathbf{D}(\mathbf{x}) : \tilde{\mathbf{e}}_k(\mathbf{x}) d\Omega \\ & + \int_{\Omega} \boldsymbol{\sigma}_0(\mathbf{x}) : [(\nabla_k \delta \tilde{\mathbf{u}}^*(\mathbf{x}))^T \nabla_k \tilde{\mathbf{u}}(\mathbf{x})] d\Omega = 0, \end{aligned} \quad (7)$$

146 subjected to the Dirichlet boundary condition:

$$\tilde{\mathbf{u}}(\mathbf{x} + \mathbf{r}) = \tilde{\mathbf{u}}(\mathbf{x}) \quad \text{on } \partial\Omega, \quad (8)$$

147 in which $(\cdot)^*$ stands for the conjugate of a complex vector or tensor field, $\tilde{\mathbf{e}}_k(\mathbf{x}) = \frac{1}{2}[\nabla_k \tilde{\mathbf{u}}(\mathbf{x}) + (\nabla_k \tilde{\mathbf{u}}(\mathbf{x}))^T]$ follows
148 from Eq. (6) and denotes the linearized Green-Lagrange strain tensor.

149 The finite element discretization of Eqs. (7) and (8) proceeds by first generating a new mesh for the deformed geometry
150 of the unit cell in C and then applying a Galerkin approach⁵⁶. As a results, the following generalized linear eigenvalue
151 problem is obtained:

$$\{\boldsymbol{\Gamma}^T [k^2 \mathbf{K}_3 + ik(\mathbf{K}_2 - \mathbf{K}_2^T) + \mathbf{K}_1 - \omega^2 \mathbf{M}] \boldsymbol{\Gamma}\} \tilde{\mathbf{Q}}(\omega) = \mathbf{0}, \quad (9)$$

152 in which $\boldsymbol{\Gamma}$ is a mapping operator implementing the Dirichlet boundary condition in Eq. (8), such that $\tilde{\mathbf{U}} = \boldsymbol{\Gamma} \tilde{\mathbf{Q}}$,
153 where $\tilde{\mathbf{U}}$ is the global vector of nodal displacement amplitudes and $\tilde{\mathbf{Q}}$ a subvector of $\tilde{\mathbf{U}}$ collecting only its independent
154 components. The expressions of \mathbf{K}_3 , \mathbf{K}_2 , \mathbf{K}_1 and \mathbf{M} are given in the Appendix A, for the sake of brevity.

155 The band diagrams of the phononic structure can be computed from the eigenvalue problem in Eq. (9) (i) by extracting
156 the Bloch wavenumbers $k(\omega)$ for any fixed frequency ω , or (ii) by computing the natural frequencies $\omega(k)$ of the system
157 for any fixed Bloch wavenumber k . Since the focus of the present research does not require the knowledge of the
158 spatial attenuation, the latter approach has been used, resulting computationally more convenient, as it does not
159 require the transformation of the system into the state space.

160 III. RESULTS

161 To study the effect of an external mechanical load on a periodic structure exhibiting BGs induced by inertial
162 amplification, the numerical method presented in the previous section is here applied to the representative unit cell
163 reported in Fig. 2A. The unit cell consists of an epoxy matrix exhibiting elongated cross-like holes, and it was proposed
164 for the first time by Acar and Yilmaz⁴³. Its geometrical and material parameters are reported in Tables I, II.

TABLE I. Material constants for the epoxy⁴⁴.

	ρ_0 [kg/m ³]	λ [GPa]	μ [GPa]	l [GPa]	m [GPa]	n [GPa]
Epoxy	1540	2.59	1.34	-18.94	-13.36	-9.81

TABLE II. Geometrical parameters of the unit cell presented in Fig. 2A. All the given parameters are in [mm].

t_1	t_2	t_3	t_4	d_1	d_2	d_3	d_4
3.2	0.4	3.2	0.4	5.2	2.0	20.0	4.0

167 A. Band structure analysis

168 As discussed in Section II, the first step for the band structure calculation is to extract the deformation induced in the
 169 unit cell by an initial state of stress / strain applied to the structure. To do this, two different sets of loading conditions
 170 are applied to the structure in the form of a normal displacement $\mathbf{u}_0(\mathbf{x}_0) \cdot \mathbf{n}_0(\mathbf{x}_0)$ prescribed to the x_{02} -parallel faces
 171 of the unit cell (highlighted in purple in Fig. 2A). The out-of-plane degrees of freedom of the unit cell are blocked,
 172 so to prevent any possible bending deformation during the application of the loading conditions. The first loading
 173 set induces a state of compression and varies from 0 (no prestrained condition) to $-360 \mu\text{m}$ (maximum compression
 174 condition) with a step of $\Delta \mathbf{u}_0(\mathbf{x}_0) \cdot \mathbf{n}_0(\mathbf{x}_0) = -20 \mu\text{m}$, while the second set induces a tensile state and varies from
 175 0 (no prestrained condition) to $+130 \mu\text{m}$ (maximum traction condition) with a step of $\Delta \mathbf{u}_0(\mathbf{x}_0) \cdot \mathbf{n}_0(\mathbf{x}_0) = +10 \mu\text{m}$.
 176 For the sake of brevity, only the deformation of the unit cell under the conditions of maximum compression / traction
 177 are reported in Figs. 2B,C, respectively. Examining the induced deformation, it is possible to infer that the stress,
 178 and thus the deformation, is mainly localized into the hinge-like regions, responsible for the activation of the inertial
 179 amplification mechanism⁴³. The analysis also shows that the maximum Von Mises stress level reached in the structure
 180 is of 33.1 and 21.2 MPa, for the two types of loading condition, respectively. Given these values of maximum stress,
 181 and applying the von Mises yield criterion⁵⁷, the minimum mono-axial tensile strength required for our material to
 182 have a safety factor ≥ 1 is $\sigma_{min} = 33.1 \cdot \sqrt{3} = 56 \text{ MPa}$ (if we consider a state of pure shear solicitation), which is
 183 an acceptable value for epoxy⁵⁸. Considering that the aforementioned value is obtained in the most strict condition
 184 of pure shear (which is not the case in the system under consideration), an elastic behaviour of the material, and
 185 thus of the band diagram, over the full range $[-360, +130] \mu\text{m}$, modulated by the intensity of the applied prestrain,
 186 is guaranteed, allowing for a full reversibility of the undeformed configuration (original dispersion diagram), once
 187 the load is removed. For the sake of completeness, since the small on large theory is considered here, the dynamic
 188 component of the stress is negligible with respect to the static prestress. For this reason it can be assumed that the
 189 safety factor does not change between the static and dynamic configuration.

190 Once the static analysis performed for the aforementioned sets of prestrain, the deformed geometries are assigned
 191 as the input unit cells to calculate the dispersion diagrams exploiting the Floquet-Bloch theory (see section II). The
 192 out-of-plane displacement of the structure is kept blocked also in this phase, in order to limit the dispersion analysis
 193 to waves belonging to the $x_1 - x_2$ plane. The band structures are computed considering the unit cell to infinitely
 194 duplicate in a periodic linear array, and assuming the epoxy in its linear elastic regime (the hypothesis of small
 195 displacements is now applied). The unit cell domain is meshed by means of 8-node hexagonal elements of maximum

size $L_{FE} = 0.2$ mm, which is found to provide accurate eigensolutions up to the frequency of interest⁵⁹. It should be noted that, since the applied prestrain applied to each face of the cell induces isotropic deformation in the $x_1 - x_2$ plane in both compression and traction cases, the deformation gradient \mathbf{F} and its affine component \mathbf{F}_L are diagonal and, as a consequence, the orientation of the reciprocal lattice vectors \mathbf{g}_1 in the deformed configurations does not change with respect to that in the undeformed configuration. This implies that the orientation of the Bloch wavevector also remains unchanged between the undeformed and deformed configurations (see Fig. 1D). Therefore, the resulting eigenvalue problem $(\mathbf{K} - \omega^2 \mathbf{M})\mathbf{u} = \mathbf{0}$ is solved by varying the non-dimensional wavevector \mathbf{k}^* along the irreducible path $[\Gamma - X]$, with $\Gamma \equiv (0, 0)$ and $X \equiv \pi/a, 0$, being $a = \left(2 \cdot \sum_{i=1}^3 d_i + d_4\right)$ the lattice parameter.

Figure 3 reports parametric plots of the dispersion diagrams of the unit cell as a function of the external prestrain intensity inducing compression (Fig. 3A) or traction (Fig. 3B) states in the structure. The dispersion curves are color-coded on the base of the level of prestrain applied at the boundaries of the unit cell in the pre-loading phase. Specifically, the color bar of Fig. 3A varies gradually from $-360 \mu\text{m}$ (blue: maximum compression state) to 0 (green: unprestrained condition), respectively. Analysing the band diagrams, it is possible to observe that increasing the compressive state in the unit cell induces (i) a general up-shift (curves shading into dark blue) of the dispersion branches, as well as (ii) group velocity inversion in the third band when k^* gets close to the high symmetry point X , as indicated by the black arrow. The band inversion is more evident comparing the dispersion curves singularly plotted for the $-360 \mu\text{m}$ and $0 \mu\text{m}$ prestrain cases, as reported in Fig. S1A and Fig. S1B. Further inspection of the dispersion diagram allows to infer that the unprestrained unit cell (green curves) allows for the opening of two BGs in the $[0 - 3000]$ Hz frequency range, going from 170 to 470 Hz and 703 to 1180 Hz, respectively (see Fig. 4A at $0 \mu\text{m}$ imposed displacement). The upper and lower bounds for both the first and second BGs shift in frequency for increasing values of the prestrain (see Fig. 4A). However, although the global width of the first BG experiences a limited variation, both its upper and lower bounds undergo a remarkable frequency shift (they both almost triple their frequency). On the contrary, the lower bound of the second BG is rather stable in frequency for increasing values of the prestrain, while its upper limit experiences a considerable frequency up-shift. This is responsible for an overall enlargement of the BG width (almost doubling with respect to the unstressed case). Finally, it is possible to notice that the lower bound of the second BG experiences a sort of inflection point when no displacement is imposed. The different behaviours of the two BGs highlights a selective nature of the prestress in altering the dispersion diagram.

The aforementioned effects partially apply also for the case of unit cell subjected to an external traction pre-loading, i.e. both curve shifting and group velocity inversion are observed (Fig. 3B). However, in this case, group velocity inversion involves more bands (the third and fourth ones) and occurs at lower reduced wavenumber values ($k^* \simeq \frac{\pi}{2a}$), as highlighted by the black arrows in Fig. 3B (refer to Fig. S1B and Fig. S1C for a direct comparison of the dispersion curves singularly plotted for the $0 \mu\text{m}$ and $+130 \mu\text{m}$ prestrain cases). This implies that, differently from the compression case, when an external state of traction is induced in the pre-loading phase, only few dispersion curves clearly shift towards higher frequencies (the first, the second, the fifth and sixth bands) over the full range of k^* (from 0 to π/a), whereas some others (the third and the fourth ones) exhibit both a down- and an up-shift over a wide range of k^* . As a consequence, while the first BG is almost kept unaltered in terms of frequency width and slightly shifts towards higher frequencies (see Fig. 4B), the second BG experiences a remarkable width decrease (up to 3 times less the original BG).

At this point, it is worth to point out here the different dynamic behaviour of inertially amplified elastic metamaterials

with respect to the ordinary ones when subjected to an external state of prestress that emerges from the present research. Focusing the attention on the case of prestrain inducing tensile deformation in the structure, in ordinary PCs the BGs tend to decrease its frequency regime, being this effect mainly driven by the geometrical changes of the unit cell rather than by the effective stiffness and mass alteration introduced by the prestress (see for instance Fig. 3A of ref.⁴⁴ and relevant literature on ordinary PCs presented in section I). On the contrary, in the case of inertially amplified elastic metamaterials, where the displacement mechanism is used to amplify the effective inertia of small masses⁶⁰, the state of external solicitation represents an important means to control the effective stiffness / effective mass ratio of the structure. This additional degree of freedom may lead to both an increase or decrease of the lower limit of the first BG frequency regime, under the same type of applied prestrain (see for instance Figs. 3B and 4B, where the lower limit of the first BG increases although a prestress condition inducing tensile solicitation in the structure is applied).

To gain further mechanical insights about this peculiar behaviour, a thorough explanation on the change of the effective stiffness / effective mass ratio of the structure as a function of the applied prestrain is provided with the help of the model reported in Fig. 5, and proposed for the first time by the research group of Yilmaz^{61–64}. Figure 5A shows the rigid link equivalent model, which assumes pin joints at the middle points of the flexural hinges. Lumped parameters m , m_a and k_{eff} are reported along with the principal geometrical parameters ϑ (initial link angle) and displacements (δ_x and δ_y) consequent the application of a prestrain inducing tensile solicitation in the system. Already in the undeformed configuration, an angle ϑ exists between the equivalent rigid links (lines in red) and the ground.

$$f_p = \left(\sqrt{\frac{k_{eff}}{m_{eff} + m}} \right) / (2\pi) = \left(\sqrt{\frac{k_{eff}}{m_a(\cot^2(\vartheta) + 1)/4 + m}} \right) / (2\pi) \quad (10)$$

where $m_a(\cot^2(\vartheta) + 1)/4$ defines the effective mass of the system.

When a tensile prestress is applied, ϑ decreases to ϑ_u , and the effective mass increases. If the stiffness k_{eff} is left unaltered, from Eq. (10) it clearly emerges that the lower limit of the first BG would decrease due to increase of the effective mass. However, if the effective stiffness k_{eff} increases more than the effective mass m_{eff} (the edge mass m does not depend on ϑ), then the lower limit of the first BG may also increase (this reasoning also applies to the case of prestrain inducing a compression state of solicitation and it may lead to analogous considerations).

To verify the correctness of the numerical approach proposed in this paper, a comparison of the analytical values of f_p deriving from Eq. (10) and the numerical solutions is performed and reported in Figs. 5B-D. Figure 5B reports the parametric plot of the dispersion curves of the unit cell when an external prestrain ($[0 - 40] \mu\text{m}$ range) is applied inducing a tensile state in the structure. The $[100 - 220]$ Hz frequency range is considered. The same polarization reported in Fig. 3 applies. The values of the frequency of the longitudinal branch responsible for the lower limit of the first BG are reported at the X high symmetry point in correspondence of the black arrows. Left panel of Fig. 5C reports the direct comparison of the analytical solution (triangular markers connected by the black line) deriving from Eq. (10) and the numerical results (magenta square markers). The values of k_{eff} introduced in the analytical model are directly calculated from the deformed numerical configuration according to standard homogenization procedures^{65,66}. Right panel of Fig. 5C shows the variation of the effective stiffness Δk_{eff} and of the effective mass Δm_{eff} . This explains why the lower limit of the first BG increases, as shown in Figs. 3B and 4B, even if a tensile prestress is applied to the structure. Indeed, the effective mass increase Δm_{eff} (Fig. 5D) is far lower than the stiffness increase Δk_{eff} (this is due to the chosen geometrical characteristics of the unit cell, including the out-of-plane dimension

272 $h = t_2$ limiting the value of m_a). As a consequence, it is possible to conclude that in this case the BG alteration is
 273 mainly stiffness driven.

274 Finally, to clearly show the enhanced potential of inertial amplification PCs with respect to the ordinary ones when
 275 an external prestrain condition is applied, additional calculations by changing some of the geometrical and mechanical
 276 parameters of the unit cell are performed. Inspired by the analytical model reported in Fig. 5A, a configuration of
 277 the unit cell allowing for the lower limit of the first BG to exhibit a non-monotone trend has been found and reported
 278 in Fig. 6. It is possible to observe that the lower limit of the first BG now first decreases, i.e., the increase of the
 279 effective mass is dominant - the red curve is above the blue one at low values of prestrain (yellow rectangle) and then
 280 increases, i.e., the increase in effective stiffness is dominant - the red curve is below the blue one at higher values of
 281 prestrain (green rectangle). This has been obtained by changing some of the model parameters as follows: $d_3 = 18.5$
 282 mm, $t_3 = 18.5$ mm, $m_a = 1$ kg/m³ and multiplying by a factor of 10 the Lamè and Murnaghan material parameters.
 283 These results suggest that a deformation of the unit cell geometry induced by a compressive / tensile prestress state,
 284 already in the elastic regime, can lead to significant changes in the passband and BG behaviours of a periodic structure,
 285 especially if the BG nucleation mechanism is lead by IA.

286 B. Transient Calculation

287 The confirmation of the above mentioned BG tunability is here verified through a nonlinear transient numerical
 288 simulation of wave propagation conducted on a finite waveguide comprising 50 unit cells disposed in the x_1 -direction,
 289 as shown in Fig. 7A. The idea, here, is to pre-load some unit cells of the waveguide before exciting elastic waves at one
 290 of its edge, in order to locally and reversibly change the dispersion diagram and confirm the ability of the waveguide
 291 to switch from a pass- to a stop-band behaviour over a specific frequency range.

292 After having pre-loaded the array, so to uniformly reach the prestrain condition of -360 μm in 6 unit cells (Fig. 7B),
 293 elastic waves are excited at the left edge of the waveguide by means of an imposed displacement of 1 μm in the
 294 x_1 -direction (red arrow in Fig. 7A). Two input signals are considered: (i) a triangular-like excitation (top-left panel
 295 of Fig. 7C) and (ii) a Hanning modulated 11 sine cycles centered at 1400 Hz (top-right panel of Fig. 7C), exhibiting
 296 a rather broadband and narrowband frequency content, respectively (bottom panels of Fig. 7C). Such pulses have
 297 been chosen according to the band structure shifts reported in Fig. 3 and to highlight the tunable filtering capabilities
 298 of the designed waveguide under prestressed conditions. In both excitation cases, 20 ms long time transient explicit
 299 simulations have been performed in order to allow multiple wave reflections to take place at both the edge of the
 300 waveguide and of the prestressed unit cells.

301 In the case of excitation (i), time transient displacements in the x_1 -direction are recorded at the two acquisition
 302 points R1 and R2 (Fig. 7B), taken equidistant from the prestressed regions and chosen respectively before (B/f) and
 303 after (A/t) the prestressed portion of the waveguide. After acquisition, signals are Fourier transformed and compared
 304 to highlight the differences of the two responses in terms of frequency content. Figure 7D reports the displacement
 305 along the x_1 -direction at points R1 and R2 (top panel), as well as their energy content in the frequency domain
 306 (lower panel). The frequencies of the computed BGs as a function of the applied prestrain are also highlighted as a
 307 shaded region, where the color scale refers to the level of imposed displacement in the pre-loading phase. Examining
 308 the energy content it emerges that the Fourier transform of the signal acquired before the prestrained region (B/f

309 - red line), where the diagram reported in Fig. S1B applies, presents component in the 1000 – 1600 Hz frequency
 310 range, whereas the signal registered after the prestrained region (A/t - black line) has no frequency components in
 311 this frequency range. On the contrary, for frequencies above $\simeq 1600$ Hz, the amplitudes of the frequency contents are
 312 comparable. This is in agreement with the two different dispersion diagrams and clearly confirms the possibility of
 313 the waveguide to switch from a pass- to a stop-band behaviour over the 1000 – 1600 Hz frequency range by readily
 314 applying and removing the imposed deformations, respectively.

315 When the second type of excitation (i.e., the Hanning modulated 11 sine cycles centered at 1400 Hz) is applied to
 316 the left edge of the waveguide, the switch potential is even more evident. Indeed, reconstructing the full wave field
 317 displacements at specific time instants, it is clearly visible that the pulse is fully supported in the first portion of the
 318 waveguide (where no prestress is applied), whereas when the prestrained region begins the wave is strongly reflected
 319 back.

320 IV. CONCLUSIONS AND FUTURE PERSPECTIVES

321 In conclusion, in this work the effect of the application of an external prestress on the dispersion diagram has been
 322 investigated. The geometrical deformation of the unit cell consequent the action of an applied external load has been
 323 determined through a static geometrically nonlinear analysis, representing the first step of a so called Updated La-
 324 grangian scheme of calculation. A Floquet-Bloch decomposition has then been applied (second step) to the linearized
 325 equations of the acousto-elasticity for the unit cell in the deformed configuration.

326 The effect of the prestress on the the original band structure (i.e., unit cell without any pre-loading phase) has been
 327 demonstrated through parametric Floquet-Bloch analysis and further confirmed by nonlinear transient numerical sim-
 328 ulations, proving the capability of the structure to switch from a pass- to a stop-band behaviour in the same frequency
 329 range ([1000 – 1600] Hz).

330 The results presented herein provide insights in the behaviour of band gaps induced by inertial amplification, and
 331 suggest new opportunities for real-time tunable wave manipulation.

332 Future investigations will concern the extension of the present study in the direction of a tensegrity-inspired re-
 333 design^{67,68} of the unit cell reported in Fig. 1. A self-similar⁶⁹ reorganization of the structural elements will allow
 334 the construction of a tensegrity architecture. The design will derive from the D-bar tensegrity systems^{67,68}, equipped
 335 with longitudinal and transverse cables. The idea will be to recursively divide the longitudinal span of the cell into
 336 segments of equal length and replace each new segment with a smaller scale unit with equal shape⁶⁷. Self-equilibrated
 337 tensile forces in the cables and compressive forces in the struts will give rise to an internal state of prestress. Cables
 338 and struts will present an offset in the transverse direction in order to prevent material overlapping. The application
 339 of a self-equilibrated system of forces composed of tensile forces in the cables and compressive forces in the struts
 340 will give rise to an *internal* state of prestress, which can superimpose to the external state of prestress, analysed in
 341 the present work. Such initial states of stress will contribute to the geometric term of the stiffness matrix of the
 342 structure⁶⁷, and allow for an extra degree of freedom for the optimal tuning of the dispersion relation of the system³¹.

343 References

- ¹P. A. Deymier, *Acoustic Metamaterials and Phononic Crystals*, Springer Series in Solid-State Sciences (Springer Berlin Heidelberg, 2013).
- ²M. I. Hussein, M. J. Leamy, and M. Ruzzene, “Dynamics of phononic materials and structures: Historical origins, recent progress, and future outlook,” *Applied Mechanics Reviews* **66**, 040802–38 (2014).
- ³H. Zhu and F. Semperlotti, “Anomalous refraction of acoustic guided waves in solids with geometrically tapered metasurfaces,” *Physical Review Letters* **117**, 034302 (2016).
- ⁴S. H. Mousavi, A. B. Khanikaev, and Z. Wang, “Topologically protected elastic waves in phononic metamaterials,” *Nature Communications* **6**, 8682 (2015).
- ⁵M. Miniaci, R. K. Pal, B. Morvan, and M. Ruzzene, “Experimental observation of topologically protected helical edge modes in patterned elastic plates,” *Physical Review X* **8**, 031074 (2018).
- ⁶X. Su, Z. Lu, and A. N. Norris, “Elastic metasurfaces for splitting sv- and p-waves in elastic solids,” *Journal of Applied Physics* **123**, 091701 (2018).
- ⁷M. Miniaci, R. K. Pal, R. Manna, and M. Ruzzene, “Valley-based splitting of topologically protected helical waves in elastic plates,” *Physical Review B* **100**, 024304 (2019).
- ⁸M. Miniaci, A. Gliozzi, B. Morvan, A. Krushynska, F. Bosia, M. Scalerandi, and N. Pugno, “Proof of concept for an ultrasensitive technique to detect and localize sources of elastic nonlinearity using phononic crystals,” *Physical Review Letters* **118**, 214301 (2017).
- ⁹S. Br  l  , E. H. Javelaud, S. Enoch, and S. Guenneau, “Experiments on seismic metamaterials: Molding surface waves,” *Physical Review Letters* **112**, 133901 (2014).
- ¹⁰M. Miniaci, A. Krushynska, F. Bosia, and N. M. Pugno, “Large scale mechanical metamaterials as seismic shields,” *New Journal of Physics* **18**, 083041 (2016).
- ¹¹F. Fraternali, A. Amendola, and G. Benzoni, “Innovative seismic isolation devices based on lattice materials: A review,” *Ingegneria Sismica* **4**, 93–113 (2018).
- ¹²M. Moleron and C. Daraio, “Acoustic metamaterial for subwavelength edge detection,” *Nature Communications* **6**, 8037 (2015).
- ¹³S. Zhang, C. Xia, and N. Fang, “Broadband acoustic cloak for ultrasound waves,” *Physical Review Letters* **106**, 024301 (2011).
- ¹⁴D. Misseroni, D. J. Colquitt, A. B. Movchan, N. V. Movchan, and I. S. Jones, “Cymatics for the cloaking of flexural vibrations in a structured plate,” *Scientific Reports* **6**, 23929 (2016).
- ¹⁵D. Bigoni, S. Guenneau, A. B. Movchan, and M. Brun, “Elastic metamaterials with inertial locally resonant structures: Application to lensing and localization,” *Physical Review B* **87**, 174303 (2013).
- ¹⁶F. Casadei, M. Ruzzene, L. Dozio, and K. A. Cunefare, “Broadband vibration control through periodic arrays of resonant shunts: experimental investigation on plates,” *Smart Materials and Structures* **19**, 015002 (2010).
- ¹⁷A. Bergamini, T. Delpero, L. De Simoni, L. Di Lillo, M. Ruzzene, and P. Ermanni, “Phononic crystal with adaptive connectivity,” *Advanced Materials* **26**, 1343–1347 (2014).
- ¹⁸N. Kherraz, L. Haumesser, F. Levassort, P. Benard, and B. Morvan, “Controlling bragg gaps induced by electric boundary conditions in phononic piezoelectric plates,” *Applied Physics Letters* **108**, 093503 (2016).
- ¹⁹K. L. Jim, C. W. Leung, S. T. Lau, S. H. Choy, and H. L. W. Chan, “Thermal tuning of phononic bandstructure in ferroelectric ceramic/epoxy phononic crystal,” *Applied Physics Letters* **94**, 193501 (2009).
- ²⁰Y. Cheng, X. J. Liu, and D. J. Wu, “Temperature effects on the band gaps of lamb waves in a one-dimensional phononic-crystal plate (I),” *The Journal of the Acoustical Society of America* **129**, 1157–1160 (2011).
- ²¹L. Airoldi and M. Ruzzene, “Design of tunable acoustic metamaterials through periodic arrays of resonant shunted piezos,” *New Journal of Physics* **13**, 113010 (2011).
- ²²Y. Wu, K. Yu, L. Yang, R. Zhao, X. Shi, and K. Tian, “Effect of thermal stresses on frequency band structures of elastic metamaterial plates,” *Journal of Sound and Vibration* **413**, 101 – 119 (2018).
- ²³J.-F. Robillard, O. B. Matar, J. O. Vasseur, P. A. Deymier, M. Stippinger, A.-C. Hladky-Hennion, Y. Pennec, and B. Djafari-Rouhani, “Tunable magnetoelastic phononic crystals,” *Applied Physics Letters* **95**, 124104 (2009).
- ²⁴O. B. Matar, J. F. Robillard, J. O. Vasseur, A.-C. Hladky-Hennion, P. A. Deymier, P. Pernod, and V. Preobrazhensky, “Band gap tunability of magneto-elastic phononic crystal,” *Journal of Applied Physics* **111**, 054901 (2012).
- ²⁵X. Guo and P. Wei, “Dispersion relations of elastic waves in one-dimensional piezoelectric/piezomagnetic phononic crystal with initial

- stresses,” *Ultrasonics* **66**, 72 – 85 (2016).
- ²⁶S. Zhang, Y. Shi, and Y. Gao, “Tunability of band structures in a two-dimensional magnetostrictive phononic crystal plate with stress and magnetic loadings,” *Physics Letters A* **381**, 1055 – 1066 (2017).
- ²⁷A. S. Gliozzi, M. Miniaci, A. Chiappone, A. Bergamini, B. Morin, and E. Descrovi, “Tunable photo-responsive elastic metamaterials,” *Nature Communications* **11**, 1–8 (2020).
- ²⁸G. Bordiga, L. Cabras, A. Piccolroaz, and D. Bigoni, “Prestress tuning of negative refraction and wave channeling from flexural sources,” *Applied Physics Letters* **114**, 041901 (2019).
- ²⁹D. Bigoni, M. Gei, and A. Movchan, “Dynamics of a prestressed stiff layer on an elastic half space: filtering and band gap characteristics of periodic structural models derived from long-wave asymptotics,” *Journal of the Mechanics and Physics of Solids* **56**, 2494 – 2520 (2008).
- ³⁰M. Gei, “Wave propagation in quasiperiodic structures: stop/pass band distribution and prestress effects,” *International Journal of Solids and Structures* **47**, 3067 – 3075 (2010).
- ³¹A. Amendola, A. Krushynska, C. Daraio, N. M. Pugno, and F. Fraternali, “Tuning frequency band gaps of tensegrity mass-spring chains with local and global prestress,” *International Journal of Solids and Structures* **155**, 47 – 56 (2018).
- ³²F. Fraternali, G. Carpentieri, and A. Amendola, “On the mechanical modeling of the extreme softening/stiffening response of axially loaded tensegrity prisms,” *Journal of the Mechanics and Physics of Solids* **74**, 136 – 157 (2015).
- ³³A. Amendola, G. Carpentieri, M. de Oliveira, R. Skelton, and F. Fraternali, “Experimental investigation of the softening–stiffening response of tensegrity prisms under compressive loading,” *Composite Structures* **117**, 234 – 243 (2014).
- ³⁴S. Babaei, N. Viard, P. Wang, N. X. Fang, and K. Bertoldi, “Harnessing deformation to switch on and off the propagation of sound,” *Advanced Materials* **28**, 1631–1635 (2016).
- ³⁵K. Bertoldi and M. C. Boyce, “Mechanically triggered transformations of phononic band gaps in periodic elastomeric structures,” *Physical Review B* **77**, 052105 (2008).
- ³⁶K. Bertoldi and M. C. Boyce, “Wave propagation and instabilities in monolithic and periodically structured elastomeric materials undergoing large deformations,” *Physical Review B* **78**, 184107 (2008).
- ³⁷L. Wang and K. Bertoldi, “Mechanically tunable phononic band gaps in three-dimensional periodic elastomeric structures,” *International Journal of Solids and Structures* **49**, 2881 – 2885 (2012).
- ³⁸S. Rudykh and M. C. Boyce, “Transforming wave propagation in layered media via instability-induced interfacial wrinkling,” *Physical Review Letters* **112**, 034301 (2014).
- ³⁹V. Slesarenko, P. I. Galich, J. Li, N. X. Fang, and S. Rudykh, “Foreshadowing elastic instabilities by negative group velocity in soft composites,” *Applied Physics Letters* **113**, 031901 (2018).
- ⁴⁰V. Romero-García, A. Krynkin, L. Garcia-Raffi, O. Umnova, and J. Sánchez-Pérez, “Multi-resonant scatterers in sonic crystals: Locally multi-resonant acoustic metamaterial,” *Journal of Sound and Vibration* **332**, 184 – 198 (2013).
- ⁴¹Z. Liu, X. Zhang, Y. Mao, Y. Zhu, Z. Yang, C. Chan, and P. Sheng, “Locally Resonant Sonic Materials,” *Science* **289**, 1734–1736 (2000).
- ⁴²C. Yilmaz, G. M. Hulbert, and N. Kikuchi, “Phononic band gaps induced by inertial amplification in periodic media,” *Physical Review B* **76**, 054309 (2007).
- ⁴³G. Acar and C. Yilmaz, “Experimental and numerical evidence for the existence of wide and deep phononic gaps induced by inertial amplification in two-dimensional solid structures,” *Journal of Sound and Vibration* **332**, 6389 – 6404 (2013).
- ⁴⁴M. Mazzotti, I. Bartoli, and M. Miniaci, “Modeling bloch waves in prestressed phononic crystal plates,” *Frontiers in Materials* **6**, 74 (2019).
- ⁴⁵P. Zhang and W. J. Parnell, “Soft phononic crystals with deformation-independent band gaps,” *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **473**, 20160865 (2017).
- ⁴⁶F. D. Murnaghan, “Finite deformations of an elastic solid,” *American Journal of Mathematics* **59**, 235–260 (1937).
- ⁴⁷A. Pau and F. Lanza di Scalea, “Nonlinear guided wave propagation in prestressed plates,” *The Journal of the Acoustical Society of America* **137**, 1529–1540 (2015).
- ⁴⁸B. Dubuc, A. Ebrahimkhanlou, and S. Salamone, “The effect of applied stress on the phase and group velocity of guided waves in anisotropic plates,” *The Journal of the Acoustical Society of America* **142**, 3553–3563 (2017).
- ⁴⁹B. Dubuc, A. Ebrahimkhanlou, and S. Salamone, “Higher order longitudinal guided wave modes in axially stressed seven-wire strands,”

- 438 Ultrasonics **84**, 382 – 391 (2018).
- 439 ⁵⁰“Comsol multiphysics 5.5,” <https://www.comsol.com/> (2017).
- 440 ⁵¹M. Mazzotti, A. Marzani, I. Bartoli, and E. Viola, “Guided waves dispersion analysis for prestressed viscoelastic waveguides by means
441 of the safe method,” *International Journal of Solids and Structures* **49**, 2359 – 2372 (2012).
- 442 ⁵²“Harnessing instability-induced pattern transformation to design tunable phononic crystals,” *International Journal of Solids and Structures*
443 **58**.
- 444 ⁵³M. Mazzotti, M. Miniaci, and I. Bartoli, “Band structure analysis of leaky bloch waves in 2d phononic crystal plates,” *Ultrasonics* **74**,
445 140 – 143 (2017).
- 446 ⁵⁴M. Mazzotti, I. Bartoli, M. Miniaci, and A. Marzani, “Wave dispersion in thin-walled orthotropic waveguides using the first order shear
447 deformation theory,” *Thin-Walled Structures* **103**, 128 – 140 (2016).
- 448 ⁵⁵M. Collet, M. Ouisse, M. Ruzzene, and M. Ichchou, “Floquet-bloch decomposition for the computation of dispersion of two-dimensional
449 periodic, damped mechanical systems,” *International Journal of Solids and Structures* **48**, 2837 – 2848 (2011).
- 450 ⁵⁶M. Mazzotti, I. Bartoli, and A. Marzani, “Ultrasonic leaky guided waves in fluid-coupled generic waveguides: hybrid finite-boundary
451 element dispersion analysis and experimental validation,” *Journal of Applied Physics* **115**, 143512 (2014).
- 452 ⁵⁷R. von Mises, “Mechanik der festen körper im plastisch-deformablen zustand,” *Nachrichten von der Gesellschaft der Wissenschaften zu*
453 *Göttingen, Mathematisch-Physikalische Klasse* **1913**, 582–592 (1913).
- 454 ⁵⁸I. Tsiafis, K.-D. Bouzakis, N. Michailidis, A. Lontos, and I. Anastopoulos, “Experimental-analytical procedures to determine the per-
455 formance of epoxy resins under various mechanical loadings,” *Journal-Balkan Tribological Association* **10**, 60–72 (2004).
- 456 ⁵⁹L. D. Marchi, A. Marzani, and M. Miniaci, “A dispersion compensation procedure to extend pulse-echo defects location to irregular
457 waveguides,” *NDT & E International* **54**, 115 – 122 (2013).
- 458 ⁶⁰C. Yilmaz and G. Hulbert, “Theory of phononic gaps induced by inertial amplification in finite structures,” *Physics Letters A* **374**,
459 3576–3584 (2010).
- 460 ⁶¹S. Taniker and C. Yilmaz, “Generating ultra wide vibration stop bands by a novel inertial amplification mechanism topology with flexure
461 hinges,” *International Journal of Solids and Structures* **106-107**, 129 – 138 (2017).
- 462 ⁶²O. Yuksel and C. Yilmaz, “Realization of an ultrawide stop band in a 2-d elastic metamaterial with topologically optimized inertial
463 amplification mechanisms,” *International Journal of Solids and Structures* **203**, 138 – 150 (2020).
- 464 ⁶³O. Yuksel and C. Yilmaz, “Shape optimization of phononic band gap structures incorporating inertial amplification mechanisms,”
465 *Journal of Sound and Vibration* **355**, 232–245 (2015).
- 466 ⁶⁴S. Taniker and C. Yilmaz, “Design, analysis and experimental investigation of three-dimensional structures with inertial amplification
467 induced vibration stop bands,” *International Journal of Solids and Structures* **72**, 88–97 (2015).
- 468 ⁶⁵S. P. Timoshenko and J. M. Gere, *Theory of elastic stability* (Courier Corporation, 2009).
- 469 ⁶⁶J. Dirrenberger, S. Forest, and D. Jeulin, “Computational homogenization of architected materials,” in
470 *Architected materials in nature and engineering* (Springer, 2019) pp. 89–139.
- 471 ⁶⁷R. E. Skelton and M. C. de Oliveira, *Tensegrity systems*, Vol. 1 (Springer, 2009).
- 472 ⁶⁸F. Fraternali and F. Santos, “Mechanical modeling of superelastic tensegrity braces for earthquake-proof structures,” *Extreme Mechanics*
473 *Letters* **33**, 100578 (2019).
- 474 ⁶⁹M. Miniaci, A. Krushynska, A. S. Gliozzi, N. Kherraz, F. Bosia, and N. M. Pugno, “Design and fabrication of bioinspired hierarchical
475 dissipative elastic metamaterials,” *Physical Review Applied* **10**, 024012 (2018).

476 **Acknowledgements** MiM has received funding from the European Union’s Horizon 2020 FET Open (“BOHEME”)
477 under grant agreement No. 863179.

478 **Data availability.** The data that support the plots within this paper and other findings of this study are available
479 from the corresponding author upon request.

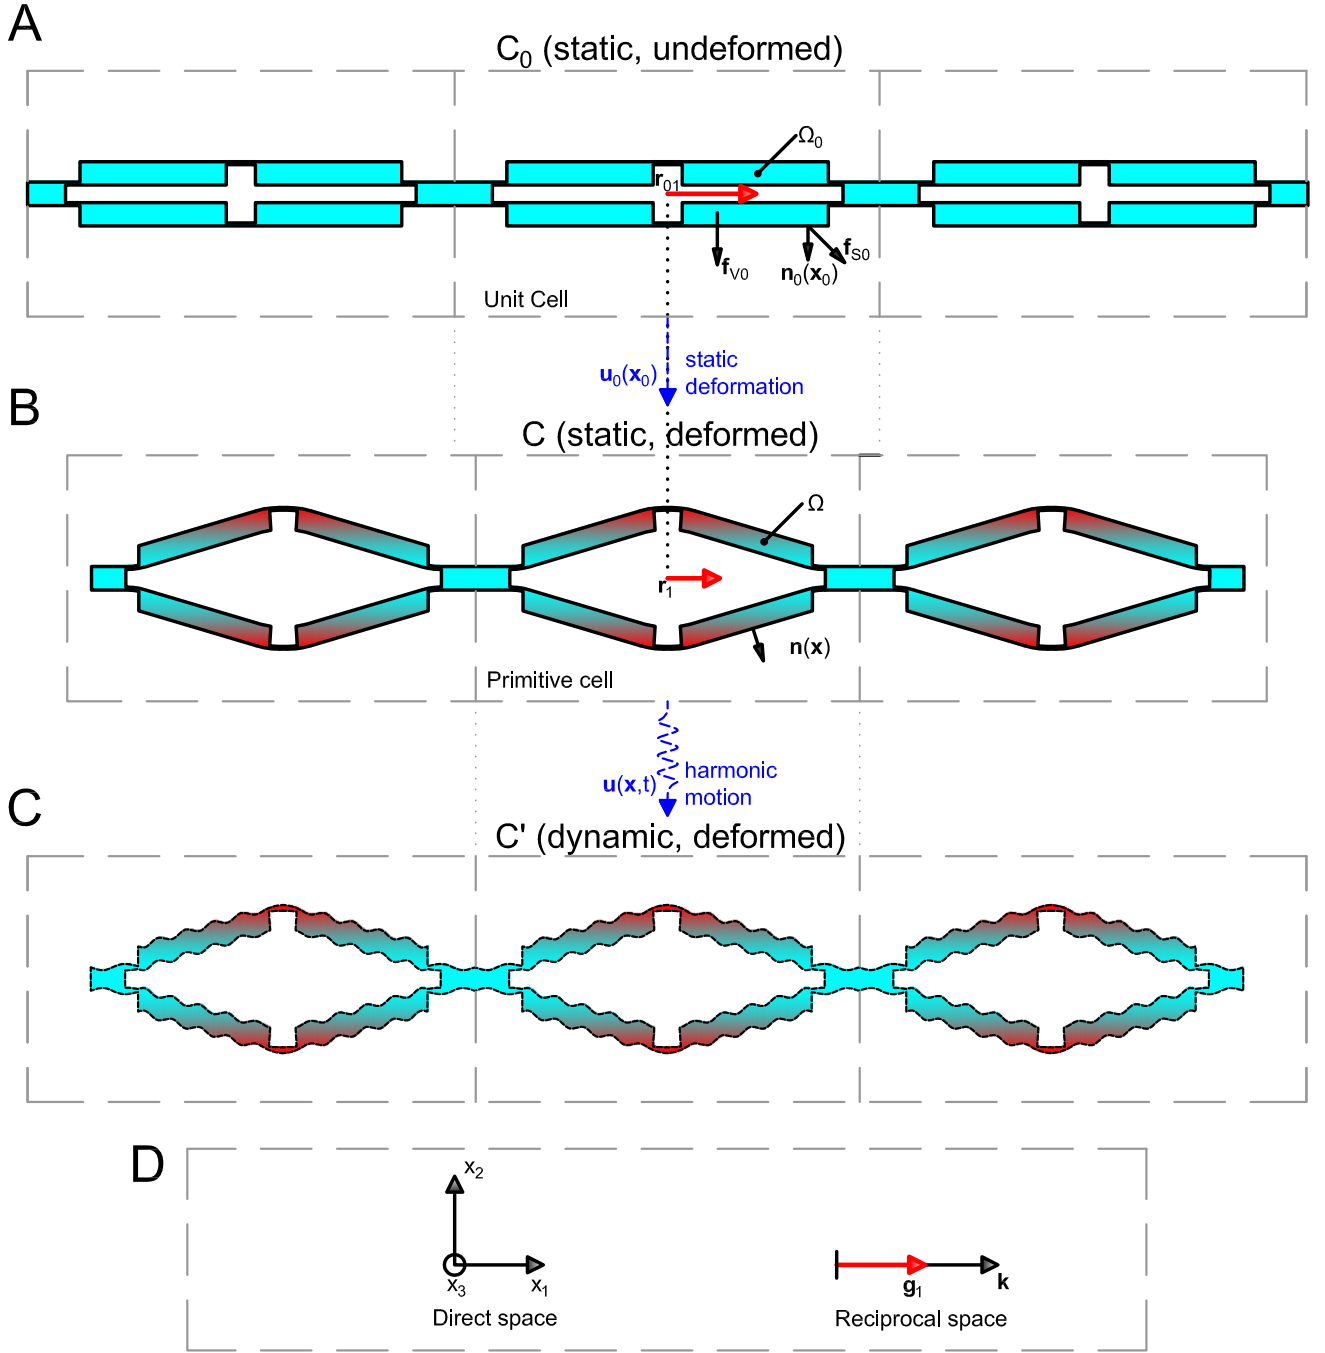


FIG. 1. **Graphic representation of the Updated Lagrangian scheme.** (A) The undeformed configuration C_0 , i.e. the initial unit cell (delimited by dashed lines) used to calculate the displacement and stress fields introduced by the external mechanical load. (B) The static deformed configuration C , resulting from the application of the external mechanical load. (C) The dynamic configuration C' undergoing a harmonic motion. (D) The reference systems in the direct and reciprocal spaces.

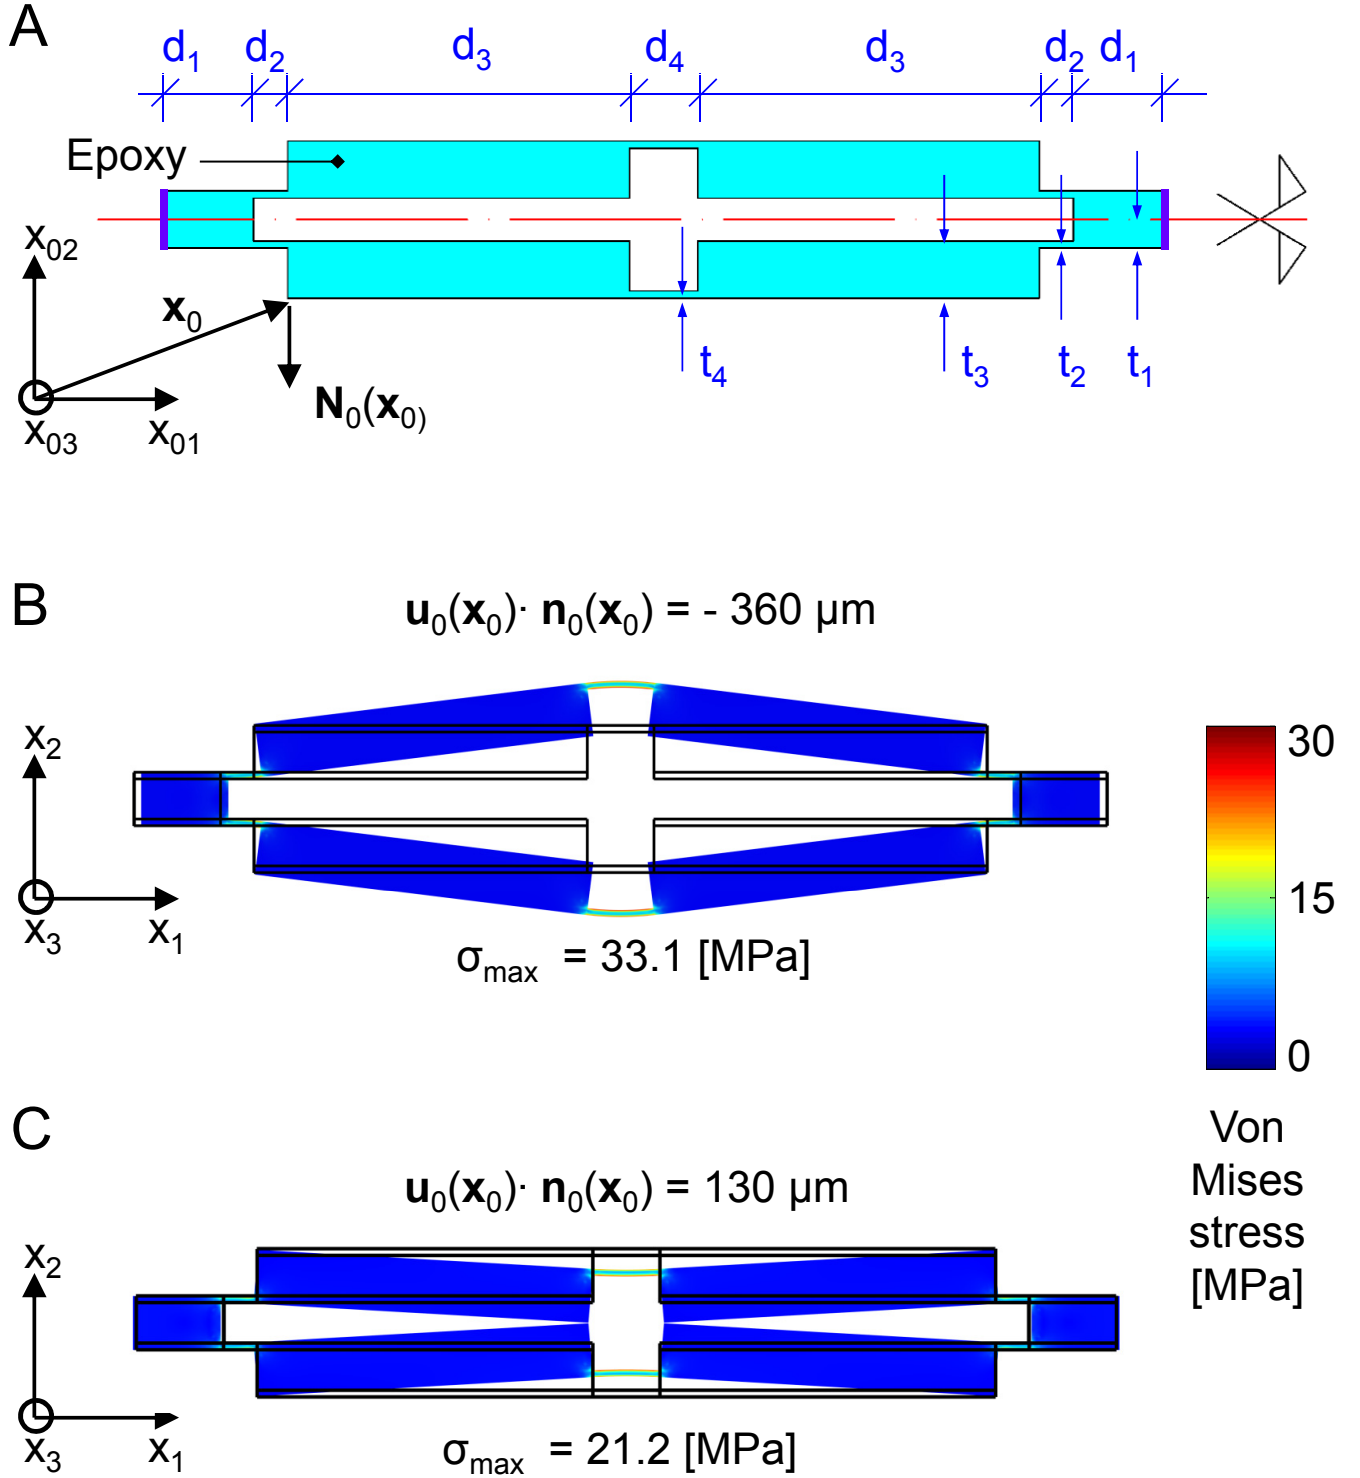


FIG. 2. Schematic representation of the undeformed unit cell and its deformed conditions under isotropic compression / traction. (A) Schematic representation of the unit cell exhibiting inertial amplification mechanism, positioned at \mathbf{x}_0 with respect to the original reference systems x_{0i} , with $i = 1, 2, 3$. The structure is made of epoxy and it was proposed for the first time by Yilmaz et al. in ref.⁴³. (B, C) Deformed configuration of the unit cell under isotropic $\mathbf{u}_0(\mathbf{x}_0) \cdot \mathbf{n}_0(\mathbf{n}_0) = 130 \mu\text{m}$ traction ($-360 \mu\text{m}$ compression). The colors denote the Von Mises stress in MPa. A maximum stress of 21.2 (28.6 33.1) MPa is observed. Deformations are in 1:1 scale.

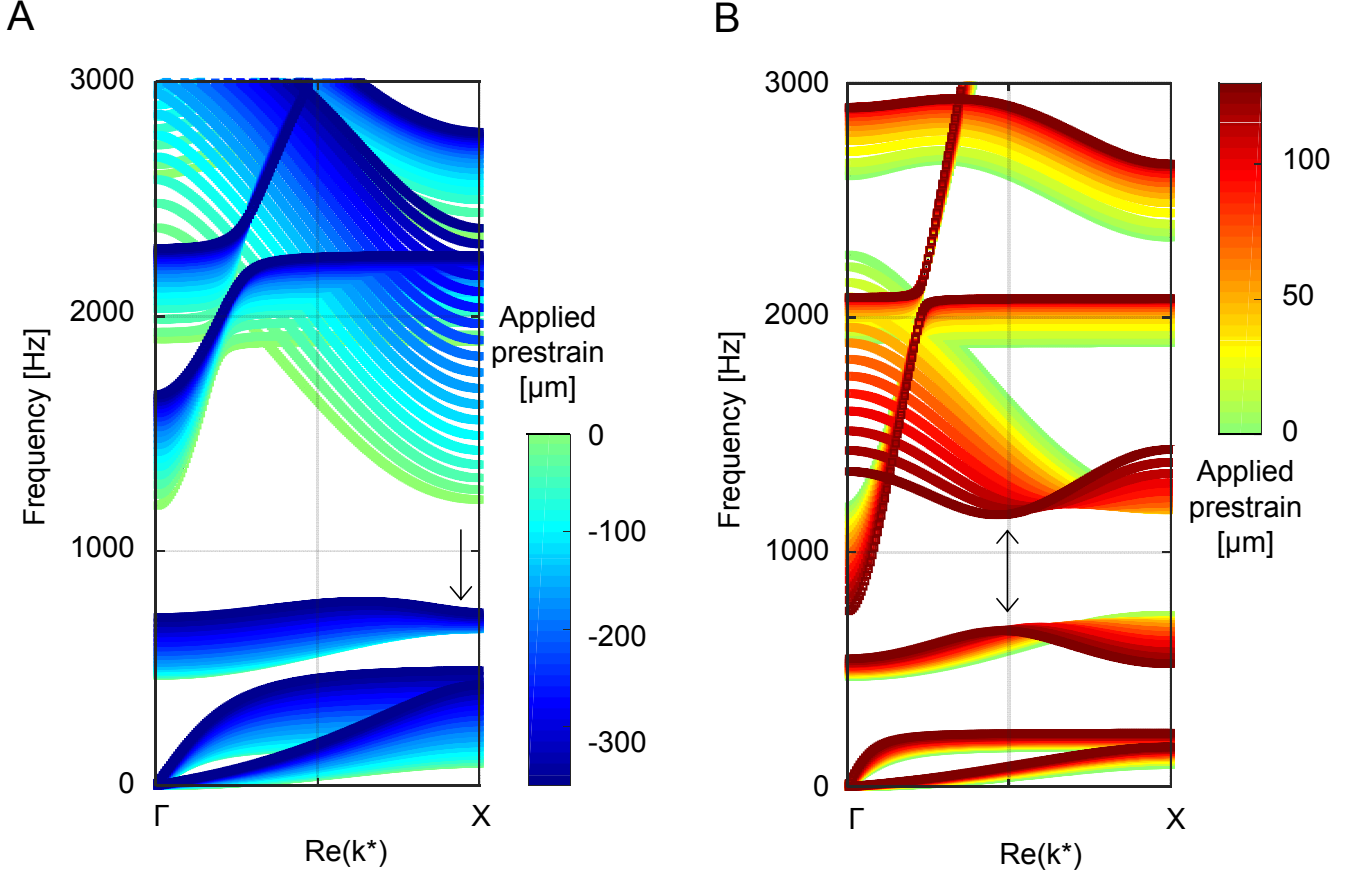


FIG. 3. **Band diagrams of the unit cell under different values of applied compression / traction.** **(A)** Parametric plot of the the real part of the reduced wavenumber k^* along the $\Gamma - X$ irreducible path as a function of the applied prestrain inducing a compressive state in the structure. The dispersion curves are color-coded on the basis of the applied prestrain level at the boundaries of the unit cell in the pre-loading phase. The polarization factor color bar varies gradually from $-360 \mu\text{m}$ (dark blue: maximum compression) to 0 (green: unprestrained structure). A general up-shift trend of the dispersion curves is observable (curves fading into dark blue) and a group velocity inversion (highlighted by the black arrow) occurs for the third band in proximity of the high-symmetry point X . **(B)** Parametric plot of the the real part of the reduced wavenumber k^* along the $\Gamma - X$ irreducible path as a function of the applied prestrain inducing a tensile state in the structure. The dispersion curves are color-coded on the basis of the applied prestrain level at the boundaries of the unit cell in the pre-loading phase. The polarization factor color bar varies gradually from $130 \mu\text{m}$ (dark red) to 0 (green: unprestrain structure). A general down-shift trend of the dispersion curves could be observed (curves fading into dark red). Group velocity inversions occur, in this case, in more bands (highlighted by the black arrows) and extend over a larger region of k^* .

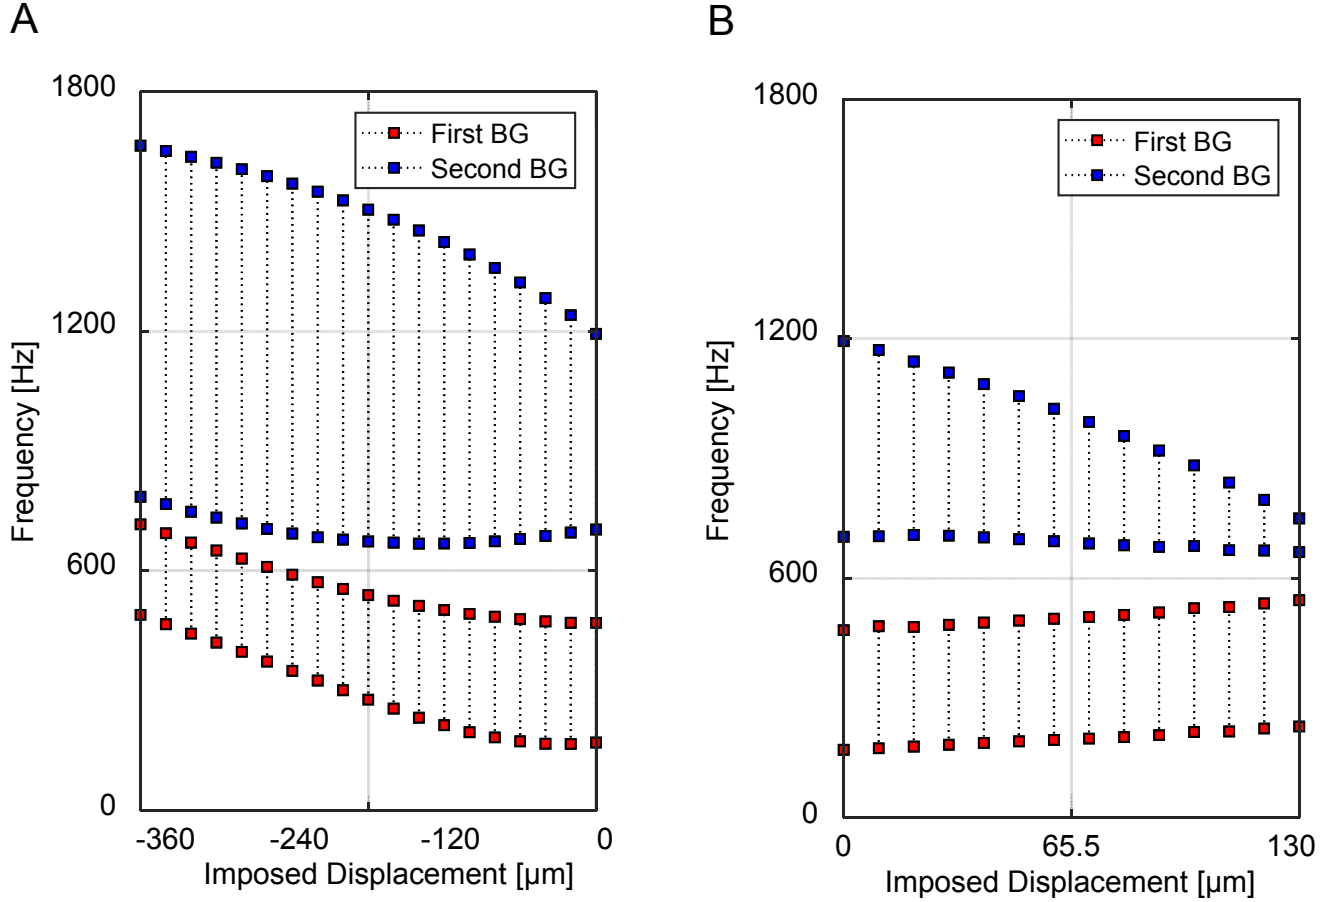


FIG. 4. Upper and lower bounds for the first and second BGs as a function of the applied prestrain inducing a compressive or tensile state in the structure. **(A)** In the case of increasing compressive prestrain, the first BG (black dashed lines delimited by red square markers) experiences a limited width variation, although both its upper and lower bounds are subjected to a remarkable frequency shift (towards higher frequencies). On the contrary, the lower bound of the second BG (black dashed lines delimited by blue square markers) is rather stable in frequency, while its upper bound still experiences a strong shift towards higher frequencies. This is responsible for an important global BG width enlargement (twice the initial value). **(B)** In the case of prestrain inducing a state of traction in the unit cell, a similar behaviour is observed for the first BG, whereas an important width reduction can be deduced for the second BG (up to three times the initial value), as the initial imposed solicitation is increased to 130 μm .

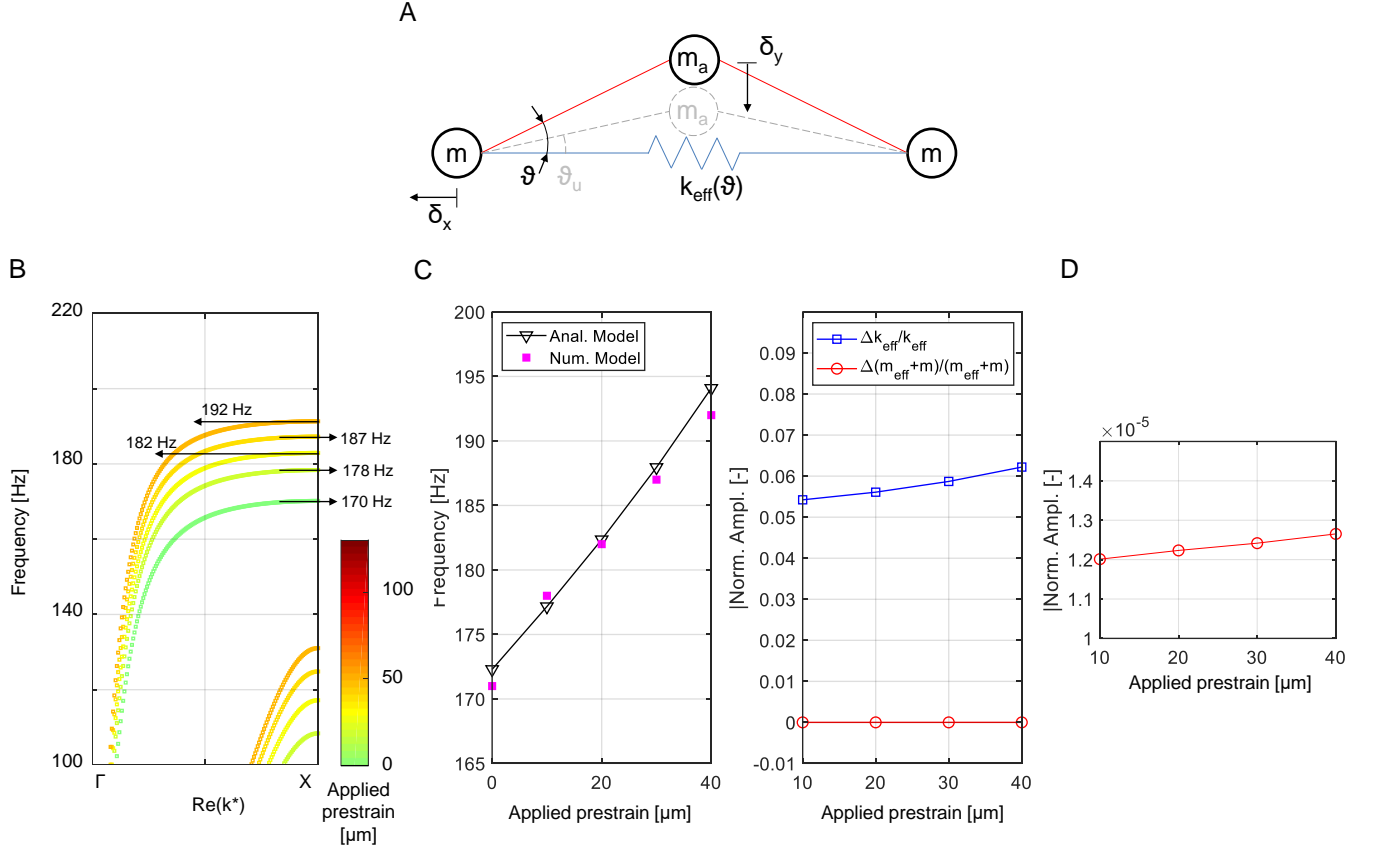


FIG. 5. **Change of the effective stiffness / effective mass ratio of the structure as a function of the applied prestrain: numerical - analytical comparison.** (A) Schematic representation of the rigid link equivalent model of the examined PC with inertial amplification mechanism⁶². Lumped parameters m , m_a and k_{eff} are reported along with the principal geometrical parameters ϑ (initial link angle) and displacements (δ_x and δ_y) consequent the application of a prestrain inducing tensile solicitation. (B) Parametric plot of the the real part of the reduced wavenumber k^* along the $\Gamma-X$ irreducible path as a function of the applied prestrain inducing a tensile state in the structure in the [100 – 220] Hz frequency range. The same polarization reported in Fig. 3 applies. The values of the frequency of the longitudinal branch responsible for the lower limit of the first BG are reported at the X high symmetry point in correspondence of the black arrows. (C) Comparison of the analytical solution (triangular markers connected by the black line) deriving from Eq. 1 and the numerical values (magenta square markers) is reported in the left panel. On the right panel, the variation of the effective stiffness Δk_{eff} and of the effective mass Δm_{eff} explaining the reason of the lower frequency increase of the BG even if a tensile prestress is applied to the structure. Indeed, the effective mass increase is far lower than the stiffness increase. (D) Magnification of the change of the effective mass showing its increase.

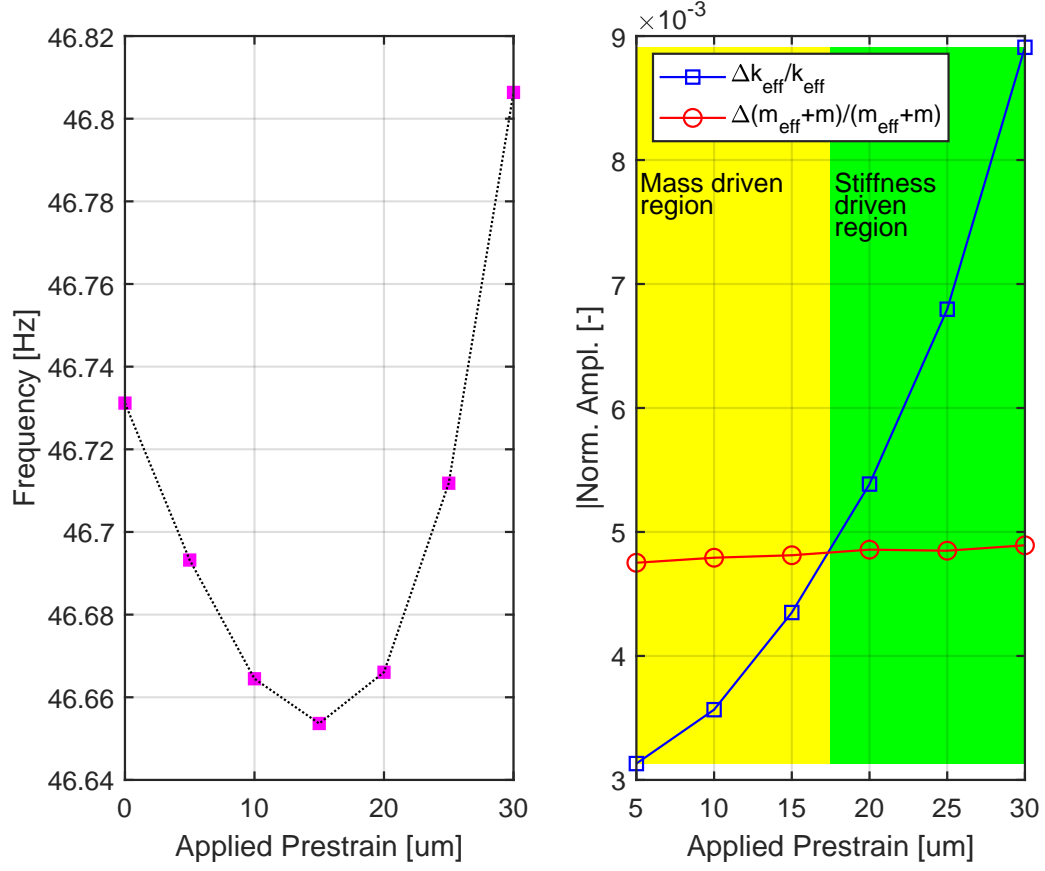


FIG. 6. **Additional degree of tunability of inertially amplified elastic metamaterials under external prestrain solicitation state.** (Left panel) Lower limit frequency of the first BG as a function of the applied prestrain. (Right panel) The variation of the normalized effective stiffness and of the normalized effective mass explaining the reason of the decrease / increase of the lower limit frequency of the first BG even if the same type of prestress (tension) is applied to the structure. Yellow and green rectangles determine the mass and stiffness driven regions, respectively.

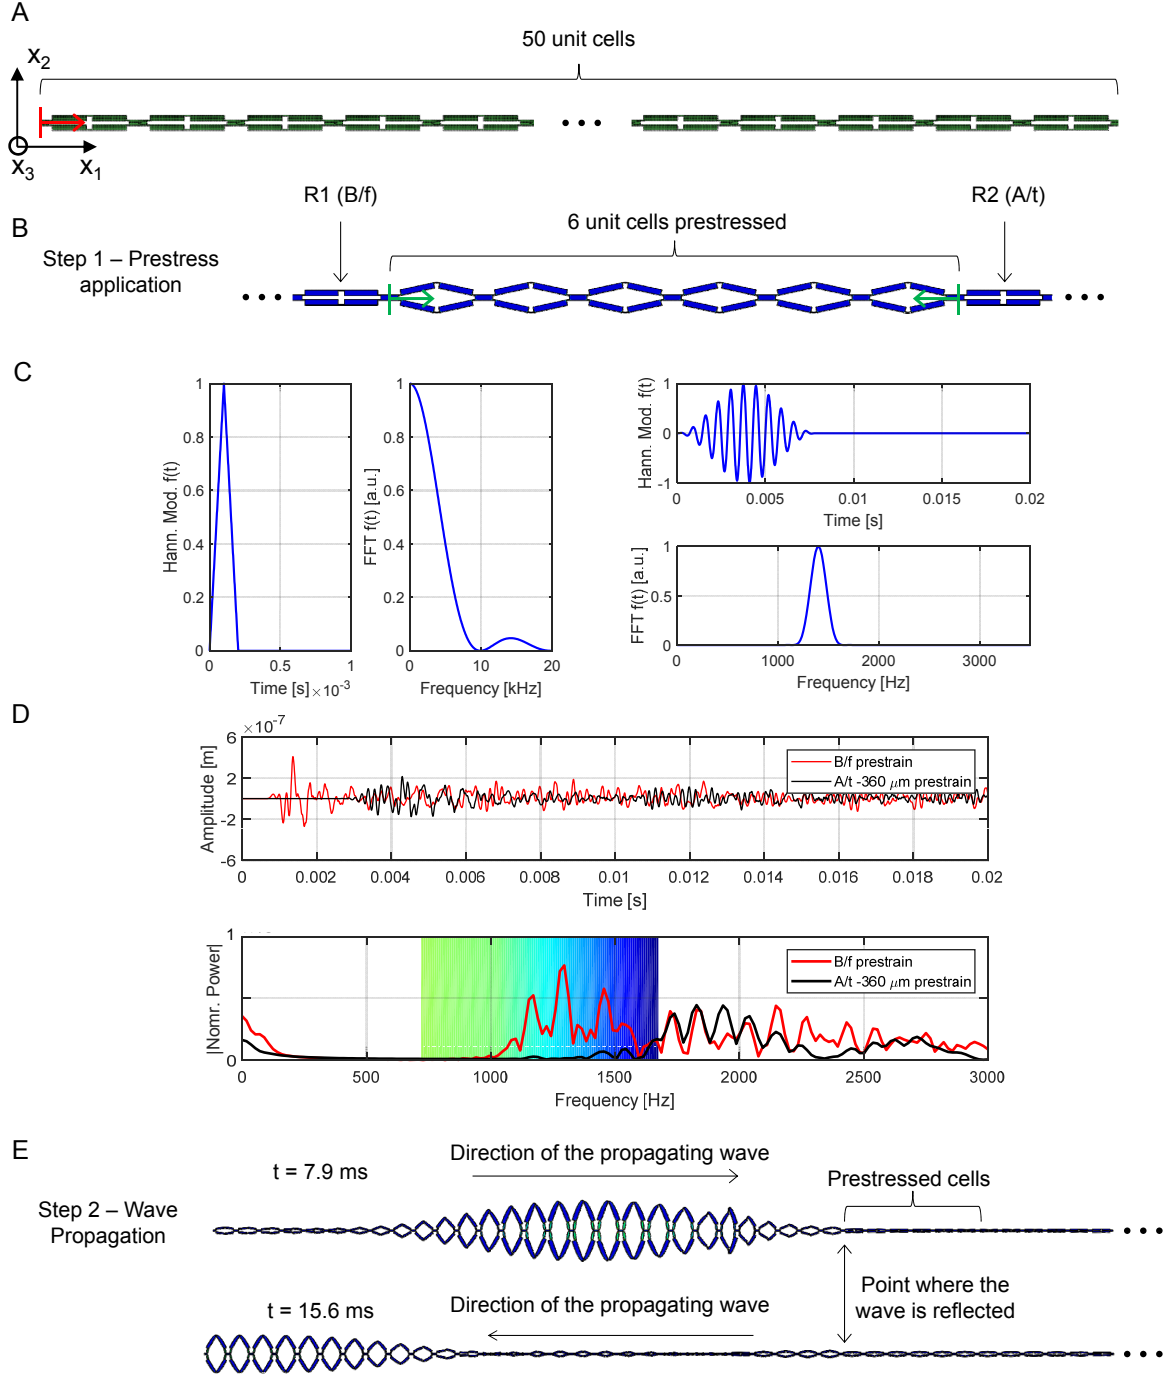


FIG. 7. **Switch from a pass- to a stop-band behaviour of the waveguide.** (A) Schematic representation of the finite structure implemented for the nonlinear transient simulation. The model comprises 50 unit cells arranged in the x_{01} -direction. (B) Before exciting the propagation of elastic waves, an external load is applied over 6 internal unit cells of the array, so to locally induce the uniform prestrained condition of $-360 \mu\text{m}$. (C) Triangular-like (left panel) and 11 sine cycles centered at 1400 Hz Hanning modulated (right panel) excitations. (D) Signals recorded before (B/f) and after (A/t) the 6 prestressed unit cells (top panel) and their Fourier Transform (low panel), for the triangular-like excitation signal. The Fourier content clearly shows how the introduction of the prestress alters the frequency response function of the structure. The tunable BG is reported as a color-coded rectangle. The green region of the rectangle is the BG corresponding to the unprestrained unit cells (up to 1180 Hz), whereas the one fading to dark blue corresponds to the BG extension (up to 1680 Hz) induced by the introduction of the external compressive prestrain (up to $-360 \mu\text{m}$: dark blue). The comparison of the two signals proves that the same waveguide is capable to support or to inhibit waves having the same frequency content. (E) Snapshots at different time steps, for the narrowband excitation signal, showing how the unprestrained waveguide is capable of supporting the propagation of the wave, whereas the stressed region reflect back the majority of the waveform.

480 APPENDIX A

The different operators in Eq. (9) are expressed by:

$$\mathbf{M} = \bigcup_e \int_{\Omega_e} \mathbf{N}^T(\mathbf{x}) \rho(\mathbf{x}) \mathbf{N}(\mathbf{x}) da, \quad (11)$$

$$\mathbf{K}_1 = \bigcup_e \int_{\Omega_e} \mathbf{N}^T(\mathbf{x}) [\mathbf{B}^T \mathbf{D}(\mathbf{x}) \mathbf{B} + \mathbf{B}_0^T \boldsymbol{\Sigma}_0(\mathbf{x}) \mathbf{B}_0] \mathbf{N}(\mathbf{x}) da \quad (12)$$

$$\mathbf{K}_2 = \bigcup_e \int_{\Omega_e} \mathbf{N}^T(\mathbf{x}) [\mathbf{B}^T \mathbf{D}(\mathbf{x}) \mathbf{H} + \mathbf{B}_0^T \boldsymbol{\Sigma}_0(\mathbf{x}) \mathbf{H}_0] \mathbf{N}(\mathbf{x}) da, \quad (13)$$

$$\mathbf{K}_3 = \bigcup_e \int_{\Omega_e} \mathbf{N}^T(\mathbf{x}) [\mathbf{H}^T \mathbf{D}(\mathbf{x}) \mathbf{H} + \mathbf{H}_0^T \boldsymbol{\Sigma}_0(\mathbf{x}) \mathbf{H}_0] \mathbf{N}(\mathbf{x}) da, \quad (14)$$

481 where Ω_e denotes the domain of the e -th finite element of the mesh, $\bigcup_e(\cdot)$ the standard direct stiffness assembling
482 procedure, $\mathbf{N}(\mathbf{x})$ the matrix of shape functions for the e -th element, and $\boldsymbol{\Sigma}_0(\mathbf{x})$ is a block-diagonal matrix of the form:

$$\boldsymbol{\Sigma}_0(\mathbf{x}) = \begin{bmatrix} \boldsymbol{\sigma}_0(\mathbf{x}) & \mathbf{0} \\ \mathbf{0} & \boldsymbol{\sigma}_0(\mathbf{x}) \end{bmatrix}, \quad (15)$$

while the different compatibility operators are expressed as:

$$\mathbf{B} = \frac{\partial}{\partial x_1} \begin{bmatrix} 1 & 0 \\ 0 & 0 \\ 0 & 1 \end{bmatrix} + \frac{\partial}{\partial x_2} \begin{bmatrix} 0 & 0 \\ 0 & 1 \\ 1 & 0 \end{bmatrix}, \quad (16)$$

$$\mathbf{B}_0 = \frac{\partial}{\partial x_1} \begin{bmatrix} 1 & 0 \\ 0 & 0 \\ 0 & 1 \\ 0 & 0 \end{bmatrix} + \frac{\partial}{\partial x_2} \begin{bmatrix} 0 & 0 \\ 1 & 0 \\ 0 & 0 \\ 0 & 1 \end{bmatrix} \quad (17)$$

$$\mathbf{H} = \begin{bmatrix} 1 & 0 \\ 0 & 0 \\ 0 & 1 \end{bmatrix}, \quad \mathbf{H}_0 = \begin{bmatrix} 1 & 0 \\ 0 & 0 \\ 0 & 1 \\ 0 & 0 \end{bmatrix}. \quad (18)$$

483 APPENDIX B

484 In this Appendix a direct comparison of the dispersion curves plotted for the specific cases of $-360 \mu\text{m}$, $0 \mu\text{m}$ and
485 $+130 \mu\text{m}$ prestrain loads are reported as singular diagrams in Fig. S1.

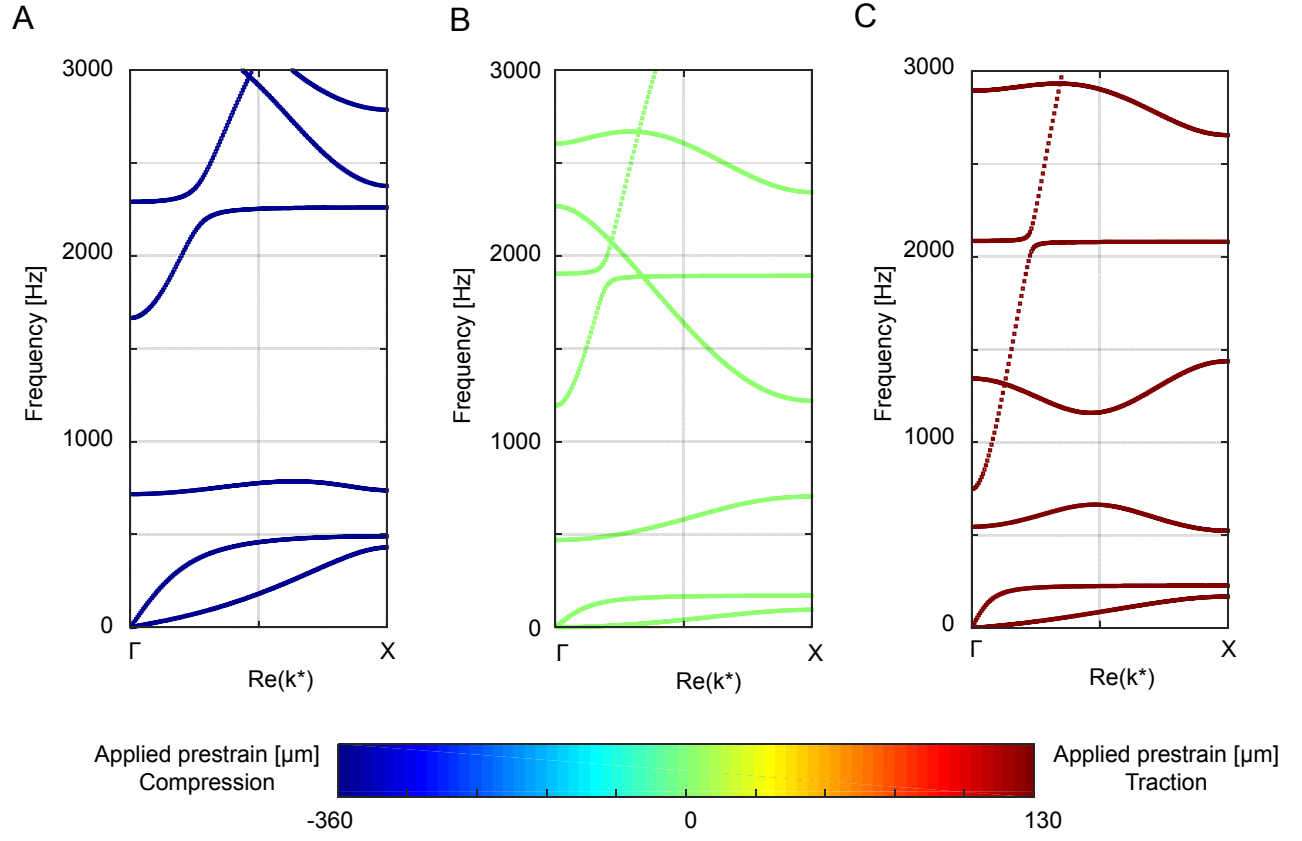


FIG. S1. **Plots of dispersion curves for single states of prestress.** Comparison of the dispersion curves plotted singularly for the (A) $-360 \mu\text{m}$, (B) $0 \mu\text{m}$ and (C) $+130 \mu\text{m}$ prestrain cases.