



**HAL**  
open science

# A Grey Wolf Optimizer-based Fractional Calculus in Studies on Solar Drying

M. Abdelkader, M. Laidi, S. Hanini, M. Hentabli, A. Amrane

► **To cite this version:**

M. Abdelkader, M. Laidi, S. Hanini, M. Hentabli, A. Amrane. A Grey Wolf Optimizer-based Fractional Calculus in Studies on Solar Drying. *Kemija u industriji*, 2021, 70 (1-2), pp.39-47. 10.15255/KUI.2020.035 . hal-03190388

**HAL Id: hal-03190388**

**<https://hal.science/hal-03190388>**

Submitted on 6 Apr 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

# A Grey Wolf Optimizer-based Fractional Calculus in Studies on Solar Drying

M. Abdelkader,<sup>a</sup> M. Laidi,<sup>a,\*</sup> S. Hanini,<sup>a</sup> M. Hentabli,<sup>b</sup> and A. Amrane<sup>c</sup>

<sup>a</sup> Laboratory of Biomaterials and Transport Phenomena (LBMPT), University of Médéa, Médéa, Algeria

<sup>b</sup> Laboratory Quality Control, Physico-Chemical Department, ANTIBIOTICAL SAIDAL of Medea, Algeria

<sup>c</sup> Univ. Rennes, Ecole Nationale Supérieure de Chimie de Rennes, CNRS, ISCR – UMR6226, 35 000, Rennes, France

This work is licensed under a Creative Commons Attribution 4.0 International License



## Abstract

In this novel article, a comparative study has been conducted between analytical and fractional solution of Fick's first- and second-order of diffusion to model the solar drying process of different products and dryers under different operating parameters. Laplace and Laplace's inverse transform have been used to obtain the solution in function with two parameters: the order index  $n$  and the fractional time index  $\alpha$  of the above Fick's laws, and their parameters have been non-linearly optimised using a *grey wolf optimisation* (GWO) algorithm. The results showed that the anomalous diffusion phenomenon during the drying process is best described by the fractional-order model. Values obtained using the model MR12 were in better agreement with the experimental data than the values obtained using the other selected models with very acceptable statistical parameters.

## Keywords

Fractional calculus, solar drying, modelling, Grey Wolf Optimizer, moisture ratio

## 1 Introduction

The drying process of wet agricultural products is the oldest and most important process for preservation of their original characteristics to be stored for a longer period.<sup>1,2</sup> When moisture content increases in food products, the activity of microorganisms and biochemical reactions increase and cause irreversible damage to the product.<sup>3</sup>

During the drying process, two phenomena occur concurrently; transfer of heat energy to the product *via* conduction, convection, and radiation transfer, and movement of internal moisture to the surface of the product were it is evaporated by appropriate hot air.<sup>4</sup>

Due to several limitations of the mathematical models for describing the drying process of food represented, for instance, by the deep knowledge of the process mechanism and many experimental governing parameters, and which soft computing modelling approach can easily solve with high performances.<sup>1</sup> Lately, fractional calculus modelling in drying has been shown as a potential tool to generalise mathematical models providing a description of the process by differential equations of arbitrary order.<sup>5</sup>

The prediction of the drying characteristics and behaviours using mathematical models, multiple linear regression (MLR) or artificial intelligence methods, such as artificial

neural network (ANN),<sup>6–8</sup> Bayesian extreme learning machine (BELM), extreme learning machine (ELM), support vector machine (SVM), adaptive neuro-fuzzy inference system (ANFIS), fuzzy inference system (FIS), and response surface methodology (RSM), have been reported in numerous research papers such as<sup>9–15</sup>. Results from these papers show that ANFIS is the most convenient approach to model drying kinetics of agricultural products.

However, according to our knowledge, only a few research investigations report the use of fractional calculus modelling of the drying process of food materials, such as<sup>16–18</sup>. In addition to the application of the classical optimisation methods, recently, a Grey Wolf Optimizer (GWO), as one of the powerful evolutionary algorithms, has successfully been used for solving various optimisation problems.<sup>19,20</sup> It is well-acknowledged that experimental measurements are expensive, time-consuming and cumbersome especially due to the highly noxious H<sub>2</sub>S. As a direct consequence, a new meta-heuristic technique namely grey wolf optimizer-based support vector machine (GWO-SVM). The objective of this work was to study the applicability of the fractional calculus with non-integer order as fractional numbers with respect to time derivatives in Fick's first and second laws of anomalous diffusion. The fractional calculus model parameters have been optimised using a GWO. The performance of the best model was approved based on the statistical parameters compared to the experimental data collected from the previously published papers in the literature.

\* Corresponding author: Dr Maamar Laidi  
Email: [maamarw@yahoo.fr](mailto:maamarw@yahoo.fr), [laidi.maamar@univ-medea.dz](mailto:laidi.maamar@univ-medea.dz)

## 2 Materials and methods

### 2.1 Experimental procedure

The database was collected from scientific papers covering different agricultural products under various drying and dryer types in different countries, as summarised in Table 1. The database was extracted from the papers using the software Digitizer. The experimental data were extracted as the moisture ratio in function of time to be used to adjust the parameters and compare the proposed models in this work.

The kinetics of the moisture content loss of thin layer and uniform washed samples the size of about 10 cm length and 1 cm thickness of fresh red tomatoes was determined by<sup>26</sup> at temperatures of 38 °C, 44 °C, 50 °C, 57 °C, and 64 °C at a drying air flow rate of 1 m s<sup>-1</sup>.

### 2.2 Theory of first/second Fick’s laws

This work is based on the normal and fractional resolution of the first and second Fick’s laws, the models’ parameters have been determined using an optimisation algorithm of grey wolf implemented in the Matlab software by minimising the objective function. This model considers that the moisture rate variation in agricultural products is directly proportional to their own moisture. The negative sign in Eq. 1 indicates that moisture will drop over time:<sup>27</sup>

$$\frac{d^\alpha X(t)}{d^\alpha t} = D_t^\alpha X(t) = -k_n (X(t) - X_e)^n \quad (1)$$

where  $X(0) = f(0) = X_0$ ,  $k$  is the kinetic constant of the model,  $X_0$  is the initial moisture content,  $X_e$  is the equilibrium moisture content,  $X(t)$  is the moisture content at time  $t$ , and  $\alpha$  the fractional time index where  $0 < \alpha < 1$  with  $\alpha \in R^{28}$  and can be represented by the Caputo derivative<sup>5</sup>

as  $D_t^\alpha X(t) = \frac{1}{\Gamma(\alpha - m)} \int_0^t \frac{X^m(\tau)}{(t - \tau)^{\alpha + 1 - m}} d\tau$  for  $m - 1 < \alpha < m$ .<sup>5</sup> The solution of Eq. 1 has been discussed according to the kinetic order and the derivative order – Table 1 summarises the proposed models which are based on Fick’s first law.<sup>29</sup> The moisture can be expressed in Eq. 2.

$$MR(t) = \frac{X(t) - X_e}{X_0 - X_e} \quad (2)$$

The moisture ratio can be simplified into the following formula, and after considering that  $X_e$  is too small compared to  $X(t)$  and  $X_0$ :

$$MR(t) = \frac{X(t) - X_e}{X_0 - X_e} \approx \frac{X_t}{X_0} \quad (3)$$

The solution of this differential equation of non-integer order as fractional number model representing mass transfer behaviour during the drying process is solved using Laplace’s direct and inverse transform. Eq. 6 shows the correlation to obtain Laplace’s transform of an arbitrary-order equation for  $\alpha$  as a non-whole number, for  $m - 1 < \alpha < m$ .<sup>27</sup>

$$\mathcal{L}[f^{(\alpha)}](s) = s^\alpha \mathcal{L}[f(t)](s) - \sum_{k=0}^{m-1} [s^{\alpha-1-k} f^{(k)}(0)] \quad (4)$$

If  $0 < \alpha < 1$ , this equation can be simplified into equation 7 where  $f(0) = X_0$ :

$$\mathcal{L}[f^{(\alpha)}](s) = s^\alpha \mathcal{L}[f(t)](s) - s^{\alpha-1} f(0) \quad (5)$$

A demonstration of the ordinary  $n$ -order and fractional  $n$ -order, Fick’s equation respectively is presented in the

Table 1 – Data base collected and drying conditions for each experiment with references

Authors	Product	Drying type	Thickness/m	T/°C	Country	Ref.
E. K. Akpinar	Mint leaves	Solar dryer Open sun	/	35-60	Turkey	21
O. Badaoui	Tomato	Solar drying	0.007	36	Algeria	22
S. Boughali	Tomato	Indirect active hybrid solar-electrical dryer	0.01	50 65 75	Algeria	23
N. Kumar	Carrot pomace	Air drying	0.01	60 65 70 75	India	24
O. Ismail	Purslane	Open-air sun drying	/	28–52	Turkey	25
S. B. Mariem	Tomato slices	Hot air blowing (Air drying)	0.01	38 44 50 57 64	Tunisia	26

Table 2 – Ordinary vs. fractional solution of Fick’s first law

Order and code		Ordinary model	Fractional model	
Order 0	MR1	$MR = 1 - K_0 t$ $K_0 = \frac{k_0}{(X_0 - X_e)}$	MR7	$MR = 1 - K_0 \frac{t^\alpha}{\Gamma(\alpha + 1)}$ $K_0 = \frac{k_0}{(X_0 - X_e)}$
Order 1	MR2	$MR = e^{-K_1 t}$ $K_1 = k_1$	MR8	$MR = E_\alpha(-K_1 t^\alpha) \text{ or } MR = \sum_{k=0}^{\infty} \frac{(-K_1 t^\alpha)^k}{\Gamma(\alpha k + 1)}$ $K_1 = k_1$
Order 2	MR3	$MR = \frac{1}{1 + K_2 t}$ $K_2 = k_2 (X_0 - X_e)$	MR9	$MR = \frac{1}{\frac{K_2 t^\alpha}{\Gamma(\alpha + 1)} + 1}$ $K_2 = k_2 (X_0 - X_e)$
Order 3	MR4	$MR = \left[ \frac{1}{1 + 2K_3 t} \right]^{\frac{1}{2}}$ $K_3 = k_3 (X_0 - X_e)^2$	MR10	$MR = \left[ \frac{1}{\frac{2K_3 t^\alpha}{\Gamma(\alpha + 1)} + 1} \right]^{\frac{1}{2}}$ $K_3 = k_3 (X_0 - X_e)^2$
Order 4	MR5	$MR = \left[ \frac{1}{1 + 3K_4 t} \right]^{\frac{1}{3}}$ $K_4 = k_4 (X_0 - X_e)^3$	MR11	$MR = \left[ \frac{1}{\frac{3K_4 t^\alpha}{\Gamma(\alpha + 1)} + 1} \right]^{\frac{1}{3}}$ $K_4 = k_4 (X_0 - X_e)^3$
Order n	MR6	$MR = \left[ \frac{1}{1 + (n-1)K_n t} \right]^{\frac{1}{n-1}}$ $K_n = k_n (X_0 - X_e)^{n-1}$	MR12	$MR = \left[ \frac{1}{\frac{(n-1)K_n t^\alpha}{\Gamma(\alpha + 1)} + 1} \right]^{\frac{1}{n-1}}$ $K_n = k_n (X_0 - X_e)^{n-1}$

following sections. Eq. 2 can be written as Eq. 6.

$$X(t) - X_e = (X_0 - X_e)MR(t) \tag{6}$$

The derivation of the above equation gives:

$$\frac{dX(t)}{dt} = (X_0 - X_e) \frac{dMR(t)}{dt} \tag{7}$$

By the equality of Eqs. 7 and 1 when  $\alpha = 1$ , we can obtain Eq. 8:

$$(X_0 - X_e) \frac{dMR(t)}{dt} = -k_n (X(t) - X_e)^n = -k_n (X_0 - X_e)^n MR^n \tag{8}$$

This equation can be written as:

$$\frac{dMR(t)}{dt} = -K_n MR^n \text{ where } K_n = k_n (X_0 - X_e)^{n-1} \tag{9}$$

where  $K_n$  is the effective drying velocity constant, and  $k_n$  is the drying velocity constant. The solution of this equation can be expressed as in MR6:

$$MR = \left[ \frac{1}{1 + (n-1)K_n t} \right]^{\frac{1}{n-1}} \tag{10}$$

The same demonstration has been done for the fractional order. The fractional form of Eq. 9 can be written as follows:

$$\frac{d^\alpha X}{d^\alpha t} = D_\alpha^t MR = -k_n (X_0 - X_e)^{n-1} MR^n \tag{11}$$

and can be simplified by performing a change-of-variable transformation  $M(t) = MR(t)^{1-n}$  or  $M(t) = MR(t)^{1-n}$ .

$$D_\alpha^t M(t) = k_n (n-1) (X_0 - X_e)^{n-1} \tag{12}$$

Laplace transform was applied to Eq. 13 by using the relationship given by Eq. 5.

$$\mathcal{L} \left[ \frac{d^\alpha M(t)}{d^\alpha t} \right] (s) = S^\alpha M(S) - S^{\alpha-1} M(0) = k_n (n-1) (X_0 - X_e)^{n-1} \frac{1}{S^{\alpha+1}} \tag{13}$$

$$M(S) = \frac{1}{S} + k_n(n-1)(X_0 - X_e)^{n-1} \cdot \frac{1}{S^{\alpha+1}} \quad (14)$$

where  $M(0) = 1$

Eq. (15) shows Laplace’s inverse transform to generalise the model’s equation.

$$\mathcal{L}^{-1}[M(s)] = \mathcal{L}^{-1}\left[\frac{1}{S}\right] + \mathcal{L}^{-1}\left[k_n(n-1)(X_0 - X_e)^{n-1} \cdot \frac{1}{S^{\alpha+1}}\right] \quad (15)$$

By using Laplace’s inverse transform of  $\mathcal{L}^{-1}\left[\frac{1}{S^{\alpha+1}}\right] = \frac{t^\alpha}{\Gamma(\alpha + 1)}$ , the gamma function is defined by the following integral  $\Gamma(x) = \int_0^\infty e^{-t}t^x dt$ ,  $x \in R^+$  and can be related to the factorials for any natural  $n$   $\Gamma(n) = (n-1)!$  and also satisfies the following functional equation  $\Gamma(x + 1) = x\Gamma(x)$ , where  $x \in R^+$ .<sup>30</sup> This function is already implemented in the MatLab software and can be used directly as `gamma(x)`. The final solution of Eq. 15 is presented in Eq. 16:

$$M(t) = 1 + k_n(n-1)(X_0 - X_e)^{n-1} \cdot \frac{t^\alpha}{\Gamma(\alpha + 1)} \quad (16)$$

And finally, by replacing  $M(t)$  with  $MR(t)$ , we will have the final solution expressed in Eq. 17 and MR12 in Table 2.

$$MR = \left[ \frac{1}{\frac{k_n(n-1)(X_0 - X_e)^{n-1}}{\Gamma(\alpha + 1)} t^\alpha + 1} \right]^{\frac{1}{n-1}} \quad (17)$$

Eqs. 10 and 16 can be used for all kinetics except for  $n = 1$ , which can be done separately in an easy manner.

### 2.3 Theory of Fick’s second law

The aim of this part was to mathematically model the drying kinetics of food slices using the analytical series solution of Fick’s second law of diffusion given by the following equation, where  $D_{\text{eff}}$  is considered as diffusion constant:

$$\frac{\partial^\beta X(x,t)}{\partial^\beta x} - \frac{1}{D_{\text{eff}}} \frac{\partial^\alpha X(x,t)}{\partial^\alpha t} = 0 \quad (18)$$

Considering the initial and boundary conditions:

$$\begin{cases} X(t=0, x) = X_0 \\ \frac{\partial X}{\partial t}(t, x=0) = 0 \\ X\left(t, x = \pm \frac{e}{2}\right) = 0 \end{cases} \quad (19)$$

The use of fractional time derivatives has been substantiated by studies indicating that porous materials are well characterised with respect to both super-diffusive and sub-diffusive behaviours using only temporal fractional orders. The value of  $\alpha$  can distinguish some domains of anomalous transport:<sup>31</sup>

$$\begin{cases} 0 < \alpha < 1 \rightarrow \text{sub-diffusion} \\ \alpha > 1 \rightarrow \text{super-diffusion} \\ \text{Threshold between the two anomalous transport domains} \rightarrow \text{normal Brownian diffusion} \end{cases}$$

In fractional calculus, the Mittag-Liffler’s function  $E_\alpha(x)$  has the same meaning as base exponential function.<sup>27</sup> This function has the form presented in the equation

$$E_\alpha(x) = \sum_{k=0}^\infty \frac{x^k}{\Gamma(1 + \alpha k)}$$

If  $\alpha = 1$  and for long drying times, the Mittag–Lefler equation converges to exponential function based on Taylor series and expressed by the relation

$$E_1(x) = \sum_{k=0}^\infty \frac{x^k}{\Gamma(1+k)} = e^x.$$

This simplification makes the fundamental equation of anomalous diffusion (Eq. 4) the fundamental Fick’s equation with the analytical solution, which is done by Crank for long drying times assumption (MR13), and the solution of the fractional anomalous diffusion for long drying times assumption is given by MR14.<sup>18</sup> This analytical solution

Table 3 – Ordinary vs. fractional solution of Fick’s second law<sup>16</sup>

Code	Ordinary model
MR13	$\alpha = 1, \beta = 2$ $MR = \frac{X(t) - X_e}{X_0 - X_e} = \frac{8}{\pi^2} \sum_{n=0}^\infty \left( \frac{1}{(2n+1)} \exp\left(-D_{\text{eff}} \left(\frac{(2n+1)\pi}{l}\right)^2 t\right) \right) = \frac{8}{\pi^2} \exp\left(-D_{\text{eff}} \left(\frac{\pi}{l}\right)^2 t\right)$
	Fractional model
MR14	$\alpha = \text{fractional}, \beta = 2$ $MR = \frac{X(t) - X_e}{X_0 - X_e} = \frac{8}{\pi^2} \sum_{n=0}^\infty \left( \frac{1}{(2n+1)} E_\alpha\left(-D_{\text{eff}} \left(\frac{(2n+1)\pi}{l}\right)^2 t^\alpha\right) \right) = \frac{8}{\pi^2} \exp\left(-D_{\text{eff}} \left(\frac{\pi}{l}\right)^2 t^\alpha\right)$ where $D_{\text{eff}} \left(\frac{m^2}{s^\alpha}\right)$

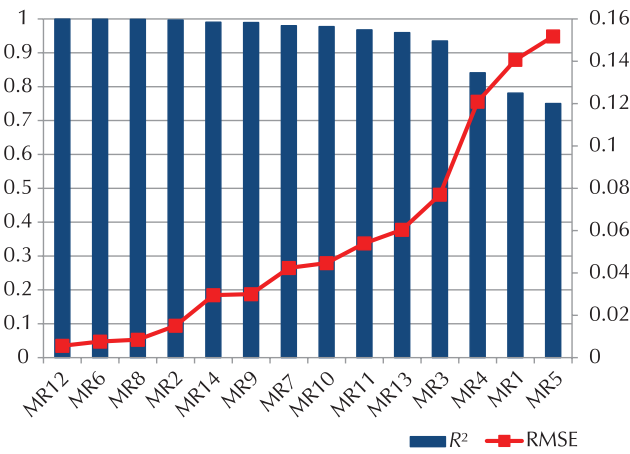


Fig. 1 – Performance of 14 models in modelling 05 kinetics

has been obtained considering assumptions like the food was an infinite slab, the initial moisture content ( $X_0$ ) was uniform, and the moisture transfer was defined as one-dimensional.

#### 2.4 Grey Wolf Optimisation (GWO) algorithm

Optimisation problems refer to the search of a maximum or minimum for a given function within an available interval. Most of the usual optimisation techniques are based on the derivative information of the concerned functions, which is not always possible. Among the nature-inspired algorithms, swarm intelligence methods are popular and have an excellent optimisation ability due to their numerous advantages to escape from local optima and derivative-free mechanism. The Grey Wolf Optimizer (GWO) considered as recent swarm-based optimisation algorithm simulates social hierarchy and hunting behaviour of grey wolves in nature, where the chasing and hunting behaviour of wolves to catch their prey represent the searching path to the optimal solution. This technique was proposed by Mirjalili et al.<sup>32</sup> and has been successfully applied to solve various optimisation problems.<sup>33</sup> In this study, GWO was programmed in MATLAB to optimise Fick's law parameters in order to match the forecasted output with the real produced output. A full description of this method is presented in paper.<sup>33</sup>

#### 2.5 Effective moisture diffusivity and activation energy calculation

The performance of the tested models was conducted on five kinetics of 0.01 m tomato slices drying at different temperatures. An investigation was conducted to determine which model was capable of modelling the 05 selected kinetics. The results show that MR12 gave best statistical parameters with an optimised kinetic order and fractional order.

Fig. 1 shows the performance of model MR12, which was obtained with very acceptable  $R$  and very low RMSE. These

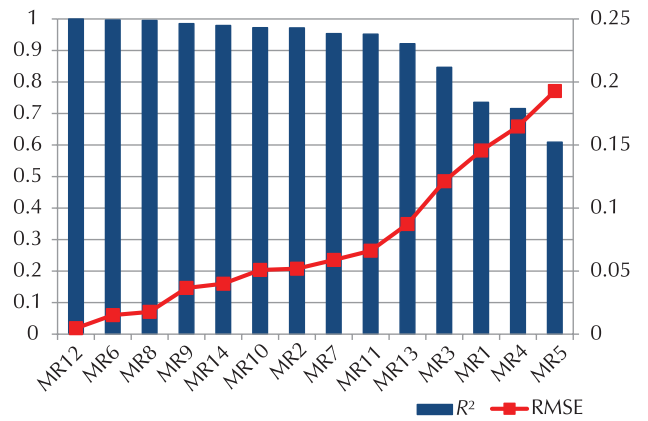


Fig. 2 – Performance of 14 models modelling in terms of statistical parameters

results prove the superiority of model MR12 in modelling the 05 selected kinetics of 0.01 m of tomato slices drying at different temperatures.

The performance of the proposed models has been generalised using other products and under different parameters. Model MR12 presented its best fitting performance and statistical evaluations in comparison to the other models when modelling 11 kinetics of various products, as presented in Fig. 2.

It has been reported that the effective moisture diffusivity ( $D_{eff}$ ) value for food materials is within the range of  $10^{-11}$ – $10^{-9}$ .<sup>34</sup> Fick's second law was applied in this work to determine the  $D_{eff}$ , and to model foods that have undergone dehydration processes. As  $D_{eff}$  increased with increasing temperature, the lowest  $D_{eff}$  was at 38 °C and the maximum at 64 °C for the fractional and ordinary solutions.

The performance of the selected models was done using the coefficient of determination ( $R^2$ ) and root mean square error (RMSE) given by the following equations:

$$R^2 = 1 - \frac{\sum_{i=1}^N (MR_{pre,i} - MR_{exp,i})^2}{\sum_{i=1}^N (\overline{MR}_{pre} - MR_{exp,i})^2} \quad (20)$$

$$RMSE = \sqrt{\frac{1}{N} \sum_{i=1}^N (MR_{pre,i} - MR_{exp,i})^2} \quad (21)$$

The deviation observed between experimental and analytical or fractional equations is because all selected kinetics where highly fitted by  $n$ -fractional-order model obtained using Fick's first law (MR12). Namely, results showed that MR13/14 was not the best when fitted with the selected drying kinetics. In addition, in this work, the  $D_{eff}$  was optimised by GWO in comparison to other selected works, and with this parameter, it was determined by the simple analytical solution given by Crank for long drying times. Table 5 presents the RMSE between effective moisture diffusivities of tomato drying kinetics at different temperatures.

Table 4 – Ordinary and fractional model's parameters

Models	38 °C			44 °C			50 °C		
	<i>k</i>	Alpha	<i>n</i>	<i>k</i>	Alpha	<i>n</i>	<i>k</i>	Alpha	<i>n</i>
MR1	0.0391			0.0496			0.0582		
MR2	0.0839			0.1016			0.1343		
MR3	0.1445			0.1726			0.2337		
MR4	0.2426			0.2853			0.3943		
MR5	0.4127			0.4753			0.6740		
MR6	0.0722		0.7455	0.0902		0.7931	0.1359		1.0200
MR7	0.1152	0.6097		0.1306	0.6116		0.1767	0.5374	
MR8	0.0686	1.0712		0.0887	1.0524		0.1359	0.9951	
MR9	0.0462	1.6667		0.0741	1.5553		0.1274	1.4875	
MR10	0.0375	2.2740		0.0706	2.0903		0.1397	2.0374	
MR11	0.0351	2.9377		0.0769	2.6705		0.1789	2.6339	
MR12	0.0773	0.9414	0.6480	0.1022	0.8612	0.5331	0.1364	0.9928	1.0064
	$D_{\text{eff}}/\text{m}^2\text{s}^{-1}$			$D_{\text{eff}}/\text{m}^2\text{s}^{-1}$			$D_{\text{eff}}/\text{m}^2\text{s}^{-1}$		
MR13	$4.39826 \times 10^{-8}$			$5.27667 \times 10^{-8}$			$6.94083 \times 10^{-8}$		
MR14	$6.63959 \times 10^{-9}$	1.2731		$8.4435 \times 10^{-9}$	1.2761		$2.30627 \times 10^{-8}$	1.1695	
Literature	$3.0722 \times 10^{-9}$			$3.622 \times 10^{-9}$			$4.048 \times 10^{-9}$		

Models	57 °C			64 °C		
	<i>k</i>	Alpha	<i>n</i>	<i>k</i>	Alpha	<i>n</i>
MR1	0.0689			0.0917		
MR2	0.1753			0.2043		
MR3	0.3040			0.3431		
MR4	0.5108			0.5560		
MR5	0.8592			0.9033		
MR6	0.1831		1.0759	0.1876		0.8476
MR7	0.2147	0.5009		0.2057	0.5813	
MR8	0.1822	0.9813		0.1881	1.0446	
MR9	0.1923	1.4716		0.2160	1.6027	
MR10	0.2430	2.0236		0.3011	2.1752	
MR11	0.3639	2.6214		0.5015	2.8010	
MR12	0.1810	1.0653	1.1936	0.1863	1.0594	0.9513
	$D_{\text{eff}}/\text{m}^2\text{s}^{-1}$			$D_{\text{eff}}/\text{m}^2\text{s}^{-1}$		
MR13	$8.93392 \times 10^{-8}$			$1.05 \times 10^{-7}$		
MR14	$3.83308 \times 10^{-8}$	1.1354		$2.55 \times 10^{-8}$	1.2364	
Literature	$4.7995 \times 10^{-9}$			$6.7881 \times 10^{-9}$		

The relationship between temperature and effective diffusivity may be well presented by an Arrhenius-type model:<sup>38</sup>

$$D_{\text{eff}} = D_0 e^{\left(\frac{-E_a}{RT}\right)} \quad (22)$$

where  $D_0$  is the pre-exponential factor of the Arrhenius model ( $\text{m}^2\text{s}^{-1}$ ),  $E_a$  is the activation energy ( $\text{kJ mol}^{-1}$ ),  $R$  is

the universal gas constant ( $8.3143 \text{ kJ mol}^{-1} \text{ K}^{-1}$ ), and  $T$  is the absolute temperature (K). The natural logarithm of  $D_{\text{eff}}$  as a function of absolute temperature was plotted.  $E_a$  could be calculated by the linearisation of Eq. 20, and using the slope =  $-E_a/R$ .  $E_a$  is presented in Table 5, and it follows the interval proposed in the literature for foods, ranging from 10 to 120  $\text{kJ mol}^{-1}$ .

Table 5 – Effective moisture diffusivities of tomato drying kinetics and activation energy values

T/K	$D_{\text{eff}}$ literature		$D_{\text{eff}}$ ordinary		$D_{\text{eff}}$ fractional	
	$D_{\text{eff}}$	RMSE	$D_{\text{eff}}$	RMSE	$D_{\text{eff}}$	RMSE
38	$3.0722 \times 10^{-9}$	0.573	$4.3983 \times 10^{-8}$	0.0697	$6.6396 \times 10^{-9}$	0.0262
44	$3.622 \times 10^{-9}$	0.5539	$5.2767 \times 10^{-8}$	0.0628	$8.4435 \times 10^{-9}$	0.0203
50	$4.048 \times 10^{-9}$	0.5774	$6.9408 \times 10^{-8}$	0.0510	$2.3063 \times 10^{-9}$	0.0292
57	$4.7995 \times 10^{-9}$	0.576	$8.9339 \times 10^{-8}$	0.0509	$3.8331 \times 10^{-9}$	0.0363
64	$6.7881 \times 10^{-9}$	0.551	$1.0468 \times 10^{-7}$	0.0675	$2.5467 \times 10^{-9}$	0.0354
Mean RMSE	0.5662		0.0604		0.0295	
$E_a/\text{kJ mol}^{-1}$	10.6700		30.2452		55.8922	

### 3 Conclusions

A comparison between analytical and fractional solution of Fick's first and second laws of anomalous diffusion to model the drying process of different products and dryers under different operating parameters was conducted in this study. Results showed that the performance of Fick's first law with  $n$ -order kinetic fractional model (MR12) was higher compared to the other models, as well as to the second-order kinetic fractional model. Model MR12 is potentially capable of fitting the whole set of experimental data from time 0 to the end of the experiment, and provides satisfactory predictions for various agricultural drying processes under different operating parameters. The parameters of each model were optimised using the GWO algorithm. Finally, the determination of the effective moisture diffusivities of some drying kinetics was calculated and found to be in the interval given in literature.

#### ACKNOWLEDGEMENT

The authors would like to thank the team of LBMPT Laboratory for their efforts and encouragement throughout this project, for providing the help and data used in this study. The authors would also like to thank the anonymous reviewers for their constructive comments, which helped to improve the quality and presentation of this paper.

#### References Literatura

1. A. Omari, N. Behroozi-Khazaei, F. Sharifian, Drying kinetic and artificial neural network modeling of mushroom drying process in microwave-hot air dryer, *J. Food. Proc. Eng.* **41** (7) (2018) 1–10, doi: <https://doi.org/10.1111/jfpe.12849>.
2. R. Polytechnic, Thin layer drying of millet and effect of temperature on drying characteristics, *Int. Food Res. J.* **17** (4) (2010) 1095–1106.
3. M. Kaveh, A. Jahanbakhshi, E. Taghinezhad, Y. Abbaspour-Gilandeh, E. Taghinezhad, M. B. F. Moghimi, The effect of ultrasound pre-treatment on quality, drying, and thermodynamic attributes of almond kernel under convective dryer using ANNs and ANFIS network, *J. Food. Proc. Eng.* **41** (7) (2018) 1–14, doi: <https://doi.org/10.1111/jfpe.12868>.
4. Z. Liu, J. Bai, S. Wang, J. Meng, H. Wang, Prediction of energy and exergy of mushroom slices drying in hot air impingement dryer by artificial neural network, *Dry. Technol.* **0** (2019) 1–12, doi: <https://doi.org/10.1080/07373937.2019.1607873>.
5. D. J. Nicolini, R. O. Defendi, D. F. Rossoni, L. M. de Matos Jorge, Mathematical modeling of soybean drying by a fractional-order kinetic model, *J. Food. Proc. Eng.* **41** (2) (2017) e12655, doi: <https://doi.org/10.1111/jfpe.12655>.
6. N. Melzi, L. Khaouane, Y. Ammi, S. Hanini, M. Laidi, H. Zentou, Comparative Study of Predicting the Molecular Diffusion Coefficient for Polar and Non-polar Binary Gas Using Neural Networks and Multiple Linear Regressions, *Kem. Ind.* **68** (11-12) (2019) 573–582, doi: <https://doi.org/10.15255/KUI.2019.010>.
7. H. Maouz, L. Khaouane, S. Hanini, Y. Ammi, M. Hamadache, M. Laidi, QSPR Studies of Carbonyl, Hydroxyl, Polyene Indices, and Viscosity Average Molecular Weight of Polymers under Photostabilization Using ANN and MLR Approaches, *Kem. Ind.* **69** (1-2) (2020) 1–16, doi: <https://doi.org/10.15255/KUI.2019.022>.
8. S. Keskes, S. Hanini, M. Hentabli, M. Laidi, Artificial Intelligence and Mathematical Modelling of the Drying Kinetics of Pharmaceutical Powders, *Kem. Ind.* **69** (2020) 137–152, doi: <https://doi.org/10.15255/KUI.2019.038>.
9. S. Pusat, M. T. Akkoyunlu, E. Pekel, M. C. Akkoyunlu, C. Özkan, S. S. Kara, Estimation of coal moisture content in convective drying process using ANFIS, *Fuel Process. Technol.* **147** (2016) 12–17, doi: <https://doi.org/10.1016/j.fuproc.2015.12.010>.
10. A. R. Yousefi, Estimation of papaw (*Carica papaw* L.) moisture content using adaptive neuro-fuzzy inference system (ANFIS) and genetic algorithm-artificial neural network (GA-ANN), *Iran. J. Food Sci. Technol. Res.* **12** (2017) 767–779, doi: <https://doi.org/10.22067/ifstrj.v12i6.62521>.
11. Z. Liu, J. Bai, W. Yang, J. Wang, L. Deng, X.-L. Yu, Z.-A. Zheng, Z.-J. Gao, H.-W. Xiao, Effect of high-humidity hot air impingement blanching (HHAIB) and drying parameters on drying characteristics and quality of broccoli florets, *Dry. Technol.* **37** (10) (2019) 1251–1264, doi: <https://doi.org/10.1080/07373937.2018.1494185>.
12. Z.-L. Liu, F. Nan, X. Zheng, M. Zielinska, X. Duan, L.-Z. Deng, J. Wang, W. Wu, Z.-J. Gao, H.-W. Xiao, Color prediction of mushroom slices during drying using Bayesian extreme learning machine, *Dry. Technol.* (2019) 1–13, doi: <https://doi.org/10.1080/07373937.2019.1675077>.
13. Z.-L. Liu, J.-W. Bai, S.-X. Wang, J.-S. Meng, H. Wang, X.-L. Yu, Z.-J. Gao, H.-W. Xiao, Prediction of energy and exergy of mushroom slices drying in hot air impingement dryer by



- artificial neural network, *Dry. Technol.* (2019) 1–12, doi: <https://doi.org/10.1080/07373937.2019.1607873>.
14. H. Basarir, L. Tutluoglu, C. Karpuz, Penetration rate prediction for diamond bit drilling by adaptive neuro-fuzzy inference system and multiple regressions, *Eng. Geol.* **173** (2014) 1–9, doi: <https://doi.org/10.1016/j.enggeo.2014.02.006>.
  15. M. Deng, S. Wen, A. Yanou, M. Oka, H. Matsumoto, A. Inoue, SVM-based moisture content modelling for Sugi drying process, in *Proc. 2010 Int. Conf. Model. Identif. Control* (2010), pp. 354–358.
  16. R. Simpson, A. Jaques, H. Nun, C. Ramirez, A. Almonacid, Fractional Calculus as a Mathematical Tool to Improve the Modeling of Mass Transfer Phenomena in Food Processing, *Food Eng. Rev* **5** (2013) 45–55, doi: <https://doi.org/10.1007/s12393-012-9059-7>.
  17. R. Simpson, C. Ramírez, V. Birchmeier, A. Almonacid, J. Moreno, H. Nuñez, A. Jaques, Diffusion mechanisms during the osmotic dehydration of Granny Smith apples subjected to a moderate electric field, *J. Food Eng.* **166** (2015) 204–211, doi: <https://doi.org/10.1016/j.jfoodeng.2015.05.027>.
  18. R. Simpson, C. Ramírez, H. Nuñez, A. Jaques, S. Almonacid, Understanding the success of Page's model and related empirical equations in fitting experimental data of diffusion phenomena in food matrices, *Trends Food Sci. Technol.* **62** (2017) 194–201, doi: <https://doi.org/10.1016/j.tifs.2017.01.003>.
  19. V. Kumar, K. S. K. Bath, Solution of non-convex economic load dispatch problem using Grey Wolf Optimizer, *Neural Comput. Appl.* **27** (2016) 1301–1316, doi: <https://doi.org/10.1007/s00521-015-1934-8>.
  20. X. Q. Bian, L. Zhang, Z. M. Du, J. Chen, J. Y. Zhang, Prediction of sulfur solubility in supercritical sour gases using grey wolf optimizer-based support vector machine, *J. Mol. Liq.* **261** (2018) 431–438, doi: <https://doi.org/10.1016/j.molliq.2018.04.070>.
  21. E. K. Akpinar, Drying of mint leaves in a solar dryer and under open sun: Modelling, performance analyses, *Energy Convers. Manag.* **51** (2010) 2407–2418, doi: <https://doi.org/10.1016/j.enconman.2010.05.005>.
  22. O. Badaoui, S. Hanini, A. Djebli, H. Brahim, A. Benhamou, Experimental and modeling study of tomato pomace waste drying in a new solar greenhouse: Evaluation of new drying, *Renew. Energy* **133** (2018) 144–155, doi: <https://doi.org/10.1016/j.renene.2018.10.020>.
  23. S. Boughali, H. Benmoussa, B. Bouchekima, D. Mennouche, H. Bouguettaia, D. Bechki, Crop drying by indirect active hybrid solar – Electrical dryer in the eastern Algerian Septentrional Sahara, *Sol. Energy* **83** (2009) 2223–2232, doi: <https://doi.org/10.1016/j.solener.2009.09.006>.
  24. N. Kumar, B. C. Sarkar, H. K. Sharma, Mathematical modelling of thin layer hot air drying of carrot pomace, *J. Food. Sci. Technol.* **49** (2012) 33–41, doi: <https://doi.org/10.1007/s13197-011-0266-7>.
  25. A. Kantu, Effects of open-air sun drying and pre-treatment on drying characteristics of purslane (*Portulaca oleracea* L.), *Heat Mass Trans.* (2015) 807–813, doi: <https://doi.org/10.1007/s00231-014-1452-8>.
  26. S. Ben Mariem, S. Ben Mabrouk, Drying Characteristics of Tomato Slices and Mathematical Modeling, *Int. J. Energy Eng.* **4** (2014) 17–24, doi: <https://doi.org/10.5923/j.ijee.201401.03>.
  27. G. D. S. Matias, C. Andressa, B. Luiz, M. De Matos Jorge, D. F. Rossoni, The fractional calculus in studies on drying: A new kinetic semi-empirical model for drying, *J. Food Proc. Technol.* **42** (1) (2018) e12955, doi: <https://doi.org/10.1111/jfpe.12955>.
  28. M. K. Krokida, Rehydration kinetics of dehydrated products, *J. Food Eng.* **57** (1) (2003) 1–7, doi: [https://doi.org/10.1016/S0260-8774\(02\)00214-5](https://doi.org/10.1016/S0260-8774(02)00214-5).
  29. H. Isleroglu, S. Beyhan, Intelligent models based nonlinear modeling for infrared drying of mahaleb puree, *J. Food Proc. Technol.* **42** (8) (2018) e12912, doi: <https://doi.org/10.1111/jfpe.12912>.
  30. A. W. Goodman, J. Munkhammar, M.-P. Chen, H. M. Srivastava, R. V. Mendes, A. Loverro, M. Dalir, M. Bashour, E. Girejko, J. Salah, P. N. Mastorakis, B. Sambandham, A. Vatsala, J. Salah, S. S. Singh, S. Gupta, S. Owa, O. A. Boikanyo, R. W. Ibrahim, M. Darus, R. Gorenflo, F. Mainardi, T. Van Rens, A. Mohammed, M. Darus, M. J. Kozdron, A. Almusharrf, Development of Fractional Trigonometry and an Application of Fractional Calculus to Pharmacokinetic Model, *Appl. Math. Sci.* **3** (1997) 455–462, doi: <https://doi.org/10.1090/S0002-9904-1968-12045-2>.
  31. R. Metzler, J. Klafter, The random walk's guide to anomalous diffusion: A fractional dynamics approach, *Phys. Report* **339** (2000) 1–77, doi: [https://doi.org/10.1016/S0370-1573\(00\)00070-3](https://doi.org/10.1016/S0370-1573(00)00070-3).
  32. S. Mirjalili, S. M. Mirjalili, A. Lewis, Grey wolf optimizer, *Adv. Eng. Soft.* **69** (2014) 46–61, doi: <https://doi.org/10.1016/j.advengsoft.2013.12.007>.
  33. S. Gupta, K. Deep, A memory-based Grey Wolf Optimizer for global optimization tasks, *Appl. Soft Comp. J.* **93** (2020) 106367, doi: <https://doi.org/10.1016/j.asoc.2020.106367>.
  34. R. Sadin, G. R. Chegini, H. Sadin, The effect of temperature and slice thickness on drying kinetics tomato in the infrared dryer, *Heat Mass Trans./Waerme - Und Stoffuebertragung* **50** (2014) 501–507, doi: <https://doi.org/10.1007/s00231-013-1255-3>.
  35. S. Mirjalili, S. M. Mirjalili, A. Lewis, Grey wolf optimizer, *Adv. Eng. Soft.* **69** (2014) 46–61, doi: <https://doi.org/10.1016/j.advengsoft.2013.12.007>.
  36. S. Gupta, K. Deep, A memory-based Grey Wolf Optimizer for global optimization tasks, *Appl. Soft Comp. J.* **93** (2020) 106367, doi: <https://doi.org/10.1016/j.asoc.2020.106367>.
  37. N. A. Akgun, I. Doymaz, Modelling of olive cake thin-layer drying process, *J. Food Eng.* **68** (2005) 455–461, doi: <https://doi.org/10.1016/j.jfoodeng.2004.06.023>.

## SAŽETAK

### Frakcijski račun temeljen na "algoritmu sivog vuka" u studijama o solarnom sušenju

Mahdad Abdelkader,<sup>a</sup> Maamar Laidi,<sup>a,\*</sup> Salah Hanini,<sup>a</sup>  
Mohamed Hentabli<sup>b</sup> i Abdeltif Amrane<sup>c</sup>

U ovom novom članku provedena je usporedna studija između analitičkog i frakcijskog rješenja Fickove difuzije prvog i drugog reda kako bi se modelirao solarni postupak sušenja različitih proizvoda i sušila pod različitim radnim parametrima. Laplaceova transformacija i Laplaceova inverzna transformacija primijenjene su za dobivanje rješenja u funkciji s dva parametra: indeksom reda  $n$  i razlomljenim vremenskim indeksom  $\alpha$  gore navedenih Fickovih zakona, a njihovi parametri nelinearno su optimirani pomoću "algoritma sivog vuka" (engl. *Gray Wolf Optimizer*, GWO). Rezultati su pokazali da fenomen anomalne difuzije tijekom postupka sušenja najbolje opisuje model frakcijskog reda. Vrijednosti dobivene primjenom modela MR12 bolje su se slagale s eksperimentalnim podacima od vrijednosti dobivenih primjenom ostalih odabranih modela s vrlo prihvatljivim statističkim parametrima.

#### Ključne riječi

Frakcijski račun, solarno sušenje, modeliranje, algoritam sivog vuka, omjer vlage

<sup>a</sup> Laboratory of Biomaterials and Transport Phenomena (LBMP), University of Médéa, Médéa, Algeria

<sup>b</sup> Laboratory Quality Control, Physico-Chemical Department, ANTIBIOTICAL SAIDAL of Medea, Algeria

<sup>c</sup> Univ. Rennes, Ecole Nationale Supérieure de Chimie de Rennes, CNRS, ISCR – UMR6226, 35 000, Rennes, France

Izvorni znanstveni rad  
Prispjelo 11. svibnja 2020.  
Prihvaćeno 27. lipnja 2020.