



HAL
open science

LatSeq, a low-impact internal latency measurement tool at OpenAirInterface

Flavien Ronteix–Jacquet, Alexandre Ferrieux, Isabelle Hamchaoui, Stéphane Tuffin, Xavier Lagrange

► **To cite this version:**

Flavien Ronteix–Jacquet, Alexandre Ferrieux, Isabelle Hamchaoui, Stéphane Tuffin, Xavier Lagrange. LatSeq, a low-impact internal latency measurement tool at OpenAirInterface. OpenAirInterface Summer 2021 Virtual Workshop, Jun 2021, Virtual, France. hal-03276142

HAL Id: hal-03276142

<https://hal.science/hal-03276142>

Submitted on 1 Jul 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

A Low-Impact Internal Latency Measurement Tool for OpenAirInterface

Flavien Ronteix-Jacquet, Alexandre Ferrieux, Isabelle Hamchaoui, Stéphane Tuffin, Xavier Lagrange
 IMT Atlantique, Rennes / Orange Labs Networks, Lannion
 flavien.ronteixjacquet@orange.com - github.com/Orange-OpenSource/LatSeq

Introduction

- 5G aims to bring low latency networking to cellular networks
- For research and development purposes, need of thorough understanding of latencies at each segments
- We propose a tool to measure Base Station internal latencies at a fine grain

Definitions

- **Internal Latency** : time between the moment when the packet is fully received by the node from input interface and the moment when all segments making up the packet leave the software part of this node
- **Journey** of a packet is the list of all ordered measurements of this packet inside the node
- **Packet Fingerprint** : The measurement of a packet at a layer
- We propose to measure internal latencies per UE, per Layer inside Base Station (BS)

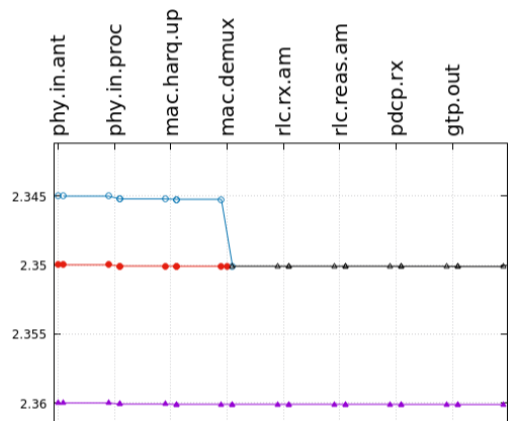


Fig.1 : Journeys of 2 packets inside BS

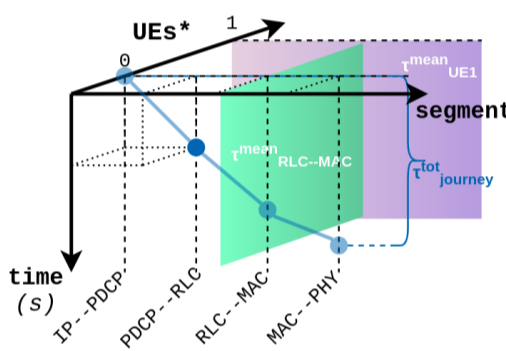


Fig.2 : Matrix of Latencies

LatSeq tool

- Tool to measure packets' internal latencies
- Ensure a low-impact on OpenAirInterface Base Station
 - > Reduce CPU instructions number for measurement function => 35 CPU cycles = 16ns
 - > Offload high consuming functions

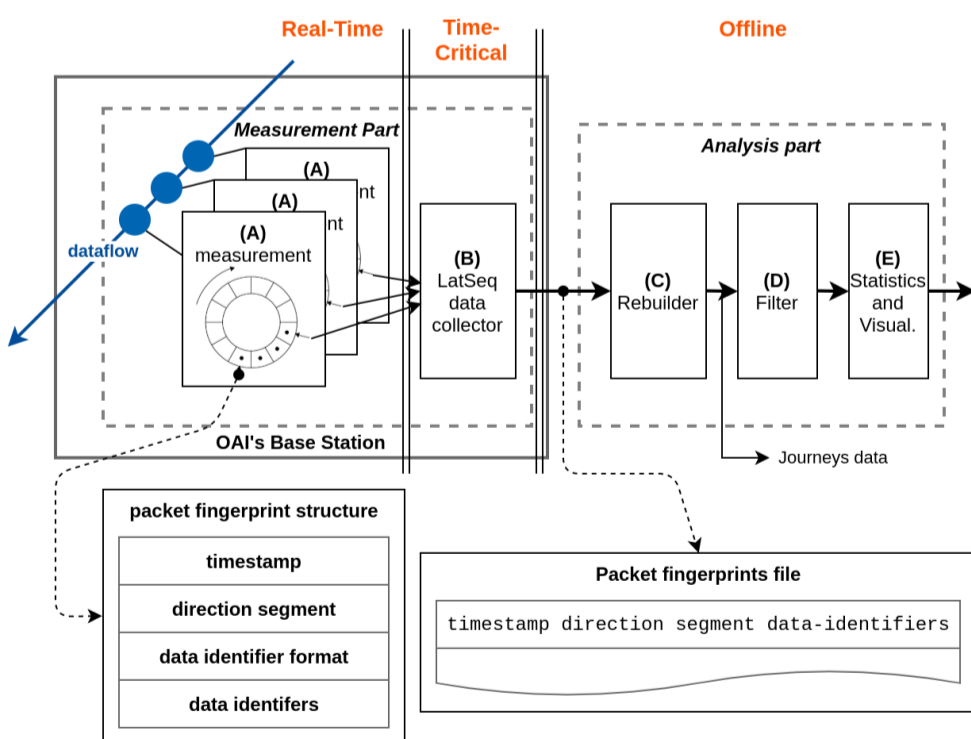


Fig.3 : LatSeq's architecture

Method and Results

- (A) Measurement of packet fingerprint at multiple points in the BS (Fig.6)
- (B) Collect all packet fingerprints in timestamped log file
- (C) Rebuild packets' journey from fingerprints (high complexity algorithm)
- (D) Optional filtering of packets
- (E) Visualizations and Statistics

```

1 #ifdef LATSEQ
2   LATSEQ_P("D rlc.tx.am--rlc.seg.am",
3           "len%d:rnti%d:drb%d:sdu%d:rsn%d.rso%d",
4           sdu->size, entity->ue_rnti, entity->channel_id, sdu->sdu_num, pdu->sn, pdu->so
5           );
6 #endif
    
```

```

1 20201030_203524.504785 D pdcp.tx--rlc.tx.am len62:rnti53421:drb1.psn87.sdu88
2 20201030_203524.506512 D rlc.tx.am--rlc.seg.am len62:rnti53421:drb1.sdu88.rsn72.rso0
3 20201030_203524.506513 D rlc.seg.am--mac.mux len64:rnti53421:drb1.lcid3.rsn72.rso0.reqfm686
    
```

Fig.4 : Measurement point (A) and result (B)

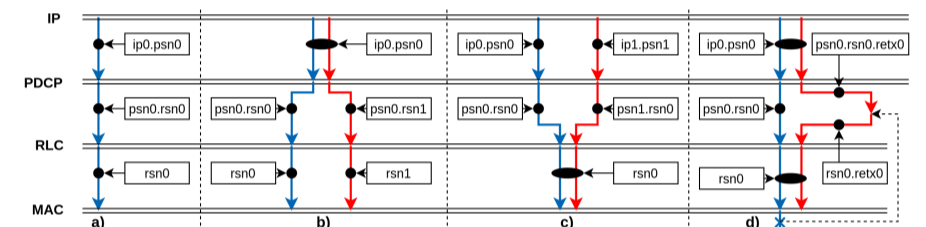


Fig.5 : Packet's journey from fingerprints (C)

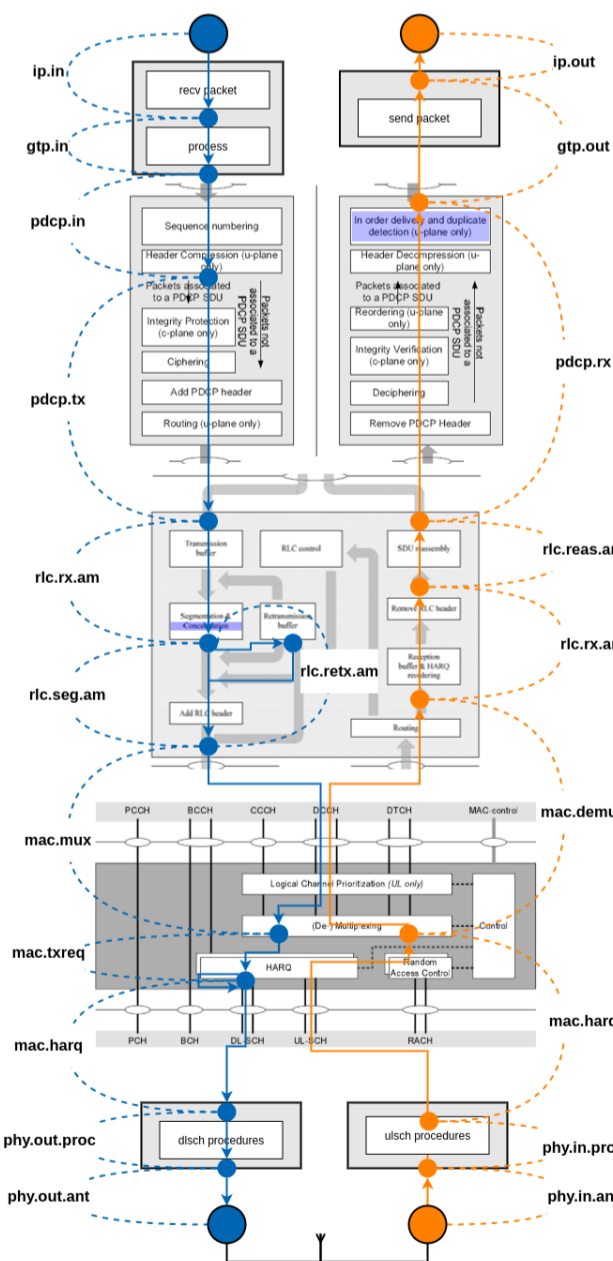


Fig.6 : LatSeq points on the OAI Base Station LTE stack

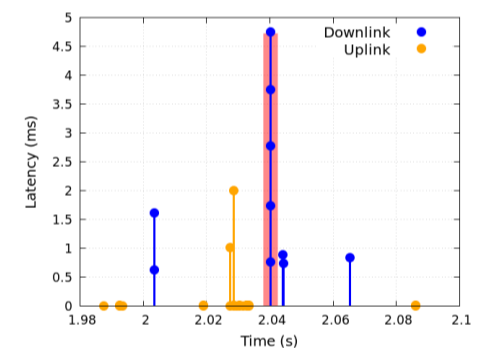


Fig.7 : Internal latency by packet segment (E)

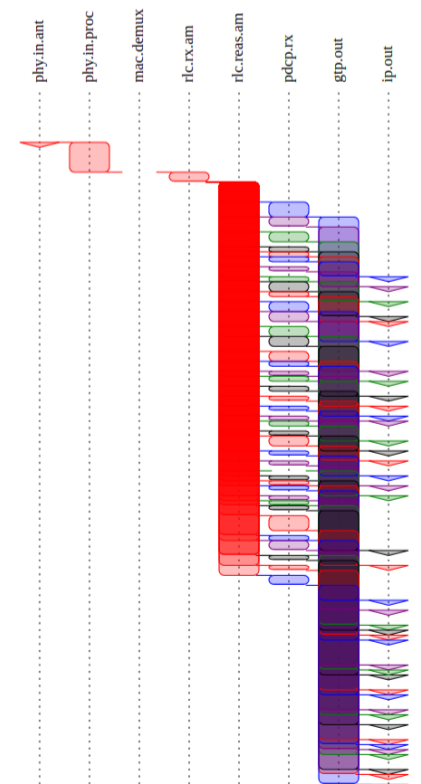


Fig.8 : Packets waterfall of an uplink transmission (E)

Conclusion

- LatSeq successfully implemented in OAI for latency analysis at a packet segment level
- Open-sourced code at github.com/Orange-OpenSource/LatSeq
- Used for uplink acknowledgement packet bundling problem analysis
- Extension with "I" point to correlate User Data packet with Control informations such as scheduling decision, BSR, SR, HARQ acknowledgment,...