



HAL
open science

AlGaN/GaN HEMTs on AlN substrate for power electronics

Jash Mehta, Idriss Abid, Thi Huong Ngo, Yvon Cordier, F Medjdoub

► **To cite this version:**

Jash Mehta, Idriss Abid, Thi Huong Ngo, Yvon Cordier, F Medjdoub. AlGaN/GaN HEMTs on AlN substrate for power electronics. 44th Workshop on Compound Semiconductor Devices and Integrated Circuits held in Europe, WOCS-DICE2021, Jun 2021, Bristol (virtual), United Kingdom. hal-03279160

HAL Id: hal-03279160

<https://hal.science/hal-03279160v1>

Submitted on 6 Jul 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

AlGaIn/GaN HEMTs on AlN substrate for power electronics

Jash Mehta^{1*}, Idriss Abid¹, Thi Huong Ngo², Yvon Cordier², and Farid Medjdoub¹

¹ IEMN (Institute of Electronics, Microelectronics and Nanotechnology), CNRS, University of Lille, 59650 Villeneuve d'Ascq, France

² University Côte d'Azur, CNRS, CRHEA, rue Bernard Grégory, 06560 Valbonne, France

* jashrinku.mehta@univ-lille.fr

Abstract - GaN high electron mobility transistors (HEMT) are becoming the mainstream for high frequency and power switching applications. On the other hand, Ultra-Wide Band Gap (UWBG) materials such as AlN that has a bandgap of 6.2 eV are attracting attention for pushing the limits of high voltage power devices. In this work, we report on AlGaIn/GaN-on-AlN HEMTs using thick and thin GaN channels in comparison with GaN-on-Si HEMTs using a similar thin epi-design.

I. Introduction

GaN HEMTs have changed the scenario from consumer level to advanced power electronic applications by saliently expanding the power competency and reducing the size of devices. Alternatively, aluminium nitride (AlN) based devices delineates the performance of UWBG devices for enhancing device operation in multiple kV's and ultimately making the device smaller and powerful compared to GaN and Si based devices. Here, we demonstrate the potential of AlGaIn/GaN-on-AlN HEMT for high voltage power electronic applications.

II. Experimental and Results

The sub-micron thick AlGaIn/GaN heterostructures were grown by molecular beam epitaxy (MBE) on bulk AlN and Si substrates. The structure comprises 150 nm AlN nucleation layer, followed by a GaN channel layer, 1 nm thin AlN spacer layer, 19 nm Al_{0.3}Ga_{0.7}N barrier layer and 2nm GaN cap on top (see Fig. 1).

In HEMT processing Ti/Al/Ni/Au for ohmic contact ($\approx 0.6\Omega\cdot\text{mm}$) and Ni/Au metal stacks for gates were used. The contacts were processed using double layer optical photolithography followed by inductive coupled plasma (ICP) etching of part of the AlGaIn barrier using Cl₂/Ar plasma. The metalization was concluded by evaporation using PLASSYS MEB550S E-beam evaporator followed by lift-off with SVC-14 solvent. Mesa isolation was performed by ICP using Cl₂/Ar plasma succeeded by SiN passivation with deposition by plasma enhanced chemical vapor deposition (PECVD).

From Hall measurements, a high 2DEG density of 10^{13} cm^{-2} or close is observed on all samples. However, the electron mobility is significantly higher ($1920\text{ cm}^2/\text{V}\cdot\text{s}$) for the thick channel on AlN substrate most probably due to the much better material quality as compared to the similar epilayers grown on Si. It can be pointed out that thinner GaN channel results in lower electron mobility. All transistors are fully functional (see Fig. 2) with low leakage current and on-state currents in agreement with the sheet resistance (Fig. 1). As expected, a drastically higher buffer breakdown is obtained on AlN substrates (Fig. 3) as measured between isolated contacts with multiple kV as compared to about 100V in Si substrate. However, interestingly the thinner channel (50nm) delivers about 10 times higher 3-terminal breakdown voltage (BV) than the 500nm thick channel on AlN substrate (Fig. 3). From the off-state characteristics (Fig. 4), electron injection into Si substrate is clearly confirmed with a high drain leakage while observing a low gate leakage current. In the case of AlN substrates, the gate and drain leakage currents match all the way to the breakdown, reflecting the absence of electron injection into the substrate.

III. Conclusion

As expected, AlGaIn/GaN-on-AlN devices increase the breakdown capacity of devices as compared to AlGaIn/GaN-on-Si device giving a brief outlook of their benefit for next generation power electronics. Electron injection phenomena is observed with AlGaIn/GaN-on-Si device portraying the limitation of the Si substrate, which is exacerbated by the use of a thin buffer. On the other hand, thinner GaN channel grown on AlN delivers superior breakdown voltage. This indicates that the electric field peaks more into the AlN as the space charge region enlarges and thus the device is less prone to the GaN channel layer. The study of even thinner GaN channel

structures using the same epi-design is under way in order to elucidate the impact of GaN channel thickness on the overall device breakdown.

IV. References

- [1.] Abid, I.; Mehta, J.; Cordier, Y.; Derluyn, J.; Degroote, S.; Miyake, H.; Medjdoub, F. AlGa_N Channel High Electron Mobility Transistors with Regrown Ohmic Contacts. *Electronics* 2021, 10, 635. <https://doi.org/10.3390/electronics10060635>
- [2.] Hirokuni Tokuda *et al* 2010 *Appl. Phys. Express* **3** 121003
- [3.] N. Yafune; S. Hashimoto; K. Akita; Y. Yamamoto; H. Tokuda; M. Kuzuhara AlN/AlGa_N HEMTs on AlN substrate for stable high-temperature operation. *Electronics Letters* 2014, 01, 50(3) pp. 211–212.

V. Acknowledgement

This work was supported by the French RENATECH network, the French National grant ANR-17-CE05-00131 project called BREAKUP and the ANR-11-LABX-0014 within the national network GaNeX.

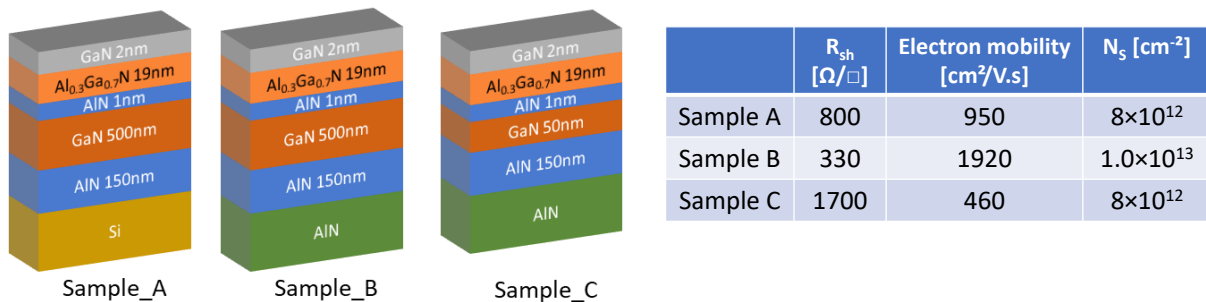


Fig. 1: Schematic cross section and 2DEG properties AlGa_N/Ga_N-on-Si and -on-AlN HEMTs

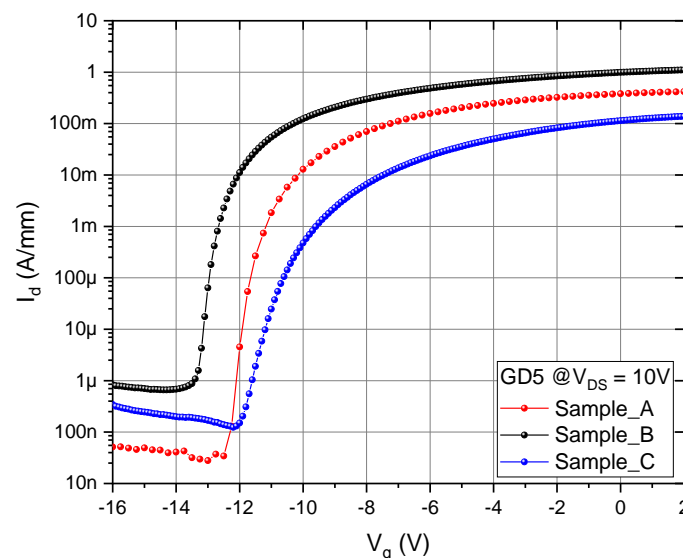


Fig. 2: I_d - V_g characteristics of AlGa_N/Ga_N-on-Si and AlGa_N/Ga_N-on-AlN HEMTs

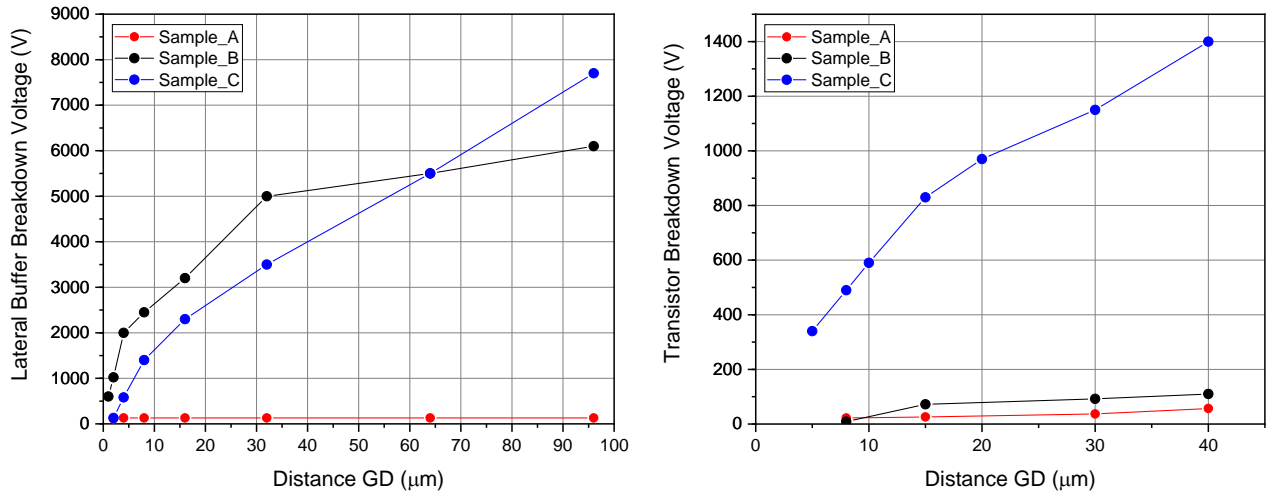


Fig. 3: Lateral buffer breakdown and 3-terminal transistor breakdown voltage of AlGaIn/GaN-on-Si and AlGaIn/GaN-on-AlN HEMTs vs. Gate-Drain distances (GD)

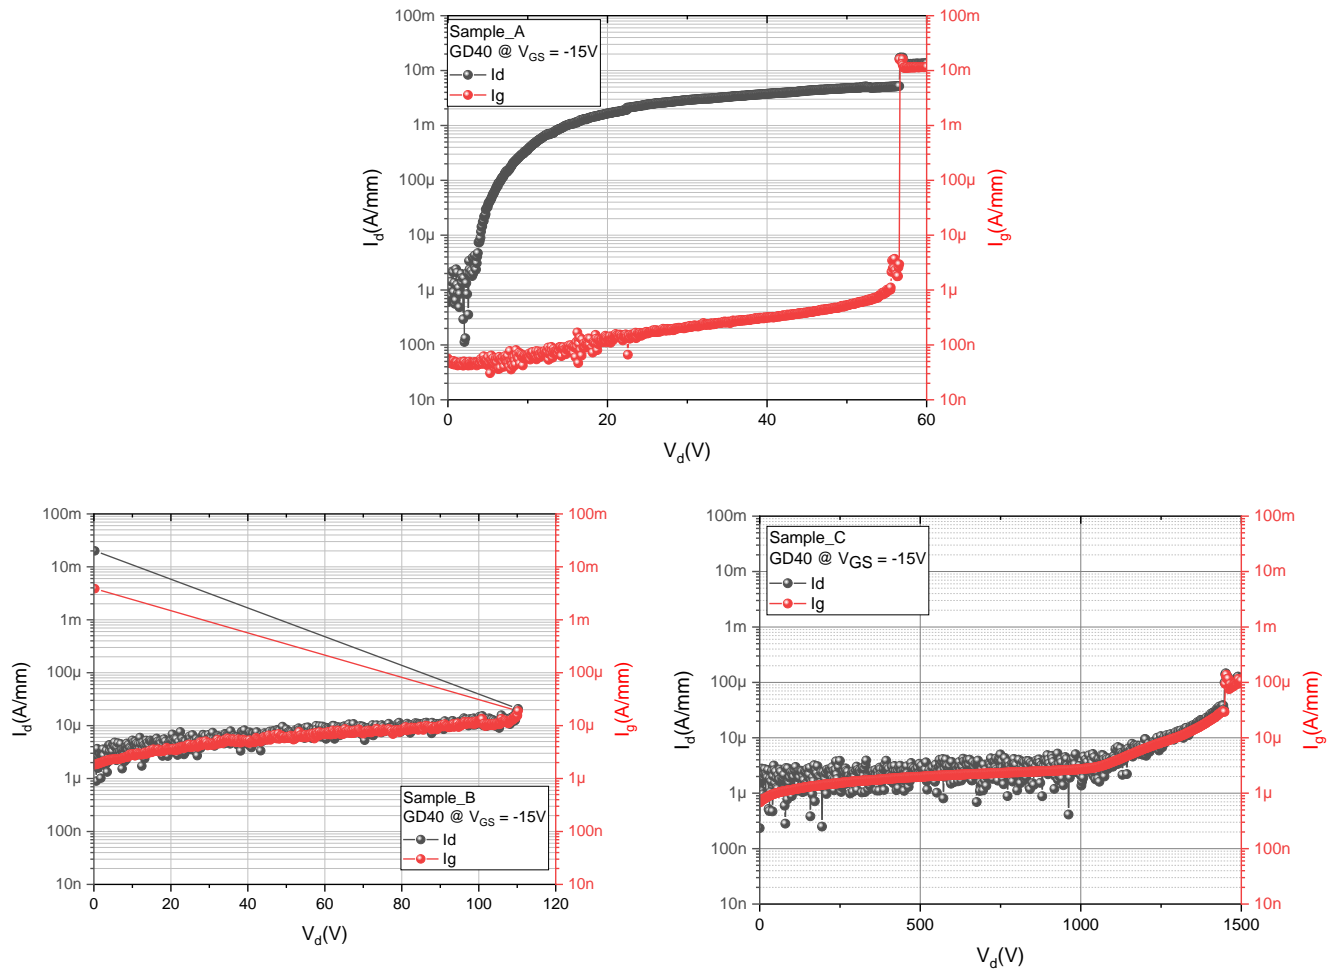


Fig. 4: Off-state leakage current characteristics of AlGaIn/GaN-on-Si and AlGaIn/GaN-on-AlN HEMTs