



HAL
open science

Identification of Hyper-viscoelastic models from one heterogeneous test for elastomers

Adel Tayeb, N Di Cesare, Jean-Benoit Le Cam

► **To cite this version:**

Adel Tayeb, N Di Cesare, Jean-Benoit Le Cam. Identification of Hyper-viscoelastic models from one heterogeneous test for elastomers. BSSM 15th International Conference on Advances in Experimental Mechanics, Sep 2021, Virtual Event, United Kingdom. hal-03337143

HAL Id: hal-03337143

<https://hal.science/hal-03337143>

Submitted on 7 Sep 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Identification of Hyper-viscoelastic models from one heterogeneous test for elastomers

A. Tayeb^{1a}, N. Di Cesare² and J.B. Le Cam¹

¹Univ Rennes, CNRS, IPR (Institut de Physique de Rennes) - UMR 6251, Rennes, France,

²Univ. Bretagne-Sud, UMR CNRS 6027, IRDL, F-56100, Lorient, France.

adel.tayeb@univ-rennes1.fr

Abstract. In this work, the identification of Hyper-viscoelastic models of elastomers is performed from only one heterogeneous relaxation experiment performed with a cruciform specimen. The identification procedure is based on the so-called Finite Element Model Updating (FEMU) technique. Even though the experiment induces heterogeneous kinematic fields, only the measured and predicted global force at the specimen edges has been used in the residual to be minimized. The minimization problem has been solved by using of the Inverse-PageRank-Particle Swarm Optimization (I-PR-PSO) algorithm. It has been found that such identification procedure coupled with the heterogeneous relaxation experiment were sufficient to identify both hyperelastic and viscoelastic parameters. The capability of the proposed methodology has been assessed by comparing both kinematic fields and global forces obtained experimentally and by using of the identified parameters. It has been found that the identified parameters predicted well the experiments, even the ones not used in the identification procedure.

Introduction. Thanks to their high elasticity, high damping and high elongation at failure, elastomers are widely used in several engineering applications such as automotive, aerospace and civil engineering applications. The mechanical behaviour of such material is modelled generally within the framework of hyperelasticity. The time-dependent character of the behaviour is modelled by associating a viscoelastic part to the instantaneous hyperelastic response; see [1] and references therein. This viscoelastic part is represented in terms of a Prony series. Classically, the hyperelastic parameters are identified from homogeneous experiments namely equibiaxial tensile, pure shear and simple extension. In the recent years, a new method has been applied to perform the identification of hyperelastic models. It is based on performing one heterogeneous experiment, which induces several loading cases with a large strain distribution for each loading case. The identification of the hyperelastic parameters are identified either by FEMU [2] or Virtual Fields Method (VFM) [3].

On the other hand, the viscoelastic parameters are identified by using stress relaxation experiments at low strain levels following the assumption that nonlinear viscoelastic models should coincide with the linear viscoelastic model of Boltzmann in the small strain domain. In the present work both hyperelastic and viscoelastic parameters are identified from only one heterogeneous test of equibiaxial tensile of a cruciform elastomer specimen. The identification is performed with the FEMU method by using the I-PR-PSO optimization.

Methods. The experimental setup is reported in Fig.1. It is composed by a biaxial tensile machine, a CCD optical camera, the cruciform elastomeric specimen and LED lighting system to ensure homogeneous distribution of cold lighting during the test. An equibiaxial displacement of 70 mm is applied to the four branches of the cruciform specimen at the same loading rate of 500 mm/min. This loading was followed by a 60 s relaxation in order to highlight the viscoelasticity effects. During the experiment both the global forces and kinematic fields were measured. The latter were measured using DIC with 7D[®] Software. The FEMU method used in this work is based on the minimization with respect to the constitutive parameters of the global force between the experiment and numerical simulation of the experiment. During the identification process, the constitutive parameters are modified by the PSO following the objective function formulated in terms of the difference of the global forces. The objective function used in this work reads as follow:

$$\sum_{i=1}^n \left(\frac{F_{exp,i} - F_{num,i}}{F_{exp,i}} \right)^2, \quad (1)$$

where the subscript (*exp*) and (*num*) corresponds to experimental and numerical data, respectively. At the end of the optimization process the retained parameters are the ones minimizing the objective function of Eq. 1.

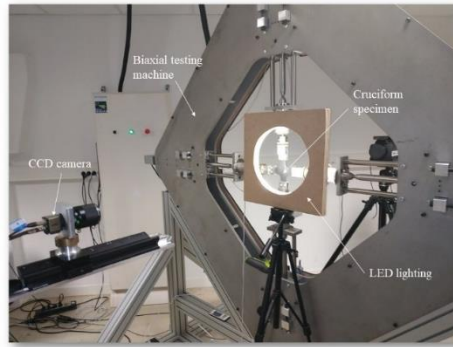


Figure 1: experimental set-up

Results. The results of the identification procedure are the hyperelastic and viscoelastic constitutive parameters. The accuracy of the identified parameters to predict the experiments is assessed through the comparison of the global response force and kinematic fields. Fig. 2 shows these results. The relative error for the force is inferior to 2 % and under 1 % for the kinematic fields. These results have been obtained with simulated data and will be applied to real experiment data. It can be concluded that this identification procedure enable us to identify both hyperelastic and viscoelastic parameters with only one experiment and without full field measurement.

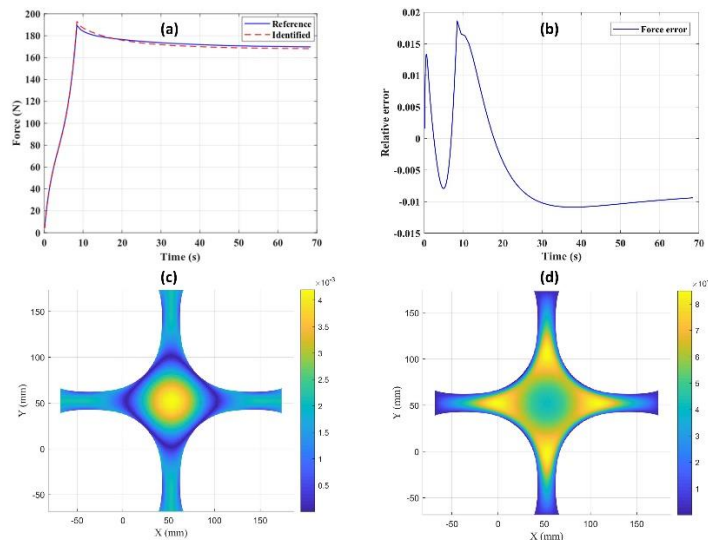


Figure 2: comparison of the obtained results with the reference data: **(a)** global force, **(b)** relative error of the global force, **(c)** relative error of the first in-plane principle stretch and **(d)** relative error of the second in-plane principle stretch

Conclusion. The identification of the hyperelastic and viscoelastic parameters from only one heterogeneous relaxation experiment is performed by using only the general force response. The method has been applied to both generated and experimental data and showed good results in terms of the ability to predict both the general force response and kinematic fields.

References

- [1] Tayeb, A., Arfaoui, M., Zine, A., Hamdi, A., Benabdallah, J., & Ichchou, M. (2017). On the nonlinear viscoelastic behavior of rubber-like materials: Constitutive description and identification. *International Journal of Mechanical Sciences*, 130, 437-447.
- [2] Tayeb, A., Le Cam, J. B., Robin, E., Canévet, F., Grédiac, M., Toussaint, E., & Balandraud, X. (2019, June). Sensitivity based virtual fields for identifying hyperelastic constitutive parameters. In *11th European Conference on Constitutive Models for Rubber, 2019* (pp. 163-168).
- [3] Bastos, G., Tayeb, A., Le Cam, J. B., & Di Cesare, N. (2019). Inverse identification of hyperelastic parameters by metaheuristic optimization algorithm. In *Constitutive Models for Rubber XI* (pp. 218-222). CRC Press.

