



HAL
open science

Finite-dimensional observer-based boundary stabilization of reaction-diffusion equations with either a Dirichlet or Neumann boundary measurement

Hugo Lhachemi, Christophe Prieur

► **To cite this version:**

Hugo Lhachemi, Christophe Prieur. Finite-dimensional observer-based boundary stabilization of reaction-diffusion equations with either a Dirichlet or Neumann boundary measurement. *Automatica*, 2022, 135 (January), pp.109955. 10.1016/j.automatica.2021.109955 . hal-03377119v2

HAL Id: hal-03377119

<https://hal.science/hal-03377119v2>

Submitted on 14 Oct 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Finite-dimensional observer-based boundary stabilization of reaction-diffusion equations with a either Dirichlet or Neumann boundary measurement [★]

Hugo Lhachemi ^a, Christophe Prieur ^b,

^a *Université Paris-Saclay, CNRS, CentraleSupélec, Laboratoire des signaux et systèmes, 91190, Gif-sur-Yvette, France*

^b *Université Grenoble Alpes, CNRS, Grenoble-INP, GIPSA-lab, F-38000, Grenoble, France*

Abstract

This paper investigates the output feedback boundary control of reaction-diffusion equations with either distributed or boundary measurement by means of a finite-dimensional observer. A constructive method dealing with the design of finite-dimensional observers for the feedback stabilization of reaction-diffusion equations was reported in a recent paper in the case where either the control or the observation operator is bounded and also satisfies certain regularity assumptions. In this paper, we go beyond by demonstrating that a finite-dimensional state-feedback combined with a finite-dimensional observer can always be successfully designed in order to achieve the Dirichlet boundary stabilization of reaction-diffusion PDEs with a either Dirichlet or Neumann boundary measurement.

Key words: Reaction-diffusion equation, output feedback, boundary control, boundary measurement, finite-dimensional observer

1 Introduction

Modal approximation methods have demonstrated to be efficient approaches for the design of state-feedback control strategies for parabolic PDEs. While the origins of these methods track back to the 1960s [23] their extensions in various directions is still an active topic of research [3,4,12,14–18,20,22]. In particular, these methods allow the design of finite-dimensional state-feedback, making them particularly relevant for practical applications. However, due to the distributed nature of the state, the design of an observer is generally required. In this field, backstepping design has emerged as a very efficient tool for the design of observers taking the form of PDEs [13], in particular because such an approach generally leads to a form of separation principle between controller and observer designs. Nevertheless, the infinite-

dimensional nature of the observer implies the necessity to resort to late lumping approximations in order to obtain a finite-dimensional control strategy that is suitable for practical implementation. Such a late lumping approximation generally requires the completion of extra stability analyses [1]. For this reason, the elaboration of finite-dimensional observer-based control strategies for PDEs is very appealing. However, such an approach is challenging due to the inherent introduction of a coupling between controller and observer designs.

One of the first contributions regarding the design of a finite-dimensional observer-based controller for PDEs was reported in [5] under a number of restrictive assumptions ensuring that a form of separation principle holds. In the case of bounded input and output operators, the stability of the resulting closed-loop system was assessed in [2] for controllers with dimension large enough, but without explicit criterion for the selection of the dimension parameter. For a similar problem, explicit conditions on the order of the finite-dimensional observer-based controller were reported in [7]. More recently, a LMI-based constructive method dealing with the design of finite-dimensional observers for the feedback stabilization of reaction-diffusion equations was reported in [8]. This approach, that takes advantage of a

[★] Corresponding author H. Lhachemi. The work of the first author was supported by ANR PIA funding: ANR-20-IDEE-0002. The work of the second author has been partially supported by MIAI@Grenoble Alpes (ANR-19-P3IA-0003)

Email addresses: hugo.lhachemi@centralesupelec.fr (Hugo Lhachemi), christophe.prieur@gipsa-lab.fr (Christophe Prieur).

direct Lyapunov method, allows the cases where either the control or the observation operator is bounded and exhibits certain regularity assumptions. The extension to configurations with small input and output delays was reported in [11].

This paper is concerned with the finite-dimensional observer-based boundary stabilization of reaction-diffusion equations. We extend the boundary control design strategy reported in [8] to the relevant and more stringent case of boundary measurements. More specifically, while the developments reported in [8] were limited to configurations where the either control or observation operator is bounded, we demonstrate in this paper how this type of control design strategy can be extended to the case where both control and observation operators are unbounded. We consider first as a preliminary step the case of a Dirichlet boundary control and a bounded observation operator. This setting was tackled in [11] for state trajectory evaluated in L^2 norm using the classical approach consisting in transferring the control input from the boundary into the domain by a classical change of variable [6, Sec. 3.3], yielding an homogeneous representation of the PDE that is used for control design. In this paper, also leveraging such classical homogeneous representations, we first revisit this problem to assess the stability of the system trajectories in H^1 norm. This higher regularity of the norm is one of the keys to address the more complex case of boundary observations and is also particularly relevant because it implies the convergence of the system trajectories in L^∞ norm. Then, using controller architectures similar to [8], we extend the control design procedure to the novel setting of a Dirichlet boundary control and either a Dirichlet or Neumann boundary observation. Comparing to [8,11], the main technical idea is the introduction of a scaling procedure while writing the system output as series expansions of the modes of the PDE when expressed in homogeneous coordinates. This scaling procedure is the key to show that the derived LMI conditions are feasible when selecting the order of the observer large enough, by invoking the Lemma in Appendix which is a generalization of a result found in [8]. This allows to infer the stability of the resulting closed-loop system in H^1 norm provided the number of modes of the observer is selected large enough.

Independently and after the original submission of this paper, new developments were made available [9,10] and have been suggested to us by the reviewers. The boundary control of a Kuramoto-Sivashinsky with Dirichlet measurement was studied in [10] by taking advantage of the fastest divergence properties of the spectrum. The case of a constant coefficients reaction-diffusion equation was studied in the preprint [9] for a Dirichlet measurement. The authors did not employ a scaling procedure but invoked fractional powers of the eigenvalues that is similar to the one used in this paper in Section 5 when studying a Neumann measurement. We show in Section 4

using a scaling procedure that such an approach is actually not necessary in the Dirichlet measurement scheme. However, the combined use of a scaling procedure and of fractional powers of the eigenvalues seems to be necessary in the Neumann measurement scheme as described in Section 5.

The rest of this paper is organized as follows. After introducing a number of notations and properties in Section 2, the case of Dirichlet boundary control with a bounded observation operator is considered in Section 3. The control design procedure is then extended to the cases of a boundary Dirichlet and Neumann observation in Section 4 and Section 5, respectively. Numerical illustrations are provided in Section 6 while concluding remarks are formulated in Section 7.

2 Notation and properties

Spaces \mathbb{R}^n are endowed with the Euclidean norm denoted by $\|\cdot\|$. The associated induced norms of matrices are also denoted by $\|\cdot\|$. Given two vectors X and Y , $\text{col}(X, Y)$ denotes the vector $[X^\top, Y^\top]^\top$. $L^2(0, 1)$ stands for the space of square integrable functions on $(0, 1)$ and is endowed with the inner product $\langle f, g \rangle = \int_0^1 f(x)g(x) dx$ with associated norm denoted by $\|\cdot\|_{L^2}$. For an integer $m \geq 1$, the m -order Sobolev space is denoted by $H^m(0, 1)$ and is endowed with its usual norm denoted by $\|\cdot\|_{H^m}$. For a symmetric matrix $P \in \mathbb{R}^{n \times n}$, $P \succeq 0$ (resp. $P \succ 0$) means that P is positive semi-definite (resp. positive definite) while $\lambda_M(P)$ (resp. $\lambda_m(P)$) denotes its maximal (resp. minimal) eigenvalue.

Let $p \in \mathcal{C}^1([0, 1])$ and $q \in \mathcal{C}^0([0, 1])$ with $p > 0$ and $q \geq 0$. Let the Sturm-Liouville operator $\mathcal{A} : D(\mathcal{A}) \subset L^2(0, 1) \rightarrow L^2(0, 1)$ be defined by $\mathcal{A}f = -(pf)'' + qf$ on the domain $D(\mathcal{A}) \subset L^2(0, 1)$ given by either $D(\mathcal{A}) = \{f \in H^2(0, 1) : f(0) = f(1) = 0\}$ or $D(\mathcal{A}) = \{f \in H^2(0, 1) : f'(0) = f'(1) = 0\}$. The eigenvalues λ_n , $n \geq 1$, of \mathcal{A} are simple, non negative, and form an increasing sequence with $\lambda_n \rightarrow +\infty$ as $n \rightarrow +\infty$. Moreover, the associated unit eigenvectors $\phi_n \in L^2(0, 1)$ form a Hilbert basis and we also have $D(\mathcal{A}) = \{f \in L^2(0, 1) : \sum_{n \geq 1} |\lambda_n|^2 |\langle f, \phi_n \rangle|^2 < +\infty\}$. Let $p_*, p^*, q^* \in \mathbb{R}$ be such that $0 < p_* \leq p(x) \leq p^*$ and $0 \leq q(x) \leq q^*$ for all $x \in [0, 1]$, then it holds [19]:

$$0 \leq \pi^2(n-1)^2 p_* \leq \lambda_n \leq \pi^2 n^2 p^* + q^* \quad (1)$$

for all $n \geq 1$. Moreover if $p \in \mathcal{C}^2([0, 1])$, we have [19] that $\phi_n(0) = O(1)$ and $\phi_n'(0) = O(\sqrt{\lambda_n})$ as $n \rightarrow +\infty$. For $f \in D(\mathcal{A})$, we have $\langle \mathcal{A}f, f \rangle = \sum_{n \geq 1} \lambda_n \langle f, \phi_n \rangle^2$ hence

$$\sum_{n \geq 1} \lambda_n \langle f, \phi_n \rangle^2 = \int_0^1 p(x) f'(x)^2 + q(x) f(x)^2 dx. \quad (2)$$

This implies that, for any $f \in D(\mathcal{A})$, the series expansion $f = \sum_{n \geq 1} \langle f, \phi_n \rangle \phi_n$ holds in $H^1(0, 1)$ norm. Then, using the definition of \mathcal{A} and the fact that it is a Riesz-spectral operator, we obtain that the latter series expansion holds in $H^2(0, 1)$ norm. Due to the continuous embedding $H^1(0, 1) \subset L^\infty(0, 1)$, we obtain that $f(0) = \sum_{n \geq 1} \langle f, \phi_n \rangle \phi_n(0)$ and $f'(0) = \sum_{n \geq 1} \langle f, \phi_n \rangle \phi_n'(0)$.

3 Case of a bounded observation operator

We first consider the reaction-diffusion PDE with right Dirichlet boundary actuation (modeling for example a source of temperature in the case of a heat equation) described for $t > 0$ and $x \in (0, 1)$ by

$$z_t(t, x) = (p(x)z_x(t, x))_x + (q_c - q(x))z(t, x) \quad (3a)$$

$$z_x(t, 0) = 0, \quad z(t, 1) = u(t) \quad (3b)$$

$$z(0, x) = z_0(x) \quad (3c)$$

$$y(t) = \int_0^1 c(x)z(t, x) dx \quad (3d)$$

where $q_c \in \mathbb{R}$ is a constant, $u(t) \in \mathbb{R}$ is the command input, $y(t) \in \mathbb{R}$ with $c \in L^2(0, 1)$ is the measurement, $z_0 \in L^2(0, 1)$ is the initial condition, and $z(t, \cdot) \in L^2(0, 1)$ is the state. The objective is to achieve the stabilization of the closed-loop system in H^1 norm. Note that a time delayed version of this problem was tackled in [11] but for state trajectories evaluated in $L^2(0, 1)$ norm. However, the ability to assess the stability in $H^1(0, 1)$ norm is a crucial step towards the ability to handle boundary measurements.

3.1 Spectral reduction

We introduce the change of variable (see, e.g., [6, Sec. 3.3] for generalities on boundary control systems)

$$w(t, x) = z(t, x) - x^2 u(t). \quad (4)$$

Note that, among all possible change of variables, we have selected one that preserves the left Dirichlet trace, i.e., such that $w(t, 0) = z(t, 0)$. This is in perspective of the developments of Section 4 in the case of a Dirichlet measurement at the left boundary. With this change of variable we have

$$w_t(t, x) = (p(x)w_x(t, x))_x + (q_c - q(x))w(t, x) + a(x)u(t) + b(x)\dot{u}(t) \quad (5a)$$

$$w_x(t, 0) = 0, \quad w(t, 1) = 0 \quad (5b)$$

$$w(0, x) = w_0(x) \quad (5c)$$

$$\tilde{y}(t) = \int_0^1 c(x)w(t, x) dx \quad (5d)$$

with $a, b \in L^2(0, 1)$ defined by $a(x) = 2p(x) + 2xp'(x) + (q_c - q(x))x^2$ and $b(x) = -x^2$, respectively, $\tilde{y}(t) = y(t) -$

$\left(\int_0^1 x^2 c(x) dx\right) u(t)$, and $w_0(x) = z_0(x) - x^2 u(0)$. With the auxiliary command input $v(t) = \dot{u}(t)$, we have

$$\dot{u}(t) = v(t) \quad (6a)$$

$$\frac{dw}{dt}(t, \cdot) = -\mathcal{A}w(t, \cdot) + q_c w(t, \cdot) + au(t) + bv(t) \quad (6b)$$

with $D(\mathcal{A}) = \{f \in H^2(0, 1) : f'(0) = f(1) = 0\}$. Introducing the coefficients of projection $w_n(t) = \langle w(t, \cdot), \phi_n \rangle$, $a_n = \langle a, \phi_n \rangle$, $b_n = \langle b, \phi_n \rangle$, and $c_n = \langle c, \phi_n \rangle$, we obtain for $n \geq 1$

$$\dot{u}(t) = v(t) \quad (7a)$$

$$\dot{w}_n(t) = (-\lambda_n + q_c)w_n(t) + a_n u(t) + b_n v(t) \quad (7b)$$

$$\tilde{y}(t) = \sum_{i \geq 1} c_i w_i(t) \quad (7c)$$

3.2 Control design

Let $N_0 \geq 1$ and $\delta > 0$ be given such that $-\lambda_n + q_c < -\delta < 0$ for all $n \geq N_0 + 1$. Let $N \geq N_0 + 1$ be arbitrary. Proceeding as in [8], we design an observer to estimate the N first modes of the plant while the state-feedback is performed on the N_0 first modes of the plant. Specifically, introducing

$$W^{N_0} = [w_1 \dots w_{N_0}]^\top,$$

$$A_0 = \text{diag}(-\lambda_1 + q_c, \dots, -\lambda_{N_0} + q_c),$$

$$B_{0,a} = [a_1 \dots a_{N_0}]^\top, \quad B_{0,b} = [b_1 \dots b_{N_0}]^\top,$$

we have from (7b) that

$$\dot{W}^{N_0}(t) = A_0 W^{N_0}(t) + B_{0,a} u(t) + B_{0,b} v(t). \quad (8)$$

Hence, defining

$$W_a^{N_0}(t) = \begin{bmatrix} u(t) \\ W^{N_0}(t) \end{bmatrix}, \quad A_1 = \begin{bmatrix} 0 & 0 \\ B_{0,a} & A_0 \end{bmatrix}, \quad B_1 = \begin{bmatrix} 1 \\ B_{0,b} \end{bmatrix},$$

we obtain that

$$\dot{W}_a^{N_0}(t) = A_1 W_a^{N_0}(t) + B_1 v(t).$$

We now define for $1 \leq n \leq N$ the observation dynamics:

$$\begin{aligned} \dot{\hat{w}}_n(t) &= (-\lambda_n + q_c)\hat{w}_n(t) + a_n u(t) + b_n v(t) \\ &\quad - l_n \left(\int_0^1 c(x) \sum_{i=1}^N \hat{w}_i(t) \phi_i(x) dx - \tilde{y}(t) \right) \end{aligned} \quad (9)$$

where $l_n \in \mathbb{R}$ are the observer gains. We select $l_n = 0$ for $N_0 + 1 \leq n \leq N$ and the initial condition of the

observer as $\hat{w}_n(0) = 0$ for all $1 \leq n \leq N$. We define for $1 \leq n \leq N$ the observation error as

$$e_n(t) = w_n(t) - \hat{w}_n(t). \quad (10)$$

With $\zeta(t) = \sum_{i \geq N_0+1} c_i w_i(t)$, we infer from (9) that

$$\begin{aligned} \dot{\hat{w}}_n(t) &= (-\lambda_n + q_c)\hat{w}_n(t) + a_n u(t) + b_n v(t) \\ &+ l_n \sum_{i=1}^N c_i e_i(t) + l_n \zeta(t) \end{aligned} \quad (11)$$

for $1 \leq n \leq N$. Introducing

$$\begin{aligned} \hat{W}^{N_0} &= [\hat{w}_1 \dots \hat{w}_{N_0}]^\top, E^{N_0} = [e_1 \dots e_{N_0}]^\top, \\ E^{N-N_0} &= [e_{N_0+1} \dots e_N]^\top, C_0 = [c_1 \dots c_{N_0}], \\ C_1 &= [c_{N_0+1} \dots c_N], L = [l_1 \dots l_{N_0}]^\top, \end{aligned}$$

we have

$$\begin{aligned} \dot{\hat{W}}^{N_0}(t) &= A_0 \hat{W}^{N_0}(t) + B_{0,a} u(t) + B_{0,b} v(t) \\ &+ LC_0 E^{N_0}(t) + LC_1 E^{N-N_0}(t) + L\zeta(t). \end{aligned} \quad (12)$$

With

$$\hat{W}_a^{N_0}(t) = \begin{bmatrix} u(t) \\ \hat{W}^{N_0}(t) \end{bmatrix}, \quad \tilde{L} = \begin{bmatrix} 0 \\ L \end{bmatrix} \quad (13)$$

we deduce that

$$\begin{aligned} \dot{\hat{W}}_a^{N_0}(t) &= A_1 \hat{W}_a^{N_0}(t) + B_1 v(t) \\ &+ \tilde{L}C_0 E^{N_0}(t) + \tilde{L}C_1 E^{N-N_0}(t) + \tilde{L}\zeta(t). \end{aligned} \quad (14)$$

Setting the auxiliary command input as

$$v(t) = K \hat{W}_a^{N_0}(t), \quad (15)$$

where $K \in \mathbb{R}^{1 \times (N_0+1)}$, we obtain that

$$\begin{aligned} \dot{\hat{W}}_a^{N_0}(t) &= (A_1 + B_1 K) \hat{W}_a^{N_0}(t) \\ &+ \tilde{L}C_0 E^{N_0}(t) + \tilde{L}C_1 E^{N-N_0}(t) + \tilde{L}\zeta(t) \end{aligned} \quad (16)$$

and, using (8) and (12),

$$\dot{E}^{N_0}(t) = (A_0 - LC_0)E^{N_0}(t) - LC_1 E^{N-N_0}(t) - L\zeta(t). \quad (17)$$

Remark 1 The pair (A_1, B_1) is controllable. Indeed, since λ_n are two by two distincts, the Kalman condition yields that (A_1, B_1) is controllable if and only if $a_n + (-\lambda_n + q_c)b_n \neq 0$ for all $1 \leq n \leq N_0$. Using two integration by parts, one has $a_n + (-\lambda_n + q_c)b_n = -p(1)\phi_n'(1)$. Since $\phi_n(1) = 0$, Cauchy uniqueness gives $a_n + (-\lambda_n + q_c)b_n \neq 0$. Assuming now that $c_n \neq 0$ for all $1 \leq n \leq N_0$, we also obtain that (A_0, C_0) is observable.

We now define

$$\begin{aligned} \hat{W}^{N-N_0} &= [\hat{w}_{N_0+1} \dots \hat{w}_N]^\top, \\ A_2 &= \text{diag}(-\lambda_{N_0+1} + q_c, \dots, -\lambda_N + q_c), \\ B_{2,a} &= [a_{N_0+1} \dots a_N]^\top, B_{2,b} = [b_{N_0+1} \dots b_N]^\top. \end{aligned}$$

Since $l_n = 0$ for $N_0 + 1 \leq n \leq N$, (9) and (15) yield

$$\begin{aligned} \dot{\hat{W}}^{N-N_0}(t) &= A_2 \hat{W}^{N-N_0}(t) + B_{2,a} u(t) + B_{2,b} v(t) \\ &= A_2 \hat{W}^{N-N_0}(t) + \left(B_{2,b} K + \begin{bmatrix} B_{2,a} & 0 \end{bmatrix} \right) \hat{W}_a^{N_0}(t) \end{aligned} \quad (18)$$

and, using in addition (7b) and (10),

$$\dot{E}^{N-N_0}(t) = A_2 E^{N-N_0}(t). \quad (19)$$

Putting together (16-19), we obtain with

$$X = \text{col}(\hat{W}_a^{N_0}, E^{N_0}, \hat{W}^{N-N_0}, E^{N-N_0}) \quad (20)$$

that

$$\dot{X}(t) = FX(t) + \mathcal{L}\zeta(t) \quad (21)$$

where

$$F = \begin{bmatrix} A_1 + B_1 K & \tilde{L}C_0 & 0 & \tilde{L}C_1 \\ 0 & A_0 - LC_0 & 0 & -LC_1 \\ B_{2,b} K + \begin{bmatrix} B_{2,a} & 0 \end{bmatrix} & 0 & A_2 & 0 \\ 0 & 0 & 0 & A_2 \end{bmatrix}, \quad (22a)$$

$$\mathcal{L} = \text{col}(\tilde{L}, -L, 0, 0). \quad (22b)$$

Defining $E = [1 \ 0 \ \dots \ 0]$ and $\tilde{K} = [K \ 0 \ 0 \ 0]$, we obtain from (13), (15), and (20) that

$$u(t) = EX(t), \quad v(t) = \tilde{K}X(t) \quad (23)$$

and, with $g = \|a\|_{L^2}^2 + \|b\|_{L^2}^2 \|K\|^2$, we can introduce

$$G = \|a\|_{L^2}^2 E^\top E + \|b\|_{L^2}^2 \tilde{K}^\top \tilde{K} \preceq gI. \quad (24)$$

3.3 Stability analysis

Theorem 2 Let $p \in \mathcal{C}^1([0, 1])$ with $p > 0$, $q \in \mathcal{C}^0([0, 1])$ with $q \geq 0$, $q_c \in \mathbb{R}$, and $c \in L^2(0, 1)$. Consider the reaction-diffusion PDE described by (3). Let $N_0 \geq 1$ and $\delta > 0$ be given such that $-\lambda_n + q_c < -\delta < 0$ for all $n \geq N_0 + 1$. Assume that $c_n \neq 0$ for all $1 \leq n \leq N_0$. Let $K \in \mathbb{R}^{1 \times (N_0+1)}$ and $L \in \mathbb{R}^{N_0}$ be such that $A_1 + B_1 K$ and

$A_0 - LC_0$ are Hurwitz with eigenvalues that have a real part strictly less than $-\delta < 0$. For a given $N \geq N_0 + 1$, assume that there exist $P \succ 0$, $\alpha > 1$, and $\beta, \gamma > 0$ such that

$$\Theta_1 \preceq 0, \quad \Theta_2 \leq 0 \quad (25)$$

where

$$\Theta_1 = \begin{bmatrix} F^\top P + PF + 2\delta P + \alpha\gamma G & P\mathcal{L} \\ \mathcal{L}^\top P^\top & -\beta \end{bmatrix}, \quad (26)$$

$$\Theta_2 = 2\gamma \left\{ -\left(1 - \frac{1}{\alpha}\right) \lambda_{N+1} + q_c + \delta \right\} + \frac{\beta \|c\|_{L^2}^2}{\lambda_{N+1}}.$$

Then, for the closed-loop system composed of the plant (3), the integral action (6a), the observer dynamics (9) with null initial condition ($\hat{w}_n(0) = 0$), and the state feedback (15), there exists $M > 0$ such that for any $z_0 \in H^2(0, 1)$ and any $u(0) \in \mathbb{R}$ such that $z'_0(0) = 0$ and $z_0(1) = u(0)$, the classical solution of the closed-loop system satisfies $w(t, \cdot) \in C^0(\mathbb{R}_+; D(\mathcal{A})) \cap C^1(\mathbb{R}_+; L^2(0, 1))$ and $u(t)^2 + \sum_{n=1}^N \hat{w}_n(t)^2 + \|z(t, \cdot)\|_{H^1}^2 \leq Me^{-2\delta t}(u(0)^2 + \|z_0\|_{H^1}^2)$ for all $t \geq 0$. Moreover, constraints (25) are always feasible for N selected large enough.

Proof. Since the observation operator is bounded, the well-posedness of the closed-loop system follows from general results on C_0 -semigroups [21, Chap. 3, Thm. 1.1]. For classical solutions, which are in particular such that $w(t, \cdot) \in D(\mathcal{A})$ for all $t \geq 0$, we define the Lyapunov functional candidate:

$$V(X, w) = X^\top PX + \gamma \sum_{n \geq N+1} \lambda_n \langle w, \phi_n \rangle^2 \quad (27)$$

with $X \in \mathbb{R}^{2N+1}$ and $w \in D(\mathcal{A})$. The computation of the time derivative of V along the system trajectories (7b) and (21) gives

$$\begin{aligned} \dot{V} + 2\delta V &= X^\top (F^\top P + PF + 2\delta P) X \\ &+ 2X^\top P\mathcal{L}\zeta + 2\gamma \sum_{n \geq N+1} \lambda_n (-\lambda_n + q_c + \delta) w_n^2 \\ &+ 2\gamma \sum_{n \geq N+1} \lambda_n (a_n u + b_n v) w_n. \end{aligned} \quad (28)$$

Using Young's inequality, we have for any $\alpha > 0$,

$$2 \sum_{n \geq N+1} \lambda_n a_n w_n u \leq \frac{1}{\alpha} \sum_{n \geq N+1} \lambda_n^2 w_n^2 + \alpha \|a\|_{L^2}^2 u^2 \quad (29a)$$

$$2 \sum_{n \geq N+1} \lambda_n b_n w_n v \leq \frac{1}{\alpha} \sum_{n \geq N+1} \lambda_n^2 w_n^2 + \alpha \|b\|_{L^2}^2 v^2. \quad (29b)$$

Since $\zeta = \sum_{n \geq N+1} c_n w_n$, we obtain that $\zeta^2 \leq \|c\|_{L^2}^2 \sum_{n \geq N+1} w_n^2$. This implies, for any $\beta > 0$,

$$\beta \|c\|_{L^2}^2 \sum_{n \geq N+1} w_n^2 - \beta \zeta^2 \geq 0.$$

Hence, combining the latter estimates and using (23-24), we infer that

$$\dot{V} + 2\delta V \leq \begin{bmatrix} X \\ \zeta \end{bmatrix}^\top \Theta_1 \begin{bmatrix} X \\ \zeta \end{bmatrix} + \sum_{n \geq N+1} \lambda_n \Gamma_n w_n^2.$$

where $\Gamma_n = 2\gamma \left\{ -\left(1 - \frac{1}{\alpha}\right) \lambda_n + q_c + \delta \right\} + \frac{\beta \|c\|_{L^2}^2}{\lambda_n} \leq \Theta_2$ for all $n \geq N+1$ because $\alpha > 1$. Thus the assumptions imply $\dot{V} + 2\delta V \leq 0$, showing that $V(t) \leq e^{-2\delta t} V(0)$ for all $t \geq 0$. On one hand we have $V(0) \leq \lambda_M(P) \|X(0)\|^2 + \gamma \sum_{n \geq N+1} \lambda_n w_n(0)^2$. As the initial conditions of the observer are null, we have $\|X(0)\|^2 = u(0)^2 + \sum_{n=1}^N w_n(0)^2$. Using (2), we infer the existence of a constant $M_1 > 0$ such that $V(0) \leq M_1(u(0)^2 + \|w_0\|_{H^1}^2)$. On the other hand, (2) shows that $p_* \|w(t, \cdot)'\|_{L^2}^2 \leq \sum_{n \geq 1} \lambda_n w_n(t)^2 \leq \lambda_N \sum_{n=1}^N w_n(t)^2 + \frac{1}{\gamma} V(t)$ with $p_* > 0$. Moreover, $w_n(t) = e_n(t) + \hat{w}_n(t)$ hence $\sum_{n=1}^N w_n(t)^2 \leq 2\|X(t)\|^2 \leq \frac{2}{\lambda_m(P)} V(t)$. This shows the existence of a constant $M_2 > 0$ such that $V(t) \geq M_2 \|w(t, \cdot)'\|_{L^2}^2$. Recalling that $w(t, 1) = 0$, Poincaré's inequality yields the existence of a constant $M_3 > 0$ such that $V(t) \geq M_3 \|w(t, \cdot)\|_{H^1}^2$. Overall, we have shown the existence of a constant $M_4 > 0$, independent of the initial condition, such that $u(t)^2 + \sum_{n=1}^N \hat{w}_n(t)^2 + \|w(t, \cdot)\|_{H^1}^2 \leq M_4 e^{-2\delta t}(u(0)^2 + \|w_0\|_{H^1}^2)$. Using (4), we obtain the claimed result.

It remains to show that we can select $N \geq N_0 + 1$, $P \succ 0$, $\alpha > 1$, and $\beta, \gamma > 0$ such that $\Theta_1 \preceq 0$ and $\Theta_2 \leq 0$. By the Schur complement, $\Theta_1 \preceq 0$ is equivalent to $F^\top P + PF + 2\delta P + \alpha\gamma G + \frac{1}{\beta} P\mathcal{L}\mathcal{L}^\top P^\top \preceq 0$. We now note that $A_1 + B_1 K + \delta I$ and $A_0 - LC_0 + \delta I$ are Hurwitz while $\|e^{(A_2 + \delta I)t}\| \leq e^{-\kappa_0 t}$ with $\kappa_0 = \lambda_{N_0+1} - q_c - \delta > 0$. Moreover, $\|\tilde{L}C_1\| \leq \|L\| \|c\|_{L^2}$, $\|LC_1\| \leq \|L\| \|c\|_{L^2}$, and $\|B_{2,b}K + [B_{2,a} \ 0]\| \leq \|b\|_{L^2} \|K\| + \|a\|_{L^2}$ where the right-hand sides are constants independent of N . Hence, applying Lemma 12 reported in Appendix to $F + \delta I$, we obtain for any $N \geq N_0 + 1$ the existence of $P \succ 0$ such that $F^\top P + PF + 2\delta P = -I$ with $\|P\| = O(1)$ as $N \rightarrow +\infty$. Moreover, we have (24) and $\|\mathcal{L}\| = \sqrt{2}\|L\|$ with g and L that are independent of N . Hence, fixing $\alpha > 1$ arbitrarily and setting $\beta = N$ and $\gamma = N^{-1/2}$, we infer from (1) the existence of a sufficiently large integer $N \geq N_0 + 1$, independent of the initial conditions, such that (25) holds. \square

Remark 3 For a given number of observed modes $N \geq N_0 + 1$, the constraints (25) of Theorem 2 are nonlinear w.r.t. the decision variables due to the decision variable $\alpha > 1$. However, fixing the value of $\alpha > 1$, the constraints now take the form of LMIs with decision variables $P \succ 0$ and $\beta, \gamma > 0$, for which efficient solvers exist. As shown in the proof of Theorem 2, this LMI formulation of the constraints remains feasible for N selected large enough.

4 Case of a Dirichlet boundary measurement

We now consider the reaction-diffusion PDE with Dirichlet boundary observation (modeling for example a temperature measurement in the case of a heat equation) described for $t > 0$ and $x \in (0, 1)$ by

$$z_t(t, x) = (p(x)z_x(t, x))_x + (q_c - q(x))z(t, x) \quad (30a)$$

$$z_x(t, 0) = 0, \quad z(t, 1) = u(t) \quad (30b)$$

$$z(0, x) = z_0(x) \quad (30c)$$

$$y(t) = z(t, 0) \quad (30d)$$

in the case $p \in \mathcal{C}^2([0, 1])$.

4.1 Spectral reduction

Since the only change compared to Subsection 3.1 is the modification of the nature of the observation, the spectral reduction is conducted identically but the observation (5d) is replaced by $\tilde{y}(t) = w(t, 0) = y(t)$. Considering classical solutions associated with any $z_0 \in H^2(0, 1)$ and any $u(0) \in \mathbb{R}$ such that $z'_0(0) = 0$ and $z_0(1) = u(0)$ (existence will be given by [21, Chap. 6, Thm. 1.7]), we have $w(t, \cdot) \in D(\mathcal{A})$ for all $t \geq 0$. Hence, we obtain in replacement of (7c) that $\tilde{y}(t) = \sum_{i \geq 1} \phi_i(0)w_i(t)$.

4.2 Control design

Let $N_0 \geq 1$ and $\delta > 0$ be given such that $-\lambda_n + q_c < -\delta < 0$ for all $n \geq N_0 + 1$. Let $N \geq N_0 + 1$ be arbitrary. We apply the same approach as the one of Subsection 3.2 in order to design an observer to estimate the N first modes of the plant while the state-feedback is performed on the N_0 first modes of the plant. Specifically, we replace the observer dynamics (9) by the following dynamics, defined for $1 \leq n \leq N$ by

$$\begin{aligned} \dot{\hat{w}}_n(t) &= (-\lambda_n + q_c)\hat{w}_n(t) + a_n u(t) + b_n v(t) \quad (31) \\ &\quad - l_n \left(\sum_{i=1}^N \phi_i(0)\hat{w}_i(t) - \tilde{y}(t) \right) \end{aligned}$$

where $l_n \in \mathbb{R}$ are the observer gains. We also select $l_n = 0$ for $N_0 + 1 \leq n \leq N$ and the initial condition of the observer as $\hat{w}_n(0) = 0$ for all $1 \leq n \leq N$. Then, defining

$\zeta(t) = \sum_{i \geq N_0+1} \phi_i(0)w_i(t)$ and recalling that e_n is defined by (10), we obtain from (31) that

$$\begin{aligned} \dot{\tilde{w}}_n(t) &= (-\lambda_n + q_c)\tilde{w}_n(t) + a_n u(t) + b_n v(t) \quad (32) \\ &\quad + l_n \sum_{i=1}^{N_0} \phi_i(0)e_i(t) + l_n \sum_{i=N_0+1}^N \frac{\phi_i(0)}{\sqrt{\lambda_i}} \tilde{e}_i(t) + l_n \zeta(t) \end{aligned}$$

for $1 \leq n \leq N$ with $\tilde{e}_n(t) = \sqrt{\lambda_n}e_n(t)$; see Remark 4 for the rationale motivating this scaling. Then, replacing the definitions of C_0 and C_1 by the followings:

$$C_0 = \begin{bmatrix} \phi_1(0) & \dots & \phi_{N_0}(0) \end{bmatrix}, \quad C_1 = \begin{bmatrix} \frac{\phi_{N_0+1}(0)}{\sqrt{\lambda_{N_0+1}}} & \dots & \frac{\phi_N(0)}{\sqrt{\lambda_N}} \end{bmatrix}, \quad (33)$$

and defining

$$\tilde{E}^{N-N_0} = \begin{bmatrix} \tilde{e}_{N_0+1} & \dots & \tilde{e}_N \end{bmatrix}^\top, \quad (34)$$

we obtain in replacement of (12) and (14) that

$$\begin{aligned} \dot{\hat{W}}^{N_0}(t) &= A_0 \hat{W}^{N_0}(t) + B_{0,a}u(t) + B_{0,b}v(t) \quad (35) \\ &\quad + LC_0 E^{N_0}(t) + LC_1 \tilde{E}^{N-N_0}(t) + L\zeta(t) \end{aligned}$$

and

$$\begin{aligned} \dot{\hat{W}}_a^{N_0}(t) &= A_1 \hat{W}_a^{N_0}(t) + B_1 v(t) \quad (36) \\ &\quad + \tilde{L}C_0 E^{N_0}(t) + \tilde{L}C_1 \tilde{E}^{N-N_0}(t) + \tilde{L}\zeta(t), \end{aligned}$$

respectively, while the command input is still given by (15). Hence, using (8) and (35), the error dynamics (17) is replaced by

$$\dot{\tilde{E}}^{N_0}(t) = (A_0 - LC_0)E^{N_0}(t) - LC_1 \tilde{E}^{N-N_0}(t) - L\zeta(t). \quad (37)$$

Moreover, because $\dot{e}_n(t) = (-\lambda_n + q_c)e_n(t)$ hence $\dot{\tilde{e}}_n(t) = (-\lambda_n + q_c)\tilde{e}_n(t)$ for all $N_0 + 1 \leq n \leq N$, then (19) is replaced by

$$\dot{\tilde{E}}^{N-N_0}(t) = A_2 \tilde{E}^{N-N_0}(t). \quad (38)$$

Putting together (15), (18), and (36-38) along with the new vector:

$$X = \text{col}(\hat{W}_a^{N_0}, E^{N_0}, \hat{W}^{N-N_0}, \tilde{E}^{N-N_0}), \quad (39)$$

we infer that (21) holds with the matrices given by (22).

Remark 4 Based on (31) and following the developments of the previous section, a natural approach would have been to define the matrix C_1 as $C_1 = \begin{bmatrix} \phi_{N_0+1}(0) & \dots & \phi_N(0) \end{bmatrix}$, hence considering in the

computations the vector E^{N-N_0} instead of \tilde{E}^{N-N_0} . However, since $\phi_n(0) = O(1)$ when $p \in \mathcal{C}^2([0, 1])$, one would have got $\|C_1\| = O(\sqrt{N})$ as $N \rightarrow +\infty$, making Lemma 12 reported in Appendix inapplicable. We avoid this pitfall by rescaling the components of the vector E^{N-N_0} into the ones of \tilde{E}^{N-N_0} . By doing so, and as a consequence of (1), we obtain that the newly introduced matrix C_1 , defined by (33), is such that $\|C_1\| = O(1)$ as $N \rightarrow +\infty$. Due to the particular structure of the error dynamics (38), such a rescaling will allow the application of Lemma 12 reported in Appendix to the matrix F defined by (22).

Remark 5 Based on the arguments of Remark 1, we have that (A_1, B_1) is controllable. Besides, (A_0, C_0) is observable because $\phi_n(0) \neq 0$ for all $n \geq 1$; otherwise $\phi_n(0) = 0$ along with the boundary condition $\phi'_n(0) = 0$ would imply the contradiction $\phi_n = 0$.

4.3 Stability analysis

We introduce the constant $M_{1,\phi} = \sum_{n \geq 2} \frac{\phi_n(0)^2}{\lambda_n}$, which is finite when $p \in \mathcal{C}^2([0, 1])$ because we recall that $\phi_n(0) = O(1)$ as $n \rightarrow +\infty$ and (1) hold.

Theorem 6 Let $p \in \mathcal{C}^2([0, 1])$ with $p > 0$, $q \in \mathcal{C}^0([0, 1])$ with $q \geq 0$, and $q_c \in \mathbb{R}$. Consider the reaction-diffusion PDE described by (30). Let $N_0 \geq 1$ and $\delta > 0$ be given such that $-\lambda_n + q_c < -\delta < 0$ for all $n \geq N_0 + 1$. Let $K \in \mathbb{R}^{1 \times (N_0+1)}$ and $L \in \mathbb{R}^{N_0}$ be such that $A_1 + B_1 K$ and $A_0 - LC_0$ are Hurwitz with eigenvalues that have a real part strictly less than $-\delta < 0$. For a given $N \geq N_0 + 1$, assume that there exist $P \succ 0$, $\alpha > 1$, and $\beta, \gamma > 0$ such that

$$\Theta_1 \preceq 0, \quad \Theta_2 \leq 0 \quad (40)$$

where Θ_1 is defined by (26) and

$$\Theta_2 = 2\gamma \left\{ - \left(1 - \frac{1}{\alpha} \right) \lambda_{N+1} + q_c + \delta \right\} + \beta M_{1,\phi}.$$

Then there exists $M > 0$ such that, for any $z_0 \in H^2(0, 1)$ and any $u(0) \in \mathbb{R}$ such that $z'_0(0) = 0$ and $z_0(1) = u(0)$, the classical solution of the closed-loop system composed of the plant (30), the integral action (6a), the observer dynamics (31) with null initial condition ($\hat{w}_n(0) = 0$), and the state feedback (15) satisfies $w(t, \cdot) \in \mathcal{C}^0(\mathbb{R}_+; D(\mathcal{A})) \cap \mathcal{C}^1(\mathbb{R}_+; L^2(0, 1))$ and $u(t)^2 + \sum_{n=1}^N \hat{w}_n(t)^2 + \|z(t, \cdot)\|_{H^1}^2 \leq M e^{-2\delta t} (u(0)^2 + \|z_0\|_{H^1}^2)$ for all $t \geq 0$. Moreover, constraints (40) are always feasible for N selected large enough.

Proof. The well-posedness for classical solutions directly follows from [21, Chap. 6, Thm. 1.7]. Let $P \succ 0$ and $\gamma > 0$ and consider the Lyapunov function candidate defined by (27). Its time derivative along the system trajectories (7b) and (21) is given

by (28). Since $\zeta = \sum_{n \geq N+1} \phi_n(0) w_n$, we infer that $\zeta^2 \leq M_{1,\phi} \sum_{n \geq N+1} \lambda_n w_n^2$ hence, for any $\beta > 0$, $\beta M_{1,\phi} \sum_{n \geq N+1} \lambda_n w_n^2 - \beta \zeta^2 \geq 0$. Using this latter estimate into (28) and using Young's inequality as in (29) along with (23-24), we obtain that

$$\dot{V} + 2\delta V \leq \begin{bmatrix} X \\ \zeta \end{bmatrix}^\top \Theta_1 \begin{bmatrix} X \\ \zeta \end{bmatrix} + \sum_{n \geq N+1} \lambda_n \Gamma_n w_n(t)^2$$

where $\Gamma_n = 2\gamma \left\{ - \left(1 - \frac{1}{\alpha} \right) \lambda_n + q_c + \delta \right\} + \beta M_{1,\phi} \leq \Theta_2$ for all $n \geq N+1$ because $\alpha > 1$. Hence, the assumptions imply $\dot{V} + 2\delta V \leq 0$, showing that $V(t) \leq e^{-2\delta t} V(0)$ for all $t \geq 0$. Proceeding as in the previous proof, we have the existence of a constant $M_5 > 0$ such that $V(0) \leq M_5 (u(0)^2 + \|w_0\|_{H^1}^2)$. Now (2) gives $p_* \|w(t, \cdot)\|_{L^2}^2 \leq \sum_{n \geq 1} \lambda_n w_n(t)^2 \leq \lambda_{N_0} \sum_{n=1}^{N_0} w_n(t)^2 + \sum_{n=N_0+1}^N \lambda_n w_n(t)^2 + \frac{1}{\gamma} V(t)$. Moreover, $w_n(t) = e_n(t) + \hat{w}_n(t)$ hence $\sum_{n=1}^{N_0} w_n(t)^2 \leq 2\|X(t)\|^2 \leq \frac{2}{\lambda_m(P)} V(t)$ and $\sum_{n=N_0+1}^N \lambda_n w_n(t)^2 \leq 2 \sum_{n=N_0+1}^N \lambda_n e_n(t)^2 + 2\lambda_N \sum_{n=N_0+1}^N \hat{w}_n(t)^2 \leq \frac{2 \max(1, \lambda_N)}{\lambda_m(P)} V(t)$. This shows the existence of a constant $M_6 > 0$ such that $V(t) \geq M_6 \|w(t, \cdot)\|_{L^2}^2$. Recalling that $w(t, 1) = 0$, Poincaré inequality yields the existence of a constant $M_7 > 0$ such that $V(t) \geq M_7 \|w(t, \cdot)\|_{H^1}^2$. Overall, we have shown the existence of a constant $M_8 > 0$, independent of the initial condition, such that $u(t)^2 + \sum_{n=1}^N \hat{w}_n(t)^2 + \|w(t, \cdot)\|_{H^1}^2 \leq M_8 e^{-2\delta t} (u(0)^2 + \|w_0\|_{H^1}^2)$. Using (4), we obtain the claimed estimate.

It remains to show that we can select $N \geq N_0 + 1$, $P \succ 0$, $\alpha > 1$, and $\beta, \gamma > 0$ such that $\Theta_1 \preceq 0$ and $\Theta_2 \leq 0$. By the Schur complement, $\Theta_1 \preceq 0$ is equivalent to $F^\top P + PF + 2\delta P + \alpha\gamma G + \frac{1}{\beta} P \mathcal{L} \mathcal{L}^\top P^\top \preceq 0$. Applying Lemma 12 reported in Appendix to $F + \delta I$, we have for any $N \geq N_0 + 1$ the existence of $P \succ 0$ such that $F^\top P + PF + 2\delta P = -I$ with $\|P\| = O(1)$ as $N \rightarrow +\infty$. Moreover, we have (24) and $\|\mathcal{L}\| = \sqrt{2}\|L\|$ with g and L that are independent of N . Hence, fixing $\alpha > 1$ arbitrarily while setting $\beta = \sqrt{N}$ and $\gamma = N^{-1}$, we infer from (1) the existence of a sufficiently large integer $N \geq N_0 + 1$, independent of the initial conditions, such that (40) holds. \square

Remark 7 Similarly to Remark 3, LMI conditions that are always feasible for N selected large enough (see end of the proof of Theorem 6) are obtained from the constraints (40) by arbitrarily fixing the decision variable $\alpha > 1$.

¹ The adopted definition (33) for the matrix C_1 is key here to apply Lemma 12 as it ensures that $\|C_1\| = O(1)$ as $N \rightarrow +\infty$.

5 Case of a Neumann boundary measurement

We now investigate the case of a Neumann boundary observation (modeling for example a heat flux measurement in the case of a heat equation):

$$z_t(t, x) = (p(x)z_x(t, x))_x + (q_c - q(x))z(t, x) \quad (41a)$$

$$z(t, 0) = 0, \quad z(t, 1) = u(t) \quad (41b)$$

$$z(0, x) = z_0(x) \quad (41c)$$

$$y(t) = z_x(t, 0) \quad (41d)$$

for $t > 0$ and $x \in (0, 1)$ in the case $p \in \mathcal{C}^2([0, 1])$.

5.1 Spectral reduction

Considering the change of variable

$$w(t, x) = z(t, x) - xu(t) \quad (42)$$

we obtain:

$$w_t(t, x) = (p(x)w_x(t, x))_x + (q_c - q(x))w(t, x) + a(x)u(t) + b(x)\dot{u}(t) \quad (43a)$$

$$w(t, 0) = 0, \quad w(t, 1) = 0 \quad (43b)$$

$$w(0, x) = w_0(x) \quad (43c)$$

$$\tilde{y}(t) = w_x(t, 0) \quad (43d)$$

with $a, b \in L^2(0, 1)$ defined by $a(x) = p'(x) + (q_c - q(x))x$ and $b(x) = -x$, respectively, $\tilde{y}(t) = y(t) - u(t)$ and $w_0(x) = z_0(x) - xu(0)$. We now proceed as in Subsection 3.1. Introducing the auxiliary command input $v(t) = \dot{u}(t)$, we obtain that (6) holds but, this time, with the domain of the operator \mathcal{A} given by $D(\mathcal{A}) = \{f \in H^2(0, 1) : f(0) = f(1) = 0\}$. Considering classical solutions associated with any $z_0 \in H^2(0, 1)$ and any $u(0) \in \mathbb{R}$ such that $z_0(0) = 0$ and $z_0(1) = u(0)$, which implies $w(t, \cdot) \in D(\mathcal{A})$ for all $t \geq 0$, we obtain that² (7a-7b) hold while (7c) is replaced by $\tilde{y}(t) = \sum_{i \geq 1} \phi'_i(0)w_i(t)$.

5.2 Control design

Let $N_0 \geq 1$ and $\delta > 0$ be given such that $-\lambda_n + q_c < -\delta < 0$ for all $n \geq N_0 + 1$. Let $N \geq N_0 + 1$ be arbitrary. We adapt the approach of Subsection 4.2 to the case of a Neumann boundary measurement. Specifically, we replace the observer dynamics (31) by the following dynamics, defined for $1 \leq n \leq N$ by

$$\begin{aligned} \dot{\hat{w}}_n(t) &= (-\lambda_n + q_c)\hat{w}_n(t) + a_n u(t) + b_n v(t) \\ &\quad - l_n \left(\sum_{i=1}^N \phi'_i(0)\hat{w}_i(t) - \tilde{y}(t) \right) \end{aligned} \quad (44)$$

² The coefficients of projection a_n and b_n are updated accordingly with the newly defined versions of $a, b \in L^2(0, 1)$.

where $l_n \in \mathbb{R}$ are the observer gains. Again, we select $l_n = 0$ for $N_0 + 1 \leq n \leq N$ while the initial condition of the observer is set as $\hat{w}_n(0) = 0$ for all $1 \leq n \leq N$. With $\zeta(t) = \sum_{i \geq N_0+1} \phi'_i(0)w_i(t)$, we infer from (44) that

$$\begin{aligned} \dot{\hat{w}}_n(t) &= (-\lambda_n + q_c)\hat{w}_n(t) + a_n u(t) + b_n v(t) \\ &\quad + l_n \sum_{i=1}^{N_0} \phi'_i(0)e_i(t) + l_n \sum_{i=N_0+1}^N \frac{\phi'_i(0)}{\lambda_i} \tilde{e}_i(t) + l_n \zeta(t) \end{aligned}$$

for $1 \leq n \leq N$ with $\tilde{e}_n(t) = \lambda_n e_n(t)$; see Remark 8 for the rationale motivating this scaling. The associated vector \tilde{E}^{N-N_0} is defined by (34). Therefore, we replace the definition (33) of the matrices C_0, C_1 by

$$C_0 = [\phi'_1(0) \ \dots \ \phi'_{N_0}(0)], \quad C_1 = \begin{bmatrix} \phi'_{N_0+1}(0) & \dots & \phi'_N(0) \\ \lambda_{N_0+1} & \dots & \lambda_N \end{bmatrix}. \quad (45)$$

Applying now the same approach as the one reported in Subsection 4.2 and considering the vector X defined by (39), the dynamics (21) hold with the matrices defined by (22).

Remark 8 Due to $\phi'_n(0) = O(\sqrt{\lambda_n})$ when $p \in \mathcal{C}^2([0, 1])$ and (1), the newly introduced matrix C_1 , defined by (45), is such that $\|C_1\| = O(1)$ as $N \rightarrow +\infty$. This property will allow the application of Lemma 12 reported in Appendix to the matrix F defined by (22).

Remark 9 The pair (A_1, B_1) is controllable and the pair (A_0, C_0) is observable. Indeed, since λ_n are two by two distincts, the Kalman condition yields that (A_1, B_1) is controllable if and only if $a_n + (-\lambda_n + q_c)b_n \neq 0$ for all $1 \leq n \leq N_0$. Using integration by parts, one has $a_n + (-\lambda_n + q_c)b_n = -p(1)\phi'_n(1)$. Hence $a_n + (-\lambda_n + q_c)b_n \neq 0$ since, otherwise, $\phi_n(1) = \phi'_n(1) = 0$, implying the contradiction $\phi_n = 0$. Moreover, because $\phi_n(0) = 0$, $\phi'_n(0) \neq 0$ hence the pair (A_0, C_0) is observable.

5.3 Stability analysis

We define, for any $\epsilon \in (0, 1/2]$, the constant $M_{2,\phi}(\epsilon) = \sum_{n \geq 2} \frac{\phi'_n(0)^2}{\lambda_n^{3/2+\epsilon}}$, which is finite when $p \in \mathcal{C}^2([0, 1])$ because $\phi'_n(0) = O(\sqrt{\lambda_n})$ as $n \rightarrow +\infty$ and (1) hold.

Theorem 10 Let $p \in \mathcal{C}^2([0, 1])$ with $p > 0$, $q \in \mathcal{C}^0([0, 1])$ with $q \geq 0$, and $q_c \in \mathbb{R}$. Consider the reaction-diffusion PDE described by (41). Let $N_0 \geq 1$ and $\delta > 0$ be given such that $-\lambda_n + q_c < -\delta < 0$ for all $n \geq N_0 + 1$. Let $K \in \mathbb{R}^{1 \times (N_0+1)}$ and $L \in \mathbb{R}^{N_0}$ be such that $A_1 + B_1 K$ and $A_0 - LC_0$ are Hurwitz with eigenvalues that have a real part strictly less than $-\delta < 0$. For a given $N \geq N_0 + 1$, assume that there exist $P \succ 0$, $\epsilon \in (0, 1/2]$, $\alpha > 1$, and $\beta, \gamma > 0$ such that

$$\Theta_1 \leq 0, \quad \Theta_2 \leq 0, \quad \Theta_3 \geq 0 \quad (46)$$

where Θ_1 is defined by (26) and

$$\Theta_2 = 2\gamma \left\{ - \left(1 - \frac{1}{\alpha} \right) \lambda_{N+1} + q_c + \delta \right\} + \beta M_{2,\phi}(\epsilon) \lambda_{N+1}^{1/2+\epsilon},$$

$$\Theta_3 = 2\gamma \left(1 - \frac{1}{\alpha} \right) - \frac{\beta M_{2,\phi}(\epsilon)}{\lambda_{N+1}^{1/2-\epsilon}}.$$

Then there exists $M > 0$ such that, for any $z_0 \in H^2(0, 1)$ and any $u(0) \in \mathbb{R}$ such that $z_0(0) = 0$ and $z_0(1) = u(0)$, the classical solution of the closed-loop system composed of the plant (41), the integral action (6a), the observer dynamics (44) with null initial condition ($\hat{w}_n(0) = 0$), and the state feedback (15) satisfies $w(t, \cdot) \in C^0(\mathbb{R}_+; D(\mathcal{A})) \cap C^1(\mathbb{R}_+; L^2(0, 1))$ and $u(t)^2 + \sum_{n=1}^N \hat{w}_n(t)^2 + \|z(t, \cdot)\|_{H^1}^2 \leq M e^{-2\delta t} (u(0)^2 + \|z_0\|_{H^1}^2)$ for all $t \geq 0$. Moreover, constraints (46) are always feasible for N selected large enough.

Proof. The well-posedness for classical solutions directly follows from [21, Chap. 6, Thm. 1.7]. Let $P \succ 0$ and $\gamma > 0$ and consider the Lyapunov function candidate defined by (27). Its time derivative along the system trajectories (7b) and (21) is given by (28). Since $\zeta = \sum_{n \geq N+1} \phi'_n(0) w_n$, we have for any $\epsilon \in (0, 1/2]$ that $\zeta^2 \leq M_{2,\phi}(\epsilon) \sum_{n \geq N+1} \lambda_n^{3/2+\epsilon} w_n^2$. Hence, for any $\beta > 0$, $\beta M_{2,\phi}(\epsilon) \sum_{n \geq N+1} \lambda_n^{3/2+\epsilon} w_n^2 - \beta \zeta^2 \geq 0$. Combining this latter estimate with (28) and using Young's inequality as in (29) along with (23-24), we obtain that

$$\dot{V} + 2\delta V \leq \begin{bmatrix} X \\ \zeta \end{bmatrix}^\top \Theta_1 \begin{bmatrix} X \\ \zeta \end{bmatrix} + \sum_{n \geq N+1} \lambda_n \Gamma_n w_n^2$$

where $\Gamma_n = 2\gamma \left\{ - \left(1 - \frac{1}{\alpha} \right) \lambda_n + q_c + \delta \right\} + \beta M_{2,\phi}(\epsilon) \lambda_n^{1/2+\epsilon}$ for $n \geq N + 1$. Since $\epsilon \in (0, 1/2]$, we have $\lambda_n^{1/2+\epsilon} = \lambda_n / \lambda_n^{1/2-\epsilon} \leq \lambda_n / \lambda_{N+1}^{1/2-\epsilon}$ for all $n \geq N + 1$. Hence we infer that $\Gamma_n \leq -\Theta_3 \lambda_n + 2\gamma \{q_c + \delta\} \leq -\Theta_3 \lambda_{N+1} + 2\gamma \{q_c + \delta\} = \Theta_2$ for all $n \geq N + 1$, where we have used that $\Theta_3 \geq 0$. Hence the assumptions imply $\dot{V} + 2\delta V \leq 0$, showing that $V(t) \leq e^{-2\delta t} V(0)$ for all $t \geq 0$. Proceeding as in the previous proof, we have the existence of a constant $M_9 > 0$ such that $V(0) \leq M_9 (u(0)^2 + \|w_0\|_{H^1}^2)$. Now (2) gives $p_* \|w(t)'\|_{L^2}^2 \leq \sum_{n \geq 1} \lambda_n w_n(t)^2 \leq \lambda_{N_0} \sum_{n=1}^{N_0} w_n(t)^2 + \sum_{n=N_0+1}^N \lambda_n w_n(t)^2 + \frac{1}{\gamma} V(t)$. Moreover, $w_n(t) = e_n(t) + \hat{w}_n(t)$ hence $\sum_{n=1}^{N_0} w_n(t)^2 \leq 2 \|X(t)\|^2 \leq \frac{2}{\lambda_m(P)} V(t)$ and $\sum_{n=N_0+1}^N \lambda_n w_n(t)^2 \leq \frac{2}{\lambda_{N_0+1}} \sum_{n=N_0+1}^N \lambda_n^2 e_n(t)^2 + 2\lambda_N \sum_{n=N_0+1}^N \hat{w}_n(t)^2 \leq \frac{2 \max(1/\lambda_{N_0+1}, \lambda_N)}{\lambda_m(P)} V(t)$. This shows the existence of a constant $M_{10} > 0$ such that $V(t) \geq M_{10} \|w(t)'\|_{L^2}^2$. Recalling that $w(t, 1) = 0$, Poincaré inequality yields the existence of a constant $M_{11} > 0$ such that $V(t) \geq M_{11} \|w(t)\|_{H^1}^2$. Overall, we have shown the existence of a constant $M_{12} > 0$, independent of the initial

condition, such that $u(t)^2 + \sum_{n=1}^N \hat{w}_n(t)^2 + \|w(t)\|_{H^1}^2 \leq M_{12} e^{-2\delta t} (u(0)^2 + \|w(0)\|_{H^1}^2)$. Using (42), we obtain the claimed estimate.

It remains to show that we can select $N \geq N_0 + 1$, $P \succ 0$, $\epsilon \in (0, 1/2]$, $\alpha > 1$, and $\beta, \gamma > 0$ such that $\Theta_1 \preceq 0$, $\Theta_2 \leq 0$, and $\Theta_3 \geq 0$. By the Schur complement, $\Theta_1 \preceq 0$ is equivalent to $F^\top P + PF + 2\delta P + \alpha \gamma G + \frac{1}{\beta} P \mathcal{L} \mathcal{L}^\top P^\top \preceq 0$.

Applying Lemma 12 reported in Appendix to $F + \delta I$, we have for any $N \geq N_0 + 1$ the existence of $P \succ 0$ such that $F^\top P + PF + 2\delta P = -I$ with $\|P\| = O(1)$ as $N \rightarrow +\infty$. Moreover, we have (24) and $\|\mathcal{L}\| = \sqrt{2} \|L\|$ with g and L that are independent of N . We set $\epsilon = 1/8$ and we arbitrarily fix $\alpha > 1$. Then setting $\beta = N^{1/8}$ and $\gamma = N^{-3/16}$, we infer from (1) the existence of a sufficiently large $N \geq N_0 + 1$, independent of the initial conditions, such that (46) holds. \square

Remark 11 Similarly to Remarks 3 and 7, LMI conditions that are always feasible for N selected large enough (see end of the proof of Theorem 10) are obtained from the constraints (46) by arbitrarily fixing the decision variable $\alpha > 1$ and by setting $\epsilon = 1/8$.

6 Numerical illustration

We first consider the Dirichlet boundary measurement setting described by (30). We set $p = 1$, $q = 0$, and $q_c = 3$, yielding an unstable open-loop system. For the decay rate $\delta = 0.5$, we obtain $N_0 = 1$, the feedback gain $K = [-5.0058 \quad -2.7748]$, and the observer gain $L = 1.4373$. Taking advantage of the LMI formulation of Remark 7, the conditions of Theorem 6 are found feasible for $N = 3$ using MATLAB LMI toolbox. The behavior of the closed-loop system associated with the initial condition $z_0(x) = 1 + x^2$, obtained based on the 50 dominant modes of the plant, is depicted in Fig. 1, confirming the theoretical predictions of Theorem 6.

We now consider the Neumann boundary measurement setting described by (41). We set $p = 1$, $q = 0$, and $q_c = 10$, yielding an unstable open-loop system. For the decay rate $\delta = 0.5$, we obtain $N_0 = 1$, the feedback gain $K = [-4.5649 \quad -0.9653]$, and the observer gain $L = 0.3670$. Taking advantage of the LMI formulation of Remark 11, the conditions of Theorem 10 are found feasible for $N = 2$ using MATLAB LMI toolbox. The behavior of the closed-loop system associated with the initial condition $z_0(x) = x(x - 2/3)$ is depicted in Fig. 2, confirming the theoretical predictions of Theorem 10.

³ The adopted definition (45) for the matrix C_1 is key here to apply Lemma 12 as it ensures that $\|C_1\| = O(1)$ as $N \rightarrow +\infty$.

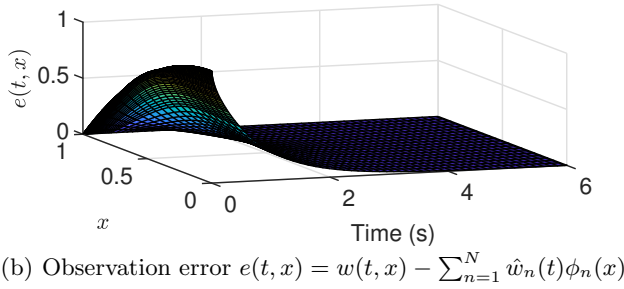
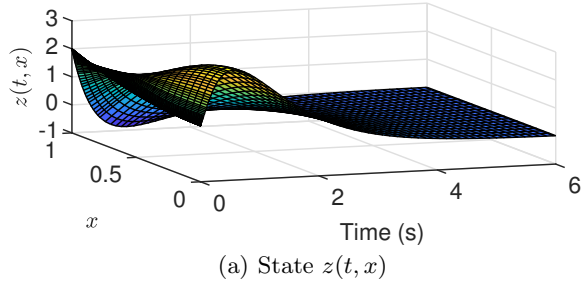


Fig. 1. Time evolution in closed-loop with Dirichlet boundary measurement for the reaction-diffusion PDE (30)

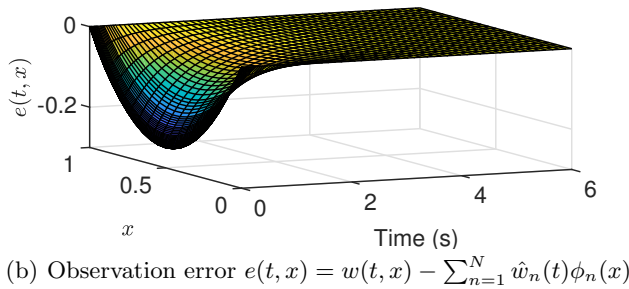
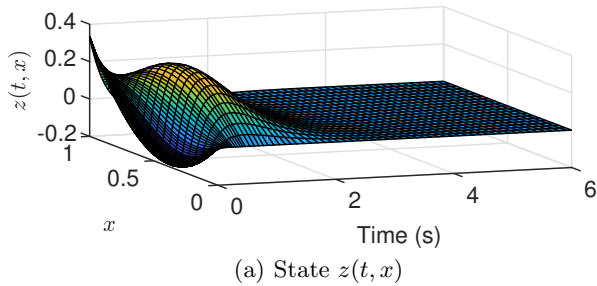


Fig. 2. Time evolution in closed-loop with Neumann boundary measurement for the reaction-diffusion PDE (41)

7 Conclusion

This paper investigated the topic of the output feedback boundary control of reaction-diffusion equations by means of a finite-dimensional controller with a either Dirichlet or Neumann boundary measurement. Even focused on the case of a Dirichlet boundary actuation, the developments reported in this paper immediately extend to the cases of a Neumann/Robin boundary actuation

by merely changing the employed change of variable formulas that only impact the functions $a, b \in L^2(0, 1)$.

References

- [1] Jean Auriol, Kirsten A Morris, and Florent Di Meglio. Late-lumping backstepping control of partial differential equations. *Automatica*, 100:247–259, 2019.
- [2] Mark J Balas. Finite-dimensional controllers for linear distributed parameter systems: exponential stability using residual mode filters. *Journal of Mathematical Analysis and Applications*, 133(2):283–296, 1988.
- [3] Jean-Michel Coron and Emmanuel Trélat. Global steady-state controllability of one-dimensional semilinear heat equations. *SIAM Journal on Control and Optimization*, 43(2):549–569, 2004.
- [4] Jean-Michel Coron and Emmanuel Trélat. Global steady-state stabilization and controllability of 1D semilinear wave equations. *Commun. Contemp. Math.*, 8(04):535–567, 2006.
- [5] Ruth Curtain. Finite-dimensional compensator design for parabolic distributed systems with point sensors and boundary input. *IEEE Transactions on Automatic Control*, 27(1):98–104, 1982.
- [6] Ruth F Curtain and Hans Zwart. *An introduction to infinite-dimensional linear systems theory*, volume 21. Springer Science & Business Media, 2012.
- [7] Christian Harkort and Joachim Deutscher. Finite-dimensional observer-based control of linear distributed parameter systems using cascaded output observers. *International journal of control*, 84(1):107–122, 2011.
- [8] Rami Katz and Emilia Fridman. Constructive method for finite-dimensional observer-based control of 1-D parabolic PDEs. *Automatica*, 122:109285, 2020.
- [9] Rami Katz and Emilia Fridman. Finite-dimensional control of the heat equation: Dirichlet actuation and point measurement. *arXiv preprint arXiv:2011.07256*, 2020.
- [10] Rami Katz and Emilia Fridman. Finite-dimensional control of the Kuramoto-Sivashinsky equation under point measurement and actuation. In *59th IEEE Conference on Decision and Control (CDC)*, pages 4423–4428, 2020.
- [11] Rami Katz and Emilia Fridman. Delayed finite-dimensional observer-based control of 1-D parabolic PDEs. *Automatica*, 123:109364, 2021.
- [12] Rami Katz, Emilia Fridman, and Anton Selivanov. Boundary delayed observer-controller design for reaction-diffusion systems. *IEEE Transactions on Automatic Control*, 66(1):275–282, 2021.
- [13] Miroslav Krstic and Andrey Smyshlyaev. *Boundary control of PDEs: A course on backstepping designs*. SIAM, 2008.
- [14] Hugo Lhachemi and Christophe Prieur. Feedback stabilization of a class of diagonal infinite-dimensional systems with delay boundary control. *IEEE Transactions on Automatic Control*, 66(1):105–120, 2021.
- [15] Hugo Lhachemi, Christophe Prieur, and Robert Shorten. An LMI condition for the robustness of constant-delay linear predictor feedback with respect to uncertain time-varying input delays. *Automatica*, 109:108551, 2019.
- [16] Hugo Lhachemi, Christophe Prieur, and Emmanuel Trélat. PI regulation of a reaction-diffusion equation with delayed boundary control. *IEEE Transactions on Automatic Control*, 66(4):1573–1587, 2021.

- [17] Hugo Lhachemi and Robert Shorten. Boundary feedback stabilization of a reaction–diffusion equation with robin boundary conditions and state-delay. *Automatica*, 116:108931, 2020.
- [18] Yuri V Orlov. Discontinuous unit feedback control of uncertain infinite-dimensional systems. *IEEE Transactions on Automatic Control*, 45(5):834–843, 2000.
- [19] Yury Orlov. On general properties of eigenvalues and eigenfunctions of a Sturm–Liouville operator: comments on ”ISS with respect to boundary disturbances for 1-D parabolic PDEs”. *IEEE Transactions on Automatic Control*, 62(11):5970–5973, 2017.
- [20] Yury Orlov, Yiming Lou, and Panagiotis D Christofides. Robust stabilization of infinite-dimensional systems using sliding-mode output feedback control. *International Journal of Control*, 77(12):1115–1136, 2004.
- [21] Amnon Pazy. *Semigroups of linear operators and applications to partial differential equations*, volume 44. Springer Science & Business Media, 2012.
- [22] Christophe Prieur and Emmanuel Trélat. Feedback stabilization of a 1D linear reaction-diffusion equation with delay boundary control. *IEEE Transactions on Automatic Control*, 64(4):1415–1425, 2019.
- [23] David L Russell. Controllability and stabilizability theory for linear partial differential equations: recent progress and open questions. *SIAM Review*, 20(4):639–739, 1978.

A Useful lemma

The following Lemma is a direct generalization of the result presented in [8].

Lemma 12 *Let $n, m, N \geq 1$, $M_{11} \in \mathbb{R}^{n \times n}$ and $M_{22} \in \mathbb{R}^{m \times m}$ Hurwitz, $M_{12} \in \mathbb{R}^{n \times m}$, $M_{14}^N \in \mathbb{R}^{n \times N}$, $M_{24}^N \in \mathbb{R}^{m \times N}$, $M_{31}^N \in \mathbb{R}^{N \times n}$, $M_{33}^N, M_{44}^N \in \mathbb{R}^{N \times N}$, and*

$$F^N = \begin{bmatrix} M_{11} & M_{12} & 0 & M_{14}^N \\ 0 & M_{22} & 0 & M_{24}^N \\ M_{31}^N & 0 & M_{33}^N & 0 \\ 0 & 0 & 0 & M_{44}^N \end{bmatrix}.$$

We assume that there exist constants $C_0, \kappa_0 > 0$ such that $\|e^{M_{33}^N t}\| \leq C_0 e^{-\kappa_0 t}$ and $\|e^{M_{44}^N t}\| \leq C_0 e^{-\kappa_0 t}$ for all $t \geq 0$ and all $N \geq 1$. Moreover, we assume that there exists a constant $C_1 > 0$ such that $\|M_{14}^N\| \leq C_1$, $\|M_{24}^N\| \leq C_1$, and $\|M_{31}^N\| \leq C_1$ for all $N \geq 1$. Then there exists a constant $C_2 > 0$ such that, for any $N \geq 1$, there exists a symmetric matrix $P^N \in \mathbb{R}^{n+m+2N}$ with $P^N \succ 0$ such that $(F^N)^\top P^N + P^N F^N = -I$ and $\|P^N\| \leq C_2$.