



HAL
open science

Study of the true contact area of sheared elastomer/glass contacts using an optical method

Riad Sahli

► **To cite this version:**

Riad Sahli. Study of the true contact area of sheared elastomer/glass contacts using an optical method. CFM 2015 - 22ème Congrès Français de Mécanique, Aug 2015, Lyon, France. <hal-03444999>

HAL Id: hal-03444999

<https://hal.science/hal-03444999v1>

Submitted on 23 Nov 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

Study of the true contact area of sheared elastomer/glass contacts using an optical method.

R. SAHLI^a, G. PALLARES^a, C. DUCOTTET^b, J. SCHEIBERT^a

a. Laboratoire de Tribologie et Dynamique des Systèmes, UMR5513, CNRS / Ecole Centrale de Lyon
36 avenue Guy de Collongue, 69134 Ecully Cedex, France

b. Laboratoire Hubert Curien, UMR5516, CNRS / Université Jean Monnet, Saint-Etienne
18 Rue Professeur Benoît Lauras, 42000 Saint-Étienne, France

corresponding author : riad.sahli@doctorant.ec-lyon.fr

Résumé :

Nous utilisons une méthode optique récemment développé pour mesurer l'aire de contact réelle à l'interface entre une surface élastomère et une plaque de verre. Nous montrons d'abord que l'aire de contact réelle diminue significativement sous cisaillement. Ensuite, nous comparons nos mesures avec deux modèles de la littérature. Nous utilisons ces résultats pour mieux comprendre le comportement des interfaces multicontacts cisailées.

Abstract :

We use a recently developed optical method to measure the real contact area at the interface between an elastomeric surface and a glass plate. We first show that the true contact area decreases significantly under shear. We then compare our measurements with two models from the literature. We use these results to better understand the behavior of sheared multicontact interfaces.

Keywords : tribology, true contact area, contact imaging, optimization, mono contact, shear rupture

1 Introduction

The study of the shear rupture mechanisms of contact interfaces is difficult because these confined interfaces are usually not directly accessible to measurement. To overcome this difficulty, we developed a non-invasive optical method to observe the transparent contact interface between an elastomeric slider and a glass surface [1]. We performed a study of the optimization of the image acquisition procedure to allow for an efficient separation of the regions in and out of contact. Here, we apply our insights to a system of interest in tribology: the sliding of the interface between a polydimethylsiloxane (PDMS) sphere and a smooth glass plane.

2 Results

We first show how the area of a single sphere-on-plane contact decreases, by up to 20%, as the tangential force is increased. The initial circular shape of the contact is also modified to a pseudo-elliptical shape as the area decreases (fig.1). We compared our area measurements with two existing models from the literature [2, 3] and found that they do not model satisfactorily all of the observed phenomena.

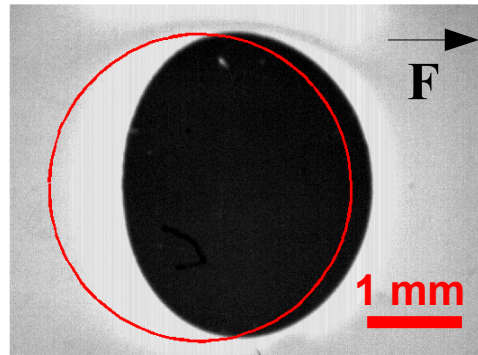


Figure 1: Image of a smooth PDMS sphere and a smooth glass plate interface under shear force F . The red circle is the initial shape of the contact.

We then show that the true area also decreases in the case of a multi-contact between a rough rubber slab and the same smooth glass plate.

3 Conclusion

Our results should be useful to relate the true contact area under purely normal load, which is the object of many contact mechanics models, to the area which is actually relevant at the onset of sliding of a multi-contact interface.

Références

- [1] Prevost, A., Scheibert, J. and Debrégeas, G., “Probing the micromechanics of a multi-contact interface at the onset of frictional sliding”, *Eur. Phys. J. E* **36**, 2013, 17.
- [2] Savkoor, A.R. and Briggs, G.A.D., “The effect of tangential force on the contact of elastic solids in adhesion”, *Proc. R. Soc. Lond. A* **356**, 1977, 103-114.
- [3] Waters, J.F. and Guduru, P.R., “Mode-mixity-dependent adhesive contact of a sphere on a plane surface”, *Proc. R. Soc. A* **466**, 2010, 1303–1325.