



Dissolved iodide in marine waters determined with Diffusive Gradients in Thin-films technique.

Josselin Gorny, Cyrielle Jardin, Olivier Diez, Josep Galceran, Alkiviadis Gourgiotis, Steffen Happel, Frederic Coppin, Laureline Fevrier, Caroline Simonucci, Charlotte Cazala

► To cite this version:

Josselin Gorny, Cyrielle Jardin, Olivier Diez, Josep Galceran, Alkiviadis Gourgiotis, et al.. Dissolved iodide in marine waters determined with Diffusive Gradients in Thin-films technique.. *Analytica Chimica Acta*, 2021, 1177, pp.338790. 10.1016/j.aca.2021.338790 . hal-03513525

HAL Id: hal-03513525

<https://hal.science/hal-03513525>

Submitted on 5 Jan 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial - NoDerivatives 4.0 International License

Journal Pre-proof

Dissolved iodide in marine waters determined with Diffusive Gradients in Thin-films technique

Josselin Gorny, Cyrielle Jardin, Olivier Diez, Josep Galceran, Alkiviadis Gourgiotis, Steffen Happel, Frédéric Coppin, Laureline Février, Caroline Simonucci, Charlotte Cazala

PII: S0003-2670(21)00616-4

DOI: <https://doi.org/10.1016/j.aca.2021.338790>

Reference: ACA 338790

To appear in: *Analytica Chimica Acta*

Received Date: 22 January 2021


Revised Date: 15 June 2021

Accepted Date: 20 June 2021


Please cite this article as: J. Gorny, C. Jardin, O. Diez, J. Galceran, A. Gourgiotis, S. Happel, F. Coppin, L. Février, C. Simonucci, C. Cazala, Dissolved iodide in marine waters determined with Diffusive Gradients in Thin-films technique, *Analytica Chimica Acta*, <https://doi.org/10.1016/j.aca.2021.338790>.

This is a PDF file of an article that has undergone enhancements after acceptance, such as the addition of a cover page and metadata, and formatting for readability, but it is not yet the definitive version of record. This version will undergo additional copyediting, typesetting and review before it is published in its final form, but we are providing this version to give early visibility of the article. Please note that, during the production process, errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

© 2021 Published by Elsevier B.V.



Josselin Gorny: Conceptualization, Methodology, Validation, Investigation, Resources, Writing - Original Draft, Review & Editing; **Cyrielle Jardin:** Methodology, Resources; **Olivier Diez:** Methodology, Resources; **Josep Galceran:** Conceptualization, Methodology, Validation, Formal analysis, Writing - Review & Editing; **Alkiviadis Gourgiotis:** Conceptualization, Methodology, Validation, Resources, Writing - Original Draft, Review & Editing; **Steffen Happel:** Conceptualization, Methodology, Resources; **Frédéric Coppin:** Conceptualization, Writing - Original Draft, Review & Editing; **Laureline Février:** Conceptualization, Writing - Original Draft, Review & Editing; **Caroline Simonucci:** Conceptualization, Funding acquisition, Writing - Original Draft, Review & Editing; **Charlotte Cazala:** Conceptualization, Project administration, Supervision, Writing - Original Draft, Review & Editing.

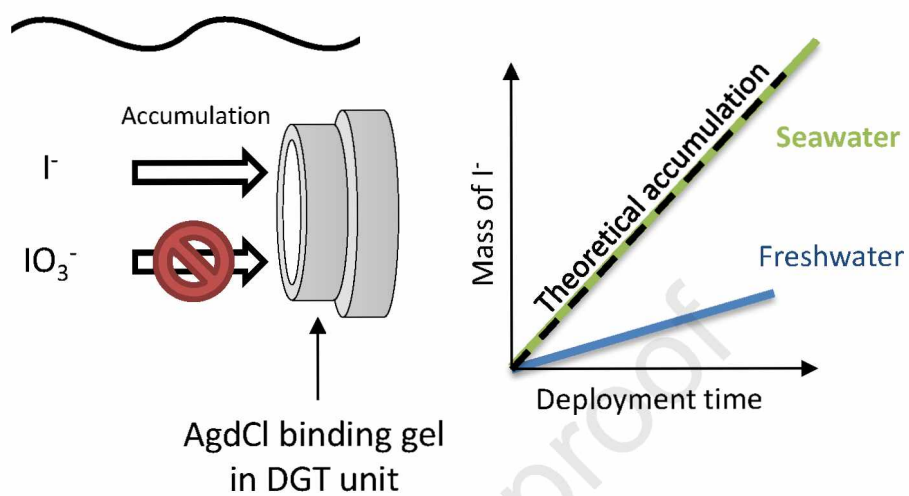Graphical abstract:

Dissolved iodide in marine waters determined with Diffusive Gradients in Thin-films technique.

Josselin Gorny^{a*}, Cyrielle Jardin^a, Olivier Diez^a, Josep Galceran^b, Alkiviadis Gourgiotis^a, Steffen Happel^c, Frédéric Coppin^d, Laureline Février^d, Caroline Simonucci^{a,e} and Charlotte Cazala^a

^a Institut de Radioprotection et de Sûreté Nucléaire (IRSN), PSE-ENV, SEDRE, LELI, Fontenay-aux-Roses, France


^b Departament de Química, Universitat de Lleida and AGROTECNIO-CERCA, Rovira Roure 191, 25198, Lleida, Spain

^c TrisKem International, Bruz, France

^d Institut de Radioprotection et de Sûreté Nucléaire (IRSN), PSE-ENV, SRTE, LR2T, Cadarache, France

^e present adress : Institut de Radioprotection et de Sûreté Nucléaire (IRSN), PSE-ENV, SIRSE, LER-NORD

* Corresponding author: josselin.gorny@irsn.fr

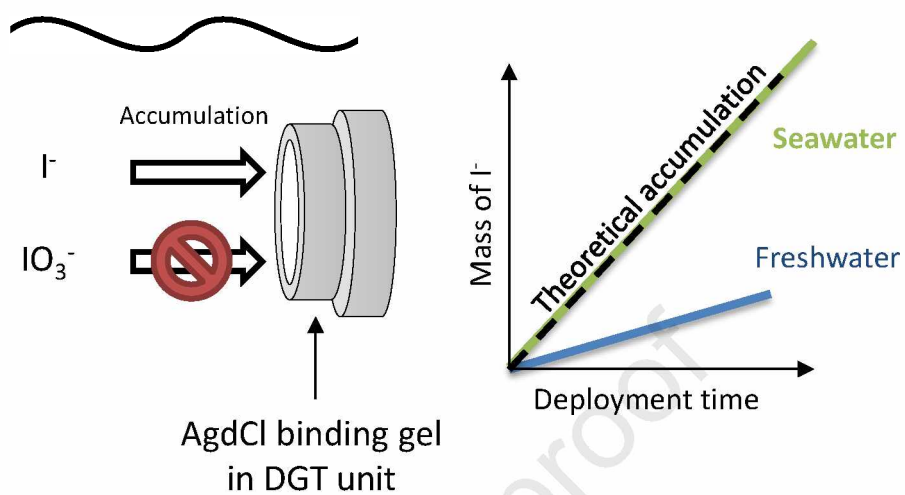12 **Graphical abstract:**

13

14

Keywords:

Iodine; Redox speciation; Diffusive Gradients in Thin-films; Time-series experiment; Laboratory validation; Iodide; Marine waters.

Highlights:

- A new DGT binding gel is proposed for selective iodide sampling.
- The diffusion coefficient of I species through agarose diffusive gel is reported.
- A DGT equation is developed to simultaneously consider DBL and kinetic effects.
- The method was successfully applied to measure iodide concentrations in seawater.

Abstract

For the first time, Diffusive Gradient in Thin-films (DGT) focuses on the inorganic iodine species iodate (IO_3^-) and iodide (I^-). A silver-doped Cl resin (AgdCl), which is known to selectively accumulate I^- , was used to make a binding gel. Laboratory investigations were designed to verify the suitability of the AgdCl -DGT method to measure the total I^- concentration in environmental waters. Total recovery of I^- was obtained using an elution solution containing 100 mmol L^{-1} KCN. DGT validation experiments in 10 mmol L^{-1} NaCl showed linear accumulation of I^- over time, contrary to IO_3^- , thus confirming the selectivity of AgdCl -binding gel. The AgdCl -DGT measurement of total I^- concentration was independent of pH (4.5 – 8.8) and was not impacted by the presence of bicarbonate ($1\text{-}5 \text{ mmol L}^{-1}$). Finally, the performance of AgdCl -DGT samplers were tested in two continental waters and a synthetic seawater. The AgdCl -DGT samplers measured 27-33 % of the total I^- concentration in the two continental waters up to 24 h of deployment time, whereas the AgdCl -DGT response retrieved the total I^- concentration in seawater up to 72 h ($106 \pm 7 \%$). The difference in DGT response was attributed to the low ionic strength of the two continental waters, limiting the application of AgdCl -DGT method to media with higher ionic strength.

1. Introduction

Natural iodine (I) is composed of the stable isotope ^{127}I and the long-lived beta-emitting radioisotope ^{129}I ($t_{1/2} = 15.7 \times 10^6$ years), which is mainly produced by nuclear activities (uranium and released plutonium fission in the environment especially by fuel reprocessing plants) [1]. Indeed, the $^{129}\text{I}/^{127}\text{I}$ ratio can reach 10^{-8} - 10^{-6} in marine waters at the vicinity (<50 km) of European fuel reprocessing plants, values significantly higher in comparison of the representative ratio commonly considered in the hydrosphere (1.5×10^{-12}) [2]. The behaviour and the transfer between compartments of ^{129}I highly depends on its speciation, which thus must be taken into account to assess short- and long-term consequences of ^{129}I releases.

Iodine is occurring as a redox sensitive trace element in environment with concentration generally lower than $100 \mu\text{g L}^{-1}$ (for the stable isotope) [3-8]. Data on its speciation are generally restricted to surface seawater environment, in which the most common I species found are iodide (I^-), iodate (IO_3^-) and dissolved organic iodine [9-12]. In contrast, few data are available on the behavior of I species at the water-sediment interface. These ones are mainly documented in marine environment, where total I concentrations are the most elevated [13-15], reflecting the high level of difficulty to analyze its speciation at very low concentration in continental environment. One solution to overcome these difficulties in aquatic environment is to use passive samplers, which concentrate the analyte of interest. Here, we propose to use the Diffusive Gradient in Thin film (DGT) technique, which is a passive sampling technique [16, 17]. The DGT sampling allows the preconcentration of the target species, leading to the improvement of their determination by chemical analysis. Nowadays, the development of DGT method permits to partially or totally access the redox speciation of the following elements: As [18-20], Br [21], Cr

[22-24], Hg [25, 26], N [27-29], P [30], S [31, 32], Sb [33, 34], Se [35] and V [36]. But, to best of our knowledge there is no DGT method for I species.

In this study, we have investigated the possibility to develop a binding gel able to accumulate specifically I⁻. The silver-doped Cl resin, developed by Triskem international (<https://www.triskem-international.com/>) has been tested as an adsorbent phase. It was already used to preconcentrate I⁻ in extraction chromatography, due to its strong interaction with silver [37, 38]. Laboratory validation experiments were designed: (i) to find an inert filter membrane and diffusive gel to make DGT samplers; (ii) to define the selectivity of the new binding gel for inorganic I species in the presence of potential competing ions (Cl⁻ and SO₄²⁻) from batch experiments; and (iii) to evaluate its performance in DGT in synthetic and natural matrices (selectivity, effect of pH, intrinsic capacity, carbonate interferences, continental and marine waters).

2. Experimental section

2.1. Reagents, materials and solutions

All the solutions were prepared with deionized water (18.2 MΩ cm resistivity, Milli-Q water, Millipore). The polypropylene plastic containers were acid-cleaned in 1.5 mol L⁻¹ HNO₃ solution over 24 h, then rinsed several times with deionized water prior to DGT sampler deployment. The following chemicals were used: agarose (Bio-rad), AgNO₃ (VWR), KCN (VWR, normapur), HCl (Merck, Emsure 37 %), HNO₃ (VWR Chemicals, Normapur 68 %), KI (VWR, normapur), NaCl (Merck, suprapur), Na₂SO₄ (Merck, suprapur), NaOH (Merck, normapur), NH₃ (Merck, utrapur 20 %), cellulose acetate (CA; Sartorius, 0.45 μm pore size), polycarbonate (PC; Pall, 0.45 μm pore size), polyester sulfone (PES; Pall, 0.45 μm pore size) and polyvinylidene fluoride filter discs (PVDF; Merck Durapore, 0.45 μm pore size). Concerning standard solutions we used IO₃⁻

solution (1 g L^{-1} ; conditioned in deionized water; VWR), anions chromatography solution including Cl^- , Br^- , NO_3^- , NO_2^- , I^- , SO_4^{2-} and PO_4^{3-} (100 mg L^{-1} ; conditioned in deionized water; VWR), acidified Te and Pt solution (1 g L^{-1} ; VWR).

2.2. Gel preparation and DGT assembly

Agarose (AGE) and agarose-polyacrylamide (APA) diffusive gel were made as in [39] and [40], respectively. The diffusive gel was stored in $10^{-2} \text{ mol L}^{-1}$ ultrapure NaCl solution. The thickness of diffusive gel was $800 \mu\text{m}$, value controlled with an optical microscope as in [39]. The binding layer was constituted by an Ag^+ loaded Cl resin (AgdCl) embedded in agarose gel. The Cl resin ($50 - 100 \mu\text{m}$) was provided by Triskem international. The AgdCl resin was prepared by contacting 1 g of the Cl resin with 10 mL of 10 mg mL^{-1} AgNO_3 solution in an orbital shaker over a period of 2 hours. During this step, the color of the Cl resin changed from white to beige. Then, the AgdCl resin was rinsed with $80 - 100 \text{ mL}$ of ultrapure water in a polypropylene column connected to a vacuum box (Triskem international). The interstitial water was eliminated by increasing pressure to the maximum in the vacuum box. Finally, the AgdCl resin was mixed with 10 mL of 1.5% (w/v) hot agarose solution. This mixture was, then, poured between two hot glass plates (50°C) separated by a 0.8 mm Teflon plastic spacer at room temperature for at least 30 minutes. Once binding gel was completely polymerized, it was removed from the glass plates, rinsed three times to remove unreacted reagents (during 24 hours), and placed into ultrapure water bath (2 weeks maximum). The AgdCl binding gel, the diffusive gel and the filter were then assembled in a piston-type ABS DGT sampler with a sampling area of 3.14 cm^2 (DGT Research Ltd).

2.3. Analytical procedures

Total iodine concentration was measured by Inductively Coupled Plasma –Mass Spectrometry (ICP-MS; Agilent 8800). The ICP-MS was equipped with a PFA concentric nebulizer (ESI), a double-pass PFA spray chamber cooled at 2°C, a PFA T-piece with an internal solution, a demountable torch with a sapphire injector, and Ni cones. ICP-MS spectrometer was calibrated using freshly standard solutions following a matrix-matching procedure between samples and standard solutions (*i.e.*, 150 mmol L⁻¹ NH₃ for basified water samples and 10 mmol L⁻¹ KCN for eluent solution). Internal standard (¹²⁵Te in 150 mmol L⁻¹ NH₃ for basified water samples [4] or ¹⁹⁵Pt (element selected due to its stability in cyanide media [41]) in 10 mmol L⁻¹ KCN for eluent solution) was used to correct for instrumental signal drift of ICP-MS over time; the concentration of the internal standard concentrations was adjusted to obtain 50000 – 70000 cps at m/z 125 or 195.

Speciation measurement was carried out on filtered water samples by chromatographic separation using a Metrohm 940 Professional IC Vario Ion Chromatography (IC) system. The chromatographic system was equipped with Metrosep A Supp 10 guard column (4.6 µm particle diameter, 2 mm i.d. × 5 mm) coupled with a Metrosep A Supp 10 analytical column (4.6 µm particle diameter, 2 mm i.d. × 250 mm), a 20 µL PEEK injection loop, a thermostatic column oven set at 35 ± 0.1°C, a mobile phase containing 50 mmol L⁻¹ NH₄NO₃ (pH 5.5 ± 0.1), a PEEK capillary (15 cm) connecting the column outlet to the nebulizer of ICP-MS. The flow rate of mobile phase was fixed at 250 µL min⁻¹. Standard solutions were freshly prepared in deionized water. The chromatographic conditions were developed in partnership with Metrohm France (see section S1-S5, Figure S1-S4, Table S1 and S2 in supplementary information).

Inductively Coupled Plasma – Optical Emission Spectrometry (ICP-OES; Thermo iCAP™ 7400, axial view) was used to evaluate the uptake capacity of AgdCl-DGT sampler for inorganic I species (section 2.5.5). Standard solutions were prepared as for ICP-MS calibration.

2.4. Experiments with DGT components

2.4.1. Reactivity of filter, diffusive gel and DGT plastic holder

Before performing DGT experiments, the reactivity of common diffusive gel (AGE and APA), filter membrane (CA, PC, PES and PVDF) and ABS-DGT plastic holder was tested regarding inorganic I species. Batch experiments were performed with each component immersed in 20 ml of solution containing $25 \mu\text{g L}^{-1}$ of IO_3^- or I^- . Experimental solution was vigorously shaken for 24 h using an orbital shaker. Filtered batch solutions were, then, basified with ultrapure NH_3 at 150 mmol L^{-1} before elemental analysis. The recovery of inorganic I species (R , %) in immersion solution was calculated using the following equation (Eq. 1).

$$R = \frac{M_f}{M_i} \times 100$$

Eq. 1

where M_i and M_f are respectively the initial and final mass (μg) of inorganic I species in deployment solution.

2.4.2. Reactivity of binding gel

The first step was devoted to define the uptake capacities of inorganic I species by the AgdCl-binding gel to confirm the possibility of using it as a new DGT binding gel. The affinity of inorganic I species with AgdCl binding gels were examined by batch experiments with 20 mL of solution containing $100 \mu\text{g L}^{-1}$ of IO_3^- or I^- where one binding gel was immersed to float freely. The experiments were performed at various ionic strength ($[\text{NaCl}]$ or $[\text{Na}_2\text{SO}_4] = 1 - 500 \text{ mmol L}^{-1}$; $\text{pH } 5.5 \pm 0.1$). The solution was vigorously shaken for 24 h with an orbital shaker. Filtered

batch solutions were, then, basified with ultrapure NH_3 at 150 mmol L^{-1} before elemental analysis. The uptake factor (f_u , %, Eq. 2) was calculated from the initial mass of inorganic I species in the deployment solution (M_i , μg), and the remaining mass of iodine species (M_f , μg):

$$f_u = \frac{M_i - M_f}{M_i} \times 100 \quad \text{Eq. 2}$$

The second step was to find a suitable eluent solution that could quantitatively recover the inorganic I species from AgdCl-binding gel. As cyanides are known to form strong complexes with Ag^+ [41], the AgdCl-binding gel was immersed for 24 h in 3 mL of KCN solution ($0.1 - 100 \text{ mmol L}^{-1}$) containing $100 \mu\text{g L}^{-1}$ of inorganic I species. The recovery of inorganic I species in KCN solution was calculated using Eq. 1.

2.5. Laboratory evaluation of DGT performances

This section focuses on the laboratory evaluation of AgdCl-DGT method in deployment solutions. The general experimental setup and calculations are firstly described, followed-up by a description of classical tests to specify the performances of the new DGT binding gel in terms of selectivity, pH influence, uptake capacity and deployment in natural matrices.

2.5.1. Experimental setup and calculations

All DGT experiments were performed in polypropylene containers (30 L). After equilibration of the deployment solution with the atmosphere during at least 24 hours, AgdCl-DGT samplers were deployed at specific time interval. The temperature and pH were monitored. Prior to the retrieval of the AgdCl-DGT, aliquots of the deployment solution were taken, filtered through acetate cellulose filter ($0.45 \mu\text{m}$), then basified with ultrapur NH_3 at 150 mmol L^{-1} before elemental analysis. Mean values of temperature, pH, concentration of inorganic I species are

included in the figures and uncertainties are expressed as the standard deviation of the variation of these parameters during the experiments.

The accumulated mass of inorganic I species by AgdCl-binding gel (M_{DGT} , ng) was calculated using Eq. 3.

$$M_{DGT} = \frac{C_e \times (V_{KCN} + V_{gel})}{f_e/100} \quad \text{Eq. 3}$$

where C_e is the eluted concentration of I in the selected elution solution (ng mL^{-1}), V_{KCN} the eluent solution volume (mL), V_{gel} the volume of the AgdCl-binding gel (mL) and f_e the eluent factor (%).

To determine the experimental DGT performances, the theoretical mass of inorganic I species (M_{th1} , ng) accumulated in the AgdCl-binding gel was calculated using Eq. 4, which is based on the well-established DGT equation [17].

$$M_{th1} = \frac{C_I \times A_p \times t}{\left(\frac{\delta^{mdl}}{D^{mdl}}\right)} \quad \text{Eq. 4}$$

where C_I is the concentration of IO_3^- or I^- in the deployment solution (ng cm^{-3}), D^{mdl} the diffusion coefficient of each inorganic I species (in the material diffusion layer) obtained by the diffusion cell method ($\text{cm}^2 \text{ s}^{-1}$), A_p the geometric area of the DGT device window (3.14 cm^2), t the deployment time (s) and δ^{mdl} the thickness of the diffusive gel plus the filter membrane (0.093 cm).

2.5.2. Selectivity and determination of the effective diffusion coefficient

The accumulation of inorganic I species was investigated by deploying five sets of triplicate AgdCl-DGT samplers in 8 L of $30 \mu\text{g L}^{-1}$ IO_3^- or I^- (prepared in $10^{-2} \text{ mol L}^{-1}$ NaCl at $\text{pH } 5.5 \pm$

0.1). Triplicate AgdCl-DGT samplers were removed at around 2, 4, 6, 8 and 10 h. In condition where all inorganic I species are labile, if a linear accumulation is observed over time with $R^2 > 0.95$, the effective diffusion coefficient (D^{eff} , $\text{cm}^2 \text{s}^{-1}$) of considered inorganic I species value can be calculated using Eq.5.

$$D^{\text{eff}} = \frac{\alpha \times \delta^{\text{mdl}}}{C_I \times A_p} \quad \text{Eq. 5}$$

where α is the slope of linear regression of the mass accumulated of considered inorganic I species over time (ng s^{-1}).

To check the selectivity of AgdCl-DGT samplers for both inorganic I species, complementary experiments were carried out in 8 L of $10^{-2} \text{ mol L}^{-1}$ NaCl at $\text{pH } 5.5 \pm 0.1$ containing inorganic I species with different weight ratio $[\text{I}^-] / [\text{IO}_3^-]$ (0, 0.4, 0.9, 1.7, 2.4 and 4.6; values obtained after speciation control by IC-ICP-MS). The concentration of IO_3^- was fixed at a value close to $20 \mu\text{g L}^{-1}$, whereas I^- concentrations varied. Triplicate AgdCl-DGT samplers were deployed for 10 h.

2.5.3. Effect of pH

The effect of pH on I^- accumulation was evaluated by deploying four AgdCl-DGT samplers in 8 L of $20 \mu\text{g L}^{-1}$ I^- (prepared in $10^{-2} \text{ mol L}^{-1}$ NaCl at $\text{pH } 5.5 \pm 0.1$) for 10 h. The pH selected for these experiments were the following: 4.5, 5.5, 6.6, 7.6 and 8.8. Acidification at pH 4.5 was performed using 6 mol L^{-1} HCl solution. A pH titrator (Metler Toledo), equipped with a DGi115 glass electrode (Metler Toledo) and dilute NaOH solution were used to control and adjust the pH of the deployment solutions for $\text{pH} > 6$.

2.5.4. Effect of bicarbonate

The effect of bicarbonate was tested by deploying five sets of triplicate AgdCl-DGT samplers in 8 L of 10 mmol L⁻¹ NaCl solution containing either 1 or 5 mmol L⁻¹ of NaHCO₃. The concentration of I⁻ was close to 30 µg L⁻¹ in the two deployment solutions. Triplicate DGT samplers were removed after 4, 6, 8, 10 and 24 h.

2.5.5. Binding capacity of AgdCl-DGT samplers

The intrinsic binding capacity of AgdCl-binding gel was investigated by deploying six sets of triplicate AgdCl-DGT samplers in 8 L of around 20 mg L⁻¹ I⁻ (prepared in 10⁻² mol L⁻¹ NaCl at pH 5.5 ± 0.1). Triplicate DGT samplers were removed after 2, 4, 6, 8, 24 and 28 h.

2.5.6. Time-series experiment in natural and synthetic matrix

To determine the performances of AgdCl-DGT in environmentally relevant matrices, AgdCl-DGT samplers were deployed in 8 L of Vittel®, Volvic® or synthetic seawater. The Vittel® and Volvic® continental waters were spiked with I⁻ at around 25 µg L⁻¹, and the synthetic seawater at 100 µg L⁻¹ (a higher level, due to important dilution before elemental and speciation measurements). Physico-chemical characteristics of drinking waters are reported in Table 1. Triplicate AgdCl-DGT samplers were removed after a defined deployment time (2 – 72 h). For samplers deployed in seawater, each AgdCl-binding gel was rinsed in 5 mL of ultrapure water for 2 h to remove unbound salts.

3. Results and discussion

3.1. Experiments with DGT components

3.1.1. Reactivity of filter, diffusive gel and DGT plastic holder

The ABS DGT holder did not react with IO_3^- or I^- ($R = 101\text{-}102\%$). All filter membranes (CA, PC, PES or PVDF) and diffusive gels (AGE or APA) tested did not accumulate inorganic I species ($R = 98\text{-}102\%$). For more details, data are available in Figure S5 in the supplementary information. To make DGT samplers for inorganic I species, there is consequently no limitation using a specific combination of filter membrane and diffusive gel rather than another. This is not the case when working, for example, with mercury (which adsorbs on APA diffusive gel) [42-44]. For the next experiments, the CA filter membrane and AGE diffusive gel were used as standard DGT components.

3.1.2. Reactivity of binding gel

The uptake efficiency of the AgdCl-binding gel disc is shown as a function of NaCl or Na_2SO_4 concentration in Figure 1 (A) and (B), respectively. Immersion time was 24 h. I^- was totally accumulated by the AgdCl-binding gel without being impacted by the NaCl and Na_2SO_4 concentrations in the immersion solution ($f_u > 98\%$). Consequently, chloride (Cl^-) and sulfate (SO_4^{2-}) ions are not a competing ion for the uptake of I^- by the AgdCl-binding gel for concentration up to 500 mmol L^{-1} . The uptake factor by AgdCl-binding gel is very limited for IO_3^- ($f_u < 15\%$). For these batch experiments, no speciation controls were done. The aim was only to roughly determine the selectivity of AgdCl-binding gel. It might be that some redox interconversion of IO_3^- to I^- could explain the low IO_3^- uptake in NaCl media. In any case, these results open up the possibility to develop a DGT method selective to I^- . This hypothesis will be

tested through DGT experiments in the section 3.2, in which the speciation of I was checked in each deployment solution.

Then, the binding dynamics of Γ by AgdCl-binding gel disc was studied in 10 mmol L⁻¹ NaCl and Na₂SO₄ immersion solution as shown Figure 1 (C). The mass of Γ bound to AgdCl-binding gel disc increased steeply at the first 10-20 min, followed by a slow increase later on. The binding rates at 5 min are 0.68 and 1.08 ng s⁻¹ cm⁻² for NaCl and Na₂SO₄ immersion solution, respectively. These values are much greater than DGT fluxes (0.022 ng s⁻¹ cm⁻²) calculated through a 0.093 cm a diffusive layer (typically used in DGT assemblies), the diffusion coefficient of Γ in free water (Table 2), and a deployment solution containing the same concentration of Γ at 25°C. It shows that Γ binding to AgdCl-binding gel can be high enough to satisfy DGT uptake. Furthermore, Figure 1 (C) indicates a lower uptake for the lower ionic strength (10 mmol L⁻¹ for NaCl solution vs 30 mmol L⁻¹ for Na₂SO₄ solution), which was not observable in previous experiments due to long immersion time (24 h). This is probably linked to the nature of AgdCl-resin. One possible mechanism is hypothesized next. Once Γ , Cl⁻ and SO₄²⁻ enter into the AgdCl-resin bead, these anions react with Ag⁺ to form precipitates. The precipitation of Ag₂SO₄ and AgCl does not hinder the formation of AgI because of its lower solubility product constant value (pK_{sp} = 4.8, 9.75 and 16.1 for Ag₂SO₄, AgCl and AgI precipitates [41], respectively). This was also confirmed by our previous batch experiments showing total uptake of Γ by AgdCl-binding gel disc whatever the concentration of NaCl and Na₂SO₄ in immersion solution. Nevertheless, the penetration of the negatively charged Γ inside the AgdCl-resin bead could be restricted due to residual negatively charged sites on the AgdCl-resin. The electrostatic potential difference (between the resin and the solution) increases with decreasing of ionic strength [45-48], and Γ tends to be excluded from the AgdCl-resin. So, less accumulation will follow in low ionic

strength. This hypothetical mechanism would explain why a faster uptake was observed in Na_2SO_4 immersion solution than in the NaCl (Figure 1(C)) one with the same analyte concentration, but different ionic strength. These results point out to a potential limitation of the use the AgdCl -DGT method. In section 3.2, experiments will designed to better understand how to use the AgdCl -DGT method, but also to check whether this decreased accumulation at lower ionic strength is negligible or not.

To define the eluent solution, the recovery of Γ from AgdCl -binding gel was tested using 3 mL of KCN solution at different concentrations ($0.1 - 100 \text{ mmol L}^{-1}$), as shown in Figure 2. Total recovery of Γ was obtained for KCN concentration higher than 10 mmol L^{-1} ($R = 101 - 103 \%$). The AgdCl -binding gel disc became white (initial color of Cl resin) when using 100 mmol L^{-1} KCN , suggesting that Ag is totally removed in the eluent solution and there is no Γ left in the AgdCl binding gel. Hence, this concentration was used to totally elute Γ from AgdCl binding gel. To prevent signal suppression of ICP-MS linked to high potassium concentration, the eluent solutions were diluted at least 10 fold with deionized water. Finally, no elution factor is needed to calculate the mass of Γ accumulated by the AgdCl -binding gel ($f_e = 100 \%$ in Eq. 3). Furthermore, the AgdCl -DGT blank values for Γ species were 5 ng ($n = 10$) following this elution procedure. This blank value of AgdCl -DGT method is low enough to measure the low concentration of Γ in environmental waters.

3.2. DGT experiments

3.2.1. Speciation and lability

To be sure of the stability of inorganic I species in deployment solution, speciation was checked with IC-ICP-MS measurements during DGT experiment. The concentration of inorganic I species

was relatively stable over time in each deployment solution with $RSD < 5 \%$, confirming that there is no redox interconversion in these DGT experiments. Concerning the lability of inorganic I species, speciation calculations were performed with PHREEQC version 3 (<https://www.usgs.gov/software/phreeqc>) with the thermodynamic database ThermoChimie version 9b0 developed by Andra (<http://www.thermochimie-tdb.com/>) [49, 50]. Input data were the concentrations of each component in deployment solution. Atmosphere-water equilibrium with CO_2 was also assumed. pH and temperature was also introduced. Whatever the simulated deployment solution, IO_3^- and I^- were mainly present as free ions ($> 95 \%$). Hence, it was considered that inorganic I species were totally available for the AgdCl-DGT samplers.

3.2.2. Selectivity of AgdCl-DGT method

Time-series experiments were used to characterize the selectivity of AgdCl-DGT samplers for inorganic I species (Figure 3). AgdCl-DGT samplers were deployed up to 10 h in the presence of either IO_3^- or I^- ($\sim 30 \mu g L^{-1}$). The mass of IO_3^- stabilized at 14 ± 2 ng after 2 h of deployment time, which coincides with the amount for equilibrium ($[IO_3^-]_{\text{solution}} \times V_{\text{gel}} \sim 12$ ng with $V_{\text{gel}} = 0.42 \pm 0.03$ mL), assuming no electrostatic effect. This indicated that IO_3^- was not trapped over time in the AgdCl binding gel. Consequently, this DGT method should not suffer from any IO_3^- interference. Selectivity control was performed using a deployment solution containing the two inorganic I species, and results are discussed later on. A good linear regression was obtained between the accumulated mass of I^- and the deployment time of DGT samplers ($R^2 = 0.994$), confirming previous results on the selectivity of AgdCl-binding gel (section 3.1.2). The slope of linear fitting was used to calculate D^{eff} according to Eq. 5. The D^{eff} value for I^- was $1.20 \cdot 10^{-5} \text{ cm}^2 \text{ s}^{-1}$ ($RSD = 6 \%$) at 25°C value. Complementarily, the diffusion cell method was used to measure the diffusion coefficient of each inorganic I species in hydrogel alone (D^{gel}) and with the addition

of a filter (D^{mdl}). Experimental details are presented in section S6, and the diffusion cell is shown in Figure S6. The concentration of IO_3^- or I^- were both constant in the source solution during each diffusion cell experiments with a RSD < 4 %, confirming the non-adsorption of inorganic I species by the components and the walls of diffusive cell. Linear accumulation of IO_3^- or I^- in the acceptor compartment was observed over time ($R^2 = 0.997-0.999$; Figure S7), and each slope was used to calculate the diffusion coefficient of inorganic I species according to Eq. S1. Results are displayed in Table 2. The diffusion of inorganic I species is slightly higher in hydrogel than in pure water ($D^{\text{gel}} / D^{\text{w}} \sim 110 \%$). Slower diffusion of IO_3^- and I^- was observed with the addition of filter ($D^{\text{mdl}} / D^{\text{w}} \sim 80 \%$), suggesting some resistance in the ensemble. These results seem to be consistent with previous experimental observations with anions [18, 51, 52]. Furthermore, there is a significant difference between D^{mdl} and D^{eff} ($D^{\text{eff}} / D^{\text{mdl}} \sim 75 \%$). Consequently, M_{th1} does not match with M_{DGT} as shown with the red dashed line in Figure 3. Investigations were carried out to check whether this lower than expected M_{DGT} could be the result from a longer diffusion path. A thin diffusion-controlled layer, known as diffusive boundary layer (DBL), exists at any solid surface in aqueous environment, even in vigorously stirred solutions. The DBL is known to affect the DGT results [53, 54]. That is the reason why its thickness (δ^{dbl1}) was assessed by using different thickness of diffusive gel in the AgdCl-DGT samplers. Experimental details are presented in section S7. A linear plot of the reciprocal mass of I^- versus δ^{mdl} was observed ($R^2 = 0.998$; Figure S8). The slope and the intercept were classically used to calculate δ^{dbl1} according to Eq. S2. Our δ^{dbl1} is $361 \pm 40 \mu\text{m}$, indicating that the mixing of deployment solution was not optimal. Indeed, common δ^{dbl} values were close to $200 \mu\text{m}$ in well mixed solution [55]. As δ^{dbl1} is not negligible, we propose now to include it in calculation of the theoretical mass accumulated of I^- (Eq. 6):

$$M_{th2} = \frac{C_I \times A_P \times t}{\left(\frac{\delta^{dbl1}}{D^w} + \frac{\delta^{mdl}}{D^{mdl}} \right)} \quad \text{Eq. 6}$$

Results are displayed with the orange dashed line in Figure 3. The impact of considering the DBL is a decrease of 23.5 % in theoretical accumulation when comparing M_{th1} and M_{th2} , but there is still some difference with M_{DGT} points. The reduced slope could indicate that the accumulation of Γ does not fulfil perfect sink condition *i.e.*, the concentration of Γ in the resin-diffusive gel interface is not zero and Γ penetrates into the resin domain [56]. This assumption was tested using DGT samplers equipped with a stack of two AgdCl-binding gels in two deployment solution containing 1 and 10 mmol L⁻¹ NaCl (see experiment details in section S8). Γ was present at 8.7 and 0.3 % in the back binding gel when AgdCl-DGT samplers were deployed in 1 and 10 mmol L⁻¹ NaCl solution, respectively. Knowing the distribution of Γ in the stack of two AgdCl-binding gels, it is now possible to determine the penetration factor λ_M *i.e.*, the mean distance that Γ can penetrate into an AgdCl-binding gel. λ_M is calculated from Eq. S3, and the average value obtained is $312 \pm 100 \mu\text{m}$ and $140.8 \pm 8.4 \mu\text{m}$ for deployment solution composed of 1 and 10 mmol L⁻¹ NaCl, respectively. The AgdCl-resin beads have a size ranging between 40 to 125 μm (Figure S9). More precisely, the diameter of AgdCl-resin beads defining 10%, 50% and 90% of the cumulative volume undersize is 55 μm , 73 μm and 97 μm , respectively. As λ_M is significantly higher than the diameter of AgdCl-resin beads, we confirm that the AgdCl-resin does not act as a perfect sink and there is a non-null concentration of Γ all along the resin disc. Consequently, for this case where there is a resulting kinetic limitation, we propose a new expression to estimate the accumulation of DGT samplers (Eq. 7):

$$M_{th3} = \frac{C_I \times A_P \times t}{\left(\frac{\delta^{dbl2}}{D^w} + \frac{\delta^{mdl}}{D^{mdl}} + \frac{\lambda_M \times \coth(\delta^r/\lambda_M)}{H \times D^{gel}} \right)} \quad \text{Eq. 7}$$

where δ^r correspond to the thickness of AgdCl-binding gel (0.08 cm) and the term $\lambda_M \times \coth(\delta^r/\lambda_M)$ to the effective distance of penetration of Γ^- in the AgdCl-resin domain (cm). Π is the ratio between the analyte concentration inside the binding gel disc and the concentration inside the diffusive gel disc, both at the limiting interface between the two gel discs [46]. Another new equation was used to recalculate the thickness of DBL (δ^{dbl2} , cm) taking into account the penetration phenomenon and the electrostatic partitioning between the two gel discs:

$$\delta^{dbl2} = D^w \left(\frac{y}{s \times D^{mdl}} - \frac{\lambda_M \times \coth(\delta^r/\lambda_M)}{\Pi \times D^{gel}} \right) \quad \text{Eq. 8}$$

An electrostatic correction could be done, but it requires complementary experiments to determine Π . As a first approximation, we have taken $\Pi = 1$ in Eq. 7 and Eq. 8. The δ^{dbl2} value ($326 \pm 42 \mu\text{m}$) is slightly lower than δ^{dbl1} . Results are shown with the green dashed line in Figure 3. The M_{th3} curve is a better fit to simulate the uptake of Γ^- by AgdCl-DGT sampler ($M_{DGT} / M_{th3} = 98 \pm 8 \%$) compared to the M_{th1} and M_{th2} curves ($M_{DGT} / M_{th1} = 71 \pm 6 \%$ and $M_{DGT} / M_{th2} = 93 \pm 7 \%$). Similar results were obtained for the DGT experiment using a stack of two AgdCl in 10 mmol L⁻¹ NaCl ($M_{DGT} / M_{th3} = 106 \pm 6 \%$). Eq. 7 will be used to evaluate the AgdCl-DGT performances in the following sections. Nevertheless, application of Eq. 7 (with $\Pi = 1$) does not explain the low amount of Γ^- found in the two AgdCl-binding gels for the DGT experiment performed in 1 mmol L⁻¹ NaCl ($M_{DGT} / M_{th3} = 4.1 \pm 0.3 \%$). The low DGT response is probably linked to the partial exclusion of anions from the resin at low ionic strength, which would be quantified by the parameter Π . This exclusion from the AgdCl-resin seems more likely than exclusion from the filter and diffusive gel as previously observed in previous laboratory validation of DGT methods [43, 48]. Additional experiments will focus on the effect of ionic strength in section 3.2.6.

Complementary, DGT experiments were done to control the possibility of using the AgdCl-binding gel for redox speciation. For this experiment, IO_3^- and I^- were simultaneously present in deployment solution with different weight ratio $[\text{I}^-] / [\text{IO}_3^-]$ up to 4.6 (Figure 4). To confirm the selectivity of AgdCl-DGT method for I^- , M_{th3} was calculated using the concentration of I^- measured by IC-ICP-MS (Eq. 7). Acceptable DGT measurements were obtained for $M_{\text{DGT}} / M_{\text{th3}} = 100 \pm 15 \%$ (dashed lines in Figure 4), as in other previous DGT laboratory evaluations [19, 20, 39]. Whatever the weight ratio $[\text{I}^-] / [\text{IO}_3^-]$ tested, the AgdCl-DGT estimations were good with $M_{\text{DGT}} / M_{\text{th3}}$ values ranging between 89 and 107 %. As the DGT measurements were not interfered by IO_3^- , it is confirmed that the AgdCl-binding gel is only selective to I^- .

3.2.3. Effect of pH

The impact of pH on the accumulation of I^- was investigated for 10 h of deployment time. Over the pH range from 4.5 to 8.8, excellent agreement was observed between the predicted and accumulated mass of I^- ($M_{\text{DGT}} / M_{\text{th3}} = 93 - 113 \%$; Figure S10). These results indicate that the performance of the AgdCl-DGT method is independent of pH over the typical range found in environmental waters (pH ~ 5-9).

3.2.4. AgdCl-DGT sampler binding capacity

To determine the AgdCl-DGT sampler binding capacity to accumulate I^- , a time-series experiment was performed using a high concentration of this species ($\sim 20 \text{ mg L}^{-1}$) in deployment solution with $[\text{NaCl}] = 10 \text{ mmol L}^{-1}$ and $\text{pH} = 5.5$. Linear accumulation of I^- by AgdCl-DGT samplers was observed up to 6 h ($R^2 > 0.95$; Figure S11). The AgdCl-DGT response was in agreement with predicted total I^- mass since the $M_{\text{DGT}} / M_{\text{th3}}$ value was $106 \pm 7 \%$ (mean \pm standard deviation). After 8 h of deployment time, the M_{DGT} values decreased compared with M_{th3} values. The maximum mass of I^- accumulated by AgdCl-DGT samplers was $218 \pm 25 \mu\text{g}$. As

inorganic I species occur at trace levels in environmental waters ($< 100 \mu\text{g L}^{-1}$), this binding capacity should be high enough to deploy AgdCl-DGT samplers during 24 - 96 h (typical deployment times).

3.2.5. Effect of bicarbonates

The effect of HCO_3^- on the accumulation was investigated up to 24 h. M_{DGT} agrees with M_{th3} within an error of 15 % (Figure S12; 105 ± 5 and 104 ± 7 % for 1 and 5 mmol L^{-1} HCO_3^- , respectively). In these conditions, HCO_3^- is not a competing ion for the accumulation of I^- by AgdCl-DGT samplers. That is consistent with thermodynamic data. Indeed, the precipitation of Ag_2CO_3 does not hinder AgI formation when comparing solubility product constant values ($\text{pK}_{\text{sp}} = 11.1$ and 16.1 for Ag_2CO_3 and AgI, respectively [41]).

3.2.6. Time-series experiment in natural and synthetic waters

After carrying out numerous experiments in 10 mmol L^{-1} NaCl solutions, the performances of AgdCl-DGT method were studied in Vittel® and Volvic® water spiked with I^- with a concentration close to $20 \mu\text{g L}^{-1}$. The concentration of IO_3^- was negligible in these deployment solutions with values lower than $1 \mu\text{g L}^{-1}$. The ionic strength for these two drinking waters are 22.6 and 3.2 mmol L^{-1} , respectively (calculations performed by using data in Table 1 and PHREEQC software). The mass of I^- accumulated by AgdCl-DGT samplers was monitored over time, and compared to M_{th3} (black line in Figure 5). Linear accumulation of total I mass by AgdCl-DGT samplers was observed up to 24 h for Vittel® and Volvic® waters ($R^2 > 0.9$; Figure 5 (A) and (B)). However, the amount of I^- measured by AgdCl-DGT samplers was 33 ± 8 and 27 ± 5 % in Vittel® and Volvic® waters, respectively. Assuming 15 % of error on predicted total I mass (dashed lines in Figure 5), the AgdCl-DGT measurements were not quantitative whatever the deployment times. Although the ionic strength of these two drinking waters was significantly

different, similar DGT responses were obtained. It is also noted that Vittel® water had a higher ionic strength than the synthetic deployment solution employed to characterize the AgdCl-DGT performances, but the pH was much higher in the natural waters. Possibly, AgdCl-resin has acid-base properties (data not found in the literature). If pH overcomes the pKa of the AgdCl-resin, the amount of negative charge sites in the AgdCl-resin might increase remarkably. More charge means more electrostatic potential, more exclusion of anions from the resin and less accumulation. This speculation is not however fully consistent with the pH-impact figure (Figure S10).

New time-series experiments were performed to verify whether the AgdCl-DGT method depends on the concentration of Cl^- . Vittel® and Volvic® water were consequently spiked with ultrapure NaCl salt to reach a concentration of Cl^- at 10 mmol L^{-1} (value used in previous experiments using synthetic waters). The ionic strength values are 32.9 and 13 mmol L^{-1} for NaCl-doped Vittel® and Volvic® water, respectively. When AgdCl-DGT samplers are deployed in the two NaCl-doped drinking waters, better DGT responses were obtained compared with non-spiked drinking waters (Figure 5 (C) and (D)). Indeed, the amount of total mass of I^- measured by AgdCl-DGT samplers were 77 ± 4 and $72 \pm 4 \%$ in NaCl-doped Vittel® and Volvic® waters, respectively. The presence of SO_4^{2-} was then tested only with Volvic® water spiked with ultrapure Na_2SO_4 salt to a concentration of SO_4^{2-} at 10 mmol L^{-1} . This time, the amount of I^- measured by AgdCl-DGT samplers reached $107 \pm 3 \%$ (Figure 5 (E)). This means an increase of the AgdCl-DGT response with anions another than Cl^- and supports the key role of ionic strength.

Although the direct application of AgdCl-DGT method will not be possible in continental waters, the deployment of AgdCl-DGT samplers could be envisaged in seawater and brine due to high concentration of Cl^- and SO_4^{2-} . To confirm the latter hypothesis, a time-series experiment was

performed in synthetic seawater spiked with Γ^- concentration close to $100 \mu\text{g L}^{-1}$. Long deployment times were used to reveal possible interferences of AgdCl-binding gel. As shown in Figure 5 (F), linear accumulation of Γ^- by AgdCl-DGT samplers was observed up to 72 h ($R^2 > 0.95$). The mass of Γ^- recovered by the AgdCl-DGT samplers reached $107 \pm 5 \%$, validating the suitability of the AgdCl-DGT method for application in seawater. The AgdCl-DGT method allowed to concentrate Γ^- by a factor 24 (C_e / C_l), which is useful to measure low Γ^- concentrations. Furthermore, the saturation of AgdCl-binding gel was not experimentally observed in this long time-series experiment. This result also confirms that there is no interference with HCO_3^- (2.38 mmol L^{-1}).

4. Conclusions

The DGT performances of AgdCl-DGT binding gel to measure the concentration of at least one inorganic I species have been tested. A rigorous experimental design involving batch and time-series experiments was performed in order to gain knowledge on AgdCl-binding gel selectivity and limitations as well as to establish a robust DGT deployment protocol. This work shows that the AgdCl-DGT sampler is able to accumulate selectively Γ^- . The AgdCl-DGT response is not pH dependent (4.5 -8.8). The quantification of Γ^- concentration is not impacted by the presence of IO_3^- and HCO_3^- . Nevertheless, the current AgdCl-DGT method requires high ionic strength in deployment solution limiting the application of to sea or brine waters. Further work should investigate the possibility of analyzing freshwaters using an effective diffusion coefficient determined at the same pH and ionic strength as the one of the natural sample.

This analytical development validates a first step to perform redox speciation for I using DGT techniques, and other developments could be performed to find a binding gel only able to accumulate IO_3^- or the two inorganic I species simultaneously. To avoid the harmful

manipulation of KCN eluent solution, laboratory equipped with pyrolyser could develop alternative extraction strategies by trapping the gaseous iodine from AgdCl binding in alkaline solution (TMAH, NaOH-NaHSO₃) [57-61]. Finally, future research should focus on the application of the AgdCl-DGT method to study the biochemistry of iodide in marine or brine environments, but also to better predict the ¹²⁹I behavior from spent nuclear fuel reprocessing plants.

Acknowledgements

This work has been supported by the ANR (French National Research Agency), under the “Investissement d’Avenir” framework program [Number ANR-11-RSNR-0002]. Véronique Hénin (Metrohm France) is gratefully thanked for the loan of the Metrosep Asupp 10 guard and analytical columns, but also Gilles Alcalde for the granulometric measurements of AgdCl-resin beads. All experiments were performed at LUTECE (the SEDRE’s experimental platform), and elemental and speciation measurements at PATERSON (the IRSN’s mass spectrometry platform). This is PATERSON contribution n°9. Support from the Spanish Ministry of Science and Innovation is gratefully acknowledged (Project PID2019-107033GB-C21).

References

- [1] R.D. Scheele, L. Burger, C. Matsuzaki, Methyl iodide sorption by reduced silver mordenite, Pacific Northwest Lab., Richland, WA (USA), 1983.
- [2] X. Hou, V. Hansen, A. Aldahan, G. Possnert, O.C. Lind, G. Lujanienė, A review on speciation of iodine-129 in the environmental and biological samples, *Analytica Chimica Acta*, 632 (2009) 181-196.
- [3] K. Tagami, S. Uchida, Concentrations of chlorine, bromine and iodine in Japanese rivers, *Chemosphere*, 65 (2006) 2358-2365.
- [4] Y. Takaku, T. Shimamura, K. Masuda, Y. Igarashi, Iodine Determination in Natural and Tap Water Using Inductively Coupled Plasma Mass Spectrometry, *Analytical Sciences*, 11 (1995) 823-827.
- [5] J. Zheng, H. Takata, K. Tagami, T. Aono, K. Fujita, S. Uchida, Rapid determination of total iodine in Japanese coastal seawater using SF-ICP-MS, *Microchemical Journal*, 100 (2012) 42-47.
- [6] J.E. Moran, S.D. Oktay, P.H. Santschi, Sources of iodine and iodine 129 in rivers, *Water resources research*, 38 (2002).
- [7] V.W. Truesdale, S.D. Jones, The variation of iodate and total iodine in some UK rainwaters during 1980–1981, *Journal of Hydrology*, 179 (1996) 67-86.
- [8] D.C. Whitehead, The distribution and transformations of iodine in the environment, *Environment International*, 10 (1984) 321-339.
- [9] G.W. Luther, H. Cole, Iodine speciation in chesapeake bay waters, *Marine Chemistry*, 24 (1988) 315-325.
- [10] R.C. Tian, E. Nicolas, Iodine speciation in the northwestern Mediterranean Sea, method and vertical profile, *Marine Chemistry*, 48 (1995) 151-156.
- [11] B.S. Gilfedder, M. Petri, H. Biester, Iodine speciation and cycling in fresh waters: a case study from a humic rich headwater lake (Mummelsee), *Journal of Limnology*, 68 (2009) 396-408.
- [12] S. Zhang, Y.-F. Ho, D. Creeley, K.A. Roberts, C. Xu, H.-P. Li, K.A. Schwehr, D.I. Kaplan, C.M. Yeager, P.H. Santschi, Temporal variation of Iodine concentration and speciation (^{127}I and ^{129}I) in wetland groundwater from the Savannah River Site, USA, *Environmental science & technology*, 48 (2014) 11218-11226.
- [13] H. Kennedy, H. Elderfield, Iodine diagenesis in pelagic deep-sea sediments, *Geochimica et Cosmochimica Acta*, 51 (1987) 2489-2504.
- [14] H.A. Kennedy, H. Elderfield, Iodine diagenesis in non-pelagic deep-sea sediments, *Geochimica et Cosmochimica Acta*, 51 (1987) 2505-2514.
- [15] W.J. Ullman, R.C. Aller, Rates of iodine remineralization in terrigenous near-shore sediments, *Geochimica et Cosmochimica Acta*, 47 (1983) 1423-1432.
- [16] W. Davison, H. Zhang, G.W. Grime, Performance Characteristics of Gel Probes Used For Measuring the Chemistry of Pore Waters, *Environmental science & technology*, 28 (1994) 1623-1632.
- [17] H. Zhang, W. Davison, Performance Characteristics of Diffusion Gradients in Thin Films for the in Situ Measurement of Trace Metals in Aqueous Solution, *Analytical chemistry*, 67 (1995) 3391-3400.
- [18] W.W. Bennett, P.R. Teasdale, J.G. Panther, D.T. Welsh, D.F. Jolley, Speciation of dissolved inorganic arsenic by diffusive gradients in thin films: selective binding of As^{III} by 3-mercaptopropyl-functionalized silica gel, *Analytical chemistry*, 83 (2011) 8293-8299.

- [19] J. Gorny, L. Lesven, G. Billon, D. Dumoulin, C. Noiriel, C. Pirovano, B. Madé, Determination of total arsenic using a novel Zn-ferrite binding gel for DGT techniques: Application to the redox speciation of arsenic in river sediments, *Talanta*, 144 (2015) 890-898.
- [20] J. Gorny, D. Dumoulin, V. Alaimo, L. Lesven, C. Noiriel, B. Madé, G. Billon, Passive sampler measurements of inorganic arsenic species in environmental waters: A comparison between 3-mercaptop-silica, ferrihydrite, Metsorb®, zinc ferrite, and zirconium dioxide binding gels, *Talanta*, 198 (2019) 518-526.
- [21] T.D.W. Corbett, A. Hartland, W. Henderson, G.J. Rys, L.A. Schipper, Development of Bromide-Selective Diffusive Gradients in Thin-Films for the Measurement of Average Flow Rate of Streams, *Science of The Total Environment*, (2021) 147737.
- [22] D. Devillers, R. Buzier, S. Simon, A. Charriau, G. Guibaud, Simultaneous measurement of Cr(III) and Cr(VI) in freshwaters with a single Diffusive Gradients in Thin Films device, *Talanta*, 154 (2016) 533-538.
- [23] Y. Yao, C. Wang, P. Wang, L. Miao, J. Hou, T. Wang, C. Liu, Zr oxide-based coloration technique for two-dimensional imaging of labile Cr(VI) using diffusive gradients in thin films, *Science of The Total Environment*, 566–567 (2016) 1632-1639.
- [24] H. Chen, Y.-Y. Zhang, K.-L. Zhong, L.-W. Guo, J.-L. Gu, L. Bo, M.-H. Zhang, J.-R. Li, Selective sampling and measurement of Cr (VI) in water with polyquaternary ammonium salt as a binding agent in diffusive gradients in thin-films technique, *Journal of Hazardous Materials*, 271 (2014) 160-165.
- [25] Y. Gao, E. De Canck, M. Leermakers, W. Baeyens, P. Van Der Voort, Synthesized mercaptopropyl nanoporous resins in DGT probes for determining dissolved mercury concentrations, *Talanta*, 87 (2011) 262-267.
- [26] O. Clarisse, D. Foucher, H. Hintelmann, Methylmercury speciation in the dissolved phase of a stratified lake using the diffusive gradient in thin film technique, *Environmental Pollution*, 157 (2009) 987-993.
- [27] J. Huang, W.W. Bennett, P.R. Teasdale, N.R. Kankanamge, D.T. Welsh, A modified DGT technique for the simultaneous measurement of dissolved inorganic nitrogen and phosphorus in freshwaters, *Analytica Chimica Acta*, 988 (2017) 17-26.
- [28] M. Ren, S. Ding, D. Shi, Z. Zhong, J. Cao, L. Yang, D.C.W. Tsang, D. Wang, D. Zhao, Y. Wang, A new DGT technique comprised in a hybrid sensor for the simultaneous measurement of ammonium, nitrate, phosphorus and dissolved oxygen, *Science of The Total Environment*, 725 (2020) 138447.
- [29] J. Huang, W.W. Bennett, D.T. Welsh, P.R. Teasdale, Determining time-weighted average concentrations of nitrate and ammonium in freshwaters using DGT with ion exchange membrane-based binding layers, *Environmental Science: Processes & Impacts*, 18 (2016) 1530-1539.
- [30] C. Han, P.N. Williams, J. Ren, Z. Wang, X. Fang, D. Xu, X. Xie, J. Geng, L.Q. Ma, J. Luo, In situ sampling and speciation method for measuring dissolved phosphite at ultratrace concentrations in the natural environment, *Water Research*, 137 (2018) 281-289.
- [31] P.R. Teasdale, S. Hayward, W. Davison, In situ, High-Resolution Measurement of Dissolved Sulfide Using Diffusive Gradients in Thin Films with Computer-Imaging Densitometry, *Analytical chemistry*, 71 (1999) 2186-2191.
- [32] O. Hanousek, S. Mason, J. Santner, M.M.A. Chowdhury, T.W. Berger, T. Prohaska, Novel diffusive gradients in thin films technique to assess labile sulfate in soil, *Analytical and Bioanalytical Chemistry*, 408 (2016) 6759-6767.

- [33] W. Bennett, M. Arsic, D.T. Welsh, P. Teasdale, In situ speciation of dissolved inorganic antimony in surface waters and sediment porewaters: development of a thiol-based diffusive gradients in thin films technique for Sb III, *Environmental Science: Processes & Impacts*, (2016).
- [34] H.-T. Fan, A.-J. Liu, B. Jiang, Q.-J. Wang, T. Li, C.-C. Huang, Sampling of dissolved inorganic SbIII by mercapto-functionalized silica-based diffusive gradients in thin-film technique, *RSC Advances*, 6 (2016) 2624-2631.
- [35] H.L. Price, P.R. Teasdale, D.F. Jolley, An evaluation of ferrihydrite- and Metsorb™-DGT techniques for measuring oxyanion species (As, Se, V, P): Effective capacity, competition and diffusion coefficients, *Analytica Chimica Acta*, 803 (2013) 56-65.
- [36] K.S. Luko, A.A. Menegário, C.A. Suárez, M. Tafurt-Cardona, J.H. Pedrobon, A.M.C.M. Rolisola, E.T. Sulato, C.H. Kiang, In situ determination of V(V) by diffusive gradients in thin films and inductively coupled plasma mass spectrometry techniques using amberlite IRA-410 resin as a binding layer, *Analytica Chimica Acta*, 950 (2017) 32-40.
- [37] A. Zulauf, S. Happel, M.B. Mokili, A. Bombard, H. Jungclas, Characterization of an extraction chromatographic resin for the separation and determination of ³⁶Cl and ¹²⁹I, *Journal of Radioanalytical and Nuclear Chemistry*, 286 (2010) 539-546.
- [38] C. Decamp, S. Happel, Utilization of a mixed-bed column for the removal of iodine from radioactive process waste solutions, *Journal of Radioanalytical and Nuclear Chemistry*, 298 (2013) 763-767.
- [39] J. Gorny, A. Gourgiotis, F. Coppin, L. Février, H. Zhang, C. Simonucci, Better understanding and applications of ammonium 12-molybdophosphate-based diffusive gradient in thin film techniques for measuring Cs in waters, *Environmental Science and Pollution Research*, 26 (2019) 1994-2006.
- [40] H. Zhang, W. Davison, Diffusional characteristics of hydrogels used in DGT and DET techniques, *Analytica Chimica Acta*, 398 (1999) 329-340.
- [41] G. Charlot, *Les réactions chimiques en solution et caractérisation des ions*, 7th ed.1983.
- [42] H. Dočekalová, P. Diviš, Application of diffusive gradient in thin films technique (DGT) to measurement of mercury in aquatic systems, *Talanta*, 65 (2005) 1174-1178.
- [43] Y. Wang, S. Ding, M. Gong, S. Xu, W. Xu, C. Zhang, Diffusion characteristics of agarose hydrogel used in diffusive gradients in thin films for measurements of cations and anions, *Analytica Chimica Acta*, 945 (2016) 47-56.
- [44] P. Diviš, R. Szkandera, H. Dočekalová, Characterization of sorption gels used for determination of mercury in aquatic environment by diffusive gradients in thin films technique, *Central European Journal of Chemistry*, 8 (2010) 1105-1109.
- [45] S. Mongin, R. Uribe, J. Puy, J. Cecilia, J. Galceran, H. Zhang, W. Davison, Key Role of the Resin Layer Thickness in the Lability of Complexes Measured by DGT, *Environmental science & technology*, 45 (2011) 4869-4875.
- [46] J. Puy, J. Galceran, S. Cruz-González, C.A. David, R. Uribe, C. Lin, H. Zhang, W. Davison, Measurement of Metals Using DGT: Impact of Ionic Strength and Kinetics of Dissociation of Complexes in the Resin Domain, *Analytical chemistry*, 86 (2014) 7740-7748.
- [47] J. Galceran, J. Puy, Interpretation of diffusion gradients in thin films (DGT) measurements: a systematic approach, *Environmental Chemistry*, 12 (2015) 112-122.
- [48] A.-L. Pommier, R. Buzier, S. Simon, G. Guibaud, Impact of low ionic strength on DGT sampling with standard APA gels: Effect of pH and analyte, *Talanta*, 222 (2021) 121413.
- [49] E. Giffaut, M. Grivé, P. Blanc, P. Vieillard, E. Colàs, H. Gailhanou, S. Gaboreau, N. Marty, B. Madé, L. Duro, Andra thermodynamic database for performance assessment: ThermoChimie, *Applied Geochemistry*, 49 (2014) 225-236.

- [50] D.L. Parkhurst, C. Appelo, Description of input and examples for PHREEQC version 3: a computer program for speciation, batch-reaction, one-dimensional transport, and inverse geochemical calculations, US Geological Survey, 2013.
- [51] H. Zhang, W. Davison, R. Gadi, T. Kobayashi, In situ measurement of dissolved phosphorus in natural waters using DGT, *Analytica Chimica Acta*, 370 (1998) 29-38.
- [52] J.G. Panther, R.R. Stewart, P.R. Teasdale, W.W. Bennett, D.T. Welsh, H. Zhao, Titanium dioxide-based DGT for measuring dissolved As(V), V(V), Sb(V), Mo(VI) and W(VI) in water, *Talanta*, 105 (2013) 80-86.
- [53] Ø.A. Garmo, K.R. Naqvi, O. Røyset, E. Steinnes, Estimation of diffusive boundary layer thickness in studies involving diffusive gradients in thin films (DGT), *Analytical and Bioanalytical Chemistry*, 386 (2006) 2233-2237.
- [54] K.W. Warnken, H. Zhang, W. Davison, Accuracy of the Diffusive Gradients in Thin-Films Technique: Diffusive Boundary Layer and Effective Sampling Area Considerations, *Analytical chemistry*, 78 (2006) 3780-3787.
- [55] W. Davison, H. Zhang, Progress in understanding the use of diffusive gradients in thin films (DGT)—back to basics, *Environmental Chemistry*, 9 (2012) 1-13.
- [56] J.L. Levy, H. Zhang, W. Davison, J. Puy, J. Galceran, Assessment of trace metal binding kinetics in the resin phase of diffusive gradients in thin films, *Analytica Chimica Acta*, 717 (2012) 143-150.
- [57] X. Hou, Y. Wang, Determination of ultra-low level ¹²⁹I in vegetation using pyrolysis for iodine separation and accelerator mass spectrometry measurements, *Journal of Analytical Atomic Spectrometry*, 31 (2016) 1298-1310.
- [58] T. Ohno, Y. Muramatsu, Y. Shikamori, C. Toyama, N. Okabe, H. Matsuzaki, Determination of ultratrace ¹²⁹I in soil samples by Triple Quadrupole ICP-MS and its application to Fukushima soil samples, *Journal of Analytical Atomic Spectrometry*, 28 (2013) 1283-1287.
- [59] Y. Muramatsu, Y. Ohmomo, M. Sumiya, Determination of iodine-129 and iodine-127 in environmental samples collected in Japan, *Journal of Radioanalytical and Nuclear Chemistry*, 123 (1988) 181-189.
- [60] E. Englund, A. Aldahan, G. Possnert, V. Alfimov, A routine preparation method for AMS measurement of ¹²⁹I in solid material, *Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms*, 259 (2007) 365-369.
- [61] L. Zhang, W. Zhou, X. Hou, N. Chen, Q. Liu, C. He, Y. Fan, M. Luo, Z. Wang, Y. Fu, Level and source of ¹²⁹I of environmental samples in Xi'an region, China, *Science of The Total Environment*, 409 (2011) 3780-3788.
- [62] K. Grasshoff, K. Kremling, M. Ehrhardt, *Methods of seawater analysis*, John Wiley & Sons 2009.
- [63] D.R. Lide, *CRC handbook of chemistry and physics*, CRC press 2004.

Figure caption

Figure 1: Uptake factor of inorganic I species by AgdCl-binding gel as a function of: (A) NaCl concentration for 24 h of immersion time; (B) Na₂SO₄ concentration for 24 h of immersion time; and (C) immersion time-series in an immersion solution containing either 10 mmol L⁻¹ NaCl or Na₂SO₄. Experimental conditions: 20 mL of immersion solution; [NaCl] or [Na₂SO₄] = 1-500 mmol L⁻¹; [IO₃⁻] or [I⁻] ~ 100 µg L⁻¹; pH = 5.5 ± 0.1.

Figure 2: Recovery of I⁻ species in the presence of AgdCl-binding gel as a function of KCN concentration. Black dashed line corresponds to the minimum acceptable recovery of I⁻ (75 %). Experimental conditions: 3 mL of eluent solution; [KCN] = 0.1-100 mmol L⁻¹; [I⁻] ~ 100 µg L⁻¹; 24 h of immersion.

Figure 3: Evolution of the mass of IO₃⁻ or I⁻ accumulated by AgdCl-DGT samplers over time. Dashed lines correspond to the DGT response simulations using Eq. 4, Eq.6 and Eq. 7 for M_{th1} , M_{th2} and M_{th3} , respectively. Experimental conditions: 8 L of deployment solution; [NaCl] = 10 mmol L⁻¹; [IO₃⁻] or [I⁻] ~ 30 µg L⁻¹; pH = 5.5 ± 0.1; $T = 20.7 \pm 1.0^{\circ}\text{C}$; up to 10 h of deployment time.

Figure 4: Confirmation of the selectivity of AgdCl-DGT samplers for inorganic I species. Black dashed lines correspond to ± 15 % acceptable error on the DGT measurement. Experimental conditions: 8 L of deployment solution; [NaCl] = 10 mmol L⁻¹; weight ratio [I⁻]/[IO₃⁻] = 0-4.6 obtained by IC-ICP-MS; [IO₃⁻] ~ 20 µg L⁻¹; pH = 5.5 ± 0.1; 10 h of deployment time.

Figure 5: Results of time-series experiments performed with (A) Vittel® water ([I⁻] = 31.6 ± 0.6 µg L⁻¹; $T = 20.5 \pm 1.1$; pH = 8.3 ± 0.2), (B) Volvic® water ([I⁻] = 24.0 ± 0.4 µg L⁻¹; $T = 20.5 \pm$

683 1.1; pH = 8.0 ± 0.2), (C) Vittel® water with 10 mmol L⁻¹ NaCl salt addition ($[I^-] = 24.7 \pm 1.1 \mu\text{g}$
684 L⁻¹; T = $20.5 \pm 1.1 \text{ }^\circ\text{C}$; pH = 8.3 ± 0.2); (D) Volvic® water with 10 mmol L⁻¹ NaCl salt addition
685 ($[I^-] = 26.3 \pm 1.2$; pH = 8.1 ± 0.2 ; T = $20.5 \pm 1.1 \text{ }^\circ\text{C}$); (E) Volvic® water with 10 mmol L⁻¹
686 Na₂SO₄ salt addition ($[I^-] = 16.7 \pm 0.9$; pH = 8.0 ± 0.2 ; T = $20.4 \pm 0.4 \text{ }^\circ\text{C}$); and (F) synthetic
687 seawater ($[I^-] = 103.8 \pm 1.2$; T = $20.9 \pm 0.3 \text{ }^\circ\text{C}$; pH = 8.2 ± 0.1). The concentration of IO₃⁻ was
688 still lower than 1 $\mu\text{g L}^{-1}$ in each deployment solution. Lines for theoretical prediction as in Figure
689 4.

690

Figure 1

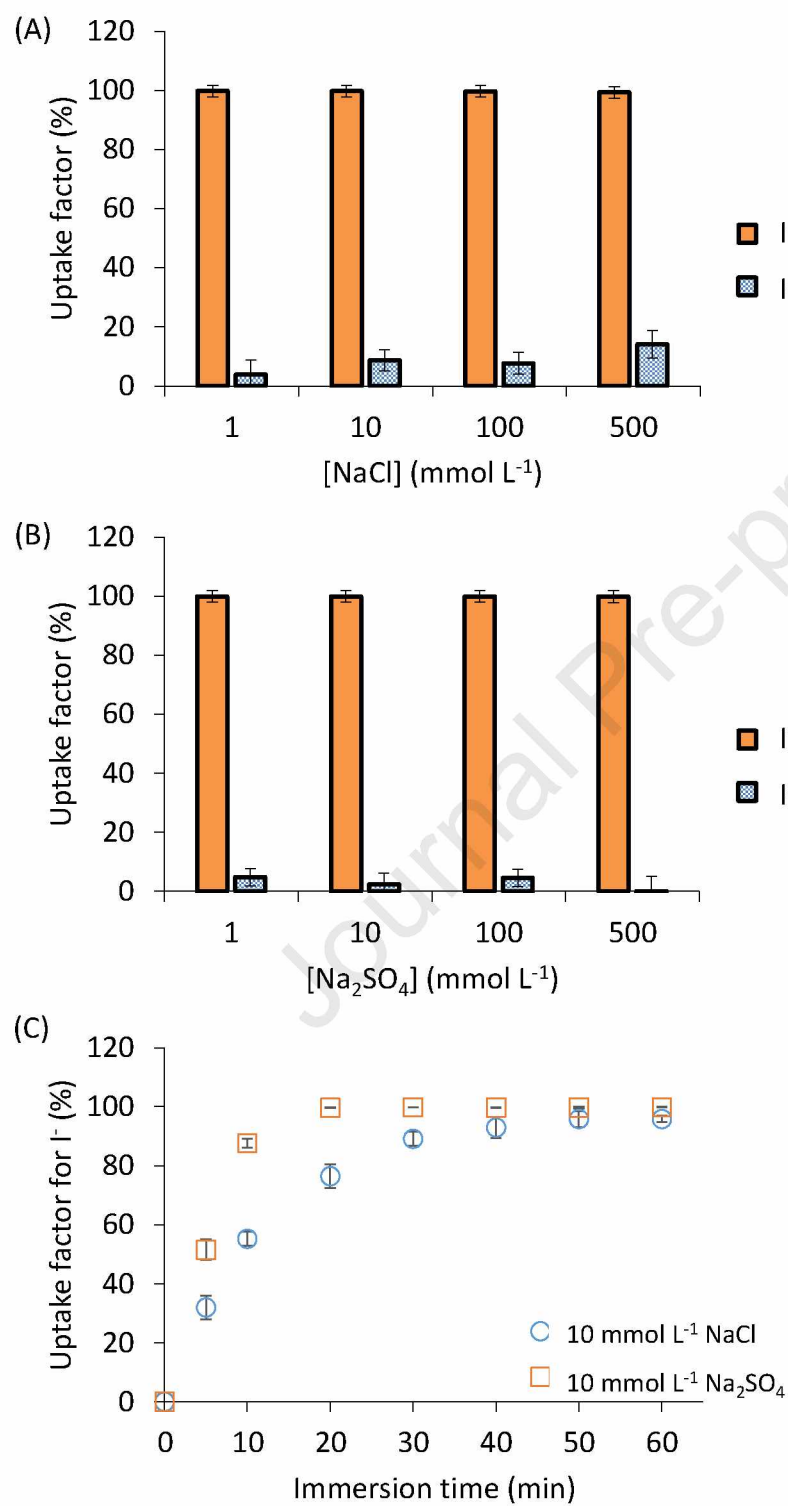


Figure 2

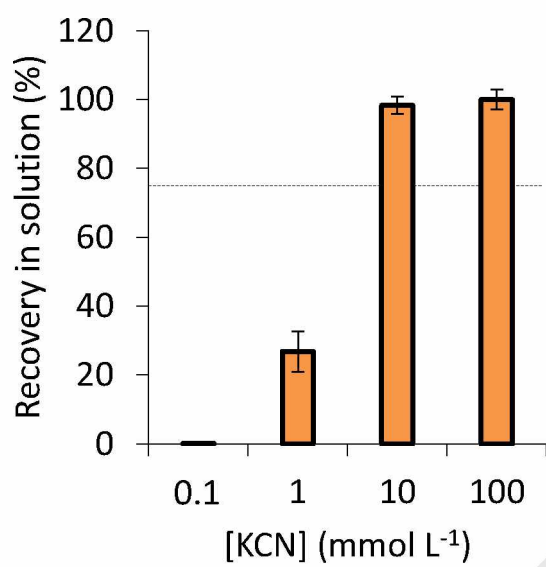


Figure 3

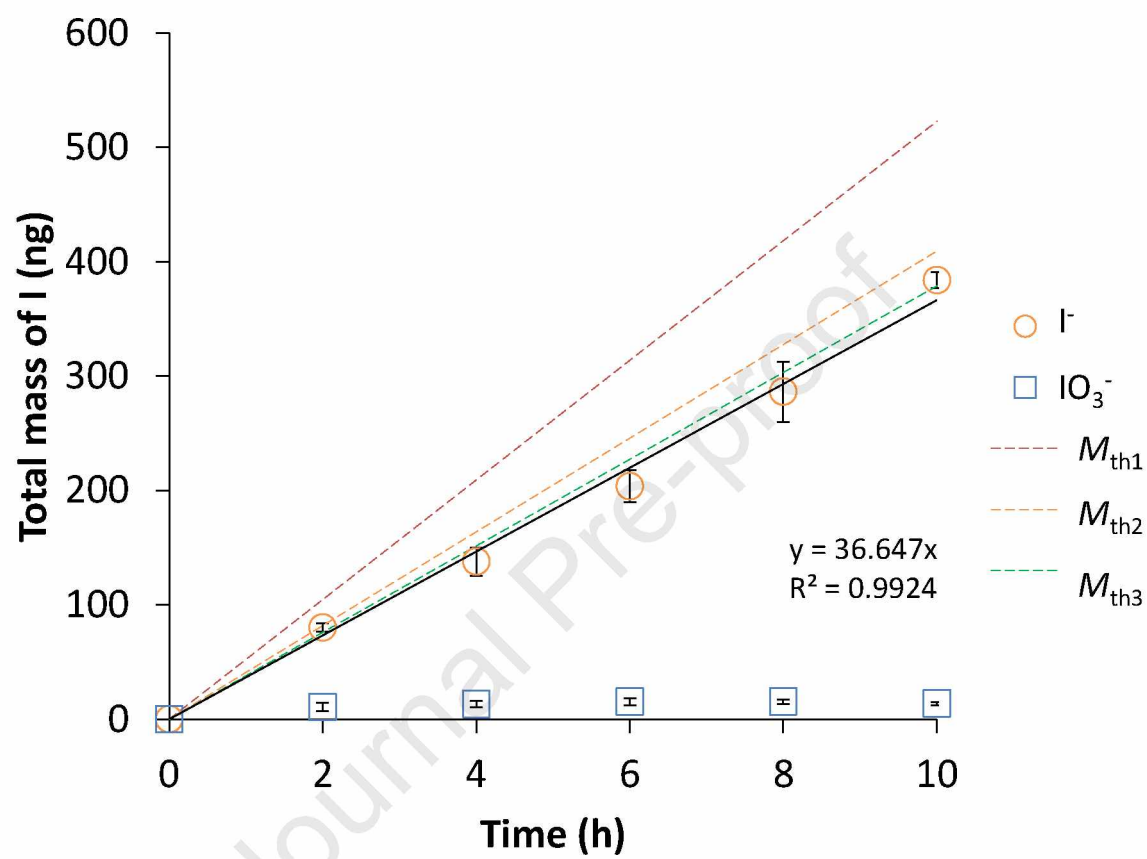


Figure 4

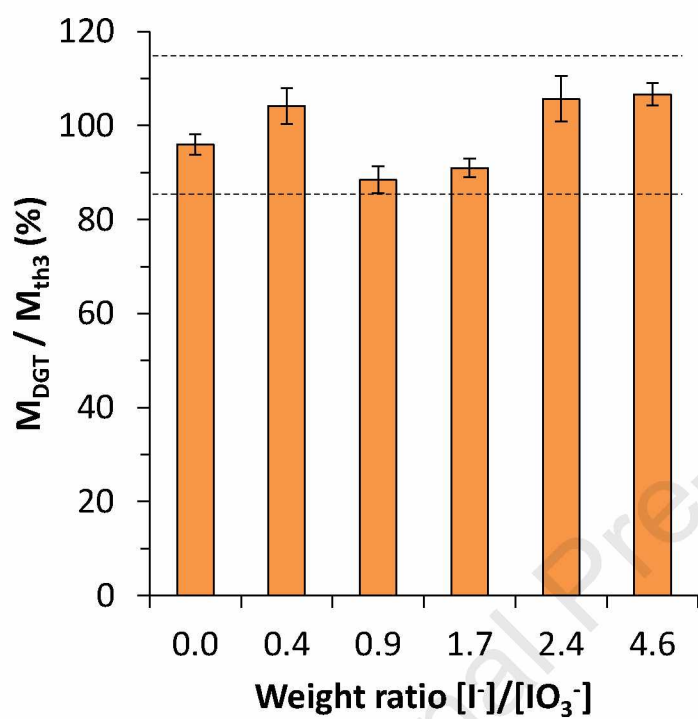


Figure 5

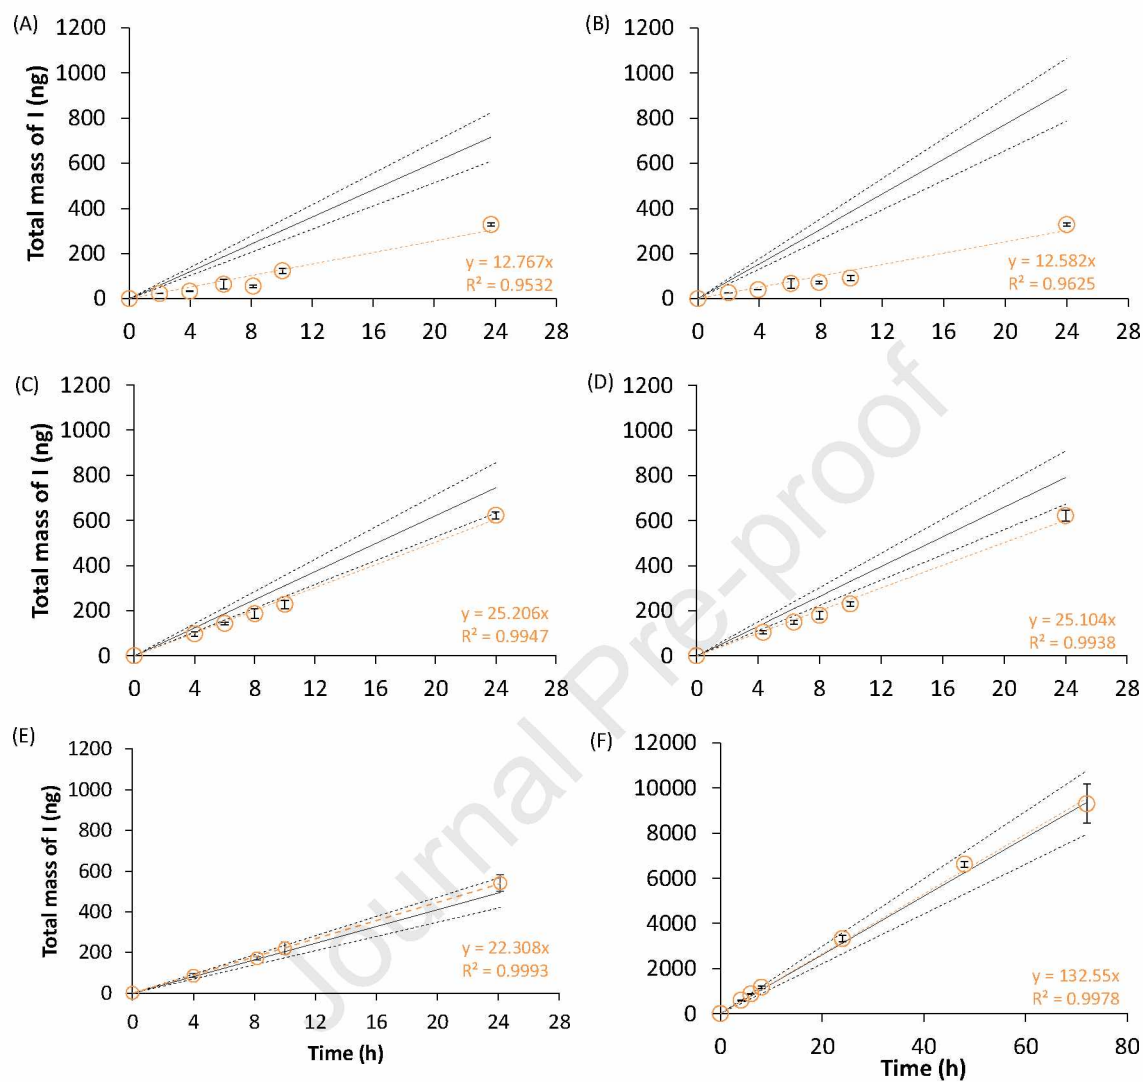


Table caption

Table 1: Continental water and seawater composition. Drinking-water physicochemical compositions provided in the bottle labels, and seawater was prepared according to Grasshoff et al. [62].

Table 2: Compilation of the experimental diffusion coefficients for IO_3^- and I^- at 25°C. Abbreviations: D^w : the diffusion coefficient in pure water; D^{gel} : the diffusion coefficient in AGE hydrogel; D^{mdl} : the diffusion coefficient in CA filter plus AGE hydrogel; D^{eff} : the effective diffusion coefficient measured by the DGT times-series method ($[\text{NaCl}] = 10 \text{ mmol L}^{-1}$; pH ~ 5.5); n.d.: not determined.

Table 1

| Element/dissolved species | Volvic | Vittel | Seawater |
|-------------------------------|--------|--------|-------------|
| Ca | 0.29 | 5.99 | 13.6 mmol/L |
| Mg | 0.33 | 1.73 | 114 mmol/L |
| Na | 0.50 | 0.23 | 471 mmol/L |
| K | 0.16 | 0.05 | 9.46 mmol/L |
| HCO ₃ ⁻ | 1.16 | 6.29 | 2.38 mmol/L |
| Cl ⁻ | 0.38 | 0.23 | 675 mmol/L |
| SO ₄ ²⁻ | 0.08 | 4.16 | 28.2 mmol/L |
| NO ₃ ⁻ | 0.24 | 0.07 | mmol/L |
| pH | 7 | 7.6 | 8.22 mmol/L |
| dry residue | 130 | 1084 | mg/L |
| Salinity | | | 34.8 |

Table 2

| | Diffusion coefficient ($\times 10^{-5} \text{ cm}^2 \text{ s}^{-1}$) | |
|------------------|------------------------------------------------------------------------|------------------|
| | IO_3^- | I^- |
| D^w | 1.08 [63] | 2.05 [63] |
| D^{gel} | 1.19 (RSD = 5 %) | 2.33 (RSD = 6 %) |
| D^{mdl} | 0.87 (RSD = 5 %) | 1.61 (RSD = 5 %) |
| D^{eff} | n.d. | 1.20 (RSD = 6 %) |

Highlights:

- A new DGT binding gel is proposed for selective iodide sampling.
- The diffusion coefficient of I species through agarose diffusive gel is reported.
- A DGT equation is developed to consider diffusive boundary layer and kinetic effects.
- The method was successfully applied to measure iodide concentrations in seawater.

Declaration of interests

☒ The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

☐ The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

| |
|--|
| |
|--|