



**HAL**  
open science

## Management of water scarcity in arid areas: a case study (Ziz Watershed)

Ismail Elhassnaoui, Zineb Moumen, Manuela Tvaronavičienė, Mohamed Ouarani, Mohamed Ben-Daoud, Issam Serrari, Ikram Lahmidi, M.A.S. Wahba, Ahmed Bouziane, Driss Ouazar, et al.

### ► To cite this version:

Ismail Elhassnaoui, Zineb Moumen, Manuela Tvaronavičienė, Mohamed Ouarani, Mohamed Ben-Daoud, et al.. Management of water scarcity in arid areas: a case study (Ziz Watershed). *Insights into Regional Development*, 2021, 3 (1), pp.80 - 103. 10.9770/ird.2021.3.1(5) . hal-03583819

**HAL Id: hal-03583819**

**<https://hal.science/hal-03583819v1>**

Submitted on 22 Feb 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License



**Publisher**

<http://jssidoi.org/esc/home>



---

**MANAGEMENT OF WATER SCARCITY IN ARID AREAS: A CASE STUDY (ZIZ WATERSHED)\***

**Ismail Elhassnaoui <sup>1</sup>, Zineb Moumen <sup>2</sup>, Manuela Tvaronavičienė <sup>3</sup>, Mohamed Ouarani <sup>4</sup>,  
Mohamed Ben-Daoud <sup>5</sup>, Issam Serrari <sup>6</sup>, Ikram Lahmidi <sup>7</sup>, M.A.S. Wahba <sup>8</sup>,  
Ahmed Bouziane <sup>9</sup>, Driss Ouazar <sup>10</sup>, Moulay Driss Hasnaoui <sup>11</sup>**

<sup>1,10,11</sup>*Mohammadia School of Engineers, Mohammed V University in Rabat, Morocco*

<sup>2</sup>*Laboratory of Functional Ecology and Environment, Faculty of Sciences and Technologies, University of Sidi Mohammed Ben Abdellah, Fès B.P. 2202 – Route d'Imouzzar, Fes, Morocco*

<sup>3</sup>*Daugavpils University, Vienibas Str. 13, Daugavpils LV-5401, Latvia*

<sup>4</sup>*International Water Research Institute (IWRI), Mohammed VI Polytechnic University (UM6P), Ben Guerir 43150, Morocco*

<sup>4</sup>*Dep. of Soil, Water, and Climate, Univ. of Minnesota, Upper Buford Circle, St. Paul, MN 55108, USA*

<sup>5</sup>*Moulay Ismail University faculty of sciences, Meknes, Morocco*

<sup>6</sup>*Ministry of Agriculture and Fisheries, Marrakech, Morocco*

<sup>7</sup>*Intelligence systems laboratory, Georesource and renewable energy, Faculty of Sciences and Technologies, University of Sidi Mohammed Ben Abdellah, Fès B.P. 2202 – Route d'Imouzzar, Fes, Morocco*

<sup>8</sup>*International Vice president Honorary of International Commission on Irrigation and Drainage and Prof Emirate, National Water Research Center (NWRC), Egypt*

<sup>9</sup>*Ministry of Equipment, Transport, Logistics and Water, Rabat, Morocco*

E-mails: <sup>1</sup>[is.elhassnaoui@gmail.com](mailto:is.elhassnaoui@gmail.com); <sup>2</sup>[moumenzineb18@gmail.com](mailto:moumenzineb18@gmail.com); <sup>3</sup>[manuela.tvaronavicienne@vilniustech.lt](mailto:manuela.tvaronavicienne@vilniustech.lt)

<sup>4,5</sup>[ouara001@umn.edu](mailto:ouara001@umn.edu); <sup>6</sup>[bendaoud.mohamed304@gmail.com](mailto:bendaoud.mohamed304@gmail.com); <sup>7</sup>[serrari.issam@gmail.com](mailto:serrari.issam@gmail.com); <sup>2</sup>[Ikram.lahmidi@usmba.ac.ma](mailto:Ikram.lahmidi@usmba.ac.ma);

<sup>1</sup>[bouziane.ahmed@gmail.com](mailto:bouziane.ahmed@gmail.com); <sup>1</sup>[ouazar@emi.ac.ma](mailto:ouazar@emi.ac.ma); <sup>9</sup>[hasnaouimd@gmail.com](mailto:hasnaouimd@gmail.com)

Received 15 July 2020; accepted 10 January 2020; published 30 March 2021

---

\* This research was partly supported by the project, which has received funding from the European Union's Horizon 2020 research and innovation programme European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme Marie Skłodowska-Curie Research and Innovation Staff Exchanges ES H2020-MSCA-RISE-2014 CLUSDEV MED (2015-2019) Grant Agreement Number 645730730



**European Research Council**

Established by the European Commission

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

**Abstract.** The 2030 Agenda for Sustainable Development aims to reach 17 Sustainable Development Goals (SDGs). The SDGs 6 deals with water security, which refers mainly to ensure availability and sus-tainable management of water. The present study aims to enhance reservoir performance under climate change to deal with water scarcity. For this purpose, we proposed a new methodology where precipitation and evaporation data provided through temporal downscaling are leveraged by a real-time management algorithm coupled with the Hydrologic Modeling System (HEC-HMS). The real-time dam management algorithm is based on water balance equation and rule curves. It provides information about (1) dam storage, (2) dam release, (3) dam evaporation, (4) dam diversion, (5) spilled water volume, (6) emergency spilled water volume, (7) dam inflow, (8) irrigation demand, (9) irrigation shortage, (10) dam siltation, (11) dam hydropower produc-tion, (12) hydropower energy income. The developed approach has been applied to the Hassan Addakhil multipurpose reservoir in Morocco. The result shows that the dam reliability and resili-ence have increased from 40% to 70% and from 16% to 66%, respectively, while the vulnerability remained constant. Additionally, this study has pointed out that the installation of a hydropower plant is an opportunity to produce clean electrical energy and generate an income enough to cov-er different costs related to dam management and maintenance. Therefore, the real-time man-agement tool developed in the framework of this project can significantly enhance reservoir per-formance.

**Keywords:** Climate change; SDGs (6); Temporal downscaling; Real-time dam management; Hydropower; Dam performance; Ziz watershed


**Reference** to this paper should be made as follows: Elhassnaoui, I., Moumen, Z., Tvaronavičienė, Ouarani, M., Bendaoud, M., Serrari, I., Lahmidi, I., Wahba, M.A.S., Bouziane, A., Ouazar, D., Hasnaoui, M.D. 2021. Management of water scarcity in arid areas: a case study (Ziz Watershed). *Insights into Regional Development*, 3(1), 80-103. [http://doi.org/10.9770/IRD.2021.3.1\(5\)](http://doi.org/10.9770/IRD.2021.3.1(5))

## 1. Introduction

According to the IPCC's Vth Report, 80% of the world's population faces a water security crisis (Jiménez Cisneros et al., 2015). Furthermore, renewable surface water and groundwater resources will significantly decrease in most dry subtropical regions (Kaito et al., 2000). The water security crisis will intensify water stress among agriculture and energy production. For the 2000-2080 future period, crop water demand will increase by 20%, under the A2 scenario (Fischer et al., 2007). Moreover, (Gain, 2016) shows that Africa will experience a very high water security crisis, which needs integrated strategies focusing on water management, enhancing water accessibility, water safety, and quality (Fig.1).

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

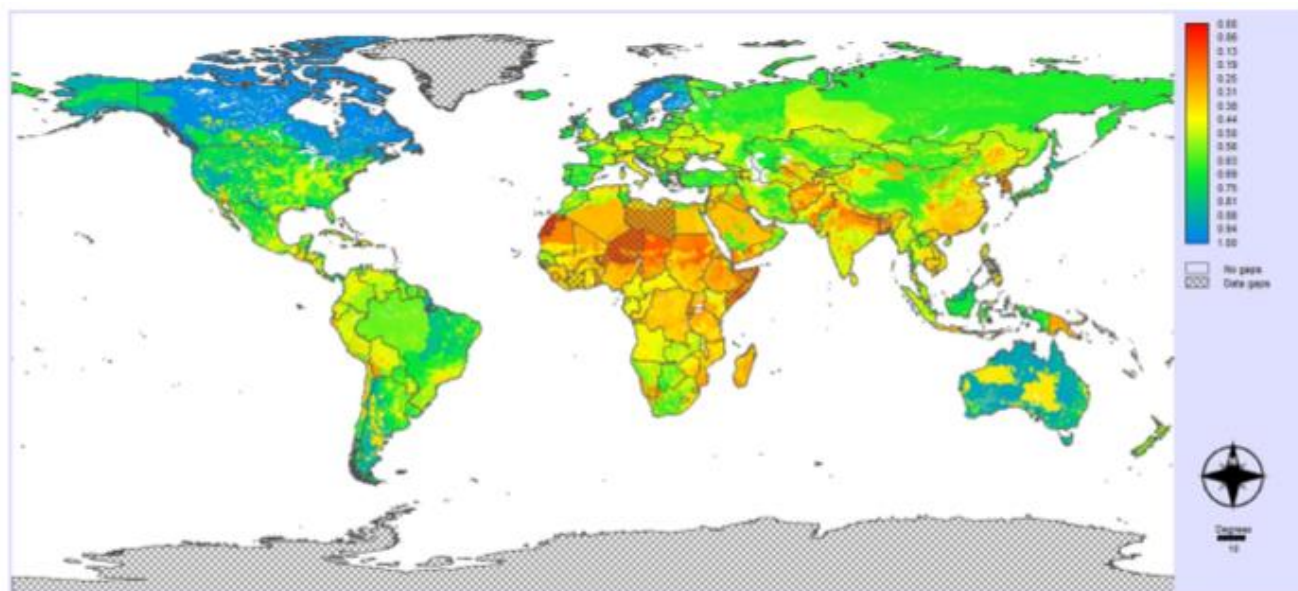

**Fig. 1:** Global water security index (Gain, 2016)

From 2000 to 2015, UN members have adopted the Millennium Development Goals (MDGs). This program concerns emerging countries. It aims eight goals: poverty, hunger, disease, unmet schooling, gender inequality, and environmental degradation. Indeed, the (MDGs) concludes at the end of 2015, and global awareness about sustainable development brings a set of Sustainable Development Goals. In September 2015, the United Nations members adopted the 17 Sustainable Development Goals (SDGs), which concern all the world. The 6th goal deals with water security in a way to ensure availability and sustainable management of water and sanitation for all (Sachs, 2012).

Morocco is a Mediterranean country located in northwestern Africa, bathed in the North by the Mediterranean Sea and in the West by the Atlantic Ocean. The kingdom covers an area of 710850 km<sup>2</sup>, with a population estimated to 35 M according to the 2014 census. Due to the topographic conditions, the influence of the Atlantic Ocean and the Mediterranean Sea, the climate in Morocco is variable (Fig 2). Based on Emberger's quotient (Condés & García-Robredo, 2012; Mokhtari et al., 2013), the climate in Morocco ranges from Humid bioclimatic stage to Saharan bioclimatic stage (Fig. 2). Indeed, 80% of the country's area experiences precipitation less than 250 mm/year (Morocco, 2014). The availability of freshwater per capita in Morocco is below 1000 m<sup>3</sup> per person per year, which makes it one of the African countries suffering from water scarcity, according to (Falkenmark et al., 1989), per capita availability of renewable freshwater resources index. Based on the future projections of regional climate model RACMO2/KNMI, (Philandras et al., 2011) shows that the mean annual precipitation within Morocco will decrease between -40% to -50% during the period 2071–2100. In this context, Morocco is one of the countries highly treated by water security problems (Bank, 2017). To overcome this problem, Morocco has adopted a dam policy since 1960. This policy increased the number of large dams from 16 to 128 by 2009, mobilizing 11.7 billion m<sup>3</sup>. Furthermore, the kingdom is planning to build three new large dams to reach an additional 1700 million m<sup>3</sup> per year by 2030 (Afilal, 2017). Moreover, Morocco has strengthened the legal water frame by adopting Law 10-95 in 1995 and Law 36-15 in 2016, aiming to ensure water security and strengthen decentralized water management. (Afilal, 2017; Avellà-Reus, 2019; Molle, 2017).

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

Moving to dam construction to guarantee water security begins in the 19th century (Shah & Kumar, 2008), which leads to the construction of 50.000 large dams in the 20th century (Sparrow et al., 2011). Dams are multiobjective in a way to guarantee agriculture demand, water supply (Zhao et al., 2012), Hydroelectric production, and flood control (Elhassnaoui et al., 2020). However, (Karami & Karami, 2019) and (Okkan & Kirdemir, 2018) show that, under RCP8.5 projections, reservoir inflow will decrease, in the Mediterranean in a way to alter the reservoir's sustainability. Therefore, sustainable management of existing dams become a real challenge for decision-makers (Karami & Karami, 2019). Then we need a better approach to enhance the performance of the existing dams (Tiğrek et al., 2009).

In this sense, linear and dynamic algorithms are required for boosting dam's operation to meet downstream demands (Hejazi & Cai, 2011). Many studies have developed models based on a water balance equation as an alternative to water resource management. (Tinoco et al., 2016) carried out a study over the Macul basin in Ecuador to maintain the sustainable balance between irrigation and river ecology. The results show that meeting irrigation demand supposes that the decision-makers should adopt for deficit irrigation and the modification of spillway dimension (Saha et al., 2017). A reservoir operation function under the HEC-5 model was proposed to analyze a system of reservoirs at a daily time step using the water balance equation. (Silva & Hornberger, 2019) developed a model that can better enhance dam performance by the optimization of irrigation satisfaction and hydropower demand. The model is based on the water balance equation at a monthly time step.

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

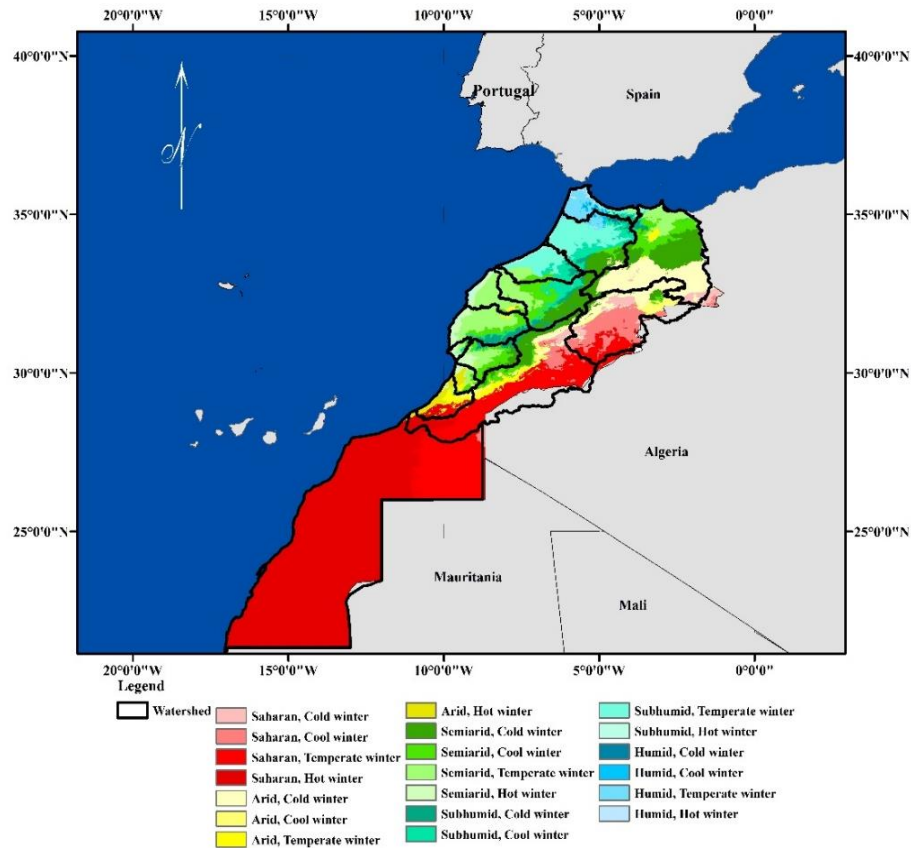


Fig. 2: Bioclimatic stages of Morocco according to Emberger's quotient

The algorithm enhanced the multipurpose reservoir cascade system in Sri Lanka based on the reliability, resilience, and vulnerability indicators. (Jaiswal et al., 2020) propose a model based on a water balance equation coupled with the Soil and Water Assessment Tool (SWAT) model for efficient dam releases. The study was conducted over the Tandula dam in India at a daily time step. (Jingwen Wu et al., 2020) developed a reservoir operation function in the Soil and Water Assessment Tool (SWAT), based on a water balance equation at a daily time step. (Dong et al., 2020) de-veloped a model able to regulate dam storage best. The results show that the model can better re-locate surplus stream flow in the wet season to the dry season and mitigate the extreme events. Furthermore, optimizing models were developed for overcoming extreme events impact and enhancing the dam performance models. (Anand, Gosain and Khosa 2018; Appuhamige and Susila; Guariso, Haynes & Whittington 1981; Milano et al. 2013; Omar, 2014; Wu & Chen 2013).

In this study, we propose a real-time dam management algorithm based on water balance and rule curves as a constraint condition to guarantee an optimal water policy. This model is coupled with the Hydrologic Modeling System (HEC-HMS), and a precipitation temporal downscaling model developed by HEC-HMS has been proposed for hydrological modeling to provide hourly inflows to the dam. The precipitation temporal downscaling model based on a combination of Intensity-duration-frequency curves (IDF) and designed hyetograph of Chicago, was used to provide hourly precipitation. Furthermore, to assess the water balance at an hourly time step, hourly evaporation was estimated by temporal downscaling of monthly evaporation, using polynomial regression. The

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

real-time dam management tool was conducted through VB.net. This tool provides information about (i) dam storage, (ii) dam release, (iii) dam evaporation, (iv) dam diversion, (v) spilled water volume, (vi) emergency spilled water volume, (vii) dam inflow, (viii) irrigation demand, (ix) irrigation shortage, (x) dam siltation, (xi) dam hydropower production, (xii) hydropower energy in-come.

## 2. Study area

The study was carried out in Hassan Addakhil's Dam (Fig.3), which regularizes Ziz watershed out-flow. Indeed, across this watershed outlet, the Hassan Addakhil dam was built in 1971, with a capacity of 347 million m<sup>3</sup>. Furthermore, this dam ensures irrigation supply and flood control essentially.

The extreme hazards in the Ziz basin caused longer and more intense periods of drought and extremely wet years, as was the case in 2010, when the dam spilled for a few months. The climate change effect makes the management of the Hassan Addakhil dam a sensitive issue (Guir-Ziz-Rheriss, 2010). According to the Representative Concentration Pathway RCP 8.5, inflow to the Hassan Addakhil dam will decrease by -30% in 2050 (Ezzine, 2017).

Figure 4 shows that over the period (1939-2003), the regular dam inflow is very low. However, the reservoir is exposed to some extreme inflow, which may present a flood risk. Indeed, the rectangle of each boxplot represents the interquartile range. Its length and position relative to the lower and upper bounds indicate the consistency and dispersion of the recorded values: the shorter the rectangle, the more homogeneous and less dispersed the values are. In the studied case, for all months, the boxplot's rectangles are close to the minimum value. Besides, the boxplots have a length much less than the maximum of the boxplot. Hence most of the recorded values are relatively small and not widely dispersed. For example, for October, 75% of the dam inflow is less than 20.00 million m<sup>3</sup>, and 25% of the values are between 160.00 million m<sup>3</sup> and 20.00 million m<sup>3</sup>.

Boosting the performance (Reliability, resilience, and vulnerability) indicators and flood control are the main goals for real-time dam management. Wu et al. (2020) has developed a daily dam operation function under SWAT, but the novelty of this work is to develop hourly dam management, which can provide hourly information about the dam and simulate the forecasted reservoir inflow to assess future irrigation supply.


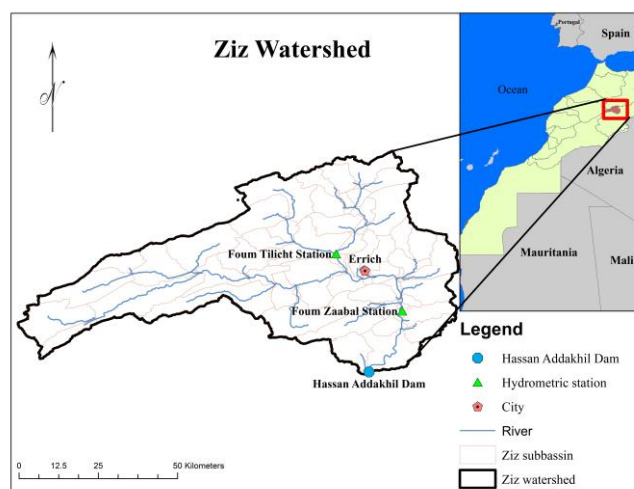


Fig. 3: Upper ZIZ watershed

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

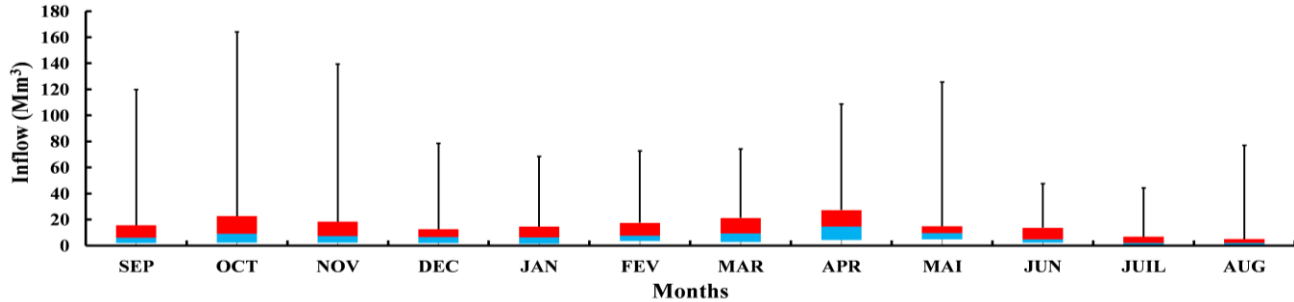

**Fig. 4:** Hassan Addakhil monthly inflow (Mm<sup>3</sup>) over the period 1939-2003

### 3. Material and methods

The operational management program aims to reduce the water release loss and highlight the opportunity to produce hydroelectric energy. The overall objective of this study is to propose a model that can assess real-time water resource management as an alternative to enhance that dam performance. For Hassan Addakhil Dam, the leading indicator that can measure the performance of the proposed model is the satisfaction of the irrigation demand with the minimum of water supply loss. The program was developed under visual basic and contains four modules, (1) loading input data module, (2) Height Area Volume curve interpolation module, (3) data analyzing and treatment module, (4) the data display module. The chart below demonstrates the algorithm's primary structure (Figure.5).



Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

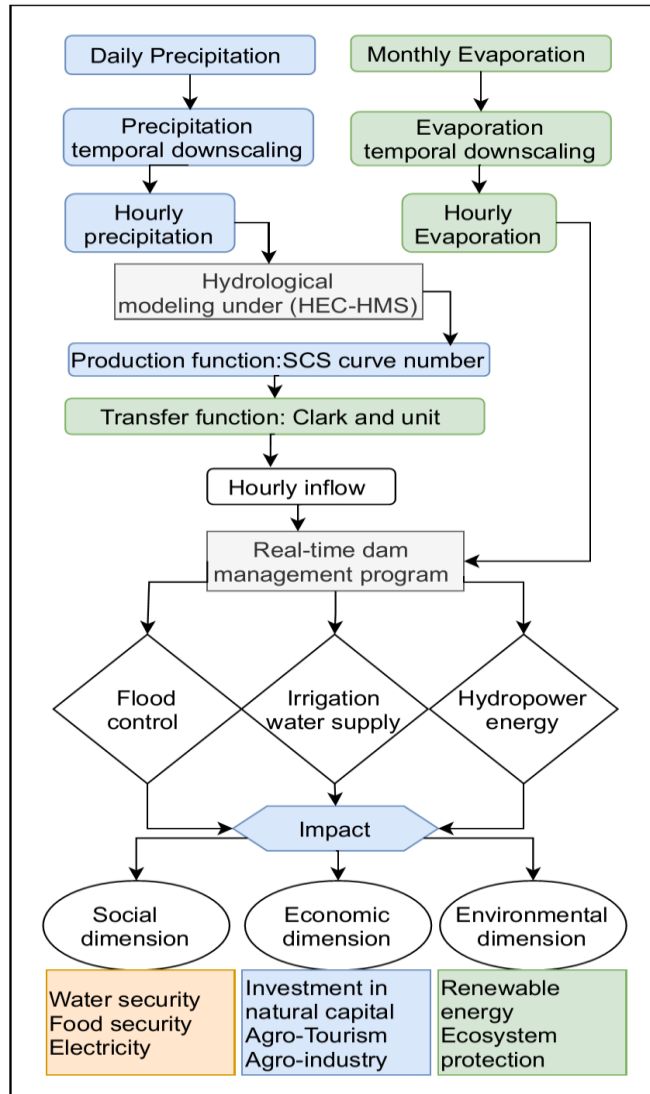


Fig. 5: Schematic diagram of real-time dam management model processing

### 3.1 Precipitation data and temporal downscaling

The daily maximum rainfall data were provided by the hydraulic basin agency of Guir-Ziz-Rheris over the period 1982-1993 (the most available data) of the rain stations of Zaabel and Fom Tillicht. The key input parameters of this study are the instantaneous precipitation. The precipitation temporal downscaling method used to downscale daily precipitation was conducted using a synthetic design storm hydrograph, developed by (Elhassnaoui et al., 2019). The approach consists of the mixture of the Intensity-duration-frequency curves (IDF) and the designed hydrograph of Chi-cago (Elhassnaoui et al., 2019).

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

### **3.2 Dam Data:**

Dam release and storage data, Height-Area-Volume curves, and dam design characteristics were provided by the hydraulic basin agency of Guir-Ziz-Rheris over the period 1983-2002

### **3.3 Evaporation data and temporal downscaling**

The monthly evaporation data were provided by the hydraulic basin agency of Guir-Ziz-Rheris over the period 1983-2002. In situ evaporation observations, data, and Height-Area-Volume curves for the Hassan Addakhil dam were conducted to assess the correlation between evaporation as an independent variable and water surface as a predictor variable. This correlation is assessed for every month over the period 1983-1993 using two-degree polynomial regression. After that, hourly evaporation data was provided using the two-degree polynomial function. The downscaling approach was validated using observed data over the period 1983-2002. Nash-Sutcliffe Efficiency (NSE) was used to assess the significance of the downscaling method.

### **3.4 The evaluation of hourly siltation:**

According to the Agency of the hydraulic basin Ziz Ghir Rheriss and Draa, the annual rate of the dam siltation is 1.99 million m<sup>3</sup> / year. Thus, we convert the rate of siltation per year to a rate per hour.

### **3.5 Hydrological modeling**

In this study, we used the same hydrological model calibrated and validated by (Elhassnaoui et al., 2019) in the same watershed under HEC-HMS.

#### **3.5.1 GIS data**

The digital elevation model (DEM) has been derived from the following features: ASTER Global Digital Elevation Model (ASTER GDEM). The DEM is used to estimate the physical parameters that control water flow, such as slope, the longest flow path.

#### **3.5.2 Land Use and soil data**

The Land Use map was extracted from a Global cover map, a European Space Agency project (ESA) (Bicher et al., 2008). The soil map was obtained from the National Institute of Agronomic Research in Morocco (INRA)

#### **3.5.3 Hydrological Model structure:**

The SCS curve number method is used as a Production function, and the Clark and unit are used as a transfer function. The temporal downscaled precipitations are introduced to the model to estimate the discharge at the watershed outlet, in a way to assess the hourly dam inflow. The goal of the current step is to estimate the hourly water supplies at HASSAN ADD-AKHIL's dam, employing the rain-flow transfer model, in this case, HEC-HMS (W.Scharffenberg, 2016). The methodology followed consists on conceptualizing the physical characteristics of the basin studied, using the HEC-GEOHMS extension to export them to the HEC-HMS hydrological modeling. In the presented case, Ziz Ghir watershed has a semi-arid climate where the dry season lasts from 6 to 8 months (ABH-Ziz-Guir-Rheriss, 2018), then to estimate the water runoff the soil conservation curve number method (SCS-CN) (USDA, 1986) was chosen. The SCS model described as:

**Equation 1:** SCS equation

$$R = \frac{P_e^2}{P_e + S}$$

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

In which:

$$\begin{aligned} P_e &= P - I_a \\ I_a &= \alpha S \\ S &= \frac{2.540}{CN} - 25.4 \end{aligned} \quad (3)$$

Where:

R: cumulative runoff, P: cumulative rainfall;  $P_e$ : effective cumulative rainfall, S: potential maximum retention,  $I_a$  : initial abstraction,  $\alpha$  : initial abstraction coefficient, CN: curve number.

Once excess precipitation is known, it is transformed into the direct runoff. The HEC-HMS platform has several transfer functions: unit hydrographs of Clark, Snyder and SCS, user-defined hydrographs, Modclark transformation, and kinematic wave. Among these methods, the unitary hydrograph of Clark is frequently used for event modeling. This method is particularly useful for reproducing complex hydrographs, in basins with varied topography and land use (Sabol, 1988) (Chu et al., 2009)

Visual examination of the simulated hydrographs could give a previous idea about the quality of the simulation, but it is required to use the evaluating equation to assess the capacity of the rain-flow model to reproduce flood episodes. Those are described in detail in the paper of (Moriasi et al., 2007), the comment and the widely used coefficient is Nash (Nash & Sutcliffe, 1970), it is expressed as follows

**Equation 2:** The Nash-Sutcliffe Efficiency

$$EF = 1 - \frac{\sum_{i=1}^n (Q_{obs,i} - Q_{sim,i})^2}{\sum_{i=1}^n (Q_{obs,i} - \overline{Q_{obs}})^2}$$

Where,

$Q_{obs,i}$  : Observed discharge,  $Q_{sim,i}$  : Simulated discharge,  $\overline{Q_{obs}}$  : Mean of the observed discharge,  $n$  : Number of the observed discharge.

### 3.5.4 Evaluation of the hydrological model performance:

The hourly dam inflows simulated using HEC-HMS was validated with the observed dam inflows over the period 1983-1993. The Nash-Sutcliffe Efficiency indicators were used to assess the accuracy of simulated hourly dam inflows.

### 3.6 Crop water demand

The irrigation demand in Ziz downstream is estimated by 100 million m<sup>3</sup>, according to Tafilalet ORMVA. Indeed, the crop water demand is generally 1000 m<sup>3</sup> / ha (Hammani et al., 2012). The dam release program depends on the vegetation cycle of the cultivated species. Indeed, the dam release is following this schedule:

- 1st release: October – November
- 2nd release: January
- 3rd release: March – April
- 4th release: July – August

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

### 3.7 Hydropower production:

The Hassan Addakhil dam was designed primarily to ensure irrigation demand and flood control. However, this section aims to highlight the opportunity to produce hydroelectric energy over this dam, and how the hydropower income can cover the dam maintenance charges. We propose to integrate a hydropower plant to the Hassan Ad-dakhil to enhance the sustainability mission of the dam. In this sense, we designed a hydropower plant. The characteristics of the hydropower station are as follows:

- Discharge of power plant: The maximum discharge.
- Hydraulic charge: The difference between the water level and the hydropower plant level. The head power value is estimated by calculating the water head corresponding to the average useful dam reserve of 1988-2009 years.
- Efficiency: Efficiency of the turbine-generator set which varies between 0.6 and 0.9
- Installed Capacity: The installed capacity is the sum of the rated capacities of all the units in the power plant.

The hydropower production function is as follow:

$$P = \rho \cdot g \cdot \eta \cdot Q \cdot H$$

Where:

$P$  : Hydropower production (kW),  $\rho$  : Density of water (kg.m<sup>3</sup>),  $g$  : Acceleration gravity (m.s<sup>-2</sup>),  $Q$  : Discharge of the power plant (m<sup>3</sup>.s<sup>-1</sup>),  $H$  : Effective head (m),  $\eta$  : The hydropower plant efficiency

### 3.8 Flood control:

The real-time information about the dam inflow can be simulated to provide information about the reservoir outflow. Real-time dam management can assess the outflow discharges and estimating the water volume lost. Hourly dam diversion information can help the decision-maker to avoid flood risk.

### 3.9 Real-time water management tool:

The real-time water management program was conducted using VB.net. Fig.6 shows the program interface. Indeed, the interface is composed of four sections: 1) the dam parameter section, 2) the hydropower plant section 3) the data loading section, and finally 4) the dam management processing.

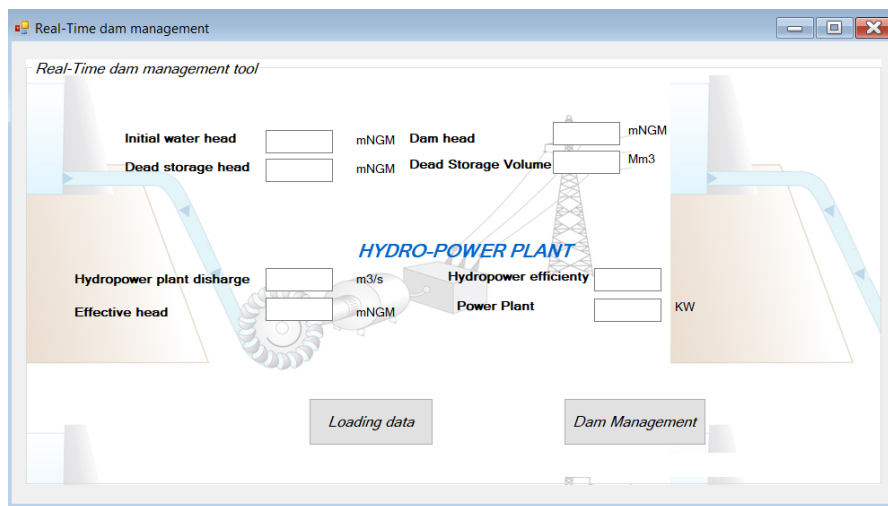


Fig. 6: Program interface of Real-time dam management tool (Source: authors)

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

### 3.9.1 Water balance equation:

The real-time dam management program is based on the water mass balance equation (Eq3). The water balance equation aims to update dam storage at an hourly time step, including dam inflow, dam outflow, evaporation volume, irrigation release, water volume spilled, and water volume evacuated. Fig.7 shows the real-time dam management algorithm operation.

Eq 3: the water mass balance equation

$$S_{i+1} = S_i + (Q_{if(i+1)} + Q_{if(i)}) \times \frac{\Delta T}{2} - (Q_{of(i+1)} + Q_{of(i)}) \times \frac{\Delta T}{2} - V_{evp} - V_{spill} - V_{evac} - F_{Irr}$$

Where  $S_{i+1}$ : Reservoir storage at  $i + 1$  time,  $S_i$ : Reservoir storage at  $i$  time,  $Q_{if(i+1)}$ : dam inflows at  $i + 1$  time,  $Q_{if(i)}$ : dam inflows at  $i$  time,  $\Delta T$ : Hourly step,  $Q_{of(i+1)}$ : Dam outflow at  $i + 1$  time,  $Q_{of(i)}$ : Dam outflow at  $i + 1$  time,  $V_{evp}$ : Evaporated volume,  $V_{spill}$ : Spilled volume,  $V_{evac}$ : Emergency Evacuated volume,  $F_{Irr}$ : Irrigation Supply.

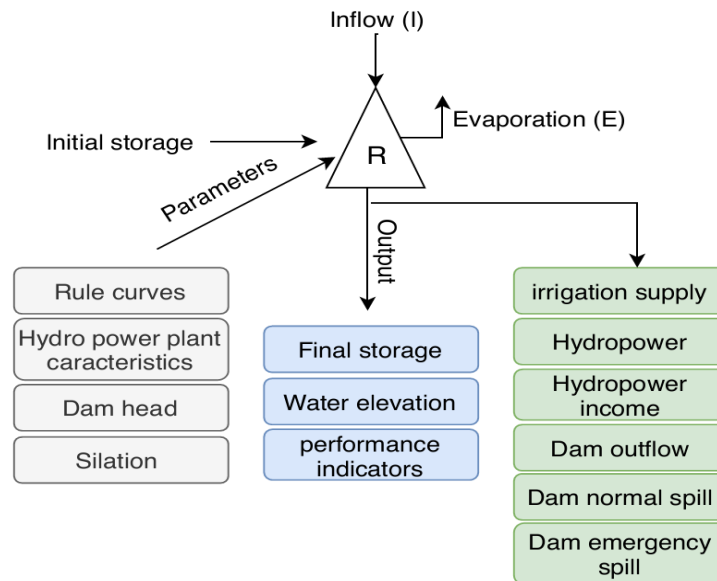


Figure.7: Real-time dam management algorithm operation

### 3.9.2 Rule curves:

The dam rule curves are used to guarantee the reservoir safety as well as water security. Many studies have developed rule curves for flood control (Chaleeraktragoon & Chinsomboon, 2015) and dam operating (Thongwan et al., 2019). Furthermore, using these curves is a way to guarantee an optimal water policy (De Silva M. & Hornberger, 2019). (Fig.8) shows that the real-time dam management program will release 100% of irrigation demand when the dam capacity is above the storage segmentation 1 (SG1). Else if the dam capacity is between the storage segmentation 1 (SG1) and the storage segmentation 2 (SG2), 70% of the irrigation demand will be released. Else if the dam capacity is between the storage segmentation 2 (SG2) and the dead storage, 50% of irrigation demand will be released.

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

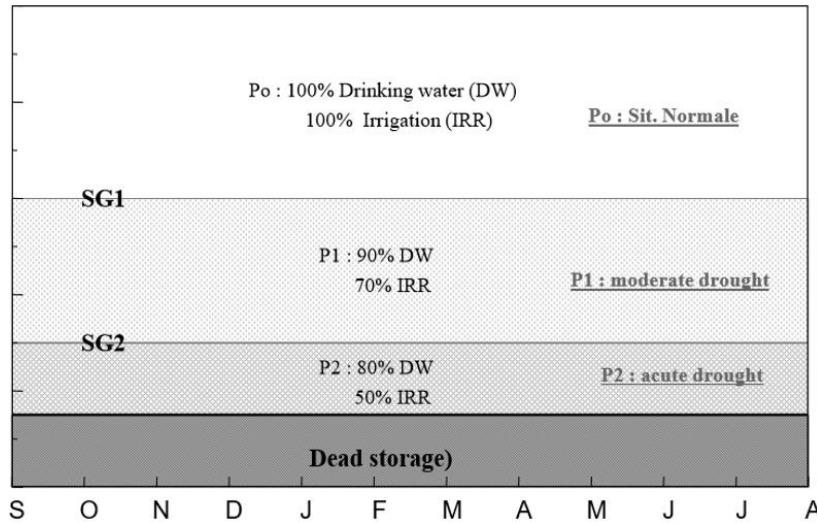


Fig. 8: Rule curve schema based on Moroccan hydrological season (Source: Ministry of Equipment, Transport, Logistic and Water)

### 3.9.3 Real-time dam management model validation:

The real-time dam management model is validated over 1983-1993 to confirm its ability to reproduce the dam storage. The Nash-Suctclife Efficiency indicators were used to assess the accuracy of simulated dam storage compared with observed storage data over this period.

### 3.9.4 Reservoir Performance Indicator

The dam performance is assessed by three indicators Reliability, resilience, and vulnerability. Indeed, reliability is the success of providing demands. Resilience describes how the dam recover from a failure and vulnerability describes the intensity of failure (Ajami et al., 2008; De Silva M. & Hornberger, 2019; Hashimoto et al., 1982). The volume reliability is the number of successful hydrological year  $X(t)$  that the dam meets the downstream demand over a period  $T$

Equation 4: Reliability

$$Reliability = \frac{\sum_{t=1}^T X(t)}{T}$$

The resilience is the dam's potential to recover  $Y(t)$  from a failure  $T - \sum_{t=1}^T X(t)$  to meet downstream requirement over a period  $T$

Equation 5: Resilience

$$Resilience = \frac{\sum_{t=1}^T Y(t)}{T - \sum_{t=1}^T X(t)}$$

The vulnerability describes the maximum number of successive failures, which highlight the severity of dam failure.

Equation 6: vulnerability

$$Vulnerability = \max(V(t))$$


Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

#### 4. Result and discussion:

##### 4.1 Temporal Evaporation downscaling:

Many studies have performed multiple regression methods and method of fragment for temporal downscaling of hydro climatic data. (Sachindra & Perera, 2018) performs the desegregating of annual evaporation to monthly evaporation using method of fragment. Monthly disaggregation consists on estimation of the ration of the evaporation value in a given month to the total evaporation value over the year. Other authors' performs the same approach in desegregating corpse temporal hydro climatic data (Rebora et al., 2016; A. T. Silva & Portela, 2012). Furthermore many authors shows that multiple regression lead to a good accuracy in temporal downscaling of hydro climatic data (Contreras et al., 2018; Herath et al., 2016; Hofer et al., 2015; Sharifi et al., 2019). In this study, the temporal downscaling method was processed by evaluation of the accuracy of the dam area with degree two polynomial regressions to predict evaporation from monthly to hourly scale. Fig.9 shows that the R square  $R^2$  ranges from 0.42 to 0.93, with an average of 0.73. The R square metric for all months is significant and proves that the dam area can best fit evaporation in polynomial regression.

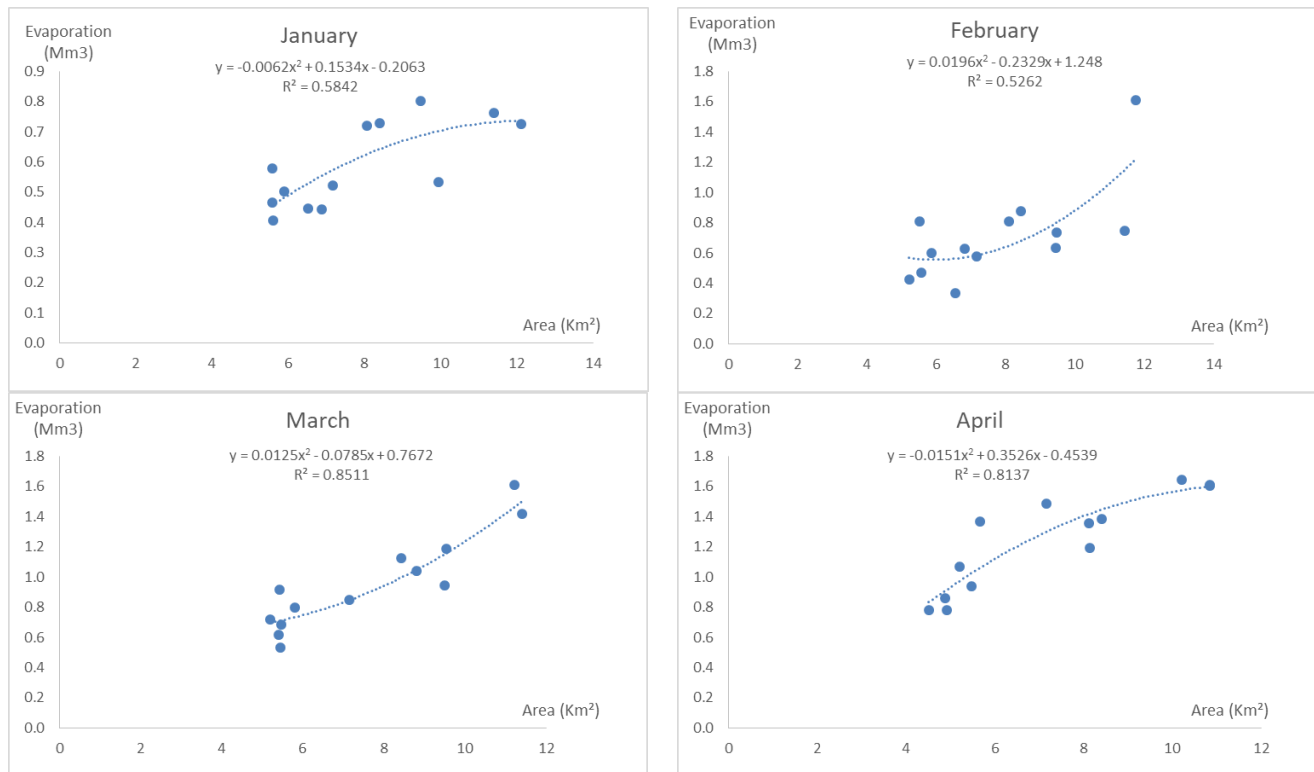

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

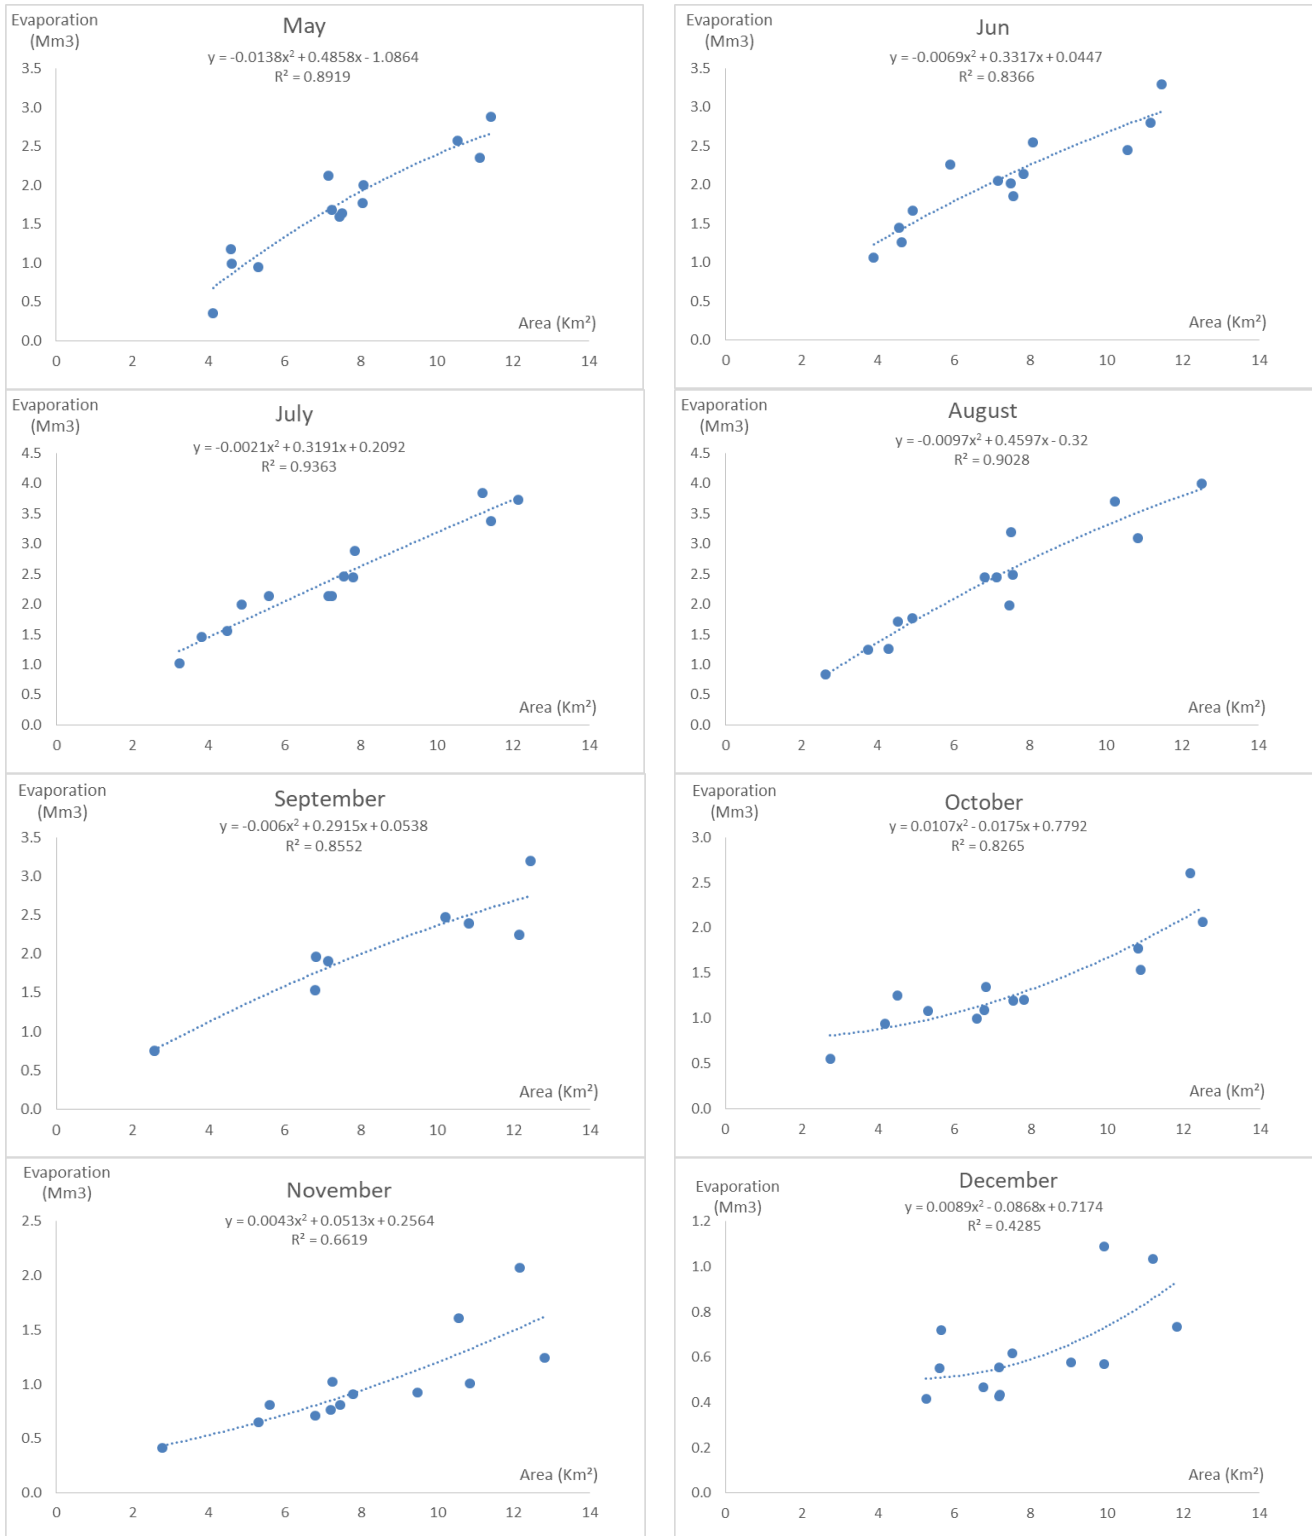


Fig. 9: The trend curve for the reservoir evaporation or month by month over the period 1983 and 2002



Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

**4.2 Validation of temporal evaporation downscaling:**

The observed evaporation in the Hassan Addakhil dam, over the period 1982-1993, was considered for the validation of downscaled evaporation using a polynomial trend equation. The Nash-Sutcliffe Efficiency (NSE) for the result of simulated and observed evaporation data is 0.84, which is very significant in terms of the evaporation downscaling model accuracy (Fig.10 and Table 1).

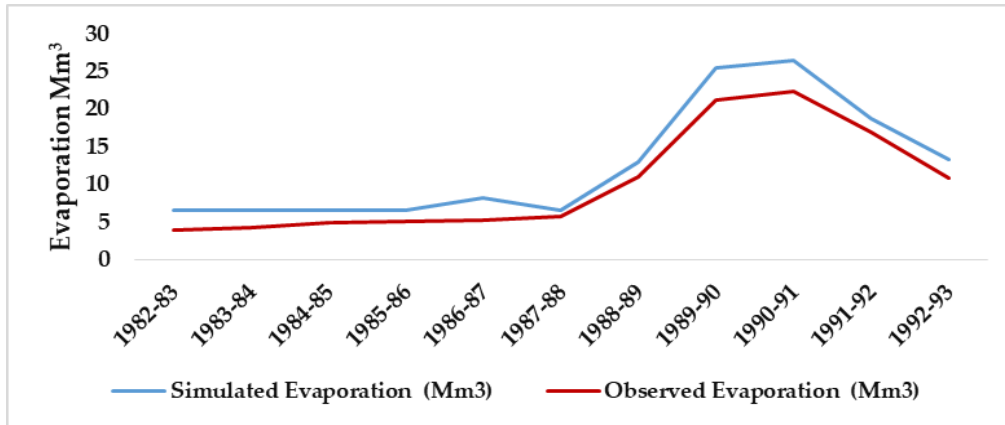


Fig. 10: Comparison between downscaled and observed evaporation

Table 1: Modeling Efficiency for evaporation downscaling over the period (1982-1993)

Period	Watershed	Evaporation	NSE
1982-1993	Upper Ziz	Hourly Evaporation validation	0.84

**4.3 Evaluation of the hydrological model performance:**

The hourly water supplies at HASSAN ADD-AKHIL’s dam was conducted through HEC-HMS software, using SCS-CN method. Many studies have been widely used the SCS-CN method for application in continuous rainfall modeling, in arid, subtropical and tropical regions (Geetha et al., 2008; Gumindoga et al., 2017; Halwatura & Najim, 2013; Hrissanthou & Kaffas, 2014).

The SCS loss model is adapted to account for the initial humidity conditions of watersheds in the event modeling scale. The parameter CN can indeed be linked to different soil moisture indicators, measured in the field (Huang et al., 2007; Brocca et al., 2009; Trambly et al., 2010), derived from models (Merchandise and Viel, 2009) or satellite data (Brocca et al., 2010). Based on the simulated water supply to the dam, the real-time dam management tool was validated in terms of dam inflow (Fig.11). The Nash-Sutcliffe Efficiency (NSE) for the result of temporal inflow provided by the HEC-HMS model and the observed data over the period 1982-1993 is 0.79 (Table 2). The NSE is significant. The same method was carried out by (Jaiswal et al., 2020)

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

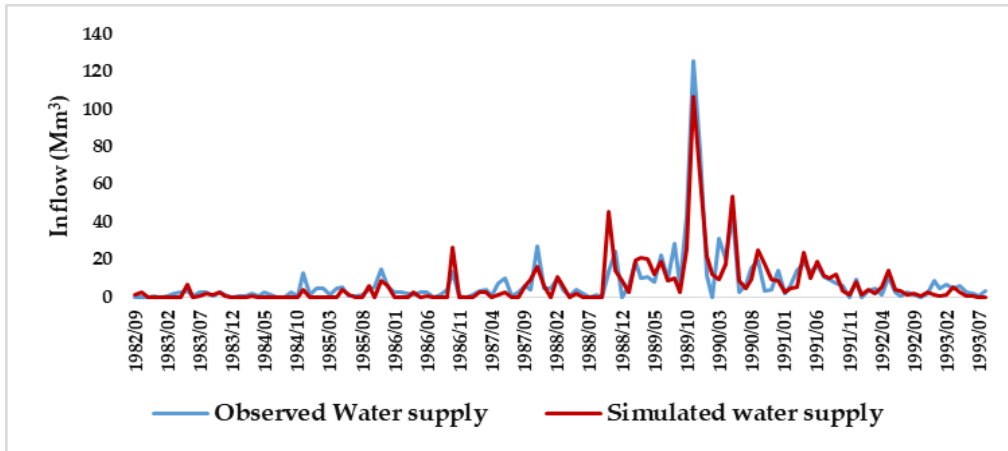


Fig. 11: Comparison between Simulated and observed water supply for HASSAN ADD-AKHIL dam

Table 2: Modeling Efficiency (EF) of dam inflow over the period (1982-1993)

Period	Watershed	Outlet	NSE
1982-1993	Upper Ziz	Hassan Addakhil dam	0.79

#### 4.4 Real-time dam management model validation:

The comparison between observed and the simulated dam's storage over the period 1982-1993, shows that the real-time dam management algorithm can accurately model the dam storage (Fig. 12). Indeed, the Nash-Sutcliffe Efficiency (NSE) for the observed and the simulated dam storage over the period 1982-1993 data is 0.96, which is very significant (Table 3). The validation of the dam management model was carried out as well using the Nash-Sutcliffe Efficiency indicator by (Jaiswal et al., 2020; T. Silva & Hornberger, 2019).

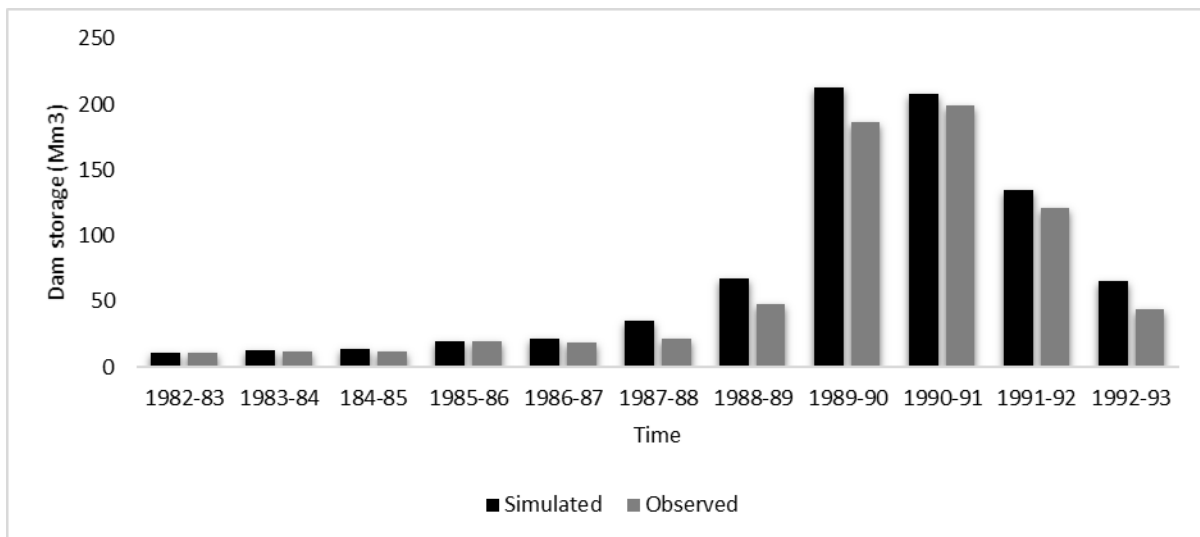


Fig. 12: Comparison between simulated and observed dam storage between the period (1982-1993)

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

**Table 3:** Modeling Efficiency (EF) of dam storage over the period (1982-1993)


Period	Watershed	Dam storage	NSE
1982-1993	Upper Ziz	Hassan Addakhil dam storage simulation	0.96

**4.5 Real-time dam management performance:**

The real-time dam management tool enhanced dam performance. Comparison based on agricultural demand satisfaction over the drought period ranged from 1983 to 1992 (Fig13) shows that real-time dam management tool has enhanced the dam release by an average of 18.33 million m<sup>3</sup>, which represents 20% of the agricultural demand in Ziz downstream over a hydrological season. Indeed, over the same period, the lower dam release volume increased from 4.9 million m<sup>3</sup> to 13.1 million m<sup>3</sup>, and the high dam release volume increased from 54.8 million m<sup>3</sup> to 89.64 million m<sup>3</sup>.

On the other hand, it can remedy to water release losses. Over the period 1987-1991, the model provides the agricultural requirement without water release losses, however, over the same has released an average surplus of 32 million m<sup>3</sup>, which represents 32 % of agricultural demand over a hydrological season. Moreover, in 1992 the model algorithm has succeeded in meeting the agricultural demand. However, classical dam management has failed to satisfy the agricultural requirement for the same year.

Based on the rule curves and the water balance equation performance at an hourly time step, table 4 shows that the dam reliability and resilience have increased respectively, over the period 1982-1992, from 40% to 70% and from 16% to 66%. Besides, vulnerability remained constant during the same period. The same indicators was performed by (Saha et al., 2017; T. Silva & Hornberger, 2019) to assess the dam performance.

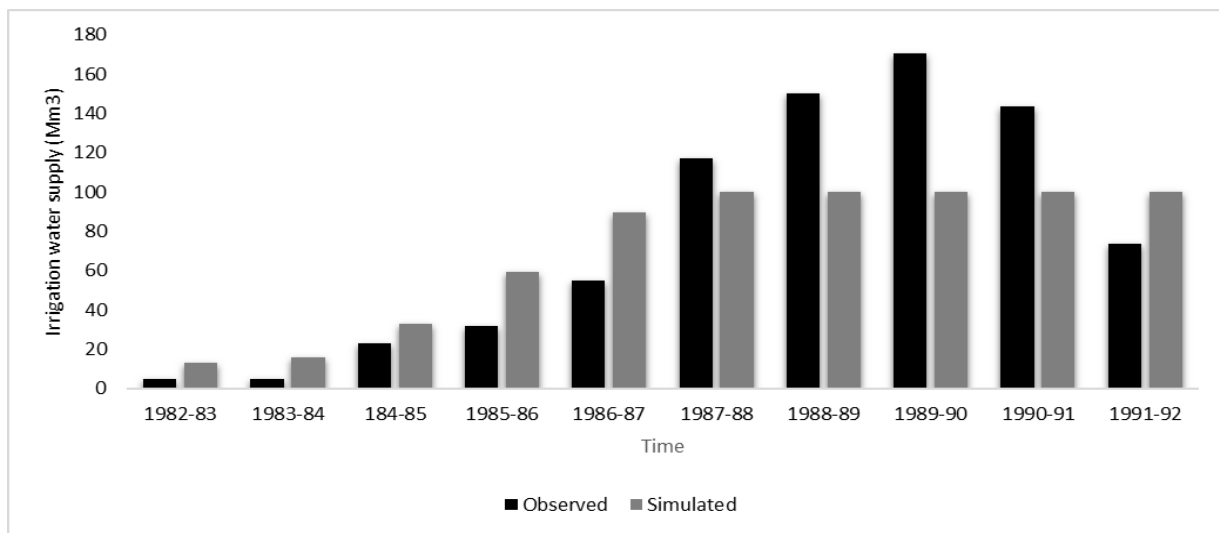

**Fig. 13:** Comparison between observed and simulated irrigation water supply

**Table 4:** Dam performance indicators

	Reliability	Resilience	Vulnerability
Classical dam management	40%	16%	5
Real time-dam management	70%	66%	5

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

#### 4.6 Hydropower production

The annual electricity consumption is 0.5 tonne of oil equivalent TEO / inhabitant (Taoumi, 2008). Besides, the average annual simulated hydropower production over this period is 57.64 GWH, which is equal to the annual consumption of 9912 inhabitants. In the case of a moderately rainy year, the hydropower production will be 89.4 GWH, which is equal to the annual consumption of 14857 inhabitants (Fig.14).

The average annual income from hydropower supply between 1982 and 1992 is equal to 57.6 Million Dirham. The decision-maker must take into account this vital budget to cover all expenses, including dam maintenance (Fig.15).

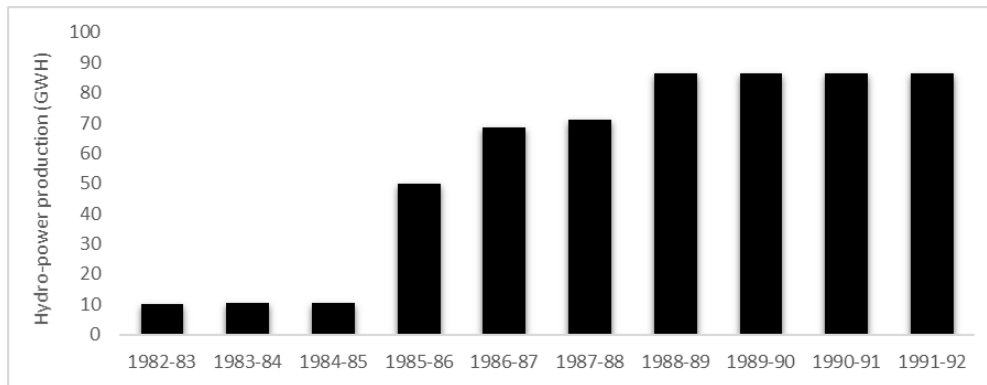


Fig. 14: Hydropower production (GWh) over the period (1982-1992)

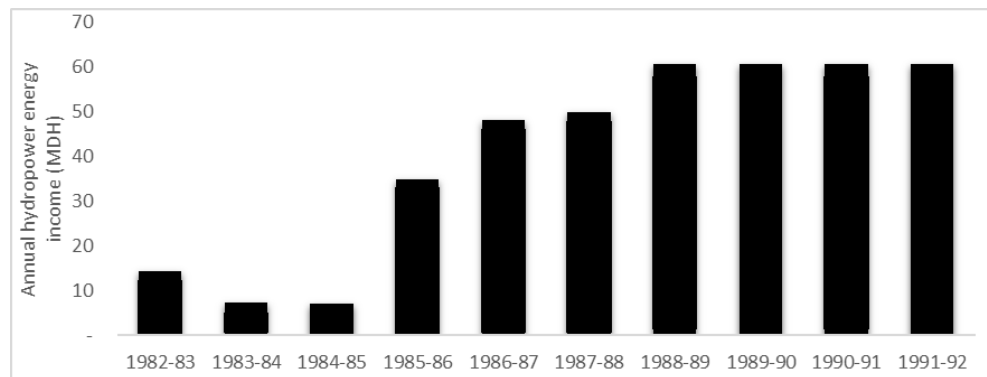


Fig. 15: Annual hydropower energy income (MDH) over the period (1982-1992)

#### Conclusions

The operational management program aims to improve the Hassan Addakhil dam efficiency by proposing a new adaptive approach for management by valorizing the water cubic meter and by demonstrating that the installation of a hydropower plant is an opportunity to produce clean electrical energy. These results can urge the decision-maker to think about improving dam management strategy, especially in an arid and semi-arid watershed.

The program provides a real-time regulation of the dam, which can help make an optimal schedule and project strategies related to droughts, impact mitigation, water security, energy conservation, and agriculture development, in case the input data projections are provided.

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

The results obtained during this reflection may be subject to specific errors inherent mainly in the nature and precision of data used and/or the lack of specific data. Indeed, the meteorological and hydrological time series used have several discontinuities and gaps. On the other hand, the number of rainfall and hydrometric stations used is insufficient for a precise assessment of the hydrological behavior at the catchment scale. Therefore, it is essential to optimize the network of measurements and ensure the quality of the instantaneous and daily data records. In this sense, it should be noted that the suggestions and recommendations given above must be considered when interpreting the results obtained by this study.

The adopted approach goes hand in hand with sustainable development goals. A sustainable environment can be attained by preserving, improving, and valuing the environment and natural resources in the long term, maintaining the principal ecological balances, on the risks, and the environmental impacts. A sustainable society can be maintained if it satisfies human needs and meets a social goal by encouraging the participation of all social groups in health, housing, consumption, education, employment, culture. Finally, a sustainable economy aims to develop growth and economic efficiency through sustainable production and consumption patterns (UN 1987), in other term switching from the linear to the circular economy.

## References

- Afilal, C. (2017). Water security in Morocco. <https://blogs.worldbank.org/arabvoices/water-security-morocco>
- Ajami, N. K., Hornberger, G. M., & Sunding, D. L. (2008). Sustainable water resource management under hydrological uncertainty. *Water Resources Research*, 44(11), 1–10. <https://doi.org/10.1029/2007WR006736>
- Anand, J., Gosain, A. K., & Khosa, R. (2018). Optimisation of multipurpose reservoir operation by coupling soil and water assessment tool (SWAT) and genetic algorithm for optimal operating policy (case study: Ganga River Basin). *Sustainability (Switzerland)*, 10(5). <https://doi.org/10.3390/su10051660>
- Appuhamige, M., & Susila, S. (n.d.). Effective Dam Operation Method Based on Inflow Forecasting for Senanayaka Samudra Reservoir, Sri Lanka.
- Avellà-Reus, F. M. C. S.-I. L. (2019). *Irrigation in the Mediterranean*. ISBN 978-3-030-03698-0
- Chaleeraktragoon, C., & Chinsomboon, Y. (2015). Dynamic rule curves for flood control of a multipurpose dam. *Journal of Hydro-Environment Research*, 9(1), 133–144. <https://doi.org/10.1016/j.jher.2014.11.002>
- Chu, X., Asce, A. M., & Steinman, A. (2009). Event and Continuous Hydrologic Modeling with HEC-HMS. 9437(November 2016). [https://doi.org/10.1061/\(ASCE\)0733-9437\(2009\)135](https://doi.org/10.1061/(ASCE)0733-9437(2009)135)
- Condés, S., & García-robredo, F. (2012). Forest Ecology and Management An empirical mixed model to quantify climate influence on the growth of *Pinus halepensis* Mill stands in South-Eastern Spain. *Forest Ecology and Management Journal*, 284, 59–68. <https://doi.org/10.1016/j.foreco.2012.07.030>
- Contreras, D., Guiot, J., Suarez, R., & Kirman, A. (2018). Reaching the human scale: A spatial and temporal downscaling approach to the archaeological implications of paleoclimate data. *Journal of Archaeological Science*, 93, 54–67. <https://doi.org/10.1016/j.jas.2018.02.013>
- De Silva M., T., & Hornberger, G. M. (2019). Assessing water management alternatives in a multipurpose reservoir cascade system in Sri Lanka. *Journal of Hydrology: Regional Studies*, 25(July), 100624. <https://doi.org/10.1016/j.ejrh.2019.100624>
- Dong, N., Yang, M., Yu, Z., Wei, J., & Yang, C. (2020). Water resources management in a reservoir-regulated basin: Implications of reservoir network layout on stream flow and hydrologic alteration. *Journal of Hydrology*, 586(March), 124903. <https://doi.org/10.1016/j.jhydrol.2020.124903>

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

Elhassnaoui, I., Moumen, Z., Serrari, I., & Bouziane, A. (2020). Reservoir Heightening as a Method to Ensure Water Security in Arid and Semi- Arid Regions Reservoir Heightening as a Method to Ensure Water Security in Arid and Semi- Arid Regions Moulay Driss Hasnaoui March. <https://doi.org/10.1145/3399205.3399236>

Elhassnaoui, I., Moumen, Z., Serrari, I., Bouziane, A., Ouazar, D., & Hasnaoui, M. I. (2019). Generation of synthetic design storm hyetograph and hydrologic modeling under HEC HMS for Ziz watershed. *International Journal of Innovative Technology and Exploring Engineering*, 8(10), 3308–3319. <https://doi.org/10.35940/ijtee.J1214.0881019>

Ezzine, H. (2017). Changement Climatique Dans Les Regions Concernees Par Les Programmes D ' Appui Au Pmv Finances Par Le Fida. [https://www.ifad.org/documents/38714170/41203546/AR2018\\_f\\_LONG.pdf/6f99df36-8bad-1cce-1537-221a06994f41](https://www.ifad.org/documents/38714170/41203546/AR2018_f_LONG.pdf/6f99df36-8bad-1cce-1537-221a06994f41)

Falkenmark, M., Lundqvist, J., & Widstrand, C. (1989). Macro-scale water scarcity requires micro-scale approaches: Aspects of vulnerability in semi-arid development. *Natural Resources Forum*, 13(4), 258–267. <https://doi.org/10.1111/j.1477-8947.1989.tb00348.x>

Fischer, G., Tubiello, F. N., van Velthuisen, H., & Wiberg, D. A. (2007). Climate change impacts on irrigation water requirements: Effects of mitigation, 1990-2080. *Technological Forecasting and Social Change*, 74(7), 1083–1107. <https://doi.org/10.1016/j.techfore.2006.05.021>

Gain, A. G. W. (2016). Millennium river basins. Measuring global water security towards sustainable development goals. <https://iopscience.iop.org/article/10.1088/1748-9326/11/12/124015/pdf>

Geetha, K., Mishra, S. K., Eldho, T. I., Rastogi, A. K., & Pandey, R. P. (2008). SCS-CN-based continuous simulation model for hydrologic forecasting. *Water Resources Management*, 22(2), 165–190. <https://doi.org/10.1007/s11269-006-9149-5>

Guariso, G., Haynes, K. E., & Whittington, D. (1981). Dam with Policy Implications. *Geographical analysis*, 13(4).

Gumindoga, W., Rwasoka, D. T., Nhapi, I., & Dube, T. (2017). Ungauged runoff simulation in Upper Manyame Catchment, Zimbabwe: Application of the HEC-HMS model. *Physics and Chemistry of the Earth*, 100, 371–382. <https://doi.org/10.1016/j.pce.2016.05.002>

Halwatura, D., & Najim, M. M. M. (2013). Application of the HEC-HMS model for runoff simulation in a tropical catchment. *Environmental Modelling and Software*, 46, 155–162. <https://doi.org/10.1016/j.envsoft.2013.03.006>

Hammani, A., Bouaziz, A., & S, B. A. (2012). Les pratiques de gestion de l ' eau dans les oasis de Jorf et Aoufous ( vallée de Tafilalet ). 40988.

Hashimoto, T., Stedinger, J. R., & Loucks, D. P. (1982). Reliability, Resiliency, and Vulnerability Criteria. *Water Resources Research*, 18(1), 14–20.

Hejazi, M. I., & Cai, X. (2011). Advances in Water Resources Building more realistic reservoir optimization models using data mining – A case study of Shelbyville Reservoir. *Advances in Water Resources*, 34(6), 701–717. <https://doi.org/10.1016/j.advwatres.2011.03.001>

Herath, S. M., Sarukkalgige, P. R., & Nguyen, V. T. Van. (2016). A spatial temporal downscaling approach to development of IDF relations for Perth airport region in the context of climate change. *Hydrological Sciences Journal*, 61(11), 2061–2070. <https://doi.org/10.1080/02626667.2015.1083103>

Hofer, M., Marzeion, B., & Mölg, T. (2015). A statistical downscaling method for daily air temperature in data-sparse, glaciated mountain environments. *Geoscientific Model Development*, 8(3), 579–593. <https://doi.org/10.5194/gmd-8-579-2015>

Chrissanthou, V., & Kaffas, K. (2014). Application of a continuous rainfall-runoff model to the basin of Kosynthos river using the hydrologic software HEC-HMS. *Global NEST Journal*, 16(1), 188–203.

Jaiswal, R. K., Yadav, R. N., Lohani, A. K., Tiwari, H. L., & Yadav, S. (2020). Water balance modeling of Tandula (India) reservoir catchment using SWAT. *Arabian Journal of Geosciences*. <https://doi.org/10.1007/s12517-020-5092-7>

Jiménez Cisneros, B. E., Oki, T., Arnell, N. W., Benito, G., Cogley, J. G., Döll, P., Jiang, T., Mwakalila, S. S., Kundzewicz, Z., & Nishijima, A. (2015). Freshwater resources. *Climate Change 2014 Impacts, Adaptation and Vulnerability: Part A: Global and Sectoral Aspects*, 229–270. <https://doi.org/10.1017/CBO9781107415379.008>

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

Jingwen Wu, Haw Yen Primary, J. G. A. (2020). Development of Reservoir Operation Functions in SWAT + for National Water Quantity Department of Civil and Environmental Engineering, Lehigh University, Bethlehem , Ven Te Chow Hydrosystems Laboratory , Department of Civil and Environmental Engineering. *Journal of Hydrology*, 124556. <https://doi.org/10.1016/j.jhydrol.2020.124556>

Kaito, C., Ito, A., Kimura, S., Kimura, Y., Saito, Y., & Nakada, T. (2000). Topotactical growth of indium sulfide by evaporation of metal onto molybdenite. In *Journal of Crystal Growth* (Vol. 218, Issue 2). [https://doi.org/10.1016/S0022-0248\(00\)00575-3](https://doi.org/10.1016/S0022-0248(00)00575-3)

Karami, S., & Karami, E. (2019). Sustainability assessment of dams. *Environment, Development and Sustainability*, April 2018. <https://doi.org/10.1007/s10668-019-00326-3>

ABH Ziz-Guir-Rheriss. (2018). Etude d'actualisation du plan directeur d'aménagement integre des ressources en eau des bassins hydrauliques du guir-ziz-rheris et maider.

Milano, M., Ruelland, D., Dezetter, A., Fabre, J., Ardoin-bardin, S., & Servat, E. (2013). Modeling the current and future capacity of water resources to meet water demands in the Ebro basin. *Journal of Hydrology*, 500, 114–126. <https://doi.org/10.1016/j.jhydrol.2013.07.010>

Mokhtari, N., Mrabet, R., Lebailly, P., & Bock, L. (2014). Spatialisation des bioclimats, de l' aridité et des étages de végétation du Maroc. *Rev. Mar. Sci. Agron. Vét.*, 50–66.

Molle, F. (2017). *Conflicting Policies: Agricultural Intensification vs. Water Conservation in Morocco*, 1, 1–48.

Moriassi, D., Arnold, J., & Liew, M. W. Van. (2007). Model Evaluation Guidelines for Systematic Quantification of Accuracy in Watershed Simulations. May 2007. <https://doi.org/10.13031/2013.23153>

Morocco. (2014). Drought Management in Morocco. Workshop on Developing and Implementing Mitigation and Preparedness Of Water Scarcity and Drought (WS&D) Management Plans Zaragoza - Madrid, Spain, May 6-9, 2014, 38.

Nash, E., & Sutcliffe, V. (1970). PART I- A DISCUSSION OF PRINCIPLES. 10, 282–290.

Nations, U. (1987). *Our Common Future*. <https://sustainabledevelopment.un.org/>

Okkan, U., & Kirdemir, U. (2018). Investigation of the Behavior of an Agricultural-Operated Dam Reservoir under RCP Scenarios of AR5-IPCC. *Water Resources Management*, 32(8), 2847–2866. <https://doi.org/10.1007/s11269-018-1962-0>

Omar, M. (2014). Evaluation of actions for better water supply and demand management in Fayoum, Egypt using RIBASIM. *Water Science*, 27(54), 78–90. <https://doi.org/10.1016/j.wsj.2013.12.008>

Philandras, C. M., Nastos, P. T., Kapsomenakis, J., Douvis, K. C., Tselioudis, G., & Zerefos, C. S. (2011). Long term precipitation trends and variability within the Mediterranean region. *Natural Hazards and Earth System Sciences*, 11(12), 3235–3250. <https://doi.org/10.5194/nhess-11-3235-2011>

Rebora, N., Silvestro, F., Rudari, R., Herold, C., & Ferraris, L. (2016). Downscaling stream flow time series from monthly to daily scales using an auto-regressive stochastic algorithm: StreamFARM. *Journal of Hydrology*, 537, 297–310. <https://doi.org/10.1016/j.jhydrol.2016.03.015>

Sachindra, D. A., & Perera, B. J. C. (2018). Annual statistical downscaling of precipitation and evaporation and monthly disaggregation. *Theoretical and Applied Climatology*, 131(1–2), 181–200. <https://doi.org/10.1007/s00704-016-1968-6>

Sachs, J. D. (2012). From millennium development goals to sustainable development goals. *The Lancet*, 379(9832), 2206–2211. [https://doi.org/10.1016/S0140-6736\(12\)60685-0](https://doi.org/10.1016/S0140-6736(12)60685-0)

Saha, S., Roy, D., & Mazumdar, A. (2017). Performance of a system of reservoirs on futuristic front. *Applied Water Science*, 7(6), 2667–2680. <https://doi.org/10.1007/s13201-016-0484-2>

Scharffenberg, W. (2016). *Hydrologic Modeling System User's Manual*. Hydrologic Engineering Center, August, <https://www.hec.usace.army.mil/>

Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:  
@IntoInsights

Shah, Z., & Kumar, M. D. (2008). In the midst of the large dam controversy: Objectives, criteria for assessing large water storages in the developing world. *Water Resources Management*, 22(12), 1799–1824. <https://doi.org/10.1007/s11269-008-9254-8>

Sharifi, E., Saghafian, B., & Steinacker, R. (2019). Downscaling Satellite Precipitation Estimates With Multiple Linear Regression, Artificial Neural Networks, and Spline Interpolation Techniques. *Journal of Geophysical Research: Atmospheres*, 124(2), 789–805. <https://doi.org/10.1029/2018JD028795>

Silva, A. T., & Portela, M. M. (2012). Modèle de désagrégation des débits mensuels utilisant une nouvelle approche de la méthode des fragments. *Hydrological Sciences Journal*, 57(5), 942–955. <https://doi.org/10.1080/02626667.2012.686695>

Silva, T., & Hornberger, G. (2019). Journal of Hydrology : Regional Studies Assessing water management alternatives in a multipurpose reservoir cascade system in Sri Lanka. *Journal of Hydrology: Regional Studies*, 25(August), 100624. <https://doi.org/10.1016/j.ejrh.2019.100624>

Sparrow, F. T., Preckel, P. V., Gotham, D. J., Bowen, B. H., & Yu, Z. (2011). Regional energy markets and the cost of natural flow dam operation. *Energy Systems*, 2(3–4), 325–357. <https://doi.org/10.1007/s12667-011-0039-4>

Taoumi, M. (2008). Les energies renouvelables au maroc. [www.retse.com/old/documentos/ponencia\\_cder\\_Lppt](http://www.retse.com/old/documentos/ponencia_cder_Lppt)

Thongwan, T., Kangrang, A., & Prasanchum, H. (2019). Multi-objective future rule curves using conditional tabu search algorithm and conditional genetic algorithm for reservoir operation. *Heliyon*, 5(9), e02401. <https://doi.org/10.1016/j.heliyon.2019.e02401>

Tığrek, Ş., Göbelez, Ö., & Aras, T. (2009). Sustainable management of reservoirs and preservation of water quality. 53, 41–53. <http://om.ciheam.org/article.php?IDPDF=801179>

Tinoco, V., Willems, P., Wyseure, G., & Cisneros, F. (2016). Journal of Hydrology: Regional Studies Evaluation of reservoir operation strategies for irrigation in the Macul Basin , Ecuador. *Biochemical Pharmacology*, 5, 213–225. <https://doi.org/10.1016/j.ejrh.2015.12.063>

USDA. (1986). Urban hydrology for small watershed TR-55. Technical release no. 55. <https://www.nrcs.usda.gov/>

World Bank. (2018). Beyond Scarcity: Water Security in the Middle East and North Africa. MENA Development Report. Washington, DC: World Bank. © World Bank. <https://openknowledge.worldbank.org/handle/10986/27659> License: CC BY 3.0 IGO.

Wu, J., Yen, H., Arnold, J. G., Yang, Y. C. E., Cai, X., & White, M. J. (2020). Development of Reservoir Operation Functions in SWAT + for National Environmental Assessments Development of reservoir operation functions in SWAT + for national environmental assessments. *Journal of Hydrology*, 583(January), 124556. <https://doi.org/10.1016/j.jhydrol.2020.124556>

Wu, Y., & Chen, J. (2013). Estimating irrigation water demand using an improved method and optimizing reservoir operation for water supply and hydropower generation : A case study of the Xinfengjiang reservoir in southern China. *Agricultural Water Management*, 116, 110–121. <https://doi.org/10.1016/j.agwat.2012.10.016>

Zhao, Q., Liu, S., Deng, L., Dong, S., Yang, J., & Wang, C. (2012). The effects of dam construction and precipitation variability on hydrologic alteration in the Lancang River Basin of southwest China. *Stochastic Environmental Research and Risk Assessment*, 26(7), 993–1011. <https://doi.org/10.1007/s00477-012-0583-z>



Make your research more visible, join the Twitter account of INSIGHTS INTO REGIONAL DEVELOPMENT:

@IntoInsights

### ***Acknowledgements***

*This research was partly supported by the project, which has received funding from the European Union's Horizon 2020 research and innovation programme European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme Marie Skłodowska-Curie Research and Innovation Staff Exchanges ES H2020-MSCA-RISE-2014 CLUSDEV MED (2015-2019) Grant Agreement Number 645730730*

**Ismail ELHASSNAOUI**

ORCID ID: <https://orcid.org/0000-0003-1979-566X>

**Zineb MOUMEN**

ORCID ID: <https://orcid.org/0000-0003-3413-6240>

**Manuela Tvaronavičienė**

ORCID ID: <https://orcid.org/0000-0002-9667-3730>

**Mohamed OUARANI**

ORCID ID: <https://orcid.org/0000-0002-1468-0487>

**Mohamed BEN-DAOUD**

ORCID ID: <https://orcid.org/0000-0002-9487-1215>

**Issam SERRARI**

ORCID ID: <https://orcid.org/0000-0002-7832-6700>

**Ikram LAHMIDI**

ORCID ID: <https://orcid.org/0000-0002-6711-9853>

**M.A.S. WAHBA**

ORCID ID: <https://orcid.org/0000-0003-3451-6155>

**Ahmed BOUZIANE**

ORCID ID: <https://orcid.org/0000-0003-4311-7439>

**Driss OUAZAR**

ORCID ID: <https://orcid.org/0000-0002-2472-3532>

**Moulay Driss HASNAOUI**

ORCID ID: <https://orcid.org/0000-0002-6585-6112>

---

Copyright © 2021 by author(s) and VsI Entrepreneurship and Sustainability Center

This work is licensed under the Creative Commons Attribution International License (CC BY).

<http://creativecommons.org/licenses/by/4.0/>

