



HAL
open science

Impact of dynamic shelter allocation in online population evacuation management

Hassan Idoudi, Mostafa Ameli, Cyril Nguyen van Phu, Mahdi Zargayouna,
Abderrezak Rachedi

► **To cite this version:**

Hassan Idoudi, Mostafa Ameli, Cyril Nguyen van Phu, Mahdi Zargayouna, Abderrezak Rachedi. Impact of dynamic shelter allocation in online population evacuation management. TRB 2022, Transportation Research Board 101st Annual Meeting, Jan 2022, Washington, DC, United States. hal-03680836

HAL Id: hal-03680836

<https://hal.science/hal-03680836v1>

Submitted on 29 May 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

1 **IMPACT OF DYNAMIC SHELTER ALLOCATION IN ONLINE POPULATION**
2 **EVACUATION MANAGEMENT**

3
4
5

6 **Hassan Idoudi (corresponding author)**

7 🏠 University Gustave Eiffel, COSYS, GRETTIA, Paris, France
8 🏠 University Gustave Eiffel, LIGM, Paris, France
9  <https://orcid.org/0000-0003-2833-9797>
10 ✉ hassan.idoudi@univ-eiffel.fr


11

12 **Mostafa Ameli**

13 🏠 University Gustave Eiffel, COSYS, GRETTIA, Paris, France
14  <https://orcid.org/0000-0002-2470-6812>
15 ✉ mostafa.ameli@univ-eiffel.fr


16

17 **Cyril Nguyen Van Phu**

18 🏠 University Gustave Eiffel, COSYS, GRETTIA, Paris, France
19  <https://orcid.org/0000-0003-0115-8697>
20 ✉ cyril.nguyen-van-phu@univ-eiffel.fr

21

22 **Mahdi Zargayouna**

23 🏠 University Gustave Eiffel, COSYS, GRETTIA, Paris, France
24  <https://orcid.org/0000-0002-1221-8977>
25 ✉ mahdi.zargayouna@univ-eiffel.fr

26

27 **Abderrezak Rachedi**

28 🏠 University Gustave Eiffel, LIGM, Paris, France
29  <https://orcid.org/0000-0002-8777-3334>
30 ✉ abderrezak.rachedi@univ-eiffel.fr

31

32

33

34 Word Count: 6105 words + 4 table(s) × 250 = 7105 words

35

36

37

38 Paper submitted for presentation at the 101th Annual Meeting Transportation Research Board,
39 Washington D.C., January 2022 to AMR20 committee on "Disaster Response, Emergency
40 Evacuations, and Business Continuity"

41

42

43 Submission Date: May 29, 2022

1 ABSTRACT

2 This study proposed a new framework to solve the network evacuation problem, considering a
3 dynamic allocation of evacuees to shelters. Although many studies have been performed on this
4 problem with static settings, there are few studies in the literature that address this problem in a dy-
5 namic context. The proposed framework couples and solves the dynamic traffic assignment (DTA)
6 and dynamic shelter allocation problem (SAP) using agent-based dynamic simulation. The model
7 for the SAP aims to satisfy system operator interests by allocating evacuees to shelters in a system
8 optimal manner. The system determines the best shelters for evacuees, and evacuees tend to reach
9 their shelters as fast as possible. Therefore, the DTA model is formulated for the user equilibrium.
10 It means that all evacuees minimize their own travel time. We validate our methodology on the real
11 network of Luxembourg and evaluate its performance in front of an advanced method that solves
12 the SAP and DTA separately, i.e., the SAP is completely solved before the evacuation process.
13 The results show that computing dynamic shelter allocation can improve mean evacuation time
14 and significantly reduce the network clearance time compared to the methods with fixed shelter
15 allocation plans. This means that considering the network state in the SAP can provide a more
16 effective evacuation plan. Moreover, we perform a complete analysis for the computation time of
17 the framework and show that solving the dynamic SAP is not computationally expensive compared
18 to the profit providing for the evacuation problem.

19

20 *Keywords:* Network evacuation, disaster management, shelter allocation, dynamic traffic assign-
21 ment.

1 INTRODUCTION

2 Natural disasters endanger the life of the entire population of the devastated areas. The frequency
3 of natural disasters is increasing, causing more deaths and destroying the environment (Zuckerman
4 et al., 1). In order to mitigate or avoid losses caused by disasters, the best way is to evacuate the
5 people from the affected areas to safe areas or shelters. Evacuation orders are then crucial and
6 should be effective in order to execute the evacuation process safely. Evacuation plans directly
7 depend on the type of disaster. In addition, the objectives of the plan can be targeted based on
8 the disaster type. The most frequently used objectives in the development of evacuation models
9 are as follows: minimizing the total or the mean evacuation time (Hajjem et al., Bayram and
10 Yaman, Bayram et al., 2–4), minimizing the network clearance time (Hsu and Peeta, 5), (Lim et al.,
11 6), (Zhao et al., 7), and minimizing the total travelled distance (Sheu and Pan, 8), (Alçada-Almeida
12 et al., 9). The network clearance time is the time that the last evacuee in the network leaves the
13 hazardous zone and reaches safety. The total evacuation time is defined as the sum of all travel
14 times of all evacuees. This is a measure of how long the evacuee spends in the hazardous area in
15 total and gives us an evaluation of how successful the evacuation operation was.

16 The evacuation time depends on two choices of evacuees: the locations of shelters and the
17 evacuation route toward the selected shelter. (Sherali et al., 10) developed a model for shelter selec-
18 tion to tackle the problem of determining shelter locations in order to have a successful evacuation
19 plan with minimum evacuation time.

20 The route choice models of evacuees used in the literature are based on three principles:
21 user equilibrium (UE) known as Nash Equilibrium, system optimum (SO), and the nearest alloca-
22 tion (NA) approach. The difference between these models relies on the evacuees' behaviors. In
23 the Nash Equilibrium model, each traveler aims to minimize his individual travel time. From the
24 system point of view, the preferred goal to achieve is to minimize the total evacuation time. Under
25 the SO principle, travelers may not be assigned to the fastest route for the benefit of the overall
26 system, which could be difficult to accept by evacuees. The NA model aims to assign evacuees to
27 the shortest path based on the distance between the origins (hazardous zone) and the destination
28 (shelters). Obviously, such a model could not lead to acceptable results by both evacuees or system
29 operators.

30 Mathematically speaking, finding UE or SO route choices for evacuees is known as traffic
31 assignment problems. The traffic assignment models are classified into two main categories: static
32 and dynamic models. Static traffic assignment (STA) models suppose that link flows and link
33 travel times are time-independent, while, in dynamic traffic assignment (DTA) models, the link
34 flow and link travel times are time-dependent (Daskin, 11). Despite the fact that static models are
35 usually employed for planning problems, they cannot correctly describe traffic congestion because
36 they do not consider capacity constraints and spillbacks. DTA models aim to capture the dynamic
37 relationships between paths, time, and network characteristics (Levin et al., 12). Since the 1970s,
38 DTA models have been used to analyze long-term and short-term planning problems (Han et al.,
39 13). A traffic assignment model can be flow-based or trip-based. Flow-based models determine
40 the flow on each path, while trip-based models specify the number of travelers (particles) on each
41 path, making the traffic assignment problem much harder because it must be solved in a discrete
42 setting (Ameli, 14).

43 This study aims to propose an evacuation model capable of dynamically assigns evacuees
44 to the best shelter taking into account the current traffic conditions of congestion measured by
45 travel time. Our model uses simulation-based DTA in order to consider traffic dynamics during

1 the evacuation periods. In our model, we solve the two problems: (i) shelter allocation problem
2 (SAP) to minimize the total travel time (under SO) and (ii) traffic assignment for UE considering
3 the travelers' selfish behavior. However, we perform UE assignment in evacuee routing. And this
4 is because users are likely to accept the system suggestion for shelters as they do not have enough
5 information about shelters capacity and characteristics. Meanwhile, for route choice they tend to
6 behave greedily and go for their own individual interests by minimizing their own travel time.

7 Note that our model covers both types of decisions that could be conflicting. To this end, we
8 propose a simulation-based framework to combine and solve the SAP and the DTA. In addition, we
9 compare the efficiency of our methodology with existing models by using performance measures,
10 e.g., mean evacuation time, network clearance time, and average speed. Note that similar to most
11 evacuation planning models in the literature, and as suggested by FEMA (15), our model is generic
12 and not related to a precise type of disaster.

13 Our methodology consists of creating a linear formulation of the shelter allocation, tak-
14 ing into account the number of opened shelters and their capacity, and deploying the C-logit model
15 used for DTA. We have created a flowchart that explains every step of our solution and the method-
16 ology adopted. Finally, we have developed a test case using the city of Luxembourg and compare
17 it to existing models.

18 The rest of the paper is organized as follows. In the next section, we review the literature
19 on network evacuation problems, focusing on shelter allocation and traffic assignment. Then,
20 we highlight our contributions to the literature. In Section "Problem Formulation", we define
21 our problem formally and present the model used by the simulator. In Section "Methodological
22 Framework", we present the framework to solve the evacuation problem. The section "Numerical
23 Experiments" is dedicated to present our case study and optimization scenarios. We discuss the
24 results in Section "Results" and present the concluding remarks in the last section.

25 LITERATURE REVIEW AND CONTRIBUTION STATEMENT

26 In the literature, many studies focus on evacuation models. They solve both shelter allocation
27 or/and traffic assignment to minimize the evacuation time or any user's cost or system benefit. In
28 this section, we revised the related works to this study. (Sherali et al., 10) used a p-median model
29 for shelter site selection with a traffic assignment model that assigns evacuees to the routes in a SO
30 manner. This model aims to minimize the evacuation time of people moving from hazard zones to
31 shelters. To solve this problem, they have used a heuristic algorithm. In addition, they have used
32 a static traffic assignment model to solve the routing problem, which is incapable of capturing the
33 real state of congestion and the dynamics of traffic evolution.

34 Flood disasters happen in many places and the reaction of evacuees responds dynamically
35 to changing conditions. Therefore, (Gama et al., 16) proposed a multi-period location-allocation
36 model based on capacitated p-median problem considering conditions changing. Their goal was to
37 minimize the overall network distance traveled by evacuees to reach shelters. To solve the proposed
38 formulation of the problem, they have used a simulated annealing approach. For routing purposes,
39 they have used the distance between hazardous nodes and shelters. The major critic of this study
40 is the difficulty of solving the complex problem within a reasonable time (Ma et al., 17).

41 Bayram et al. (4) proposed a non-linear mixed-integer program to formulate a static Con-
42 strained System Optimal (CSO) with an additional constraint related to tolerance level, assuming
43 that evacuees accept to be assigned to routes that rely on a tolerance level. They have proposed a
44 scenario-based approach to minimize the total evacuation, making decisions on two variables: shel-

1 ter selecting variable and path assignment variable. Furthermore, the authors evaluate their model
2 with a fairness measure. They solved the problem with an exact method called second-order cone
3 programming. The results are generated for Sioux Falls network, the Istanbul European and Is-
4 tanbul Anatolian networks under earthquake conditions. This study represents the most advanced
5 approach in solving the STA coupled with the SAP.

6 Many studies used simulation-based traffic assignment models to represent the network
7 evacuation problem in a realistic way. However, to the best of our knowledge, there is no study
8 in the literature that addresses and solves the SAP and the DTA simultaneously. For example,
9 Peeta and Mahmassani (18) created DTA models for the objective of system optimal (SO) and
10 user equilibrium (UE) with a given shelter allocation using an iterative search solution employing
11 the simulator DYNASMART (Jayakrishnan et al., 19). They compute new travel times and assign
12 travelers based on the new travel times using the method of successive averages (MSA).

13 (Zhang et al., 20) proposes a method to optimize productivity (the greatest utilization of
14 the available network capacity) using phased (considering time intervals) evacuation process be-
15 fore hazard occurrence and user equilibrium constraints for routing using the TRANSIMS simu-
16 lator. But TRANSIMS has not received good exposure, and its capabilities are unknown to many
17 researchers in the transportation field (Jeihani, 21). Besides, (Zhu et al., 22) have used Matsim
18 to compute simulation-based DTA. They have used a study to estimate socioeconomic parameters
19 included in the process of evacuee decision-making, proposing a method for generating the evacu-
20 ation demand. (Liu and Lim, 23) proposes a scenario-based strategy to route people and to select
21 shelters. The 2011 Brisbane flood event is considered in this paper. A simulation of scenarios
22 was conducted using an agent-based simulation of households. The shelter assignment was based
23 on the shortest distance between hazardous nodes and shelters, and routing was statically resolved
24 based on the shortest distance. All the mentioned studies either use a give shelter allocation or
25 solve DTA and SAP separately. This study aims to fill this gap by combining and solving both the
26 DTA and the SAP.

27 The main contributions of this study are (i) investigate the impact of the dynamic shelter
28 allocation on the online network evacuation problem; (ii) develop a novel model to couple the
29 SAP and the DTA problem, which offers for the first time to formulate a fully simulation-based
30 dynamic evacuation problem that integrates system operators' decision to choose the allocation
31 of evacuees to shelters and evacuees interests while selecting their routes to shelters. Moreover,
32 our model considers the dynamic location-allocation model distinguished from most models in the
33 literature that solves the problem in a static setting. The proposed model is a multi-period model
34 that combines system operators and user needs. Besides, we considered the problem with a real
35 network of Luxembourg city and without any assumption of super origin/sink.

36 **PROBLEM FORMULATION**

37 An evacuee has two main decisions to be made in network evacuation problems: (i) Which shelter
38 to choose as the destination, and (ii) Which route to choose in order to reach the destination. By
39 taking into account all evacuees, the first decision problem is the SAP and the second one is the
40 DTA problem. We aim to formulate the SAP satisfying the system operators interests (SO) in order
41 to minimize the total evacuation time. However, the DTA problem is formulated to address the UE.
42 In a sense, this scenario is equivalent to a real-world scenario wherein the vehicles are guided by
43 the system to choose their shelter (destination) as they do not have the information about the shelter
44 conditions and capacities. Afterward, they choose their path toward their chosen shelters selfishly

1 in order to reach the shelter with minimum travel time.
 2 Let us define our evacuation problem on a directed graph representing a traffic network
 3 $G = (N, A)$, where N is the set of nodes, A is the set of edges (links). We define O as the set of
 4 origin nodes that determines the risky zone to be evacuated and S as the set of destination nodes
 5 that represent safe locations, i.e., shelter sites. Without loss of generality, we assume that O and
 6 S are disjoint subsets of N ($O, S \subset N$). We denote by w_o the amount of demand of each origin o ,
 7 $o \in O$, this demand represents the number of vehicles that should be evacuated. We note by x_{os} the
 8 integer decision variable that determine the number of evacuees allocated to the pair having origin
 9 o and destination s . We define the binary variable y_s as the decision variable of the selection of
 10 shelter s . The t_{os}^* is the minimum travel time between origin o and destination s . In most studies,
 11 the calculation of travel time is based on a static formulation of the traffic assignment problem
 12 that uses a convex travel time function (BPR function) Bayram (24). In our case, we aim to use a
 13 dynamic simulator to provide us the real-time information for the travel time. Therefore, t_{os}^* is a
 14 given parameter at time of solving this problem. This transforms the model to the linear setting,
 15 thus, we can formulate this problem with linear integer programming. We define c_s as the capacity
 16 of shelter s and M as the maximum allowable number of opened shelters. The full list of the
 17 important notations of this paper is presented in table 1.

TABLE 1: Table of notations

O	Set origin nodes, subset of set of nodes, $O \subset N$.
S	Set destination nodes, subset of set of nodes, $S \subset N$.
o	Index of origin node, $o \in O$.
s	Index of destination node, $s \in S$.
t_{os}^*	Minimum experienced travel time form origin o and destination s .
t_{os}	Experienced travel time form origin o and destination s .
w_o	Amount of demand from origin o .
c_s	Capacity of shelter s , limit number of evacuee allocated to shelter s .
M	Maximum number of open shelters.
C	OD pairs, subset of origin \times destination nodes, $C \subset O \times S$.
c	Index of origin-destination (OD) pair, $c \in C$, $c = os$.
P_c^α	Set of paths for c in departure time interval α .
$P_c^{\alpha*}$	Set of shortest paths for c in departure time interval α .
p	Index of path, $p \in P_c^\alpha$.
p^*	Index of shortest path, $p^* \in P_c^{\alpha*}$.
Tr_c^α	List of trips which travel for c in departure time interval. α .
Tr_p^α	List of trips which travel for c on path p in departure time interval α , $Tr_p^\alpha \subset Tr_c^\alpha$.
tr	Index of trip, $tr \in Tr_c^\alpha$.
$t_{tr,p}^\alpha$	Experienced travel time of trip tr on path p in departure time α .
$t_c^{\alpha*}$	Minimum experienced travel time for c in departure time interval α .
$n(A)$	Cardinality of set A .

18 The goal of the SAP is to calculate the SO. The solution of this problem is the allocation
 19 of evacuees to shelters for the minimum total evacuation time (TET) based on the current travel
 20 time from risky nodes to shelters. The p-median model is the most common approach to represent

1 the shelter location-allocation problem under different types of hazards like hurricanes, typhoons,
 2 tsunamis, etc [Ma et al. \(17\)](#). due to its global objective that makes it applicable in most cases of
 3 hazard. This global objective prioritizes efficiency and fairness over users preferences by minimiz-
 4 ing the overall evacuation time which represents the SO Here, the mathematical model for the SO
 5 shelter allocation is based on the p-median model [Hakimi \(25\)](#):

$$\min \sum_{o \in O} \sum_{s \in S} t_{os}^* x_{os} \quad (1)$$

$$s.t. \sum_{s \in S} x_{os} = w_o; \quad \forall o \in O, \quad (2)$$

$$\sum_{o \in O} x_{os} \leq c_s y_s; \quad \forall s \in S, \quad (3)$$

$$\sum_{s \in S} y_s \leq M, \quad (4)$$

$$x_{os} \leq w_o y_s; \quad \forall o \in O, \forall s \in S, \quad (5)$$

$$x_{os} \geq 0; \quad \forall o \in O, \forall s \in S, \quad (6)$$

$$y_s \in \{0, 1\}; \quad \forall s \in S. \quad (7)$$

6 Objective function (1) represents the system operator's objective. We minimize the total
 7 travel time of evacuees from all origins to all chosen shelters. Constraints (2) ensures that all the
 8 demand from origin node o is evacuated. Constraints (3) forbids assigning evacuees to shelters
 9 exceeding the specified shelters capacity (C_s). Constraints (4) specifies a fixed number of open
 10 shelters. Constraints (5) forbids assigning evacuees to non-opened shelters. Constraints (6) and (7)
 11 are variable restrictions.

12 Note that the presented model is categorized as an NP-hard problem [Sherali and Nordai](#)
 13 [\(26\)](#). The SAP provides us the demand from each origin o to each shelter s , i.e, OD matrix for
 14 the DTA model. C denotes the set of origin-destination pairs, $C \subset S \times O$. As mentioned before,
 15 in order to successfully formulate each part of our model, we need, not only determine the shelter
 16 allocation in a system optimal fashion but also route evacuees from risky zones to specified shelters
 17 in a way that they satisfy the UE conditions. We define the UE conditions based on the [Wardrop](#)
 18 [\(27\)](#) first principle. While we solve the SAP at a given time, the DTA problem has to be solved
 19 time-dependently. In other words, we consider the same graph G with the time dependent demand
 20 of each origin. The finite time period of interest is the planning horizon H defined as the total
 21 duration considered. This total duration is discretized into a set of small time intervals indexed
 22 by α ($\alpha \in T = \{\alpha_0, \alpha_0 + \eta, \alpha_0 + 2\eta, \dots, \alpha_0 + M\eta\}$ and $\alpha_0 + M\eta = H$). η is the duration of the
 23 time intervals. Note that the departure time of evacuees are fixed in this study. In addition, the
 24 minimum path travel time is defined as the shortest path. In this study, we use trip-based simulator
 25 in which each traveler is a particle in the network. Thus The dynamic traffic network equilibrium
 26 conditions with given travel demand and the users' departure time for the aforementioned traffic
 27 network equilibrium problem are [Ameli et al. \(28\)](#):

$$t_{tr,p}^\alpha - t_c^{\alpha*} \geq 0 \quad ; \forall c \in C, p \in P_c^\alpha, \alpha \in T \quad (8)$$

$$n(Tr_p^\alpha)(t_{tr,p}^\alpha - t_c^{\alpha*}) = 0 \quad ; \forall c \in C, p \in P_c^\alpha, \alpha \in T \quad (9)$$

$$n(Tr_p^\alpha) \geq 0 \quad ; \forall p \in P_c^\alpha, \alpha \in T \quad (10)$$

1 Equation 8 ensures the definition of the shortest path. Equation 9 is the main condition
 2 of the UE which guarantees that all users travel on shortest path with minimum travel time at UE
 3 state. The non-negativity of $n(Tr_p^\alpha)$ is hold by equation 10. Lu et al. (29) proved that in the trip-
 4 based setting, solving the UE problem is equivalent to solve a non-linear problem to minimize the
 5 user delay function. The delay is defined as the difference between the user travel time and the
 6 shortest path travel time on the same c . Therefore, the solution to this UE problem is equivalent to
 7 solve the following variational inequality Sbayti et al., Ameli et al. (30, 31):

$$\sum_{c \in C} \sum_{p \in P_c^\alpha} t_{tr,p}^* [n(Tr_c) - n(Tr_p^*)] \geq 0 \quad (11)$$

8 where $n(Tr_p^*)$ is the optimal number of trips on path p and $t_{tr,p}^*$ is the optimal travel time of trips
 9 on path p . $n(Tr_c), n(Tr_p^*) \in \mathcal{H}$. \mathcal{H} is a set feasible solution satisfying the equilibrium.

10 In the simulation-based DTA, at each departure time interval, we tend to attain the UE state
 11 so that each vehicle could not reduce their trip travel time by changing the chosen route. To achieve
 12 this condition, we iteratively run both phases optimization and simulation. The optimization deter-
 13 mines the route choice of vehicles and in the simulation part, we simulate the trajectories on paths
 14 by executing a dynamic simulation of vehicles taking specified routes. The model used to assign
 15 users to the route is the C-logit mechanism (Cascetta et al., 32).

The C-logit model is based on the logit model (Cascetta et al., 32) with the assumption that
 all route alternatives travel times are identically and independently distributed Gumbel variates
 (Daskin, 11). C-logit presents a probability $Pr(k)$ for selecting paths the formula is shown below:

$$pr(k) = \frac{\exp[\theta \cdot (t_k - CF_k)]}{\sum_{h \in P_{c,\alpha}} \exp[\theta \cdot (t_h - CF_h)]} \forall k \in P_{c,\alpha}, \forall c \in C \quad (12)$$

16 θ denotes dispersion parameter of the travel time perception among vehicles. t_k represents the
 17 travel time on path k . the set $P_{c,\alpha}$ is the route set for c OD pair.

18 CF_k is the ‘‘commonality factor’’ of the route k that determines the degree of overlap between the
 19 current path and all alternative routes. this commonality factor is calculated using the following
 20 formula:

$$CF_k = \beta_0 \ln \sum_{h \in P_c} \left[\frac{ID_{hk}}{t_h^{0.5} \cdot t_k^{0.5}} \right]^\gamma \quad (13)$$

21 ID_{hk} represents an identical part between Path h and k The respective unit can be travel time or
 22 other measurements. In this paper, travel time is adopted. t_h and t_k denote the travel time of Path h
 23 and k respectively. β_0 and γ are calibration parameters.

24 In this section, we presented the formulation for the two models to be solved for the network
 25 evacuation problem. As mentioned before, finding the optimal solution for both problems (SAP
 26 and DTA) at the same time is hard to achieve, so indicators are required to measure the distance
 27 between the solutions and the optimal solution.

28 Solution quality indicators

29 In this section, we define the metrics that are used to evaluate the optimality of our solution and
 30 monitor the network performance. We have used the network clearance time C as a metric to compare

1 the quality of solutions obtained with different optimizers. The clearance time is defined as the
 2 arrival time of the last evacuee to her shelter. This gives us information about the rapidity of the
 3 evacuation process. Note that the best solution method provides the earliest clearance time.

4 We have also used the mean evacuation time which is defined as the mean over of all
 5 evacuees travel time. Besides, we have made use of the network speed, which is the mean speed
 6 of the network on all simulation time steps, to quantify the network usage (Vickrey, 33).

7 Moreover, in order to evaluate the quality of the DTA solution, we define the average travel
 8 delay, which is the mean amount of delay compared to the best evacuee of each OD pair. We have
 9 calculated this measure to compare the effectiveness of UE assignment. In other words, minimum
 10 value of this measure shows that all users of the OD pair have almost the same travel time.

$$ATD = \frac{\sum_{\alpha \in H} \sum_{c \in C} \sum_{p \in P_c^\alpha} t_{tr,p}^\alpha - t_{tr,c}^{\alpha*}}{\sum_{o \in O} w_o} \quad (14)$$

11 We have also calculated an indicator called the average evacuation delay, representing the
 12 mean amount of delay over the best evacuee of each origin. This indicator is meaningful in the
 13 context of evacuation problems because the ultimate goal of each evacuee is to reach any shelter
 14 as soon as possible.

$$AED = \frac{\sum_{\alpha \in H} \sum_{o \in O} \sum_{s \in S} \sum_{p \in P_c^\alpha} t_{tr,p}^\alpha - t_o^{\alpha*}}{\sum_{o \in O} w_o} \quad (15)$$

15 where $t_{tr,p}^\alpha$ denotes the minimum travel time of the evacuation trip from origin o . Note that at the
 16 pure UE state, ATD and AED are equal to zero; however, with the trip-based setting and network
 17 dynamics, it is not trivial for the UE solution.

18 METHODOLOGICAL FRAMEWORK

19 The process of solving our model is composed of three main parts: the SAP problem, the DTA
 20 optimization computing and the traffic simulation running. Here, we present the sequence of exe-
 21 cution of each step. These steps are solved in a time dependent manner. In each time period, we
 22 optimize all of these parts iteratively based on the data provided by the dynamic simulation until
 23 all the demand is satisfied. According to the states of art, these steps are solved together using a
 24 static traffic assignment model as a single level problem like Bayram et al. (4) and Bayram and
 25 Yaman (3) or bi-level programming problem firstly proposed by (Von Stackelberg, 34) (see e.g.,
 26 Ng et al., Li et al., Kongsomsaksakul et al., Xu et al. (35–38)).

27 In the dynamic setting, Hsu and Peeta (5) proposed the most complete setting for dynamic
 28 network evacuation problem. They have defined multiple time intervals and solved the problem
 29 in time periods and evolving state of the network. While they do consider the problem of risk
 30 determination based on risk estimation, they do not consider the SAP in their methodology. In
 31 fact, their study could be compared to solving DTA in SO manner having multiple time intervals
 32 with fixed shelter allocation solution from the beginning of the process. Here, we aim to solving the
 33 shelter allocation and evacuation routing using simulation-based DTA in time intervals to capture
 34 the evolving state (congestion) of the network, creating an evacuation plan with flexible shelter
 35 allocation. The proposed methodology by this study is presented in Figure 1.

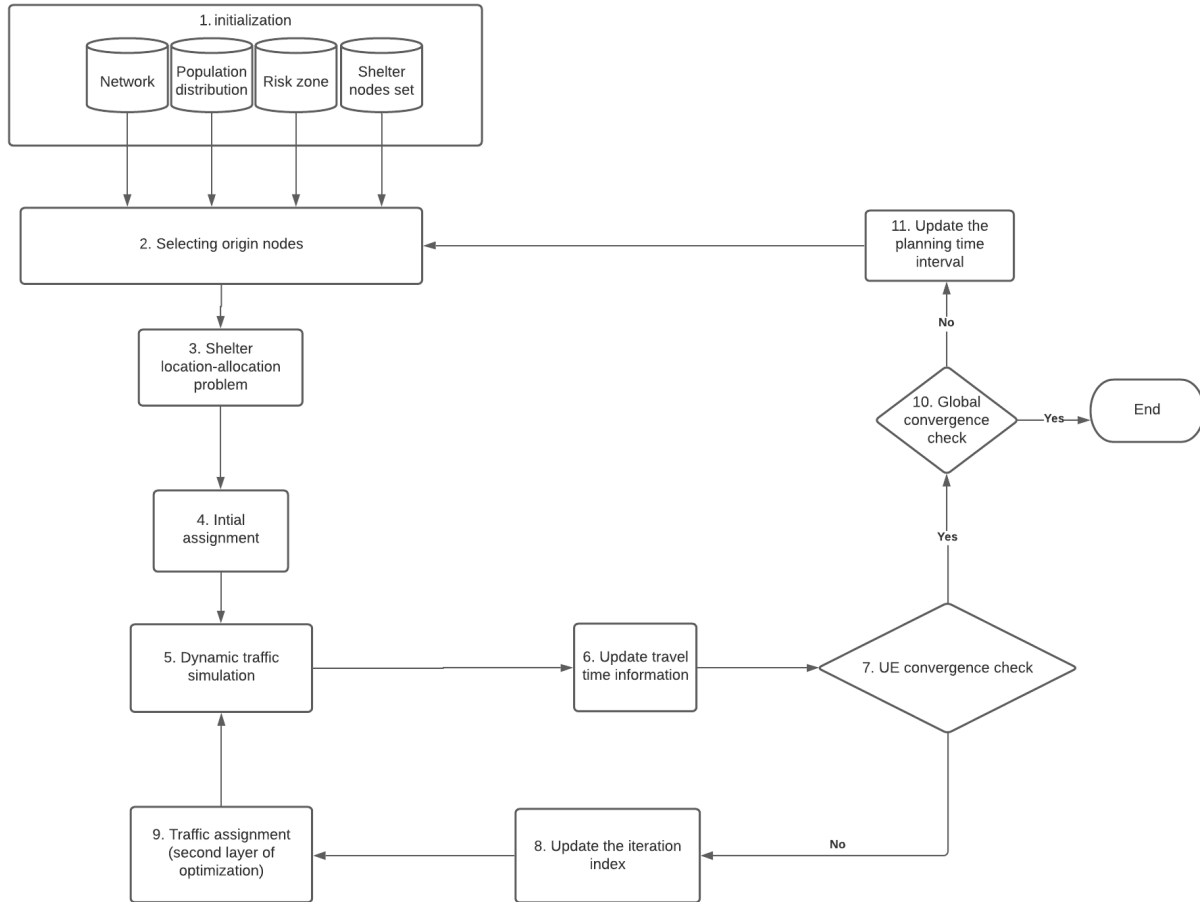


FIGURE 1: flowchart of the solving the evacuation problem

1 There are two loops in the flowchart that combine all three mentioned parts. The first loop,
 2 called outer loop, represents the SAP under SO. The loop updates the information of the network
 3 needed by the SAP at each time interval. The second loop inside the outer loop addresses the
 4 simulation-based DTA. The solution method starts with Initialization and solves the SAP for the
 5 first time interval. The results of the SAP is used as the input of the DTA. The DTA calculation un-
 6 der UE is started by the all-or-nothing assignment. Then the dynamic simulation is executed, and
 7 the travel time are updated for all users. Afterward, we check the convergence test for the UE con-
 8 ditions. If we do not converge, we reassign the users to the path based on the C-logit mechanism
 9 and rerun the simulation. The simulation-based DTA is continued until the convergence. Then
 10 check to determine whether all demand is served or not. If yes, the process is finished, otherwise,
 11 we go to the next departure time interval. Then, we solve SAP for the new demand, considering
 12 the updated network dynamics provided by the simulation. The main advantage of our framework
 13 is to consider the traffic state while we are solving the SAP for each time interval. It means that we
 14 first solve dynamic SAP and then for the optimal OD matrix we solve the DTA problem for each
 15 departure time interval.

16

17

1 The steps of the framework is detailed below:

Step 1. **Initialization:**

- a. Population distribution: the number of people that should be evacuated from each node.
- b. Network map: the city map represented as a graph via a network file.
- c. Risk zone: the set of all origins that will be considered.
- d. Destination nodes set: the set of shelters. nodes.

Step 2. **Selecting origin nodes:** This step corresponds to selecting nodes of the current time period, beginning with the highly risky nodes. This step offers us the possibility to have dynamic origin node adding. In fact, as hazards progress, we can add new origin nodes which are not known at the beginning of the evacuation.

Step 3. **Shelter location-allocation problem:** This is the first optimization problem following the SO principle and solving the above linear formulation. In fact, the objective of this layer is to assign users to the right destination. The output of this step is the demand profile defining the origin-destination pair with the number of users of each pair (OD matrix).

Step 4. **Initial assignment:** This step consists of the All-or-Nothing assignment and the initialization of the iteration index.

Step 5. **Dynamic traffic simulation:** In this step, we simulate each vehicle from their origin to the planned shelter by Step 3 based on the path that is determined from Step 4 or Step 9. Note that any trip-based dynamic simulator can be used in this step.

Step 6. **Updating travel time information:** This step is for updating the users travel time and path travel time based on the result of the simulator. Moreover, we calculate all metrics for the solution quality and network performance.

Step 7. **UE convergence check:** Check if the quality of the UE solution (ATD) is below a threshold or not. **OR** Is the maximum number of iteration is reached or not. The second condition is designed to skip the infinite loop problem when arriving at the optimal solution. If we converge, we go to Step 10; otherwise, we go to the next step.

Step 8. **Update the iteration index:** This step is for calculating the new iteration number.

Step 9. **Traffic assignment (second layer of optimization):** The reassignment procedure follows the C-logit mechanism to generate routes to be simulated.

Step 10. **Global convergence check:** This step checks if all the demand is evacuated or not. If that is true, we had to end the all process. Otherwise, we go to the next step.


Step 11. **Update the planning time interval** In this step, we change the planning time interval and move to the next departure time interval ($\alpha + 1$).

1 **NUMERICAL EXPERIMENTS**

2 In the previous section, we presented our framework to solve the online evacuation problem with
 3 dynamic shelter allocation. Here, we tend to apply the methodology to a real network in order to
 4 validate our solution method.

5 **Case study**


6 We implement our framework in order to solve the evacuation problem on the network of the LuST
 7 scenario (Figure 2a), representing the city of Luxembourg (Codeca et al., 39). We create a demand
 8 profile based on synthetic data of the evacuation scenario. All simulations are performed on a
 9 laptop with a 1.7 GHz. and 16 GB of RAM. To solve the simulation-based DTA problem, we used
 10 the SUMO simulator and its C-logit optimization function (Lopez et al., 40). We used Sumo as a
 11 microscopic agent-based simulator. We set 1 second as the simulation time-step. In addition, to
 12 tackle the shelter location-allocation problem, the ILOG CPLEX version 12.9 is used.

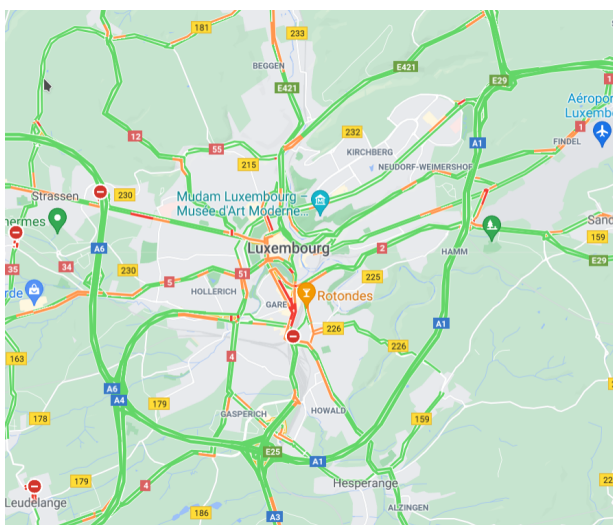

(a) Luxembourg mapping data ©Google 2021



(b) Luxembourg sumo city network

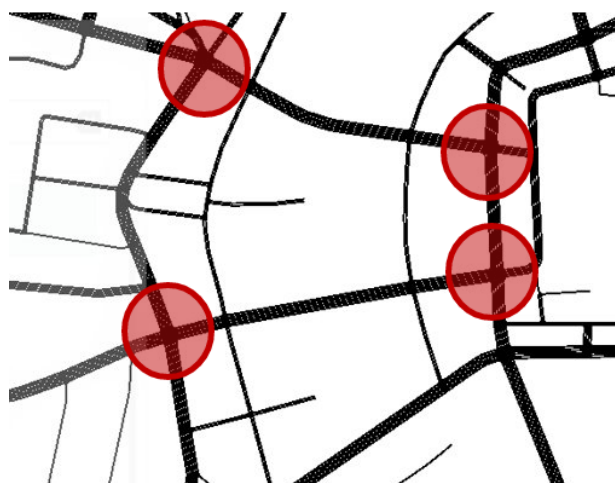

(c) Luxembourg sumo city network hazard nodes

FIGURE 2: Evacuation network map

1 Figure 2 presents the real network of Luxembourg with the size of 155.95 km² and the
2 traffic network graph considered by SUMO for dynamic simulation. We examine a hypothetical
3 threat in the center zone affecting people of that region colored in red in figure 2b. we do not
4 assume a super origin (source) node in this study. Multiple origin nodes are considered as the
5 evacuation sources in the risk zone, as described in figure 2c. Vehicles, carrying people, should
6 be evacuated to shelters, colored in green in figure 2b, located at the periphery of the network.
7 According to the size of the network, we set the duration of each departure time interval (η) to
8 10 minutes for the simulation. The demand at each node is 200 vehicles at each time period. We
9 have four origin nodes selected and four shelters each with capacity of holding 1500 evacuees.
10 Therefore, the total demand is 600 vehicles per origin for the planning horizon (H).

11 **Simulation-based optimization scenarios**

12 In this study, we design two scenarios to investigate the impact of the dynamic SAP on the online
13 evacuation planning problem. The scenarios are detailed below:

- 14 • **Scenario 1:** This scenario includes our proposed framework (illustrated in Figure 1) that
15 sequentially solves the shelter allocation and the traffic assignment coupled in a loop on
16 multiple time intervals.
- 17 • **Scenario 2:** This scenario represents one of the complete existing approaches to address
18 the evacuation problem in the literature via DTA (proposed by (Hsu and Peeta, 5)). In
19 each departure time interval, the DTA problem is solved without modifying the choice
20 of shelters, i.e., the SAP is chosen shelters from the beginning on the basis of free-flow
21 links speed. Note that several studies choose the shelters based on euclidean distance or
22 network distance, which is not realistic compared to this setting as they do not take into
23 account the characteristics of the network, e.g., road capacities.

24 **RESULTS**

25 In this section, the results for the two scenarios are presented. The two scenarios were run on
26 the same evacuation demand, source nodes, and the same shelter set. We consider multiple per-
27 formance measures used in the literature to evaluate the efficiency of the solution method in each
28 scenario. We use the metrics defined in the subsection "Solution quality indicators". Table 2
29 presents the results for the two scenarios. The results show a significant improvement in the qual-
30 ity of the final solution obtained by our model compared to the second model. For instance, the
31 reduction of 40 minutes (32%) in the network clearance time. This shows that allocating users to
32 different shelters considering the network congestion improves the evacuation operation. The high
33 congestion level around shelters during the evacuation could explain this difference. With fixed
34 shelter choices in all time intervals, we will have more congestion in edges leading to these shel-
35 ters, but having different shelters at each state, taking into account the network state, will ensure
36 that we will assign evacuees to the closest shelters in terms of time-dependent shortest path and
37 not the closest shelter(s) in terms of distance or free-flow travel time.

TABLE 2: Performance metrics

Metrics	Scenario 1	Scenario 2
Network clearance time(s)	4956.00	7320.00
Mean evacuation time(s)	1296.77	2028.75
Average travel delay (ATD)	599.03	1069.66
Average evacuation delay (AED)	696.14	1110.59

1 The reduction of mean evacuation time in table 2 approves that the dynamic allocation
2 improves the evacuation planning solution. In addition, it also provides better AED for evacuees
3 (37%). The improvement amount is even higher for ATD, 44% reduction, which shows that the
4 DTA solution of our method is closer to the UE solution.

5 Figure 3a presents the evolution of the number of vehicles evacuating in the network. The
6 network is empty at the beginning; thus, for the first time interval, we have the same solution of
7 the SAP for both scenarios. Then the two curves are separated because we have different shelters
8 allocation approaches. In addition, the curve that represents our proposed method is arriving at the
9 final state of zero running vehicle before the second curve, proving that the network clearance time
10 is decreased compared to the other method.


11 The evolution of the mean speed in the evacuation process is presented in Figure 3b. The
12 maximum speed of the network is the mean free-flow speed (73 km/h) achieved when the network
13 is empty. At the beginning of the evacuation, the network speed for Scenario 1 is less than Scenario
14 2, but shortly after, it increases and stays higher than scenario 2 until the end of the process. It
15 means that Scenario 1 uses the capacity of the network better than Scenario 2 and finishes the
16 evacuation process faster.

17 The DTA is solved to find the UE state. Most studies used *ATD* to describe the quality of
18 the solution. *ATD* could be seen as the mean distance between the travel time of users and the
19 minimum travel time of that OD pair. In figure 4a, we can have an idea about the evolution of this
20 measure over two last time intervals because, at the end of the first interval, no vehicles arrive at
21 their destination. Besides, the difference in *ATD* between the scenarios is becoming larger in the
22 third time period, indicating that having flexible shelter allocation offers evacuees the possibility
23 of reducing their travel time by changing their choice of destination.


24 Figure 4a presents *AED* for the two last interval. Recall that the main difference compared
25 to the average travel delay is that the user delay is calculated w.r.t minimum evacuation time of all
26 users from the same origin. In other words, we compute the average difference between the travel
27 time of each user and the shortest travel time having the same origin node. Similar to figure 4a,
28 *AED* delay has the same shape as *ATD*, and this proves that our method is better than the second
29 method even for the destination-free measure.

30 Figure 4c compares the number of evacuees that arrived at shelters in each time interval.
31 Our proposed method evacuates vehicles faster than the second scenario by using the remaining
32 capacity of the network capacity, and that is why in Scenario 1, more evacuees finish their travel
33 in the second interval.

34 Moreover, we measure the computation time (CT) for both optimization scenarios (see
35 table 3). The results show that there is no large difference between the two scenarios, and this is
36 explained by the fact that the dynamic shelter allocation optimizer does not require a long time to
37 provide the results. Note that the shelter location-allocation is a simple linear formulation solved

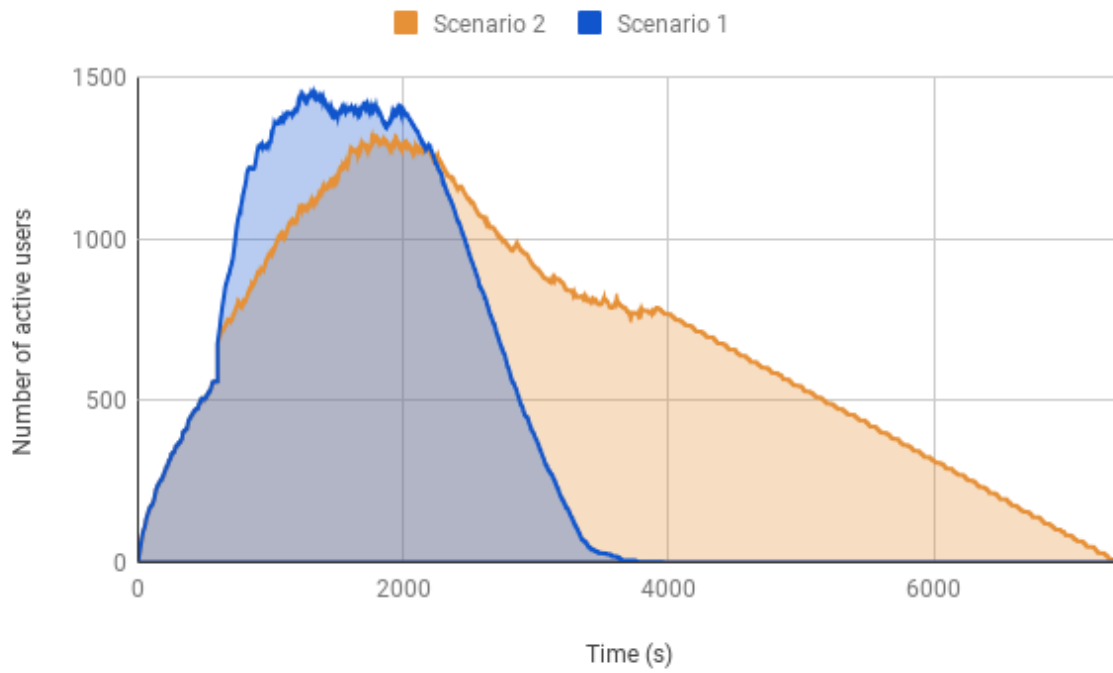


(a) Number of active users in the network variation

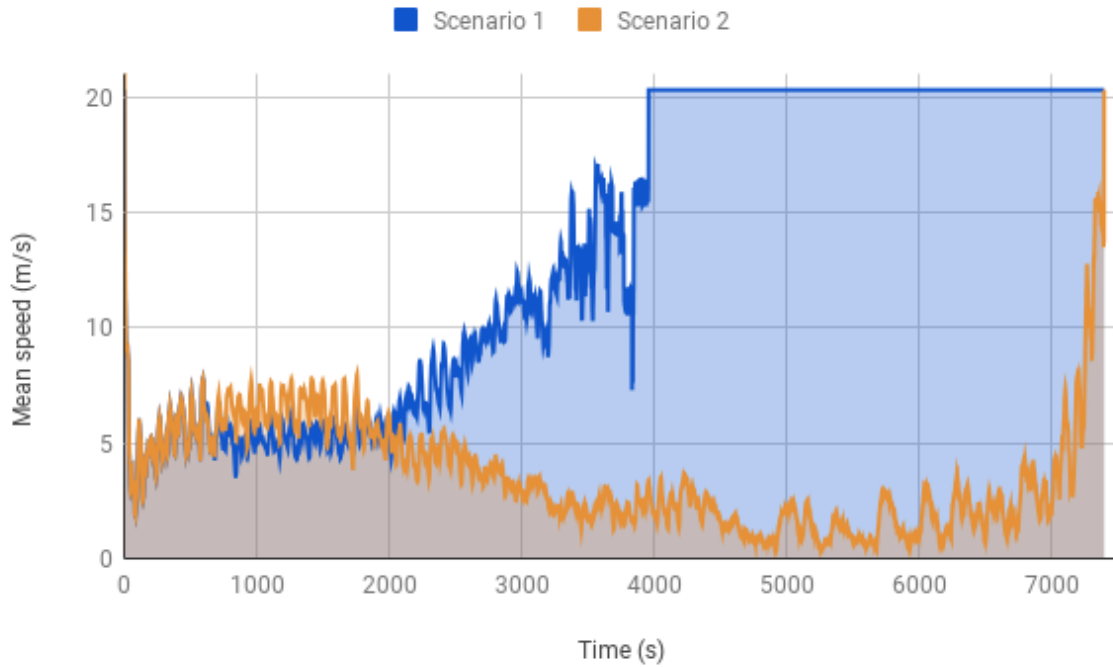


(b) Network mean speed variation


FIGURE 3: Performance measures variation

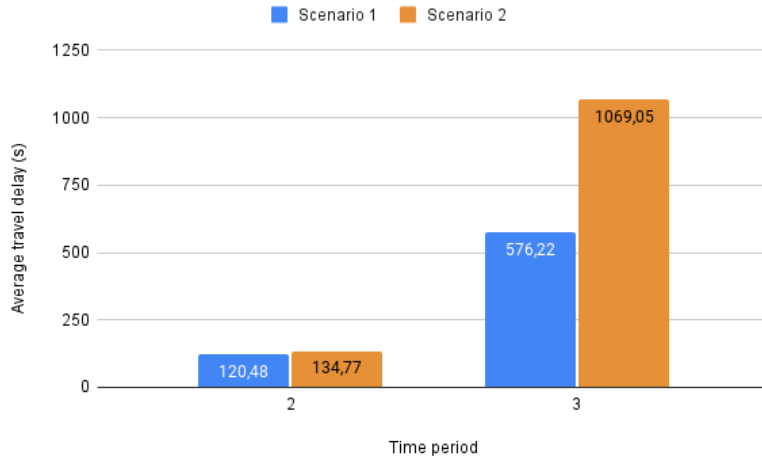

(a) Average travel delay variation

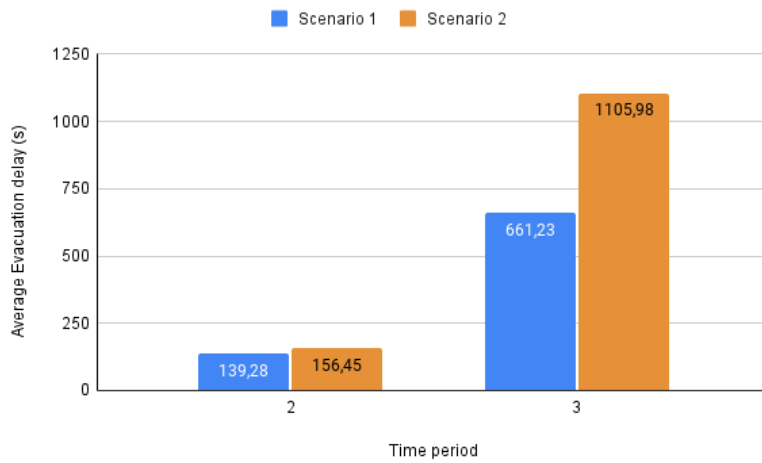

(b) Average evacuation delay variation

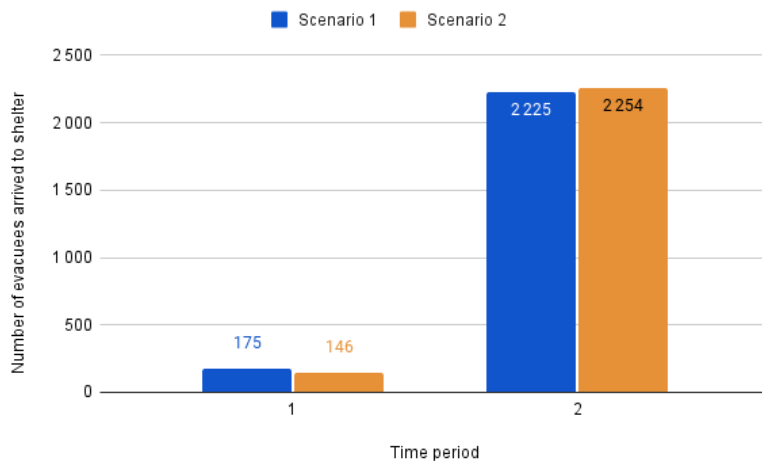

(c) Number of evacuees arrived to shelters in time periods.

FIGURE 4: Delay and number of arrival measures variation

1 with branch and bound technique. In table 3, the CT of the shelter allocation is defined only for
 2 the first scenario because the second scenario does not consider it. Note that a small difference in
 3 the DTA calculation is due to the probabilistic nature of the C-logit model. It is worth mentioning
 4 that the CT needed for DTA calculation in the last stage is lower because the SAP generates an
 5 allocation that is less computationally expensive for the DTA.

6 As we can see in table 3, the major part of the CT belongs to the DTA calculation. There-
 7 fore, it is worth performing a sensitivity analysis on DTA iteration because the number of iterations
 8 directly impacts the CT.

TABLE 3: Computation time of the solution methods

α	Computation time [s]	Scenario 1	Scenario 2
1	Shelter location allocation	0.09	-
	DTA Calculation	80.99	81.41
2	Shelter location allocation	0.09	-
	DTA Calculation	102.02	103.55
3	Shelter location allocation	0.09	-
	DTA Calculation	229.10	430.01

9 Convergence analysis

10 This section analyzes the effect of changing the number of iterations in the DTA calculation on
 11 the final solution. We perform our comparison based on performance measures like the clearance
 12 time and the mean evacuation time. Table 4 present the results for four values for the number of
 13 iterations. Value 1 represents the scenario wherein we use the All-or-Nothing assignment. The
 14 results show that we have minimized a mean evacuation time and converge in 10 iterations in
 15 both cases. However, for a large number of iterations (20 or 30), there is an oscillation in the
 16 value of measures even there is a higher value of mean evacuation time. This is expected because
 17 we aim to achieve the UE, not the SO. Therefore, our algorithm minimizes the individual travel
 18 time, and that could have a negative effect on the whole system performance. The results can be
 19 viewed from another angle. Table 4 shows that by increasing the number of iterations to search for
 20 the optimal solution for the UE, we decrease the network production factors. From these results,
 21 we can conclude that if we fix the iteration number between 10 and 20, we could have a good
 22 evacuation plan for this test case from both points of view, users and the system.

TABLE 4: The impact of the number of DTA iterations on the final solution.

Number of iterations		1	10	20	30
Network clearance time [s]	Scenario 1	8087	4956	4740	5282
	Scenario 2	8425	7320	7307	7386
Mean evacuation time [s]	Scenario 1	3429,69	2409,93	2392,35	2457,73
	Scenario 2	4205,69	3369,16	3365,08	3376,42

1 CONCLUSION

2 Catastrophes threaten the entire population of the devastated areas and put them in high-risk situ-
3 ations. In order to avoid life losses caused by these disasters, the best way is to evacuate people
4 from areas considered as risky zones to safe areas. This paper focuses on solving network evacua-
5 tion problems. Modeling and optimizing this problem efficiently can help us not only to save more
6 lives, but also to help evacuees to evacuate from hazardous areas as fast as possible.

7 In this study, we perform a literature review and analyze the different approaches and mod-
8 els used in the research field for evacuation planning. We have found that the evacuation problem is
9 composed of two main parts: the route choice and the shelter choice of evacuees. For the first part,
10 known as traffic assignment, two types of models are used: STA and DTA models. Researchers
11 have made good progress using the static formulation for the network evacuation problem, espe-
12 cially when having a shelter allocation model. However, there are few studies about the evacuation
13 problem in the dynamic context for both traffic routing and shelter allocation. This study pro-
14 posed a planning framework to solve the dynamic network evacuation problem, including shelter
15 allocation problem and dynamic traffic assignment.

16 In order to solve the evacuation problem dynamically, we have solved the problem in mul-
17 tiple departure time intervals by considering the system optimum principle for the SAP and the
18 user equilibrium principle for the DTA problem. For calculation of the vehicle evacuation time,
19 we have considered a trip-based dynamic simulator that provides us the travel information every
20 second. We apply our methodology to the real network of Luxembourg and compare it with a
21 model using fixed shelters. The results show that the proposed model outperforms the model with
22 fixed shelter by more than 30% reduction in network clearance time. It means that using dynamic
23 allocation can improve the evacuation process because it gives us an opportunity to provide the
24 optimal evacuation plan considering the dynamics of the network. Besides, the analysis on the
25 computation time proves that solving the online SAP needs tiny computational resources, while it
26 significantly reduces the duration of the evacuation process. The second main finding of this study
27 is that using an online shelter allocation model can also use better the production capacity of the
28 traffic network (Figure 3).

29 Moreover, we have conducted a sensitivity analysis on the maximum number of iterations
30 used in DTA calculation. The results show that with a reasonable number of iteration, we can find
31 a plan closer to UE in terms of delay. For future works, we aim first to evaluate our framework
32 performance to large-scale real network evacuation scenarios. Second, we want to extend the
33 current framework to solve the SAP and DTA problem together in an online setting. An interesting
34 extension of our framework is to consider the capacity of shelters in a dynamic way, taking into
35 account the outflow rate of each shelter. Another direction for the research can be addressing
36 multiple hazard zones by mimicking the hazard evolution.

37 CONFLICT OF INTEREST

38 The authors declare no potential conflict of interests.

39 AUTHOR CONTRIBUTION STATEMENT

40 All the authors have contributed to all aspects of this study, ranging from the conception and design
41 of the methodology, analysis and interpretation of the results and discussion, and the manuscript
42 preparation.

1 References

- 2 1. Zuckerman, A. D., P. C. Patel, M. Sullivan, A. Potts, M. Knostman, E. Humphreys,
3 M. O’Neal, A. Bryant, D. K. Torr, B. Lobo, et al., *From natural disaster to pandemic:
4 a health-system pharmacy rises to the challenge*, 2020.
- 5 2. Hajjem, M., H. Bouziri, E.-G. Talbi, and K. Mellouli, Intelligent indoor evacuation guid-
6 ance system based on ant colony algorithm. In *2017 IEEE/ACS 14th International Confer-
7 ence on Computer Systems and Applications (AICCSA)*, IEEE, 2017, pp. 1035–1042.
- 8 3. Bayram, V. and H. Yaman, Shelter location and evacuation route assignment under uncer-
9 tainty: A benders decomposition approach. *Transportation science*, Vol. 52, No. 2, 2018,
10 pp. 416–436.
- 11 4. Bayram, V., B. Ç. Tansel, and H. Yaman, Compromising system and user interests in
12 shelter location and evacuation planning. *Transportation research part B: methodological*,
13 Vol. 72, 2015, pp. 146–163.
- 14 5. Hsu, Y.-T. and S. Peeta, Risk-based spatial zone determination problem for stage-based
15 evacuation operations. *Transportation research part C: emerging technologies*, Vol. 41,
16 2014, pp. 73–89.
- 17 6. Lim, G. J., M. Rungta, and M. R. Baharnemati, Reliability analysis of evacuation routes
18 under capacity uncertainty of road links. *Iie Transactions*, Vol. 47, No. 1, 2015, pp. 50–63.
- 19 7. Zhao, X., G. Ren, and Z.-f. Huang, Optimizing one-way traffic network reconfiguration
20 and lane-based non-diversion routing for evacuation. *Journal of Advanced Transportation*,
21 Vol. 50, No. 4, 2016, pp. 589–607.
- 22 8. Sheu, J.-B. and C. Pan, A method for designing centralized emergency supply network to
23 respond to large-scale natural disasters. *Transportation research part B: methodological*,
24 Vol. 67, 2014, pp. 284–305.
- 25 9. Alçada-Almeida, L., L. Tralhão, L. Santos, and J. Coutinho-Rodrigues, A multiobjective
26 approach to locate emergency shelters and identify evacuation routes in urban areas. *Geo-
27 graphical analysis*, Vol. 41, No. 1, 2009, pp. 9–29.
- 28 10. Sherali, H. D., T. B. Carter, and A. G. Hobeika, A location-allocation model and algorithm
29 for evacuation planning under hurricane/flood conditions. *Transportation Research Part
30 B: Methodological*, Vol. 25, No. 6, 1991, pp. 439–452.
- 31 11. Daskin, M. S., *Urban transportation networks: Equilibrium analysis with mathematical
32 programming methods*, 1985.
- 33 12. Levin, M. W., M. Pool, T. Owens, N. R. Juri, and S. T. Waller, Improving the convergence
34 of simulation-based dynamic traffic assignment methodologies. *Networks and Spatial Eco-
35 nomics*, Vol. 15, No. 3, 2015, pp. 655–676.
- 36 13. Han, K., W. Szeto, and T. L. Friesz, Formulation, existence, and computation of boundedly
37 rational dynamic user equilibrium with fixed or endogenous user tolerance. *Transportation
38 Research Part B: Methodological*, Vol. 79, 2015, pp. 16–49.
- 39 14. Ameli, M., *Heuristic Methods for Calculating Dynamic Traffic Assignment*. Ph.D. thesis,
40 Université de Lyon, 2019.
- 41 15. FEMA, D., *Developing and Maintaining Emergency Operations Plans*, 2010.
- 42 16. Gama, M., B. F. Santos, and M. P. Scaparra, A multi-period shelter location-allocation
43 model with evacuation orders for flood disasters. *EURO Journal on Computational Opti-
44 mization*, Vol. 4, No. 3, 2016, pp. 299–323.
- 45 17. Ma, Y., W. Xu, L. Qin, and X. Zhao, Site selection models in natural disaster shelters: a

- 1 review. *Sustainability*, Vol. 11, No. 2, 2019, p. 399.
- 2 18. Peeta, S. and H. S. Mahmassani, System optimal and user equilibrium time-dependent
3 traffic assignment in congested networks. *Annals of Operations Research*, Vol. 60, No. 1,
4 1995, pp. 81–113.
- 5 19. Jayakrishnan, R., H. S. Mahmassani, and T.-Y. Hu, An evaluation tool for advanced traffic
6 information and management systems in urban networks. *Transportation Research Part C:
7 Emerging Technologies*, Vol. 2, No. 3, 1994, pp. 129–147.
- 8 20. Zhang, Z., S. A. Parr, H. Jiang, and B. Wolshon, Optimization model for regional evacu-
9 ation transportation system using macroscopic productivity function. *Transportation Re-
10 search Part B: Methodological*, Vol. 81, 2015, pp. 616–630.
- 11 21. Jeihani, M., A review of dynamic traffic assignment computer packages. In *Journal of the
12 Transportation Research Forum*, 2007, Vol. 46, pp. 34–46.
- 13 22. Zhu, Y., K. Xie, K. Ozbay, and H. Yang, Hurricane evacuation modeling using behavior
14 models and scenario-driven agent-based simulations. *Procedia computer science*, Vol. 130,
15 2018, pp. 836–843.
- 16 23. Liu, X. and S. Lim, Integration of spatial analysis and an agent-based model into evacu-
17 ation management for shelter assignment and routing. *Journal of spatial science*, Vol. 61,
18 No. 2, 2016, pp. 283–298.
- 19 24. Bayram, V., Optimization models for large scale network evacuation planning and man-
20 agement: A literature review. *Surveys in Operations Research and Management Science*,
21 Vol. 21, No. 2, 2016, pp. 63–84.
- 22 25. Hakimi, S. L., Optimum locations of switching centers and the absolute centers and medi-
23 ans of a graph. *Operations research*, Vol. 12, No. 3, 1964, pp. 450–459.
- 24 26. Sherali, H. D. and F. L. Nordai, NP-hard, capacitated, balanced p-median problems on
25 a chain graph with a continuum of link demands. *Mathematics of Operations Research*,
26 Vol. 13, No. 1, 1988, pp. 32–49.
- 27 27. Wardrop, J. G., Road paper. some theoretical aspects of road traffic research. *Proceedings
28 of the institution of civil engineers*, Vol. 1, No. 3, 1952, pp. 325–362.
- 29 28. Ameli, M., J.-P. Lebacque, and L. Leclercq, Cross-comparison of convergence algorithms
30 to solve trip-based dynamic traffic assignment problems. *Computer-Aided Civil and In-
31 frastructure Engineering*, Vol. 35, No. 3, 2020, pp. 219–240.
- 32 29. Lu, C.-C., H. S. Mahmassani, and X. Zhou, Equivalent gap function-based reformulation
33 and solution algorithm for the dynamic user equilibrium problem. *Transportation Research
34 Part B: Methodological*, Vol. 43, No. 3, 2009, pp. 345–364.
- 35 30. Sbayti, H., C.-C. Lu, and H. S. Mahmassani, Efficient implementation of method of suc-
36 cessive averages in simulation-based dynamic traffic assignment models for large-scale
37 network applications. *Transportation Research Record*, Vol. 2029, No. 1, 2007, pp. 22–30.
- 38 31. Ameli, M., J.-P. Lebacque, and L. Leclercq, Simulation-based dynamic traffic assignment:
39 Meta-heuristic solution methods with parallel computing. *Computer-Aided Civil and In-
40 frastructure Engineering*, Vol. 35, No. 10, 2020, pp. 1047–1062.
- 41 32. Cascetta, E., A. Nuzzolo, F. Russo, and A. Vitetta, A modified logit route choice model
42 overcoming path overlapping problems. Specification and some calibration results for in-
43 terurban networks. In *Transportation and Traffic Theory. Proceedings of The 13th Interna-
44 tional Symposium On Transportation And Traffic Theory, Lyon, France, 24-26 July 1996*,
45 1996.

- 1 33. Vickrey, W., Types of congestion pricing models. *Memo, Columbia University. Notational*
2 *Glossary*, 1994.
- 3 34. Von Stackelberg, H., *Marktform und gleichgewicht*. J. Springer, 1934.
- 4 35. Ng, M., J. Park, and S. T. Waller, A hybrid bilevel model for the optimal shelter assignment
5 in emergency evacuations. *Computer-Aided Civil and Infrastructure Engineering*, Vol. 25,
6 No. 8, 2010, pp. 547–556.
- 7 36. Li, L., M. Jin, and L. Zhang, Sheltering network planning and management with a case
8 in the Gulf Coast region. *International Journal of Production Economics*, Vol. 131, No. 2,
9 2011, pp. 431–440.
- 10 37. Kongsomsaksakul, S., C. Yang, and A. Chen, Shelter location-allocation model for flood
11 evacuation planning. *Journal of the eastern Asia society for transportation studies*, Vol. 6,
12 2005, pp. 4237–4252.
- 13 38. Xu, W., Y. Ma, X. Zhao, Y. Li, L. Qin, and J. Du, A comparison of scenario-based hybrid
14 bilevel and multi-objective location-allocation models for earthquake emergency shelters:
15 a case study in the central area of Beijing, China. *International Journal of Geographical*
16 *Information Science*, Vol. 32, No. 2, 2018, pp. 236–256.
- 17 39. Codeca, L., R. Frank, and T. Engel, Luxembourg SUMO Traffic (LuST) Scenario: 24
18 hours of mobility for vehicular networking research. In *2015 IEEE Vehicular Networking*
19 *Conference (VNC)*, 2015, pp. 1–8.
- 20 40. Lopez, P. A., M. Behrisch, L. Bieker-Walz, J. Erdmann, Y.-P. Flötteröd, R. Hilbrich,
21 L. Lücken, J. Rummel, P. Wagner, and E. Wießner, Microscopic Traffic Simulation using
22 SUMO. In *The 21st IEEE International Conference on Intelligent Transportation Systems*,
23 IEEE, 2018.