



First-cycle oscillation excursions of Pickering-stabilised microbubbles subjected to a high-amplitude ultrasound pulse

Nicole Anderton, Craig Stuart Carlson, Ryunosuke Matsumoto, Ri-Ichiro Shimizu, Albert Thijs Poortinga, Nobuki Kudo, Michiel Postema

► To cite this version:

Nicole Anderton, Craig Stuart Carlson, Ryunosuke Matsumoto, Ri-Ichiro Shimizu, Albert Thijs Poortinga, et al.. First-cycle oscillation excursions of Pickering-stabilised microbubbles subjected to a high-amplitude ultrasound pulse. Current Directions in Biomedical Engineering, 2022, Proceedings of the 2022 Joint Annual Conference of the Austrian (ÖGBMT), German (VDE DGBMT) and Swiss (SSBE) Societies for Biomedical Engineering, 8 (2), pp.30-32. <10.1515/cdbme-2022-1009>. <hal-03696311>

HAL Id: hal-03696311

<https://hal.science/hal-03696311v1>

Submitted on 2 Sep 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons CC BY 4.0 - Attribution - International License

Nicole Anderton*, Craig S. Carlson, Ryunosuke Matsumoto, Ri-ichiro Shimizu, Albert T. Poortinga, Nobuki Kudo, and Michiel Postema

First-cycle oscillation excursions of Pickering-stabilised microbubbles subjected to a high-amplitude ultrasound pulse

<https://doi.org/10.1515/cdbme-2022-1009>

Abstract: Pickering stabilisation is a manufacturing process involving the adsorption of colloidal particles at gas–liquid interfaces. It is used to create the shells of stable, long-lived ultrasound contrast agent microbubbles. The purpose of the present study is to determine whether high-amplitude sonication influences the integrity of Pickering-stabilised shells. To this purpose, Pickering-stabilised microbubbles were subjected to high-speed photography at 10 million frames per second during 1-MHz, 1-MPa sonication. In addition, radial excursions as a function of time were simulated using the Rayleigh-Plesset equation for free gas microbubbles and microbubbles encapsulated by Pickering-stabilised shells of 7.6-N m^{-1} stiffness. The maximum expansions observed from camera recordings were either agreeing with those computed for Pickering-stabilised microbubbles or corresponding to greater values. The results indicate that optically identical microbubbles may undergo shell disruption of different severity. We conclude that the disruption occurs during sonication and not prior to it. These findings may aid in the development of Pickering-stabilised agents that facilitate ultrasound-triggered release.

Keywords: Acoustic cavitation, ultrasound contrast agent, shell stiffness, microbubble oscillation modelling, high-speed photography.

1 Introduction

Ultrasound contrast agents comprising gas microbubbles surrounded by stabilising elastic or viscoelastic shells are commonly used in diagnosis [1, 2]. Their highly nonlinear oscillation behaviour makes them suitable aides for harmonic ultrasonic imaging [3]. The dynamics of individual ultrasound contrast agent microbubbles under sonication has traditionally been studied with high-speed photography setups [4, 5]. The manufacturing process of more stable, very long-lived microbubbles involves the adsorption of colloidal particles at the interfaces, a process which is called Pickering stabilisation [6]. This process has been extensively used to stabilise emulsions, albeit rarely in combination with acoustics [7–9]. Pickering-stabilised microbubbles and antibubbles have been observed to generate a harmonic acoustic response, even at modest transmission amplitudes [10]. Therefore, Pickering-stabilised ultrasound contrast agents may be of interest in contrast-enhanced ultrasonic imaging [10, 11]. In a previous study, we determined the shell stiffness of Pickering-stabilised microbubbles from oscillation excursion data using low-amplitude sonication [11]. The stiffness was found to be 7.6 N m^{-1} [11]. The purpose of the present study is to determine whether high-amplitude sonication influences the integrity of the Pickering-stabilised shell.

2 Materials and methods

Pickering-stabilised microbubbles were produced with Aerosil® R972 hydrophobised silica particles (Evonik Industries AG, Essen, Germany) as a stabilising agent, identical to the procedure in our previous studies [10, 11]. A 0.2-ml volume of microbubble suspension was pipetted into the observation chamber of a high-speed observation system, which was placed under an Eclipse Ti inverted microscope (Nikon Corporation, Minato-ku, Tokyo, Japan) with a Plan Apo LWD 40× WI (N.A. 0.8) objective lens. The microscope was coupled to an HPV-X2 high-speed camera (Shimadzu, Nakagyo-ku, Kyoto, Japan), operating at a recording speed of 10 million

*Corresponding author: Nicole Anderton, BioMediTech, Faculty of Medicine and Health Technology, Tampere University, Korkeakoulunkatu 3, 33720 Tampere, Finland, e-mail: nicole.anderton@tuni.fi

Craig S. Carlson, Michiel Postema, BioMediTech, Faculty of Medicine and Health Technology, Tampere University, Tampere, Finland and School of Electrical and Information Engineering, University of the Witwatersrand, Johannesburg, Braamfontein, South Africa

Ryunosuke Matsumoto, Ri-ichiro Shimizu, Nobuki Kudo, Faculty of Information Science and Technology, Hokkaido University, Sapporo, Hokkaido, Japan

Albert T. Poortinga, Department of Mechanical Engineering, Eindhoven University of Technology, Eindhoven, Netherlands

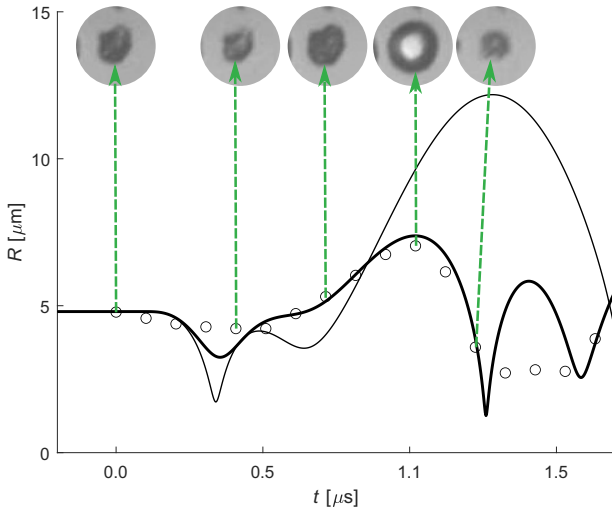


Fig. 1: Radius measured as a function of time for a Pickering-stabilised microbubble (\circ), simulated $R(t)$ curves of a free (—) and a shell-stabilised (—) microbubble of $R_0=4.8 \mu\text{m}$, and inlays extracted from high-speed video footage. Each inlay corresponds to a $22\text{-}\mu\text{m}$ diameter.

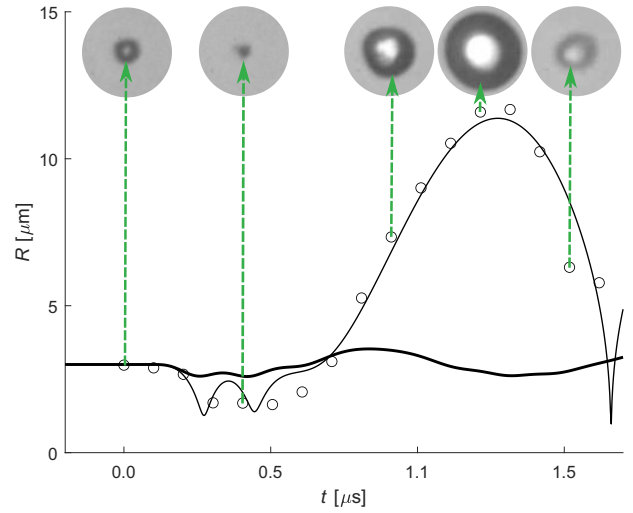


Fig. 2: Radius measured as a function of time for a Pickering-stabilised microbubble (\circ), simulated $R(t)$ curves of a free (—) and a shell-stabilised (—) microbubble of $R_0=3.0 \mu\text{m}$, and inlays extracted from high-speed video footage. Each inlay corresponds to a $22\text{-}\mu\text{m}$ diameter.

frames per second with exposure times of 100 ns per frame. High-speed videos were recorded during sonication. A burst comprised a 3-cycle sine pulse with a centre frequency of 1 MHz and a peak-negative pressure of 1.0 MPa, which corresponds to a high mechanical index of 1.0. The frames were clipped, segmented, and analysed using MATLAB[®] (The MathWorks, Inc., Natick, MA, USA). A total number of one hundred different microbubbles was included in this study. In addition, radius as a function of time, $R(t)$, curves were computed from the Rayleigh-Plesset equation [12], using the ode45 differential equation solver of MATLAB[®], for free gas microbubbles and for microbubbles encapsulated by shells with a 7.6-N m^{-1} stiffness [11]. The latter can be explained if shell disruption took place during the first oscillation cycle.

3 Results and discussion

Figure 1 shows the radial dynamics during the first oscillation cycle of a Pickering-stabilised microbubble of $4.8\text{-}\mu\text{m}$ initial radius. The measured data correspond to the first cycle of the simulated $R(t)$ curve of a microbubble with shell stiffness of 7.6 N m^{-1} and clearly do not correspond to the much greater expansion of a free microbubble. The microbubble did not appear to have undergone disruption during its first expansion. Figure 2 shows the radial dynamics during the first oscillation cycle of a Pickering-stabilised microbubble of $3.0\text{-}\mu\text{m}$ initial radius. The measured data correspond to the first cycle of the simulated $R(t)$ curve of a free microbubble and clearly do not

correspond to the almost negligible expansion of a microbubble with shell stiffness 7.6 N m^{-1} . The microbubble whose dynamics are shown in Figure 2 did not appear to have undergone gas release. From this observation, we deduct, that stabilising particles must have been present on the interface during expansion. From the large expansion, however, we conclude that, if indeed stabilising particles were present on the interface, these did not form a uniform stabilising shell.

Figure 3 shows an overview of measured first-cycle oscillation amplitudes, R_{max} , as a function of initial radius, R_0 . Some 40% of the microbubbles had expanded to excursions computed for microbubbles with a shell stiffness of 7.6 N m^{-1} . The remaining microbubbles had expanded to greater excursions, with only three microbubbles reaching free-gas bubble excursions. Microbubbles of the same initial radius were observed to expand to different maxima. This could indicate that optically identical microbubbles may have different shell properties. However, that would also mean that maximum excursions at lower acoustic amplitudes should be different for optically identical bubbles, which they are not [11]. A different explanation for the observed excursion amplitudes is that optically identical microbubbles may undergo shell disruption of different severity. Although disruption prior to sonication might be possible, we rule it out for an explanation based on the consistency of excursion observations at low acoustic amplitudes [11]. In the absence of other mechanisms observed, we hold the explanation that the disruption occurs during first expansion for most plausible.

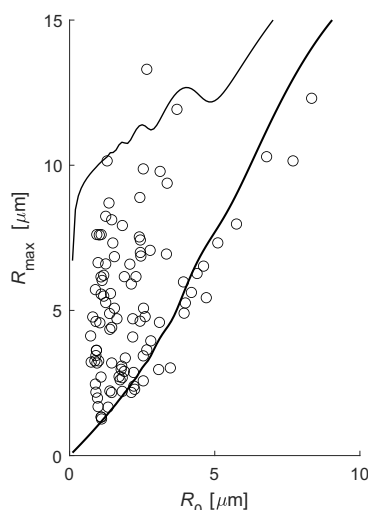


Fig. 3: Scatter plot of maximum microbubble expansion measured as a function of initial radius (\circ), overlain with simulated $R_{\max}(R_0)$ curves of free (—) and Pickering-stabilised (—) microbubbles.

4 Conclusions

In summary, the maximum radial expansions observed were either agreeing with the maxima predicted by the model of Pickering-stabilised microbubbles or corresponding to greater values. These observations support the hypothesis that the rigidity of Pickering-stabilised shells is affected by sonication. Nevertheless, gas release from these disrupted microbubbles was not observed, indicating that the particle structuring remained on the interface during radial oscillation. The results indicate that optically identical microbubbles may undergo shell disruption of different severity. We conclude that the disruption occurs during sonication and not prior to it.

These findings may aid in the development of Pickering-stabilised agents that facilitate ultrasound-triggered release.

Author statement

Research funding: This work was supported by JSPS KAKENHI, Grant Numbers JP17H00864 and JP20H04542, by the National Research Foundation of South Africa, Grant Number 127102, and by the Academy of Finland, Grant Number 340026. **Conflict of interest:** Authors state no conflict of interest. **Informed consent:** Authors state that informed consent is not applicable. **Ethical approval:** Authors state that no ethical approval was required for this research as no human or animal samples or data were used.

References

- [1] Park S, Yoon H, Emelianov S, Aglyamov S. Fluid flow measurement for diagnosis of ventricular shunt malfunction using nonlinear responses of microbubbles in the contrast-enhanced ultrasound imaging. *Jpn J Appl Phys* 2017;56:07JF10.
- [2] Kikuchi Y, Kanagawa T. Weakly nonlinear theory on ultrasound propagation in liquids containing many microbubbles encapsulated by viscoelastic shell. *Jpn J Appl Phys* 2021;60:07JF10.
- [3] Mleczko M, Postema M, Schmitz G. Nonlinear modeling of ultrasound contrast agents with Wiener series. *Gemeinsame Jahrestagung der Deutschen, Österreichischen und Schweizerischen Gesellschaft für Biomedizinische Technik* 2006:#V77.
- [4] Postema M, Mleczko M, Schmitz G. Experimental setup for synchronous optical and acoustical observation of contrast microbubbles. *Gemeinsame Jahrestagung der Deutschen, Österreichischen und Schweizerischen Gesellschaft für Biomedizinische Technik* 2006:#V75.
- [5] Postema M, Schmitz G. Messung und Modellierung physikalischer Eigenschaften von Kontrastmitteln. In: Langer S, Scholl W, Wittstock V, editors. *Fortschritte der Akustik: Plenarvorträge und Fachbeiträge der 32. Deutschen Jahrestagung für Akustik DAGA '06*, Braunschweig. Berlin: DEGA 2006:37–38.
- [6] Poortinga AT. Long-lived antibubbles: stable antibubbles through Pickering stabilization. *Langmuir* 2011;27:2138–2141.
- [7] Melle S, Lask M, Fuller GG. Pickering emulsions with controllable stability. *Langmuir* 2005; 21, 2158–2162.
- [8] Chevalier Y, Bolzinger M-A. Emulsions stabilized with solid nanoparticles: Pickering emulsions. *Colloids Surf. A: Physicochem. Eng. Asp.* 2013;439:23–34.
- [9] Wu J, Ma G-H. Recent studies of pickering emulsions: particles make the difference. *Small* 2016;12:4633–4648.
- [10] Kudo N, Uzbekov R, Matsumoto R, Shimizu R, Carlson CS, Anderton N, et al. Asymmetric oscillations of endoskeletal antibubbles. *Jpn J Appl Phys* 2020;59:SKKE02.
- [11] Anderton N, Carlson CS, Matsumoto R, Shimizu R, Poortinga AT, Kudo N, et al. On the rigidity of four hundred Pickering-stabilised microbubbles. *Jpn J Appl Phys* 2022;61:ac4adc.
- [12] Postema M, de Jong N, Schmitz G. The physics of nanoshelled microbubbles. *Biomed Tech* 2005;50(S1):748–749.