



HAL
open science

The Silicon Vertex Detector of the Belle II experiment

L. Zani, K. Adamczyk, L. Aggarwal, H. Aihara, T. Aziz, S. Bacher, S. Bahinipati, G. Batignani, J. Baudot, P.K. Behera, et al.

► To cite this version:

L. Zani, K. Adamczyk, L. Aggarwal, H. Aihara, T. Aziz, et al.. The Silicon Vertex Detector of the Belle II experiment. 16th Vienna Conference on Instrumentation, Feb 2022, Wien, Austria. pp.166952, 10.1016/j.nima.2022.166952 . hal-03703984

HAL Id: hal-03703984

<https://hal.science/hal-03703984>

Submitted on 22 Jul 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial 4.0 International License

The Silicon Vertex Detector of the Belle II Experiment

L. Zani^d, K. Adamczyk^u, L. Aggarwal^j, H. Aihara^r, T. Aziz^k, S. Bacher^u, S. Bahinipati^f, G. Batignani^{l,m}, J. Baudot^e, P. K. Behera^g, S. Bettarini^{l,m}, T. Bilka^c, A. Bozek^u, F. Buchsteiner^b, G. Casarosa^{l,m}, L. Corona^{l,m}, T. Czank^q, S. B. Das^h, G. Dujany^e, C. Finck^e, F. Forti^{l,m}, M. Friedl^b, A. Gabrielli^{n,o}, E. Ganiev^{B,n,o}, B. Gobbo^o, S. Halder^k, K. Hara^{s,p}, S. Hazra^k, T. Higuchi^q, C. Irmeler^b, A. Ishikawa^{s,p}, H. B. Jeon^t, Y. Jin^{n,o}, M. Kaleta^u, A. B. Kaliyar^k, J. Kandra^c, K. H. Kang^q, P. Kapusta^u, P. Kodyš^c, T. Kohriki^s, M. Kumar^h, R. Kumarⁱ, C. La Licata^q, K. Lalwani^h, R. Lebouche^d, S. C. Lee^t, J. Libby^g, L. Martel^e, L. Massaccesi^{l,m}, S. N. Mayekar^k, G. B. Mohanty^k, T. Morii^q, K. R. Nakamura^{s,p}, Z. Natkaniec^u, Y. Onuki^r, W. Ostrowicz^u, A. Paladino^{A,l,m}, E. Paoloni^{l,m}, H. Park^t, L. Polat^d, K. K. Rao^k, I. Ripp-Baudot^e, G. Rizzo^{l,m}, D. Sahoo^k, C. Schwanda^b, J. Serrano^d, J. Suzuki^s, S. Tanaka^{s,p}, H. Tanigawa^r, R. Thalmeier^b, R. Tiwary^k, T. Tsuboyama^{s,p}, Y. Uematsu^r, L. Vitale^{n,o}, K. Wan^r, Z. Wang^r, J. Webb^a, O. Werbycka^o, J. Wiechczynski^u, H. Yin^b,

(Belle-II SVD Collaboration)

^aSchool of Physics, University of Melbourne, Melbourne, Victoria 3010, Australia

^bInstitute of High Energy Physics, Austrian Academy of Sciences, 1050 Vienna, Austria

^cFaculty of Mathematics and Physics, Charles University, 121 16 Prague, Czech Republic

^dAix Marseille Université, CNRS/IN2P3, CPPM, 13288 Marseille, France

^eIPHC, UMR 7178, Université de Strasbourg, CNRS, 67037 Strasbourg, France

^fIndian Institute of Technology Bhubaneswar, Satya Nagar, India

^gIndian Institute of Technology Madras, Chennai 600036, India

^hMalaviya National Institute of Technology Jaipur, Jaipur 302017, India

ⁱPunjab Agricultural University, Ludhiana 141004, India

^jPunjab University, Chandigarh 160014, India

^kTata Institute of Fundamental Research, Mumbai 400005, India

^lDipartimento di Fisica, Università di Pisa, I-56127 Pisa, Italy, ^Apresently at INFN Sezione di Bologna, I-40127 Bologna, Italy

^mINFN Sezione di Pisa, I-56127 Pisa, Italy

ⁿDipartimento di Fisica, Università di Trieste, I-34127 Trieste, Italy ^Bpresently at DESY, Hamburg 22761, Germany

^oINFN Sezione di Trieste, I-34127 Trieste, Italy

^pThe Graduate University for Advanced Studies (SOKENDAI), Hayama 240-0193, Japan

^qKavli Institute for the Physics and Mathematics of the Universe (WPI), University of Tokyo, Kashiwa 277-8583, Japan

^rDepartment of Physics, University of Tokyo, Tokyo 113-0033, Japan

^sHigh Energy Accelerator Research Organization (KEK), Tsukuba 305-0801, Japan

^tDepartment of Physics, Kyungpook National University, Daegu 41566, Korea

^uH. Niewodniczanski Institute of Nuclear Physics, Krakow 31-342, Poland

Abstract

Since the start of data taking in spring 2019 at the SuperKEKB collider (KEK, Japan) the Belle II Silicon Vertex Detector (SVD) has been operating reliably and with high efficiency, while providing high quality data: high signal-to-noise ratio, greater than 99% hit efficiency, and precise spatial resolution. These attributes, combined with stability over time, result in good tracking efficiency. Currently the occupancy, dominated by beam-background hits, is quite low (about 0.5 % in the innermost layer), causing no problems to the SVD data reconstruction. In view of the operation at higher luminosity foreseen in the next years, specific strategies aiming to preserve the tracking performance have been developed and tested on data. The time stability of the trigger allows reducing sampling of the strip-amplifier waveform. The good hit-time resolution can be exploited to further improve the robustness against the higher level of beam background. First effects of radiation damage on strip noise, sensor currents and depletion voltage have been measured: they do not have any detrimental effect on the performance of the detector. Furthermore, no damage to the SVD is observed after sudden and intense bursts of radiation due to beam losses.

Keywords: Belle II, Silicon strip sensor, Vertex detector, Tracking, Radiation damage

1 Introduction

The Belle II experiment [1], installed at the e^+e^- SuperKEKB [2] collider that operates mainly at the centre-of-mass energy of the $\Upsilon(4S)$ resonance, aims at probing new

physics beyond the Standard Model through precise measurements on large samples of B mesons, τ and charm decays. Moreover, the asymmetric energy of the 7 GeV e^- beam and 4 GeV e^+ beam is exploited for time-dependent CP -violation measurements. SuperKEKB achieved the world's highest instantaneous luminosity of $3.8 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ in December 2021 and will reach a final peak luminosity of about $6 \times 10^{35} \text{ cm}^{-2} \text{ s}^{-1}$.

Email address: zani@cppm.in2p3.fr (L. Zani)

12 Belle II already collected more than 267 fb^{-1} and its final
 13 target is to accumulate up to 50 ab^{-1} , a 50 times larger
 14 data set than that integrated by Belle. As major upgrade of
 15 its predecessor, Belle II needs to provide similar or better per-
 16 formance in a harsher beam background environment. More-
 17 over, it must achieve better vertex resolution to compensate for
 18 the reduced boost $\beta\gamma$ from 0.45 to 0.28, and so ensure simi-
 19 lar or better time resolution. Besides high statistics, precision
 20 measurements require precise determination of the decay ver-
 21 tices, excellent tracking reconstruction and energy loss mea-
 22 surement, as well as optimal particle identification, including
 23 for low-momentum particles.

24 The Vertex Detector (VXD), as the innermost tracking de-
 25 vice needs to cope with a hit rates of 20 (3) MHz/cm^2 at a ra-
 26 dius of 14 (40) mm and requires a radiation hardness of 2 (0.2)
 27 Mrad/year. It comprises two inner layers of DEPFET pixel sen-
 28 sors (layer 1 and 2) that compose the Pixel Detector (PXD), and
 29 four layers (layers 3 to 6) of double-sided silicon strip detectors
 30 (DSSDs) forming the Silicon Vertex Detector (SVD) [3]. The
 31 remainder of this paper describes the SVD (Sec. 1), operational
 32 experience and performance (Sec. 2), and the effects of beam-
 33 background and radiation (Sec. 3).

34 1. The Belle II Silicon Vertex Detector

35 The SVD detector consists of 172 DSSD sensors arranged
 36 in four layers (3, 4, 5, and 6), which from lower to highest
 37 radius are composed of seven, ten, twelve, and sixteen ladders
 38 with two, three, four, and five sensors, respectively. Its material
 39 budget average per layer is 0.7% of the radiation length X_0 .
 40 Diamond sensors are installed on the beam pipe for radiation
 41 monitoring and to trigger fast beam aborts [4]. A longitudinal
 42 schematic view of the SVD is shown in Figure 1.

43 Each sensor is based on an N-type bulk between $300\text{-}320$
 44 μm thick, equipped with implanted P- and N-doped sensitive
 45 strips on opposite sides. The metal strips for the readout are AC
 46 coupled on top of the implanted strips, separated by a dielec-
 47 tric SiO_2 layer, and alternated with strips which are not readout
 48 (floating strips). Along the sensors, strips are arranged in per-
 49 pendicular directions on opposite sides in order to provide 2D
 50 spatial information: the u/P side strips, orthogonal to the beam
 51 axis, measure the $r\phi$ -direction and the v/N side provides infor-
 mation on the z -coordinate along the beam line.

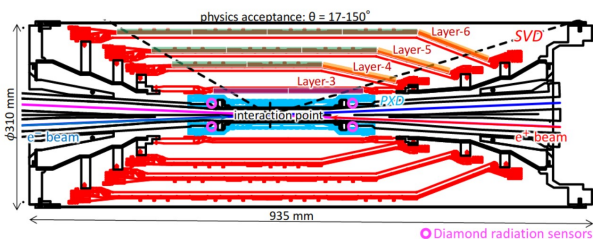


Figure 1: Schematic view of the Belle II Silicon Vertex Detector (SVD).

	Small	Large	Trap.
No. u/P readout strips	768	768	768
No. v/N readout strips	768	512	512
Readout pitch u/P strips (μm)	50	75	50-75
Readout pitch v/N strips (μm)	160	240	240
Sensor thickness (μm)	320	320	300
Active Length (mm)	122.90	122.90	122.76
Active Width (mm)	38.55	57.72	57.59-38.42

Table 1: Geometrical details of the SVD DSSD sensors. All sensors have one intermediate floating strip between two readout strips.

52 Small rectangular sensors are used for layer 3, while layers
 53 4, 5, and 6 are equipped with large rectangular sensors pro-
 54 duced by Hamamatsu Photonics and slanted trapezoidal ones
 55 in the forward region produced by Micron Semiconductor. The
 56 geometrical details of the different sensors are shown in Ta-
 57 ble 1. In total, the SVD covers an active area of 1.2 m^2 and has
 58 224 thousands readout strips. The front-end electronic consists
 59 of APV25 [5] chips that provide an analog readout of the col-
 60 lected signal. Each chip comprises 128 channels and consumes
 61 0.4 W , with a fast shaping time of 50 ns and a high radiation
 62 tolerance up to 100 Mrad of integrated dose. They are operated
 in multi-peak mode with a 32 MHz clock, not synchronous with
 the bunch crossing frequency, which is about eight times higher.
 The signal waveform is reconstructed by six subsequent analog
 samplings. A mixed three/six acquisition mode has also been
 devised to reduce dead time, data size and occupancy at higher
 luminosity. While for the shorter layer 3 ladders the chips are
 outside the active area, for the long ladders in layers 4, 5, and
 6, the chip-on-sensor concept has been developed, to minimize
 the signal propagation length and to reduce the capacitance and
 noise. With this design, for the middle sensors of the ladders,
 the chips are placed only on one side of the detector, where a
 wrapped flex allows read out of the sensor side opposite to the
 chip position. The chips are thinned to $100 \mu\text{m}$ to minimize
 the material budget and stainless steel pipes for bi-phase CO_2
 cooling at -20° are located on one side only.

The SVD fulfills three main roles: it extrapolates the tracks
 to the PXD; it defines the region of interest for data reduction;
 finally, it provides standalone tracking and particle identifica-
 tion via the measurement of ionisation energy loss.

83 2. Operational experience and performance

84 The SVD has been operating smoothly with no major is-
 85 sues since its installation in 2019. So far, the total fraction of
 86 masked strips is less than 1% and only one APV25 chip out
 87 of 1748 was temporarily disabled during spring 2019, which
 88 was fully recovered after cable reconnection. Moreover tem-
 89 perature and calibration constants are stable, the last ones also
 90 evolving within the expected ranges, due to radiation damage.
 91 The SVD hit efficiency is measured to be above 99% for all

sensors. The signal charge normalised to the traversed sensor thickness, shown in Figure 2, is found to be in good agreement with expectations and similar in all sensors. On the u/P side the charge matches the predicted value for a minimal ionising particle when accounting for the uncertainty in the APV25 gain calibration ($\sim 15\%$). On the v/N side, due to the larger pitch combined with the presence of the floating strip, approximately 10% - 30% signal loss is observed. Overall, an excellent signal-to-noise ratio (SNR) is measured in all 172 sensors with a most probable value ranging between 13 and 30. This variability in the SNR is due both to the different noise figures on the two sides of the sensors, u/P side has a larger noise due to the longer strip length and the larger inter-strip capacitance, and also to significant difference in the signal, that highly depends on the track incident angle and therefore on the sensor position. As an example, the SNR distributions for the backward sensors of layer 3, averaged over the azimuthal angle ϕ , are shown in Figure 2.

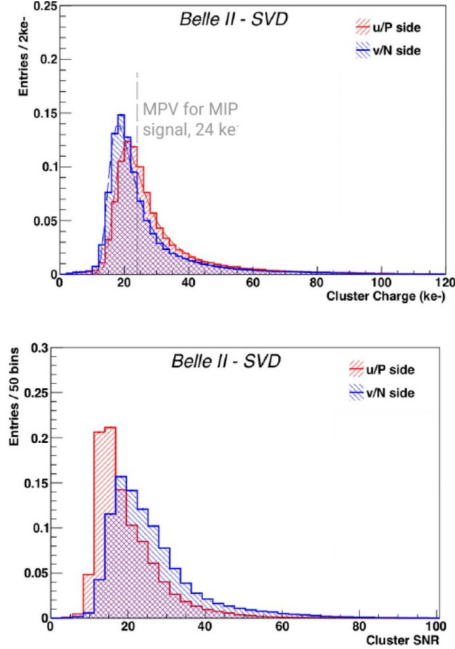


Figure 2: The cluster charge normalised with the track path length and scaled to the sensor thickness (top) and signal-to-noise ratio (SNR) for the backward sensors of layer 3, averaged on all ladders (bottom) are shown for the u/P and v/N side in red and blue respectively. In the top plot, the dashed grey line in correspondence to 24 ke^- represents the expected most probable value (MPV) for a minimal ionising particle (MIP). Data distributions are from a typical run with colliding beam in 2019 for a total luminosity of 14 pb^{-1} .

An excellent resolution on the cluster position is crucial to accurately reconstruct tracks and vertices. The SVD resolution is estimated from the residual of the cluster position with respect to the unbiased track extrapolation after subtracting the effect of the error on the track intercept. The measurement is performed on $e^+e^- \rightarrow \mu^+\mu^-$ events and results are in fair agreement with expectations from the pitch, giving 9 (11) μm for layer 3 (4, 5 and 6) u/P side and 20 (25) μm for layer 3 (4, 5 and 6) v/N side. The measured resolutions, as well as their values

normalized to the pitch, are displayed as a function of the track incidence angle in Figure 3.

Optimal hit-time resolution of less than 2.9 (2.4) ns for u/P (v/N) side is achieved on the SVD time, which is calibrated with respect to the event time provided by the Belle II Central Drift Chamber (CDC). The excellent time resolution can be exploited to reject off-time background hits and preliminary studies on data show a rejection power larger than 50% on the background hits, while preserving more than 99% signal hits. Currently, no selection based on the hit-time resolution is implemented in the reconstruction, but it will help against larger background levels expected at higher luminosities.

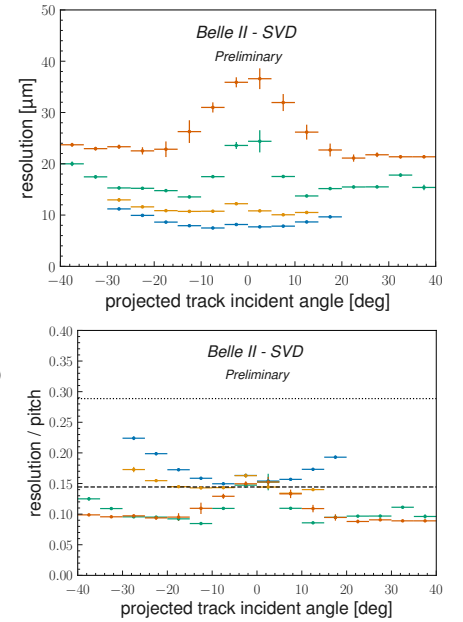


Figure 3: Cluster position resolutions (top) and resolutions normalised to the sensor (bottom) as a function of the incident angle of the track traversing the sensor are shown. Results are obtained on 98 pb^{-1} collision data from 2020 run.

3. Beam-background, occupancy limit and radiation effects

Beam-background increases the SVD hit occupancy degrading the tracking performance and causes radiation damage. A higher occupancy corresponds to a larger number of clusters that can be wrongly associated to tracks or create fake tracks in the reconstruction. The current occupancy limit, set by performance studies, is around 3% in layer 3 and it could be approximately doubled by exploiting the information on the hit time to reject background hits. At the present luminosity the average hit occupancy in layer 3 is below 0.5% and it reaches 3% at the design luminosity of $8 \times 10^{35} \text{ cm}^{-2} \text{ s}^{-1}$ according to beam-background projections based on scaling the simulation with a data-simulation ratio. This extrapolation is affected by large uncertainties due to the assumption of optimal collimator settings and the missing contribution of the injection background not yet simulated. Moreover, the safety factor is relatively small and this motivates the proposal of a possible vertex upgrade to

improve the tolerance to the hit rate and the radiation hardness. The technology assessment is currently ongoing.

The integrated dose on the SVD sensors is estimated from the correlation between the measured occupancy and the dose rate measured in the diamond sensors [4] and is based on several assumptions that result in an uncertainty of about 50%. The most exposed mid plane of layer 3 collected less than 10 krad dose during the 2021 run period and 80 krad in total during the first two and a half years of data taking. It corresponds to a 1-MeV neutron equivalent fluence of 1.9×10^{11} n_{eq}/cm² assuming a ratio of 2.3×10^9 n_{eq}/cm²/krad between dose and neutron equivalent from simulation studies.

The radiation damage has produced already observable effects, but they do not degrade the SVD performance. The increase of leakage currents are proportional to the sensor-bulk damage due to non-ionising energy loss (NIEL). According to the NIEL model [6], the damage is proportional to the 1-MeV neutron equivalent fluence, which in turn is proportional to the integrated dose. The resulting linear correlation between leakage current and integrated dose is observed for all sensors, with slopes between 2 to 5 μ A/cm²/Mrad, of the same order of magnitude as the effect measured by the BaBar experiment of 1 μ A/cm²/Mrad at 20°C [7]. Currently, the noise increase is dominated by strip capacitance and the leakage current contribution is highly suppressed by the short shaping time of the APV25 chips. Also after ten years at design luminosity, corresponding to about 2 Mrad of dose with present background extrapolation, it is not expected to significantly contribute to the total strip noise. Leakage current contribution will become comparable with the present noise after about 10 Mrad of integrated dose. The radiation damage is also visible in a general increase of strip noise of 20% (30%) on n/V (u/P) side, due to a surface effect induced by radiation on the sensors. This non-linear increase is related to fixed oxide charges in the SiO₂ layer increasing the inter-strip capacitance, which is expected to saturate, as it has already been observed in the v/N side. The saturation level has been reached also in the u/P side after 80 krad. No degradation of the SVD performance has been observed due to the noise increase.

Finally, non-ionising energy loss causes sensor bulk damage that can result in a change of the effective doping and therefore of the depletion voltage. This can be monitored by measuring the v/N side noise as a function of the applied bias voltage, since N-type strips are completely insulated when the N-type bulk is fully depleted, causing also the strip noise to drop. Hence, the voltage for which the strip noise on the v/N-side reaches its minimum allows a measurement of the depletion voltage, which is shown to be constant and no changes are observed due to radiation, as expected for a low integrated 1-MeV neutron equivalent fluence accumulated so far.

Conclusions and Outlooks

The Belle II SVD has been taking data smoothly since March 2019 and shows excellent stable performance in agreement with expectations. The first effects of radiation damage have been observed at the expected level and they are not degrading the

performance. The system is also ready to cope with the higher beam-background expected during future runs at higher luminosity.

Acknowledgements

This project has received funding from the European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant agreements No 644294 and 822070 and ERC grant agreement No 819127. This work is supported by MEXT, WPI, and JSPS (Japan); ARC (Australia); BMBWF (Austria); MSMT (Czechia); CNRS/IN2P3 (France); AIDA-2020 (Germany); DAE and DST (India); INFN (Italy); NRF and RSRI (Korea); and MNiSW (Poland).

References

- [1] T. Abe, et al., Belle II Technical Design Report (2010). [arXiv:1011.0352](https://arxiv.org/abs/1011.0352).
- [2] K. Akai, K. Furukawa, H. Koiso, SuperKEKB Collider, Nucl. Instrum. Meth. A 907 (2018) 188–199. [arXiv:1809.01958](https://arxiv.org/abs/1809.01958), [doi:10.1016/j.nima.2018.08.017](https://doi.org/10.1016/j.nima.2018.08.017).
- [3] K. Adamczyk, et al., The Design, Construction, Operation and Performance of the Belle II Silicon Vertex Detector (I 2022). [arXiv:2201.09824](https://arxiv.org/abs/2201.09824).
- [4] S. Bacher, et al., Performance of the diamond-based beam-loss monitor system of Belle II, Nucl. Instrum. Meth. A 997 (2021) 165157. [arXiv:2102.04800](https://arxiv.org/abs/2102.04800), [doi:10.1016/j.nima.2021.165157](https://doi.org/10.1016/j.nima.2021.165157).
- [5] M. J. French, et al., Design and results from the APV25, a deep sub-micron CMOS front-end chip for the CMS tracker, Nucl. Instrum. Meth. A 466 (2001) 359–365. [doi:10.1016/S0168-9002\(01\)00589-7](https://doi.org/10.1016/S0168-9002(01)00589-7).
- [6] G. Lindström, M. Ahmed, et al., Developments for radiation hard silicon detectors by defect engineering—results by the CERN RD48 (ROSE) Collaboration, Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment 465 (1) (2001) 60–69, sPD2000. [doi:https://doi.org/10.1016/S0168-9002\(01\)00347-3](https://doi.org/10.1016/S0168-9002(01)00347-3).
- [7] The BaBar Collaboration, The BaBar Detector: Upgrades, Operation and Performance (2013). [doi:10.48550/ARXIV.1305.3560](https://arxiv.org/abs/1305.3560). URL <https://arxiv.org/abs/1305.3560>