



**HAL**  
open science

## Visual servoing of a laser beam through a mirror

Japheth Odira, Nicolas Andreff, Luc Petiet, Jean Bosco Byiringiro

► **To cite this version:**

Japheth Odira, Nicolas Andreff, Luc Petiet, Jean Bosco Byiringiro. Visual servoing of a laser beam through a mirror. *Robotica*, 2022, 40, pp.3157-3177. 10.1017/S026357472200011X . hal-03812965

**HAL Id: hal-03812965**

**<https://hal.science/hal-03812965>**

Submitted on 13 Oct 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Visual servoing of a laser beam through a mirror

Odira Japheth Ka'pesha\*<sup>1,2</sup>, Nicolas Andreff<sup>1</sup>, Luc Petiet<sup>1</sup> and Jean Bosco Byiringiro<sup>2</sup>

<sup>1</sup>Automatic Control and Micro-Mechatronic Systems Department (AS2M), FEMTO-ST Institute, CNRS-UFC/ENSMM, Besancon 25000, France; *nicolas.andreff@femto-st.fr* (N.A.); *luc.petiet@femto-st.fr* (L.P.).

<sup>2</sup>Siemens Mechatronics Certification Centre, Dedan Kimathi University of Technology, Nyeri, Kenya; *jean.bosco@dkut.ac.ke* (J.B.).

\*Corresponding author. E-mail: [japhethkapesha@gmail.com](mailto:japhethkapesha@gmail.com).

**Keywords:** Minimally invasive surgery, Vocal fold access, Visual servoing, Mirror, Laser beam steering.

## Abstract

In this paper, we present a new approach to improving vocal fold access to perform phonomicrosurgery. It is done by shooting the laser through a mirror to reach the vocal fold hidden parts. A geometrical study of laser shooting path was conducted for vocal fold anatomical constraints, followed by devising a laser-shooting system conceptual design. Control laws were developed and tested by simulation and validated experimentally on a test bench in a monocular and stereoscopic configuration. Simulation and experimental results are provided to demonstrate the effectiveness of the developed approach.

## 1. Introduction

The demand to improve health quality has led to much research including, phonomicrosurgeries, which involves delicate surgical operations on the vocal fold and requires a highly skilled surgeon [1], [2]. Vocal fold surgery requires precision and accuracy due to the tissue's nature being resected, thin, fragile, and viscous. Their lesions might be less than 1mm [3], [4]. The most common procedure to resect those lesions relies on laser surgery.

Systems for laser phonosurgery, such as Acupulse Duo by Lumenis [5], are based on a laser manipulator mounted onto an external microscope. The patient is placed in extreme neck extension so that a rigid straight laryngoscope can be placed in the patient mouth and throat to allow a direct line of sight between the laser manipulator and vocal fold in the larynx. However, certain vocal fold portions are inaccessible in such a placement as lateral and posterior sides because the laser source is located out of the patient's body. A small area laser beam could be moved into the laryngoscope, which prevents the surgeon from conducting a surgical operation on those portions.

Another system, a flexible endoluminal robotic system, was developed during the European project  $\mu$ RALP [6]. That concept has a miniaturized laser manipulator, having micro cameras embedded at the endoscope tip and shooting laser from within the larynx. Nevertheless, since the laser source was placed above the vocal fold and light only travels along straight lines hindered the surgeon from operating on the anterior vocal fold but hardly had access to lateral sides and, to the best of our knowledge, no access to the posterior side. The  $\mu$ RALP project also proposed improving laser steering accuracy by automatically controlling the laser [7] to follow a surgeon-drawn path [8], rather than having the surgeon manually steer the laser beam through a poorly ergonomic joystick. This automatic control is done by visually servoing laser spots from one [7] or two [9], [10] endoscopic cameras.

There are several works reported in the literature, especially in visually guided laser ablation catheter [11]. Which was designed to allow the operator to directly visualize target tissue for ablation and then deliver laser energy to perform point-to-point circumferential ablation. Also, the velocity independent visual path following for laser surgery in [12] where nonholonomic control of the unicycle model and path following at high frequency to satisfy the constraints of laser-tissue interaction were explored. Another example is reported in [13], where a robotic system for skin photo-rejuvenation, which uniformly delivers laser thermal stimulation to a subject's facial skin tissue, was investigated. Yet, as far as we could understand it, none of those work automatically steered laser along hidden paths.

Visual servoing techniques use visual information extracted from the images to design a control law [14], [15], and [16]. It is a systematic way to control a robot using the information provided by one or multiple cameras [17]. Standard stereo sensors used for visual servoing have a limited view and consequently limit their application range. Hence, using planar mirrors has been prioritized to enlarge the field of view of classic pinhole cameras [18] and for high-speed gaze control [19], [20]. A planar mirror is a mirror with a planar reflective surface. An image of an object in front of it appears to be behind the mirror plane. This image is equivalent to one being captured by a virtual camera located behind the mirror; additionally, the virtual camera's position is symmetric to the position of the real camera. In our case, the camera's reflection in the planar mirror is used to track virtual features points in the vocal fold hidden scene. For instance, by using mirror reflections of a scene, stereo images are captured [21].

Tracking is the problem of estimating the trajectory of an object in the image plane as it moves around a scene. A tracker allocates unswerving labels to the tracked objects in different video frames. In addition, depending on the tracking field, a tracker can provide object-centric information, such as the area or shape of an object. Simple algorithms for video tracking rely on selecting the region of interest in the first frame associated with the moving objects. Tracking algorithms can be classified into three categories: point tracking [22], [23], kernel tracking [24], [25], and silhouette tracking [26]. Occlusion can significantly undermine the performance of the object tracking algorithms. Occlusion often occurs when two or more objects come too close and seemingly merge or combine. Image processing systems with object tracking often wrongly track the occluded objects [27]. After occlusion, the system will wrongly identify the initially tracked objects as new objects [28]. If the geometry and placement of static objects in the real surroundings are known, the so-called phantom model is a common approach for handling the occlusion of virtual objects. A method for detecting a dynamic occlusion in front of static backgrounds is described in [29]. This algorithm does not require any previous knowledge about the occluding objects but relies on a textured graphical model of planar elements in the scene. Some approaches solve the occlusion problem using depth information delivered by stereo matching [30]. In our approach to the occlusion problem, we use the triangulation method, where we pay attention to the pixels which are well reconstructed when an image is reproduced and ignore the ones which are not well reconstructed.

The paper focused on a conceptual method of servoing laser to hidden parts of the vocal fold. Having been inspired by this clinical need for improved access and those work-pieces on mirror reflections, we propose an analysis of anatomical constraints of the vocal fold, devised a conceptual design, and formulated a controller, which was evaluated experimentally on a tabletop set-up.

The first contribution is to propose a method to access parts of the vocal fold work-space that are not directly visible during phonosurgery, for instance, the posterior side of the vocal fold by seeing through an auxiliary mirror to overpass the limited micro-cameras field of view of a flexible endoscopy system that was missing in [7], and shooting surgical laser using the same auxiliary mirror to access those invisible parts in the vocal fold workspace. The second contribution is to derive the control equations for automatically steering the laser through the auxiliary mirror to the hidden parts of the vocal fold by updating the control in [9] and [10]. However, through modelling, simulation, and experimentation, the addition of the auxiliary mirror is shown to have no impact, which is thereby demonstrated as being used as it is. Nonetheless, we took the opportunity of this study to derive a variant of the control in [9] based on the geodesic error (cross-product) rather than on the linear error. The *figure 1* below shows a

sample of a simulated image of the vocal fold.

The remainder of this paper is presented as follows. Section 2 gives a detailed description of the conceptual system design to access parts of the vocal fold. Section 3 deals with modelling the proposed system both in monocular and stereoscopic cases to establish a controller. Section 4 focuses on the simulation results of the controller for both the monocular case and stereoscopic case. Section 5 presents the performed experimental validations in a tabletop setup.

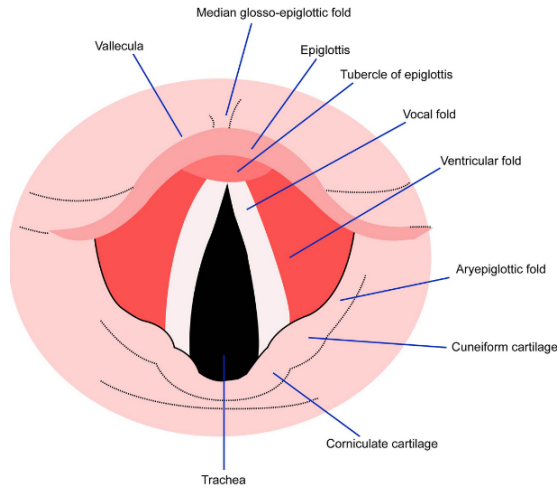


Figure 1. Simulated image of vocal fold anatomy

## 2. Design

### 2.1. System configuration

As illustrated in *figure 2*, the objective is to devise a method that improves access to hidden parts of the vocal fold. In our approach, we propose a system with two cameras to give stereo view and visual feedback to the scene, a laser source to provide surgical laser needed for tissue ablation, illumination guidance, auxiliary mirror guide, and an auxiliary mirror manipulator through which laser is steered to hidden parts of the vocal fold. In practice, human tissues will never contact the designed micro-robotic device, just the endoscope outer shell, which can be readily sterilized and biocompatible. An auxiliary mirror would be inserted at the beginning of the surgical process and remain stationary until the end of surgery. All those parts must be miniaturized and enclosed in a flexible endoscope during fabrication which is out of this paper's scope. However, details on packing all those hardware components (miniaturized) into an endoscope can be found in [31]

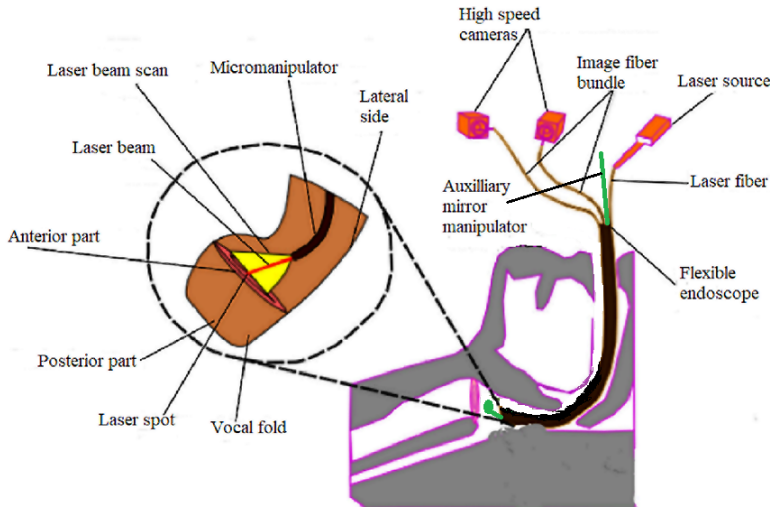


Figure 2. System configuration

### 2.2. System model for accessing hidden parts of vocal fold

From the system configuration above, enlarging its distal arrangements of a flexible endoscope and focusing on how to access hidden features of the vocal fold is shown in *figure 3*. The system has a micro-robot, a tip/tilt actuating mirror to steer the laser through an auxiliary mirror to reach hidden parts. The two cameras also observe the same hidden scene through a mirror reflection. Hence, providing a clear vision of the surgeon's stage to define a trajectory followed automatically by surgical laser in those hidden parts.

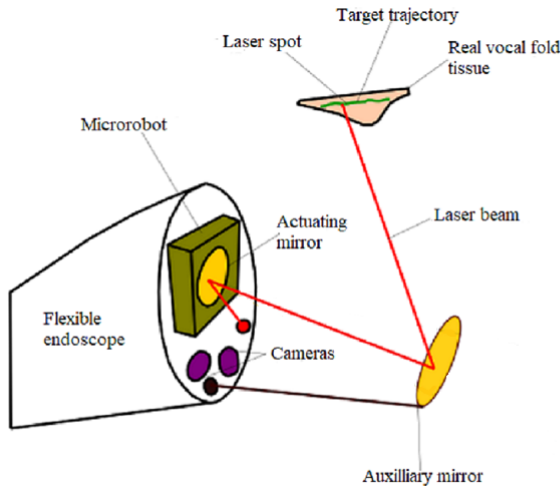


Figure 3. System model

### 2.3. Enlarged anterior, lateral and posterior view for accessing hidden parts of vocal fold

The former configuration of *figure 2* has a limited field of view, even on anterior parts of the vocal fold, because of technical constraints (miniaturization for endoluminal systems, direct line of sight for

extracorporeal systems). Thus, the proposed method for accessing hidden parts on the vocal fold anterior side is in *figure 4(a)*. Based on the orientation and position of the auxiliary mirror, the surgical laser can be steered to all parts on the anterior side of the vocal fold, which is the surface of the vocal fold that is visible from the larynx. For instance, the laser can reach parts outside of the direct view field ( in yellow).

In *figure 4(b)*, a surgical laser is first shot to an auxiliary mirror, then reflected towards the tissues located above the vocal fold in the larynx, such as the ventricular fold.

As demonstrated in *figure 4(c)*, rare portions of a vocal fold being the surface visible from the trachea can be accessed by opening the vocal lips using forceps, exposing the backside for the auxiliary mirror to be oriented and pushed.

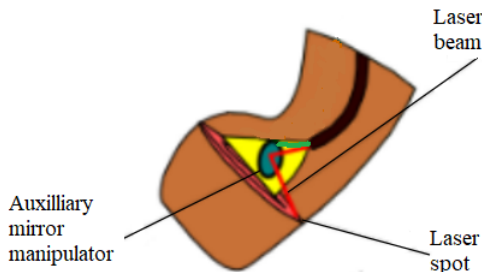


Figure 4 (a). Anterior view access

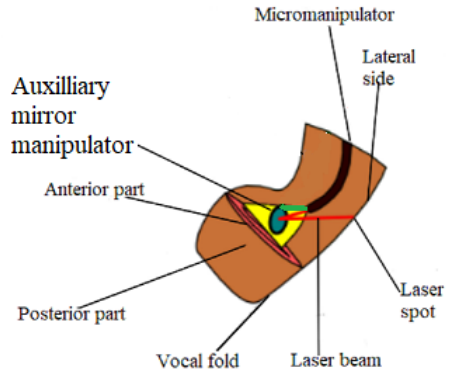


Figure 4 (b). Lateral view access

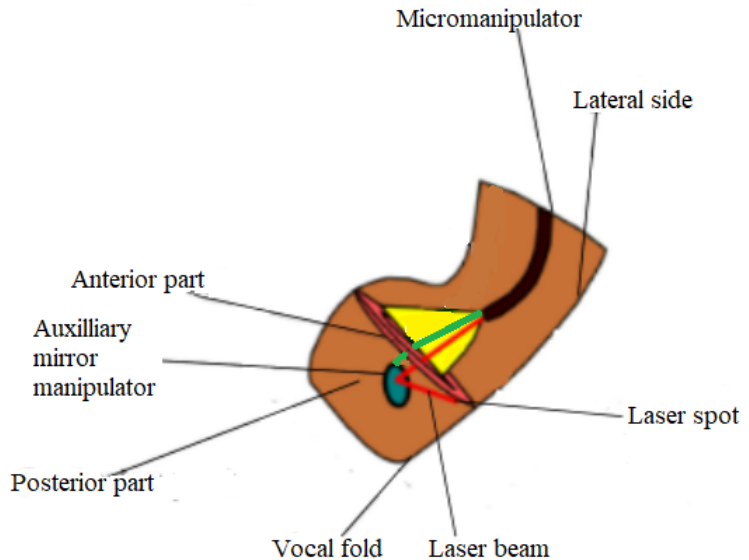


Figure 4 (c). Posterior view access

### 3. Modelling

Table 1: List of symbols used in the paper

Symbol	Remarks
$\pi$	Mirror plane
$\underline{n}$	Vector normal to the mirror plane
$d$	Distance of the reference frame origin to the mirror plane
$\tilde{X}_R$	Homogeneous coordinates for the reflected point
$\tilde{X}$	Homogeneous coordinates for the real point
$\mathbf{D}$	Reflection matrix
${}^w\tilde{X}_R$	Homogeneous coordinates for the reflected point in the world frame
${}^c\tilde{X}_R$	Homogeneous coordinates for the reflected point in the camera frame
$\mathbf{I}_{3 \times 4}$	Canonical perspective projection in the form of $3 \times 4$ identity matrix
${}^c\mathbf{T}_w$	Euclidean 3D transformation
${}^c\mathbf{G}_w$	Notation simplification of the product of identity, transformation matrix, and reflection matrix
${}^c\tilde{x}$	A 2D point position in the image coordinate
$\dot{{}^c\tilde{x}}$	Velocity of the 2D point in the image coordinate
${}^w\dot{\tilde{X}}$	Velocity of the 3D point
$\delta_c$	The unknown depth along the line of sight passing through ${}^c\tilde{x}$
${}^m\mathbf{z}$	The virtual projected spot on the mirror virtual image plane
${}^m\mathbf{T}_w$	Transformation matrix relating micro-mirror frame ( $m$ ) with world frame through the auxiliary mirror
${}^m\dot{\mathbf{z}}$	The velocity of the virtual projected spot on the mirror virtual image plane
$e_{geo}$	The geodesic error
${}^c\tilde{x}$	The detected position of the laser spot in the image
${}^c\tilde{x}^*$	The desired position of the laser spot in the image
$\zeta$	a pseudo-control signal on the sphere
$\lambda$	a positive gain
$\omega$	Angular velocity of the actuated mirror
${}^o\tilde{p}$	Homogeneous representation of 2D point
${}^o\mathbf{F}_L$	Left fundamental matrix
${}^o\mathbf{F}_R$	Right fundamental matrix
$\mathbf{h}_R$ and $\mathbf{h}_L$	Epipolar lines in right and left images, respectively

#### 3.1. Mirror reflection

From a technical point of view, these control equations also differ from the already published ones [7], [9], [10] by the use of an alternative formulation of the perspective projection model and by the servoing of geodesic image errors instead of linear image errors.

Consider the reflection of  $X$  into  $X_R$  through the auxiliary mirror plane  $\pi = (\underline{n}^T, d)^T$  where  $\underline{n}$  is the vector normal to the mirror plane, and  $d$  is the distance of the reference frame origin to the mirror plane. Using homogeneous coordinates for the points and following [32], one has

$$\tilde{X}_R = \mathbf{D}\tilde{X} \quad (1)$$

where

$$\mathbf{D} = \begin{bmatrix} \mathbf{I} - 2\mathbf{nn}^T & 2d\mathbf{n} \\ \mathbf{0}_{3 \times 1}^T & 1 \end{bmatrix} \quad (2)$$

Implementing these equations depends on the chosen reference frame and can thus be expressed either in the world frame.

$${}^w \tilde{\mathbf{X}}_R = {}^w \mathbf{D}^w \tilde{\mathbf{X}} \quad (3)$$

or in a camera frame:

$${}^c \tilde{\mathbf{X}}_R = {}^c \mathbf{D}^c \tilde{\mathbf{X}} \quad (4)$$

### 3.2. Camera projection based on a cross-product concept

When a camera captures an image of a scene, depth information is lost as objects, and points in 3D space are mapped onto a 2D image plane. For the work in this paper, depth information is crucial since there is a need for scene reconstruction from the information provided by the 2D image to know the distance between the actuated mirror and the scene without prior knowledge of where they are. Therefore the used approach of the perspective (pinhole) image projection  $\mathbf{x}$  of a 3D point  $\mathbf{X}$  is stated as;

$${}^{im} \tilde{\mathbf{x}} \equiv {}^{im} \mathbf{K}_c \mathbf{I}_{3 \times 4} {}^c \mathbf{T}_w {}^w \mathbf{D}^w \tilde{\mathbf{X}} \quad (5)$$

where  ${}^{im} \mathbf{K}_c$  represents calibrated intrinsic camera parameters,  $\mathbf{I}_{3 \times 4}$  represents a canonical perspective projection in the form of  $3 \times 4$  identity matrix,  ${}^c \mathbf{T}_w$  represents Euclidean 3D transformation (rotation and translation) between the two coordinate systems of camera and world through a mirror. The  $\equiv$  sign represents depth loss in the projection up to some scale factor. In practice, the  $\equiv$  sign can be removed through division operation, which introduces non-linearity. Alternately, using the cross product, we can make the projection equation a linear constraint equation. Since the light ray emitted from the camera centre point aligns with the light ray coming from the 3D point. If we treat light ray emitted from the camera centre point as vector  $\mathbf{A}$  and light ray coming from the 3D point as vector  $\mathbf{B}$ . The cross-product of two 3D vectors  $\mathbf{A}$  and  $\mathbf{B}$  gives another vector with a magnitude equal to that of the area enclosed by the parallelogram formed between the two vectors. The direction of this vector is perpendicular to the plane enclosed by  $\mathbf{A}$  and  $\mathbf{B}$  in the direction given by the Right-hand rule, and the magnitude of the cross product will be given by  $|\mathbf{A}| |\mathbf{B}| \sin\theta$ . However, if these two vectors are in the same direction, just like in our case, the angle between them will be zero. The magnitude of the cross product will be zero since  $\sin(0) = 0$ . The resultant vector will be the zero vector.  $\mathbf{A} \times \mathbf{B} = 0$

$$[{}^{im} \mathbf{K}_c^{-1} {}^{im} \tilde{\mathbf{x}}]_{\times} \mathbf{I}_{3 \times 4} {}^c \mathbf{T}_w {}^w \mathbf{D}^w \tilde{\mathbf{X}} = \mathbf{0} \quad (6)$$

Hence for notation simplicity, let;

$${}^c \tilde{\mathbf{x}} = {}^{im} \mathbf{K}_c^{-1} {}^{im} \tilde{\mathbf{x}} \quad (7)$$

$${}^c \mathbf{G}_w = \mathbf{I}_{3 \times 4} {}^c \mathbf{T}_w {}^w \mathbf{D} \quad (8)$$

Consequently, equation (6) rewrites more simply as

$$[{}^c \tilde{\mathbf{x}}]_{\times} {}^c \mathbf{G}_w {}^w \tilde{\mathbf{X}} = \mathbf{0} \quad (9)$$



### 3.3. Laser spot kinematics

The time derivative of *equation (9)* is considered to servo the spot position from the current position to the desired one while the camera and mirror remain stationary.

$$[{}^c \dot{\tilde{\mathbf{x}}}]_{\times} {}^c \mathbf{G}_w {}^w \tilde{\mathbf{X}} + [{}^c \tilde{\mathbf{x}}]_{\times} {}^c \mathbf{G}_w {}^w \dot{\tilde{\mathbf{X}}} = \mathbf{0} \quad (10)$$

Since  ${}^c \tilde{\mathbf{x}}$  is a unit vector (i.e.  $\|{}^c \tilde{\mathbf{x}}\| = 1$ ) and using *equation (9)* yields

$${}^c \mathbf{G}_w {}^w \tilde{\mathbf{X}} = \delta_c {}^c \tilde{\mathbf{x}} \quad (11)$$

with  $\delta_c > 0$  the unknown depth along the line of sight passing through  ${}^c \tilde{\mathbf{x}}$  hence, *equation (10)* becomes

$$[{}^c \tilde{\mathbf{x}}]_{\times} {}^c \dot{\tilde{\mathbf{x}}} = \frac{1}{\delta_c} [{}^c \tilde{\mathbf{x}}]_{\times} {}^c \mathbf{G}_w {}^w \dot{\tilde{\mathbf{X}}} \quad (12)$$

### 3.4. Scanning laser mirror as a virtual camera

Scanning a mirror as a virtual camera is considered with a virtual image plane. Therefore the mathematical relationship between it and the 3D spot on the reflected vocal fold is established in *equation (13)* below. Some parameters of *equation (6)* have changed as;  $c = m$ , and  $\mathbf{K} = \mathbf{I}_{3 \times 3}$  since when using the mirror as a camera, focal length, optical centre, and lens distortion are no longer a problem hence  $\mathbf{K}$  is taken to be one.

$$[{}^m \mathbf{z}]_{\times} \mathbf{I}_{3 \times 4} {}^m \mathbf{T}_w {}^w \mathbf{D} {}^w \tilde{\mathbf{X}} = \mathbf{0} \quad (13)$$

${}^m \mathbf{z}$  is the virtual projected spot on the mirror virtual image plane,  ${}^m \mathbf{T}_w$  transformation matrix relating micro-mirror frame ( $m$ ) with world frame through the auxiliary mirror ( $w$ ) hence  ${}^m \mathbf{T}_w$  constant. Differentiating *equation (13)* gives the velocity at which the laser is servoed from one point to another in the image. The resultant equation is;

$${}^m \dot{\mathbf{z}} = -\frac{1}{\delta_m} \mathbf{I}_{3 \times 4} {}^m \mathbf{T}_w {}^w \mathbf{D} {}^w \dot{\tilde{\mathbf{X}}} \quad (14)$$

### 3.5. To be virtual or not to be?

The overall static model for both the laser steering system through the auxiliary mirror and a camera observing the laser spot through *the same mirror* is given by the constraints in *equation (6)* and *equation (13)*. This forms an *implicit* model of the geometry at play, from which one can, depending on what is known beforehand and what's needed, *explicitly* try to get the unknown values from the known ones. The easiest is to find the laser direction and its spot projection in the image from a known place of the spot in 3D and the 3D locations of the camera  ${}^c \mathbf{T}_w$ , the steering mirror  ${}^m \mathbf{T}_w$ , and auxiliary mirror  ${}^w \mathbf{D}$ . However, in practice, one would like to "triangulate through the mirror" the 3D spot from the laser orientation and the spot image projection. And even more helpful, one would like to steer the laser (i.e., change  $\mathbf{z}$ , thus  $\mathbf{X}$ ) from an image-based controller (i.e., a desired motion of  $\mathbf{x}$ ). Then, the question is whether one should explicitly reconstruct  $\mathbf{X}$  or can the controller be derived without this explicit reconstruction.

A large part of the answer to that question lies in the auxiliary mirror location  ${}^w \mathbf{D}$ . If it is known, then triangulation can potentially be done, but this imposes strong practical constraints. However, looking closely at the above equations and *figure 4*, one can remark that there exists a virtual spot location,  $\mathbf{X}_R = {}^w \mathbf{D} \mathbf{X}$  which lies behind the mirror. Replacing  ${}^w \mathbf{D} \mathbf{X}$  by  $\mathbf{X}_R$  in the *equation (6)* and *equation (13)* yields a solution independent of the auxiliary mirror location.

$$[{}^c \tilde{\mathbf{x}}]_{\times} \mathbf{I}_{3 \times 4} {}^c \mathbf{T}_w {}^w \tilde{\mathbf{X}}_R = \mathbf{0} \quad (15)$$

$$[{}^m \tilde{\mathbf{z}}]_{\times} \mathbf{I}_{3 \times 4} {}^m \mathbf{T}_w {}^w \tilde{\mathbf{X}}_R = \mathbf{0} \quad (16)$$

Of course, this simplification is only valid when *both the laser and the camera reflect through the same mirror*, forcing the user to check that the laser spot is visible in the image. This also reduces the calibration burden to determine the relative location  ${}^c \mathbf{T}_m$  between the steering mirror and the camera since the steering mirror frame can arbitrarily be chosen as the world frame of the virtual scene. As a consequence, from a modelling point of view, working with the virtual scene reduces the problem to its core:

$$[{}^c \tilde{\mathbf{x}}]_{\times} \mathbf{I}_{3 \times 4} {}^c \mathbf{T}_m {}^m \tilde{\mathbf{X}}_R = \mathbf{0} \quad (17)$$

$$[{}^m \tilde{\mathbf{z}}]_{\times} \mathbf{I}_{3 \times 4} {}^m \tilde{\mathbf{X}}_R = \mathbf{0} \quad (18)$$

As will be seen in the following sections, this allows to derive a controller without making an explicit triangulation, that is, without necessarily having sensors for  $\mathbf{z}$ .

Consequently, placing the problem in the virtual space allows for a simple solution, independent from prior knowledge of the auxiliary mirror location. Which just needs to be held stable during control so that the desired visual feature and the current one are geometrically consistent.

### 3.6. Geodesic error

Geodesic error differs from linear error since error reduction is made along the unit sphere's surface for geodesic error rather than within the image plane, resulting in linear error minimization.

$$\mathbf{e}_{geo} = {}^c \tilde{\mathbf{x}} \times {}^c \tilde{\mathbf{x}}^* \quad (19)$$

where  ${}^c \tilde{\mathbf{x}}$  is the detected position of the laser spot in the image and  ${}^c \tilde{\mathbf{x}}^*$  is the desired one, which is chosen arbitrarily by users in the visual image, and  $\mathbf{e}_{geo}$  representing the shortest arc between the two points defining the rotation vector orthogonal to the arc plane. Once  ${}^c \tilde{\mathbf{x}}$  is a unit vector, its derivative takes the form of  ${}^c \dot{\tilde{\mathbf{x}}} = \zeta \times {}^c \tilde{\mathbf{x}}$  where  $\zeta$  is a pseudo-control signal on the sphere and replacing in *equation (12)* yields

$$\zeta = \lambda \mathbf{e}_{geo} = \lambda ({}^c \tilde{\mathbf{x}} \times {}^c \tilde{\mathbf{x}}^*) \quad \lambda > 0 \quad (20)$$

$$\lambda [{}^c \tilde{\mathbf{x}}]_{\times}^3 {}^c \tilde{\mathbf{x}}^* = -\frac{1}{\delta_c} [{}^c \tilde{\mathbf{x}}]_{\times} {}^c \mathbf{G}_w {}^w \dot{\mathbf{X}} \quad (21)$$

since  $[{}^c \tilde{\mathbf{x}}]_{\times}^3 = -[{}^c \tilde{\mathbf{x}}]_{\times}$  and the virtual 3D laser spot velocity  ${}^m \dot{\tilde{\mathbf{x}}}_R$ , to be controlled, is thus constrained by

$$\lambda \mathbf{e}_{geo} = -\frac{1}{\delta_c} [{}^c \tilde{\mathbf{x}}]_{\times} {}^c \mathbf{G}_m {}^m \dot{\tilde{\mathbf{X}}}_R \quad (22)$$

### 3.7. Single-camera case of observing hidden portions of vocal fold

We can effectively model and control the laser path with one camera, actuating mirror, and auxiliary mirror. By first establishing angular velocity of the actuating mirror to control the orientation of the laser beam. The general solution to *equation (22)* is

$$\lambda \delta_c \mathbf{e}_{geo} + \mathbf{k} {}^c \tilde{\mathbf{x}} = {}^c \mathbf{G}_m {}^m \dot{\tilde{\mathbf{X}}}_R \quad \mathbf{k} \in \mathbf{R} > 0 \quad (23)$$

where  $\mathbf{k}^c \tilde{\mathbf{x}}$  can be interpreted as the motion of  $X$  along its line of sight (thus a variation of  $\delta_c$ ) that is not observable by the camera. It can be due to the irregular shape of the surface hit by the laser or made by a specific motion of that surface.

Observing that

$${}^c \mathbf{G}_m {}^m \dot{\mathbf{X}}_R = \mathbf{I}_{3 \times 4} \begin{bmatrix} {}^c \mathbf{R}_m & {}^c \mathbf{t}_m \\ 0 & 1 \end{bmatrix} \begin{bmatrix} {}^m \dot{\mathbf{X}}_R \\ 0 \end{bmatrix} = {}^c \mathbf{R}_m {}^m \dot{\mathbf{X}}_R \quad (24)$$

allows solving for  ${}^m \dot{\mathbf{X}}_R$  in *equation (23)*

$${}^m \dot{\mathbf{X}}_R = {}^c \mathbf{R}_m^T (\lambda \delta_c \mathbf{e}_{geo} + \mathbf{k}^c \tilde{\mathbf{x}}) \quad (25)$$

Hence, substituting  ${}^m \dot{\mathbf{X}}_R$  with *equation (25)* result in:

$${}^m \dot{\mathbf{z}} = -\frac{1}{\delta_m} {}^c \mathbf{R}_m {}^c \mathbf{R}_m^T (\lambda \delta_c \mathbf{e}_{geo} + \mathbf{k}^c \tilde{\mathbf{x}}) \quad (26)$$

which simplifies into

$${}^m \dot{\mathbf{z}} = -\lambda' \mathbf{e}_{geo} + \mathbf{k}'^c \tilde{\mathbf{x}} \quad (27)$$

where  $\lambda' = \frac{\lambda \delta_c}{\delta_m}$  and  $\mathbf{k}' = \frac{\mathbf{k}}{\delta_m}$  are the control gains and can be tuned without explicit reconstruction of the depths  $\delta_c$  and  $\delta_m$ . Again, the controller is independent of the mirror's position because both the image and the laser go through it.  $\mathbf{k}$  can be taken as zero unless one wishes to estimate and compensate for the surface shape and ego-motion.

The relationship between laser speed velocity and angular velocity of the actuated mirror is given us:[9]

$${}^o \dot{\mathbf{z}} = \boldsymbol{\omega} \times^o \mathbf{z} \quad (28)$$

$$\boldsymbol{\omega} \times^o \mathbf{z} = -\lambda' \mathbf{e}_{geo} \quad (29)$$

Making  $\boldsymbol{\omega}$  the subject of the formula from *equation (29)*

$$\boldsymbol{\omega} = -\lambda' \mathbf{e}_{geo} \times^o \mathbf{z} \quad (30)$$

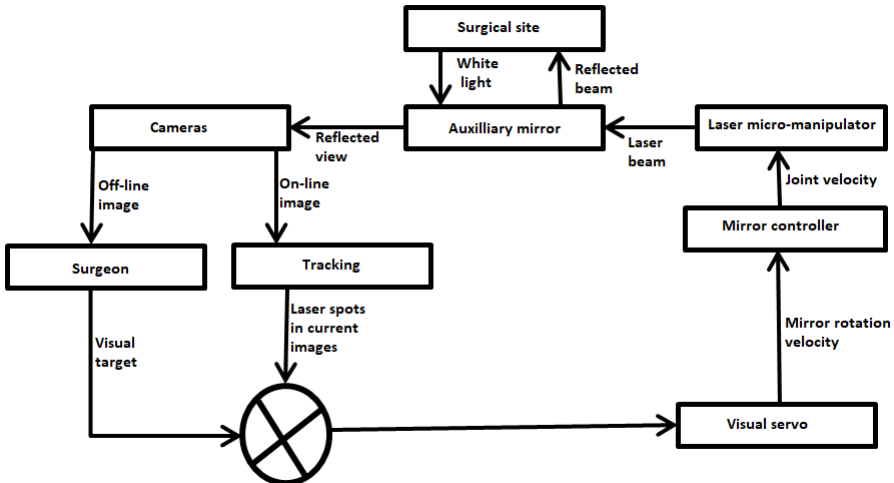


Figure 5. The system model workflow

### 3.8. Trifocal geometry

Let us now investigate the effect of using two cameras, in addition to the actuating mirror and an auxiliary mirror.

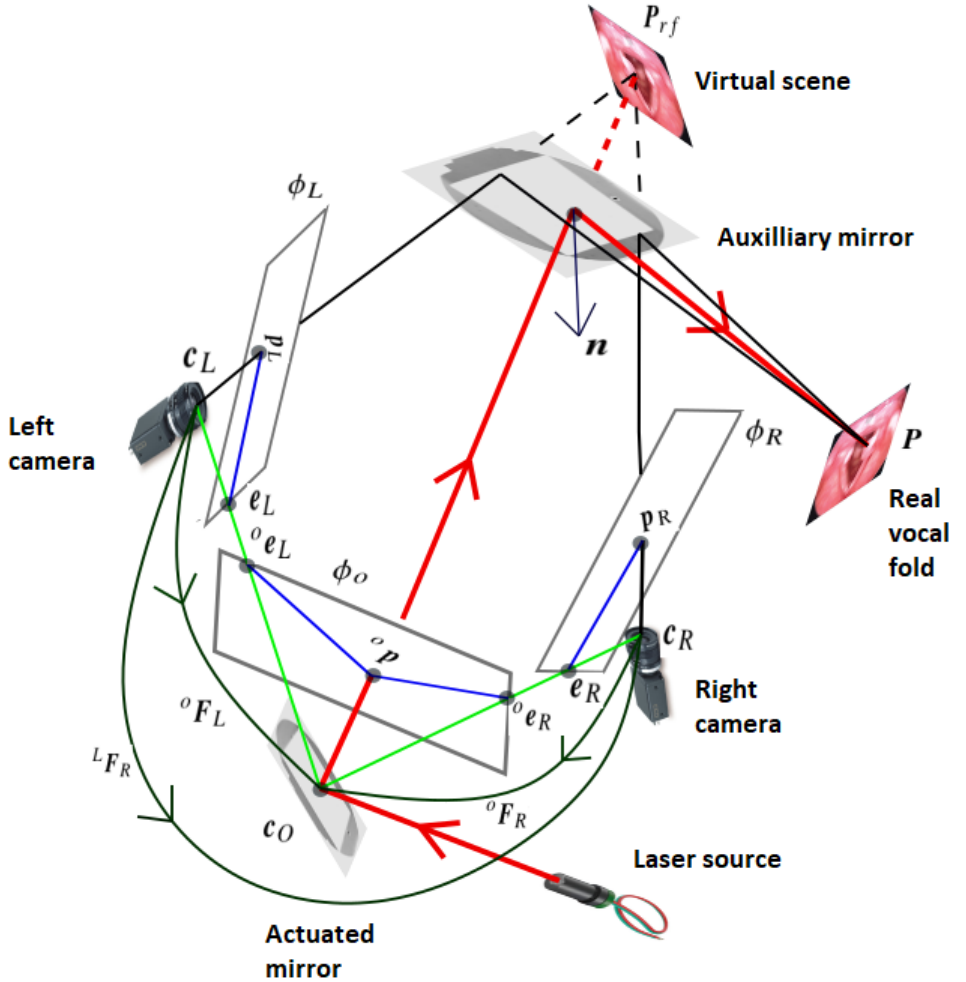


Figure 6. Model schematic

In *figure 6*, three cameras with optical centres  $c_O$ ,  $c_L$ , and  $c_R$  observe a 3D point  $P = (x, y, z)^T$  through a mirror as point  $P_{rf}$  which is projected in 2D points  ${}^o p = (x, y)^T$ ,  $p_L = ({}^L \tilde{x}, {}^L \tilde{y})^T$  and  $p_R = ({}^R \tilde{x}, {}^R \tilde{y})^T$  in the images planes  $\phi_o$ ,  $\phi_L$  and  $\phi_R$  respectively.

The fundamental matrices  ${}^o F_R$  and  ${}^o F_L$  and the epipolar lines  $e_L$  and  $e_R$  showing a relation between the cameras and actuated mirrors.

There are mathematical relations between the Epipolar lines ( $e_L p_L$ ) and ( $e_R p_R$ ) and 2D point  ${}^o p$ ,

commonly called Epipolar constraints, which are given by;

$${}^o \tilde{\mathbf{p}}^{T o} \mathbf{F}_L^c \tilde{\mathbf{p}}_L = \mathbf{0} \quad (31)$$

$${}^o \tilde{\mathbf{p}}^{T o} \mathbf{F}_R^c \tilde{\mathbf{p}}_R = \mathbf{0} \quad (32)$$

$${}^c \tilde{\mathbf{p}}_L^{T L} \mathbf{F}_R^c \tilde{\mathbf{p}}_L = \mathbf{0} \quad (33)$$

Hence mirror velocity as a function of the laser spot velocities is expressed as [9]

$$\boldsymbol{\omega} = -\frac{\mathbf{h}_R \times \mathbf{h}_L}{\|\mathbf{h}_R \times \mathbf{h}_L^2\|} \times \{\mathbf{h}_L \times ({}^o \mathbf{F}_R^R \dot{\tilde{\mathbf{x}}}) - \mathbf{h}_R \times ({}^o \mathbf{F}_L^L \dot{\tilde{\mathbf{x}}})\} \quad (34)$$

where  $\mathbf{h}_R = \mathbf{e}_R \times {}^o \underline{\mathbf{z}}$  and  $\mathbf{h}_L = \mathbf{e}_L \times {}^o \underline{\mathbf{z}}$ . However, contrary to [9], where a linear error was used in both images, we use here geodesic error which involves error minimization along the surface of the object rather than error minimization between two points on the object.

$${}^c \mathbf{e}_{geo} = {}^c \tilde{\mathbf{x}} \times {}^c \tilde{\mathbf{x}}^* \quad c \in \{L, R\} \quad (35)$$

Its time derivative was as follows;

$${}^c \dot{\mathbf{e}}_{geo} = {}^c \dot{\tilde{\mathbf{x}}} \times {}^c \tilde{\mathbf{x}}^* \quad (36)$$

under the assumption that the desired configuration is piecewise constant. Then  $\lambda$  is a positive gain, and  ${}^c \mathbf{e}_{geo}$  undergoes exponential decay to increase the convergence rate.

$${}^c \dot{\mathbf{e}}_{geo} = -\lambda {}^c \mathbf{e}_{geo} \quad (37)$$

Hence substituting *equation (37)* into *equation (36)* yields;

$${}^c \dot{\tilde{\mathbf{x}}} = -\lambda {}^c \tilde{\mathbf{x}}^* \times {}^c \mathbf{e}_{geo} + \mu {}^c \tilde{\mathbf{x}}^* \quad (38)$$

where  $\mu$  can be chosen in different manners;

Here we chose  $\mu = 0$  and relied on the physical constraints; then, the final controller is obtained by applying *equation (38)* for each image and reporting the result into *equation (34)*.

## 4. Simulation

### 4.1. Simulation results for a single camera and auxiliary mirror in a realistic case

ViSP was used for simulation in C++ SDK, and graphs were plotted with Octave. Table 2 shows parameters used during the simulation period.

Table 2: Simulation parameters

Fields	Quantity
Simulation period	2 milliseconds
Camera separation distance	5 mm
Vocal fold offset distance	28 mm
Vocal fold orientation	30 degrees (+)
Auxilliary mirror offset distance	25 mm
Auxilliary mirror orientation	45 degrees(-)

As actual geometry of the vocal fold is not needed in the controller, since it is implicitly included in the desired and current laser spot position, we simplified the simulation of the vocal fold to a simple planar patch.

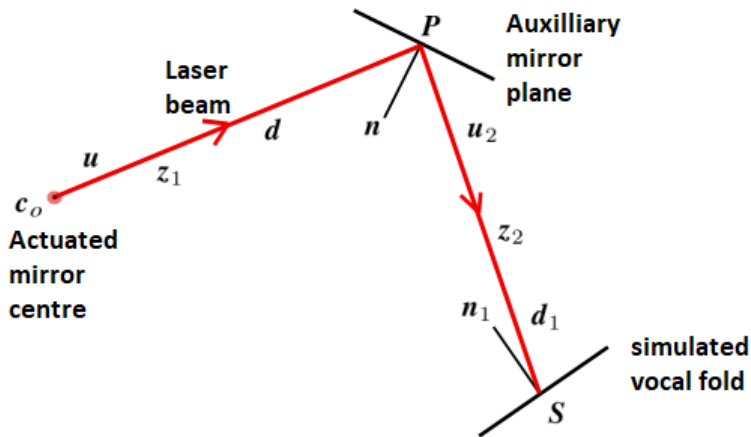


Figure 7. Simulated set-up

Figure 7 shows the simulation setup used. Where point  $S$  corresponds to the laser spot position on the vocal fold. Vector  $\mathbf{u}$  is a unit vector in the direction of a laser beam,  $d$  is the shortest distance from the centre of the micro-mirror to the plane of the auxiliary mirror. Vector  $\mathbf{u}_2$  is the reflected unit vector of  $\mathbf{u}$ ,  $d_1$  is the shortest distance between the auxiliary mirror and vocal fold plane, and  $z_2$  is the distance along the reflected laser beam.

This simulation aims to validate the laser monocular visual servoing through an auxiliary mirror, controlled by equation (30). Figure 8(a) orange colour asterisk is the laser spot's initial position, red plus colour is the desired location of spot, and the magenta cross colour is geometric coherence.

The trajectory path shown in the image of figure 8(a) marked with a blue line is the laser beam path followed by the steering laser in an image from the initial position to the desired place at hidden parts

of the vocal fold. As expected, the trajectory is straight in the image. Error versus time plot shows an exponential convergence, as shown in *figure 8(b)*.

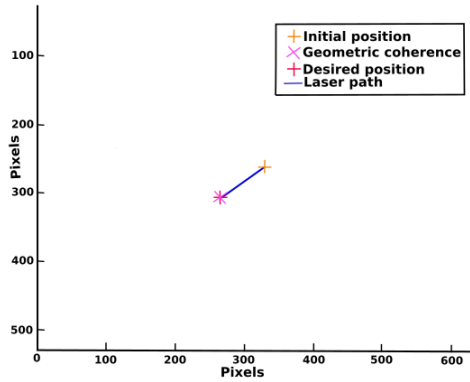


Figure 8 (a). Image

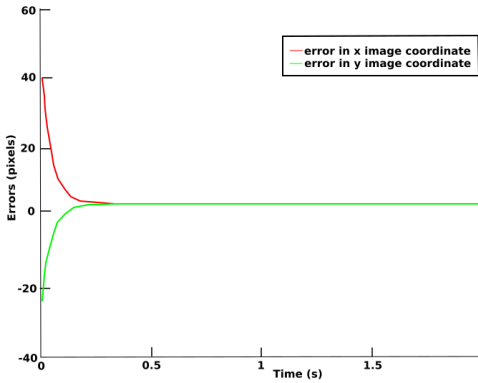


Figure 8 (b). Error versus Time

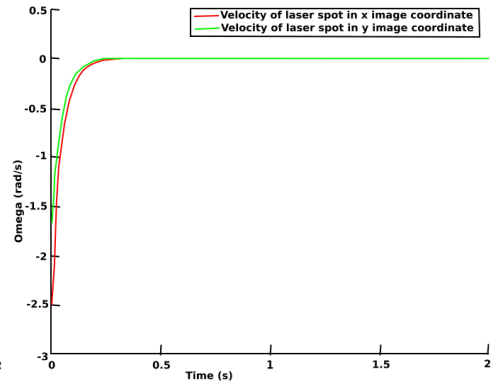


Figure 8 (c). Mirror Velocity

#### 4.2. Stereo-view imaging system and auxiliary mirror simulation result in a realistic case

The second simulation implies a stereoscopic imaging system. Thus, a second camera is added to the first simulation setup, and the control in *equation (34)* is applied. The obtained results in *figure 9(a)* and *figure 9(b)* showed that the laser beam's trajectory path from the initial position to the desired position was straight. Error versus time plot, in *figure 9(c)* converged to zero. Similarly, as in *figure 9(d)*, mirror velocity had exponential decay.

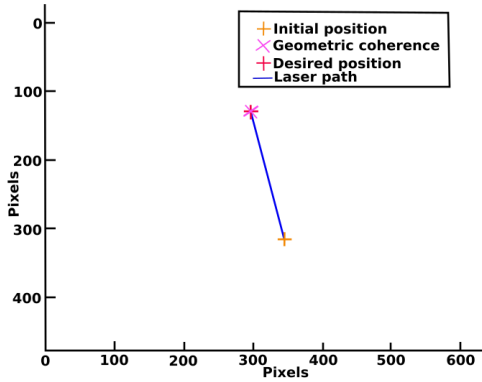


Figure 9 (a). Left Image

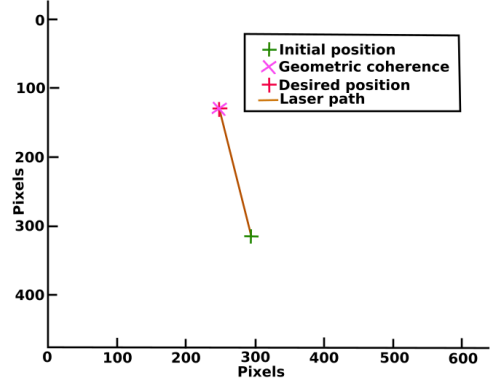


Figure 9 (b). Right Image

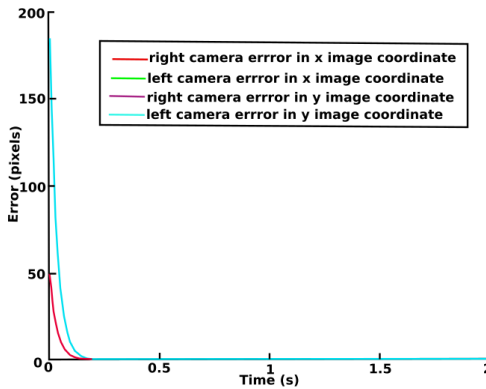


Figure 9 (c). Error versus Time

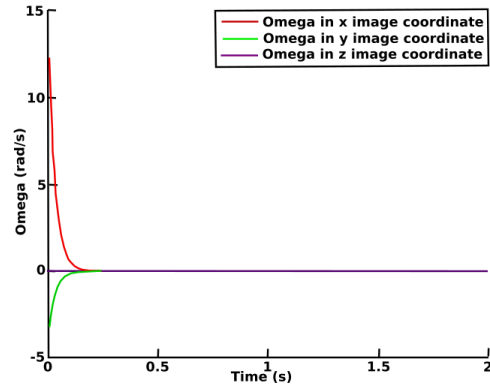


Figure 9 (d). Mirror Velocity

## 5. Experimentation

### 5.1. Experimental setup

The proposed approaches were validated on the experimental setup shown in *figure 10* below. It had two cameras (Guppy pro model: GPF 033B ASG-E0030013 set to work at a frame rate of 25 images per second for a resolution of  $640 \times 480$ ), a laser source, auxiliary mirror, and an actuated mirror based on a parallel-kinematics designed with coplanar axes having triple design, and the platform is driven of three piezo actuators that are located in 120 degrees angles to one another. With the differential drive design, the actuators operate in pairs in a push/ pull mode. Two orthogonal rotation axes share a common pivot point. DAC-board in a PC generated the analog input signal; the E-616 PI analog controller was used to control the actuated mirror's tip/tilt mirror platform, which caused a change of laser beam direction directed by a laser pointer to the target via an auxiliary mirror. The spot's position was calculated with respect to the platform center by a computer (with a program in C++ using the library ViSP <http://visp.inria.fr>). That computed position was sent to a National Instrument card (NI model: USB-6211 with 250kS/s) externally installed via a USB connection. This communication was enabled using the Labview platform.

The system acquired pixel coordinates through mouse clicks on the image; the user-defined the desired position from which the control algorithm was computed. The corresponding position of the micromanipulator thus servoed laser spot from its initial pose to the desired pose. When the laser finally reached its desired position, user-defined through mouse-click the next desired position to be attained by the



laser.

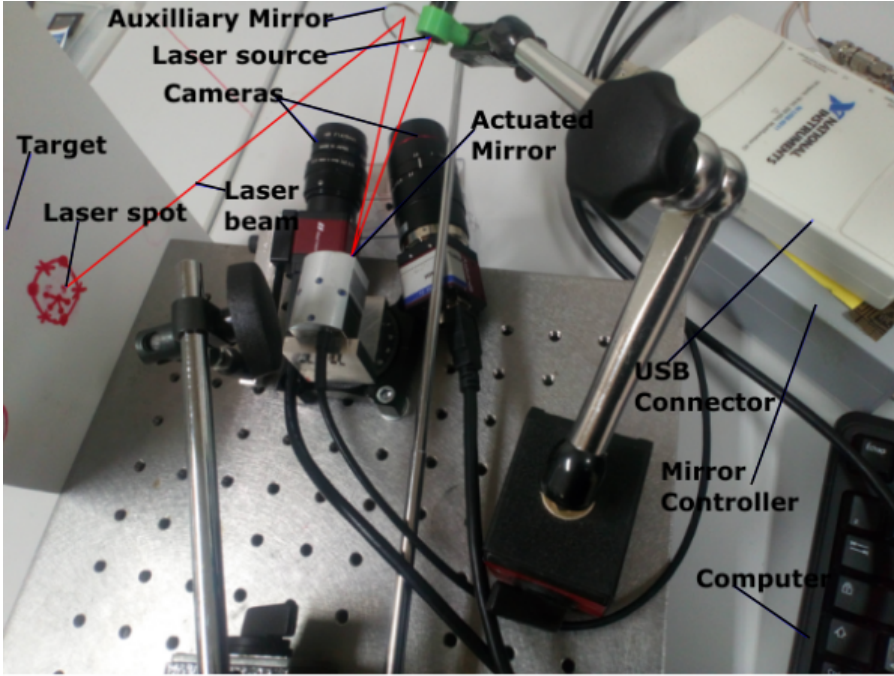


Figure 10. Photography of the experimental setup

*5.2. Experimental workflow*

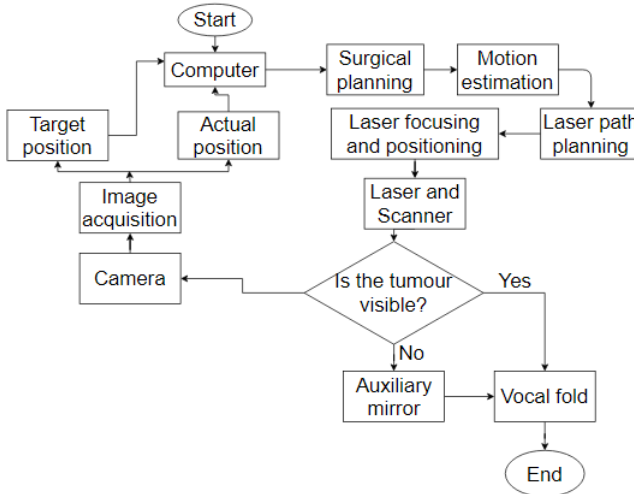


Figure 11. Monocular/ stereoscopic experimental workflow

### 5.3. Single-camera and auxiliary mirror experimental results

Using the setup discussed in *figure 10*, with one camera. The monocular case was validated experimentally, and results obtained in *figure 12(a)* were similar to a simulated case in section 4.

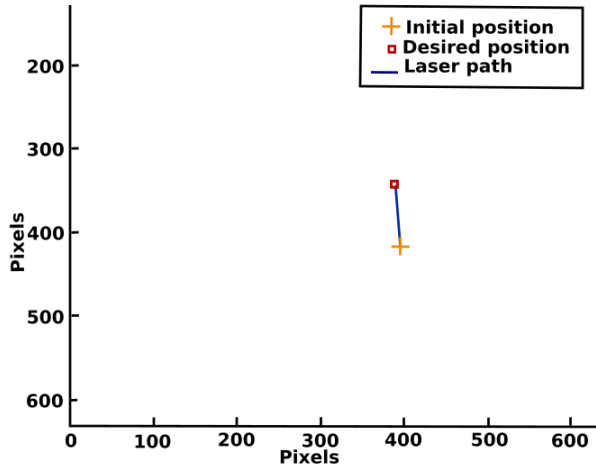


Figure 12 (a). Image

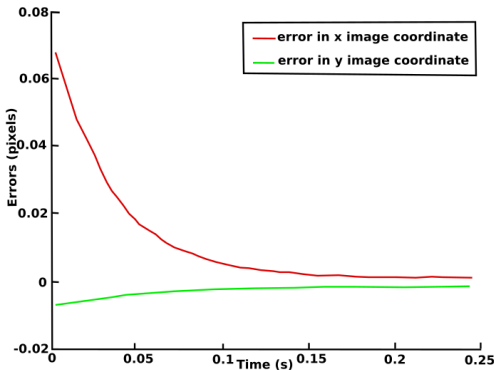


Figure 12 (b). Error Vs. Time

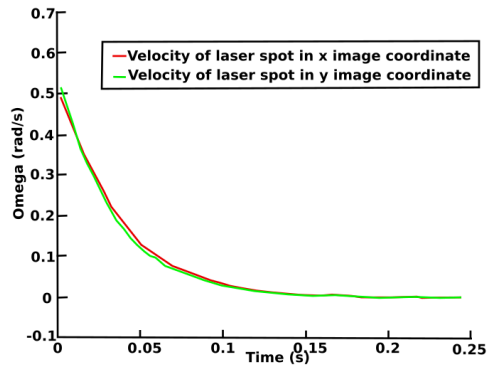


Figure 12 (c). Mirror Velocity

*Figure 12(b)* and *figure 12(c)*, error versus time and mirror velocity, respectively, followed exponential decay to reach desired positions, leading to convergence.

5.4. Stereo-view imaging system and auxiliary mirror experimental results

Experimental validation of stereo-view imaging was performed with the setup discussed in figure 10. Indeed, Figure 13(a) and figure 13(b) is straight image trajectory path.

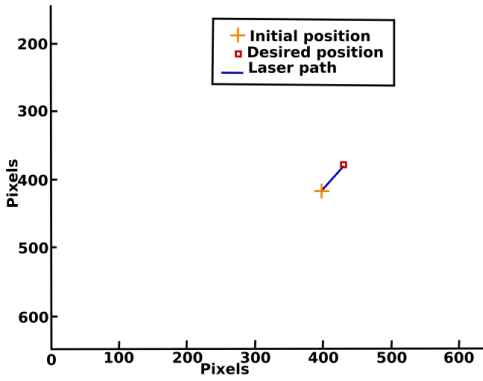


Figure 13 (a). Left Image

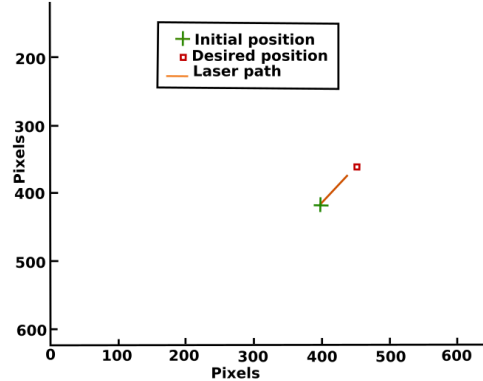


Figure 13 (b). Right Image

Even though both trajectories were straight but for the right image, the path didn't reach the desired target; this could be due to laser spot size differences; hence, their center of gravity moved slightly during control.

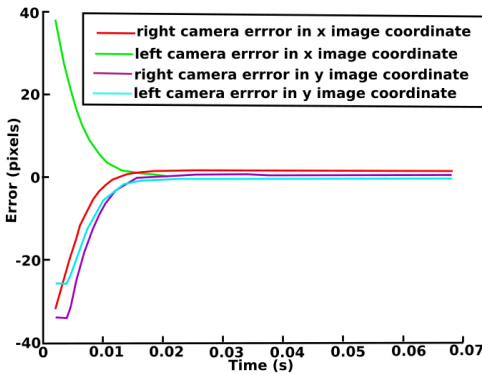


Figure 13 (c). Error Vs. Time


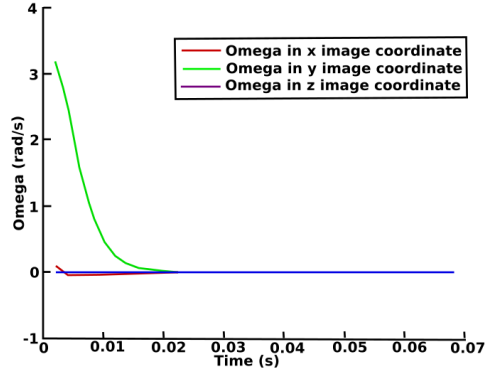



Figure 13 (d). Mirror Velocity

Figure 13(c) and figure 13(d), error versus time for each image, both  $x$ , and  $y$  error components had exponential decay.


Figures 14 and 15 show live video screenshots of laser servoing for the conducted experiments.

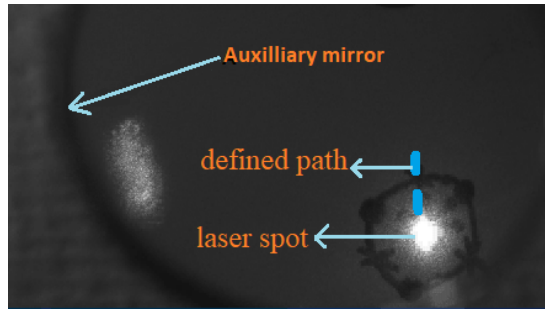


(a)

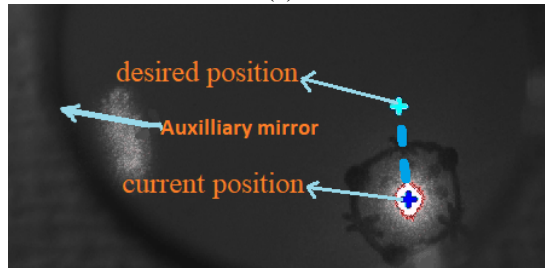


(b)

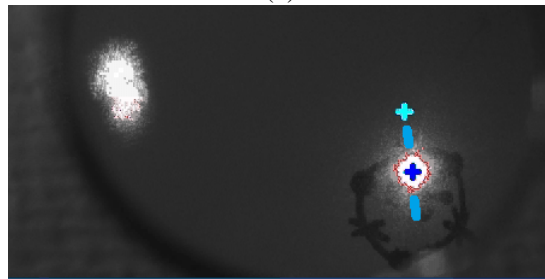

(c)

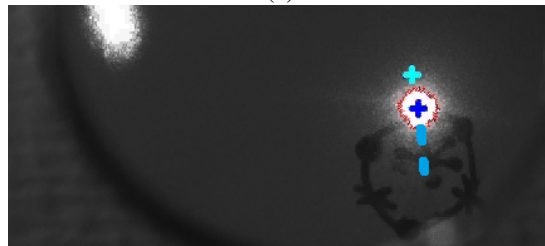

(d)

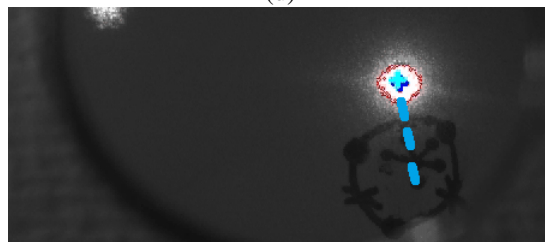

(e)

Figure 14. Some experimental images acquired for a single camera system

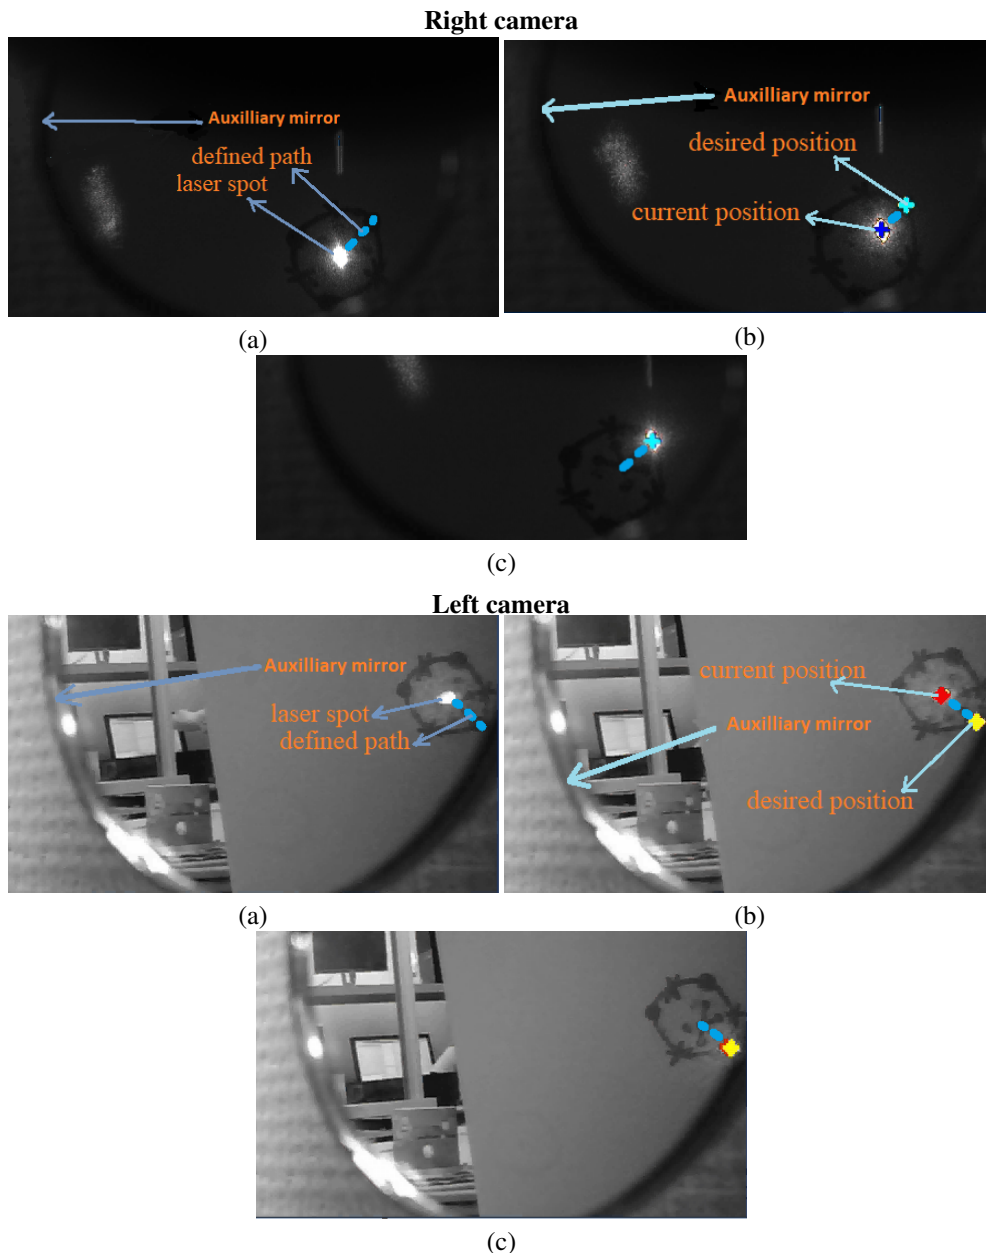


Figure 15. Some experimental images acquired for stereo view imaging system

## 6. Conclusion

The study shows that vocal fold accessibility improved by seeing through a mirror and servoing surgical laser to reach those hidden portions of the vocal fold. Also, the mirror did not affect the controller. The derived control laws could work in both 2D and 3D paths without any prior knowledge of the scene. They were successfully validated in both simulation and experimentally; in all cases, the laser steering control law showed its ability to operate accurately. The experimental results further demonstrated that

the proposed control laws were accurate, fully decoupled with exponential decay of the image errors. The next stages of this paper will involve adapting the controller to work under different conditions, for instance, in the influence of perturbations and experimenting on a vocal fold mock-up.

### Acknowledgement

This work was supported by the Fondation Charles Defforey - Institut de France through its Grand Prix Scientifique 2018.

### Conflicts of Interest

Nicolas Andreff holds a minor share in the capital of Amarob Technologies. All other authors do not have any conflict of interest.

### Financial Support

None

### Ethical Considerations

None

### Authors' Contributions

Odira Japheth Ka'pesha is the main author, all other are coauthors.

### References

- [1] S. M. Zeitels, *Atlas of phonosurgery and other endolaryngeal procedures for benign and malignant disease*. Singular Publishing Group, 2001.
- [2] J. F. I. Giallo *et al.*, "A medical robotic system for laser phonosurgery," 2008.
- [3] H. E. Eckel, S. Berendes, M. Damm, J. P. Klussmann, and K. Wassermann, "Suspension laryngoscopy for endotracheal stenting," *The Laryngoscope*, vol. 113, no. 1, pp. 11–15, 2003.
- [4] M. Remacle, "Laser-assisted microphonosurgery," in *Surgery of Larynx and Trachea*. Springer, 2009, pp. 51–56.
- [5] L. Israel, "Digital acublade system. israel@ online," 2014.
- [6] L. S. Mattos and N. Andreff, "The  $\mu$ ralp project: new technologies and systems for robot-assisted laser phonosurgery," in *3rd Joint Workshop on New Technologies for Computer/Robot Assisted Surgery, DOI*, vol. 10, 2013.
- [7] R. Renevier, B. Tamadazte, K. Rabenoroso, L. Tavernier, and N. Andreff, "Endoscopic laser surgery: Design, modeling, and control," *IEEE/ASME Transactions on Mechatronics*, vol. 22, no. 1, pp. 99–106, 2016.
- [8] L. S. Mattos, N. Deshpande, G. Barresi, L. Guastini, and G. Peretti, "A novel computerized surgeon-machine interface for robot-assisted laser phonosurgery," *The Laryngoscope*, vol. 124, no. 8, pp. 1887–1894, 2014.
- [9] N. Andreff and B. Tamadazte, "Laser steering using virtual trifocal visual servoing," *The International Journal of Robotics Research*, vol. 35, no. 6, pp. 672–694, 2016.

- [10] B. Tamadazte and N. Andreff, "Weakly calibrated stereoscopic visual servoing for laser steering: Application to phonomicrosurgery," in *2014 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 2014, pp. 743–748.
- [11] S. R. Dukkipati, K.-H. Kuck, P. Neuzil, I. Woollett, J. Kautzner, H. T. McElderry, B. Schmidt, E. P. Gerstenfeld, S. K. Doshi, R. Horton *et al.*, "Pulmonary vein isolation using a visually guided laser balloon catheter: the first 200-patient multicenter clinical experience," *Circulation: Arrhythmia and Electrophysiology*, vol. 6, no. 3, pp. 467–472, 2013.
- [12] J.-A. Seon, B. Tamadazte, and N. Andreff, "Decoupling path following and velocity profile in vision-guided laser steering," *IEEE Transactions on Robotics*, vol. 31, no. 2, pp. 280–289, 2015.
- [13] M. Muddassir, D. Gomez, L. Hu, S. Chen, and D. Navarro-Alarcon, "Robotics meets cosmetic dermatology: Development of a novel vision-guided system for skin photo-rejuvenation," *IEEE/ASME Transactions on Mechatronics*, 2021.
- [14] B. Espiau, F. Chaumette, and P. Rives, "A new approach to visual servoing in robotics," *IEEE Transactions on Robotics and Automation*, vol. 8, no. 3, pp. 313–326, 1992.
- [15] S. Hutchinson, G. D. Hager, and P. I. Corke, "A tutorial on visual servo control," *IEEE transactions on robotics and automation*, vol. 12, no. 5, pp. 651–670, 1996.
- [16] A. C. Sanderson and L. E. Weiss, "Image-based visual servo control of robots," in *Robotics and industrial inspection*, vol. 360. International Society for Optics and Photonics, 1983, pp. 164–169.
- [17] F. Chaumette and S. Hutchinson, "Visual servoing and visual tracking," 2008.
- [18] G. L. Mariottini, S. Scheggi, F. Morbidi, and D. Prattichizzo, "Catadioptric stereo with planar mirrors: multiple-view geometry and camera localization," in *Visual servoing via advanced numerical methods*. Springer, 2010, pp. 3–21.
- [19] K. Iida and H. Oku, "Saccade mirror 3: High-speed gaze controller with ultra wide gaze control range using triple rotational mirrors," in *2016 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2016, pp. 624–629.
- [20] K. Okumura, H. Oku, and M. Ishikawa, "High-speed gaze controller for millisecond-order pan/tilt camera," in *2011 IEEE International Conference on Robotics and Automation*. IEEE, 2011, pp. 6186–6191.
- [21] G. L. Mariottini, S. Scheggi, F. Morbidi, and D. Prattichizzo, "Planar catadioptric stereo: single and multi-view geometry for calibration and localization," in *2009 IEEE International Conference on Robotics and Automation*. IEEE, 2009, pp. 1510–1515.
- [22] C. Rasmussen and G. D. Hager, "Probabilistic data association methods for tracking complex visual objects," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 23, no. 6, pp. 560–576, 2001.
- [23] C. Hue, J.-P. Le Cadre, and P. Pérez, "Sequential monte carlo methods for multiple target tracking and data fusion," *IEEE Transactions on signal processing*, vol. 50, no. 2, pp. 309–325, 2002.
- [24] S. K. Zhou, R. Chellappa, and B. Moghaddam, "Visual tracking and recognition using appearance-adaptive models in particle filters," *IEEE Transactions on Image Processing*, vol. 13, no. 11, pp. 1491–1506, 2004.
- [25] H. T. Nguyen and A. W. Smeulders, "Fast occluded object tracking by a robust appearance filter," *IEEE transactions on pattern analysis and machine intelligence*, vol. 26, no. 8, pp. 1099–1104, 2004.
- [26] A. Yilmaz, X. Li, and M. Shah, "Contour-based object tracking with occlusion handling in video acquired using mobile cameras," *IEEE Transactions on pattern analysis and machine intelligence*, vol. 26, no. 11, pp. 1531–1536, 2004.
- [27] Q. Zhao, W. Tian, Q. Zhang, and J. Wei, "Robust object tracking method dealing with occlusion," in *2016 3rd International Conference on Soft Computing & Machine Intelligence (ISCMCI)*. IEEE, 2016, pp. 143–147.

- [28] M. I. Shehzad, Y. A. Shah, Z. Mehmood, A. W. Malik, and S. Azmat, "K-means based multiple objects tracking with long-term occlusion handling," *IET Computer Vision*, vol. 11, no. 1, pp. 68–77, 2017.
- [29] J. Fischer, H. Regenbrecht, and G. Baratoff, "Detecting dynamic occlusion in front of static backgrounds for ar scenes," in *Proceedings of the workshop on Virtual environments 2003*, 2003, pp. 153–161.
- [30] M. M. Wloka and B. G. Anderson, "Resolving occlusion in augmented reality," in *Proceedings of the 1995 symposium on Interactive 3D graphics*, 1995, pp. 5–12.
- [31] B. Tamadazte, R. Renevier, J.-A. Séon, A. V. Kudryavtsev, and N. Andreff, "Laser beam steering along three-dimensional paths," *IEEE/ASME Transactions on Mechatronics*, vol. 23, no. 3, pp. 1148–1158, 2018.
- [32] E. Marchand and F. Chaumette, "Visual servoing through mirror reflection," in *2017 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2017, pp. 3798–3804.