

### Modelling the vibration behavior in hands influence of pushing gripping forces

Simon Vauthier, Christophe Noël, Emmanuelle Jacquet, Jérôme Chambert, Emmanuel Foltête

#### ▶ To cite this version:

Simon Vauthier, Christophe Noël, Emmanuelle Jacquet, Jérôme Chambert, Emmanuel Foltête. Modelling the vibration behavior in hands influence of pushing gripping forces. Séminaire interne FEMTO 2022, Jun 2022, Besançon, France. hal-03813291

HAL Id: hal-03813291

https://hal.science/hal-03813291

Submitted on 13 Oct 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



# femto-st Modelling the vibration behavior in hands: **EXERCES & influence of pushing / gripping forces**

S. VAUTHIER<sup>a,b</sup>, C.NOEL<sup>b</sup>, E. JACQUET<sup>a</sup>, J. CHAMBERT<sup>a</sup>, E.FOLTETE<sup>a</sup>,

Univ. Bourgogne Franche Comté, FEMTO-ST institute, UFC/CNRS/ENSMM/UTBM, Department of Applied Mechanics, Besançon, France

Institut national de recherche et de sécurité (INRS), EVO laboratory, Vandœuvre-lès-Nancy, France

### Introduction

In France, almost 2.2m workers are exposed to hand-transmitted vibration. A sustained exposure to high level vibration may induce various health disorders named "Hand-Arm Vibration Syndrome" [1]. Symptoms onset could be linked to mechanical stress and strain caused by vibrating machines. Knowing these quantities could be the basis for future prevention strategies. Unfortunately, measuring this quantities remains still tough challenging.

### Objectives

Thus, this study aims at estimating mechanical stress and strain fields inside the hand by developing a finite element model of a hand tightening a vibrating handle. Unlike previous works limited to a finger or a highly simplified hand, this thesis seeks to reproduce a complete hand including a detailed MRI-based geometry, realistic constitutive laws and muscle activation. The model should replicate pushing and gripping efforts and will be validate with several experimental measurements.



Figure 1. Example of using a chipping hammer

### Methods

#### **Model definition**

- Kinematic joints for modelling movements between bones.
- Boundary conditions with rigid arm and trunk are specified.
- Visco-hyperelastic constitutive law for soft tissues [2].
- A specific law with muscle activation should identified using indentation and elastography tests.

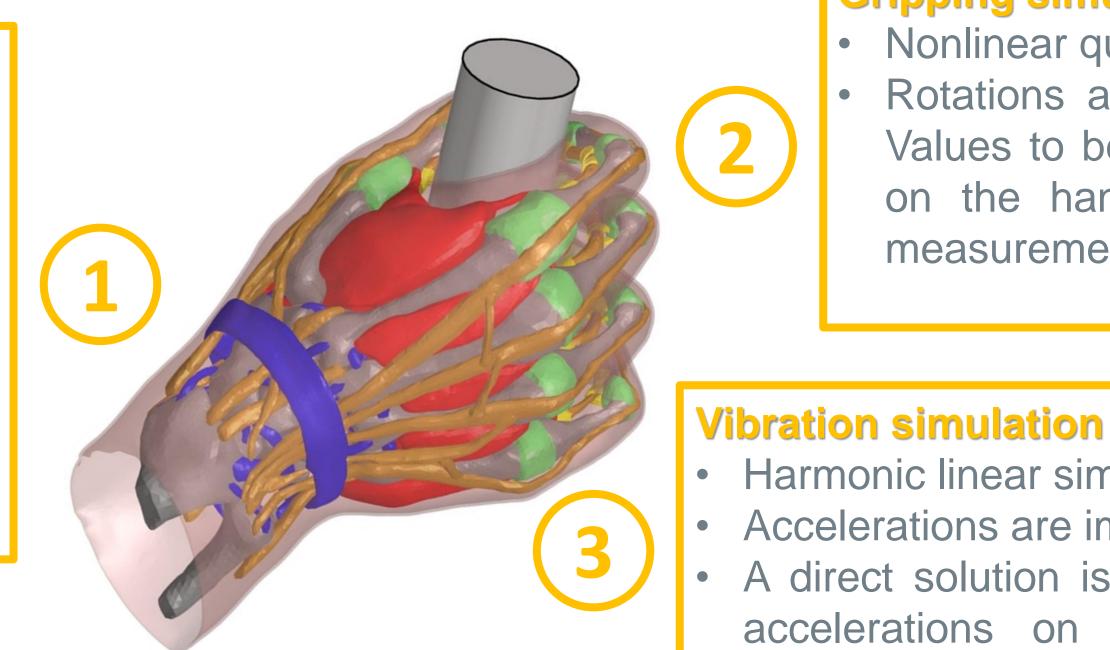


Figure 2. Finite element model of the hand

#### **Gripping simulation**

- Nonlinear quasi-static simulation.
- Rotations and displacements are imposed to bones joints. Values to be applied would be identify comparing pressures on the handle obtained by calculation and experimental measurements.

## Identification of revolute joints axes

Parameters of the kinematic joints were identified with a predictive method. For revolute joints used between phalanges, the axes are estimated using the "Bone-based curvature method" [3].

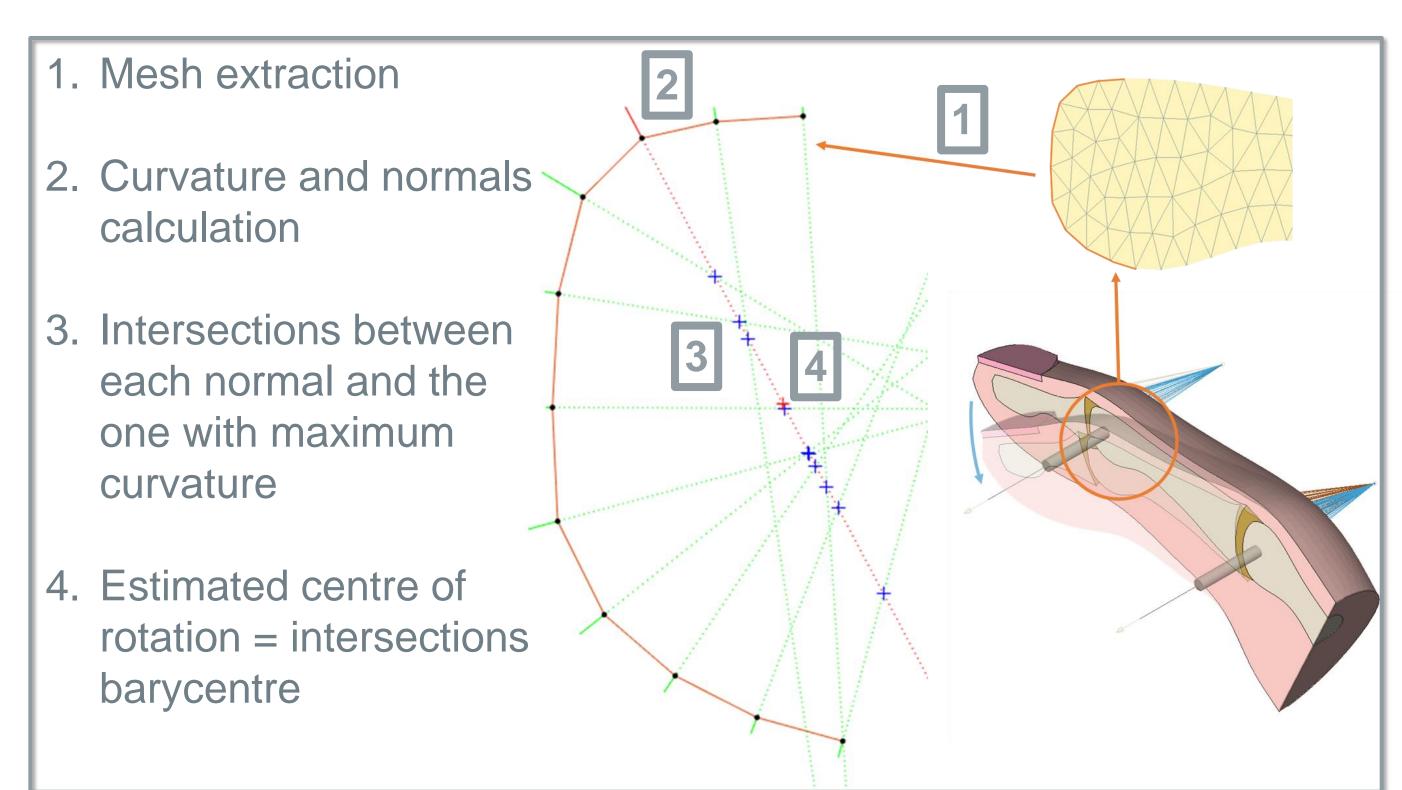


Figure 3. The bone-based curvature method applied on a phalanx

### Conclusions and prospects **Short term**

Implementation of a working predictive method to estimate revolute joint centre. Conception of an instrumented handle to validate vibration simulations.

### Long term

Contacts

Improvement of the estimation of the maximum regulatory vibration dose. Design of handle minimizing vibration transfers.

- Harmonic linear simulation with the former pre-stress conditions.
- Accelerations are imposed on the handle.
- A direct solution is computed (no modal projection) and simulated accelerations on the back of the hand are compared with accelerations measured by laser vibrometry.

## Conception of an instrumented handle

measurements require designing a Acceleration instrumented with force sensors. The device should be attached on a shaker with a range of use of [5; 2500] Hz. In this range, design criteria are: no resonance in the excitation direction and a flat and spatially homogeneous response in the grip area.

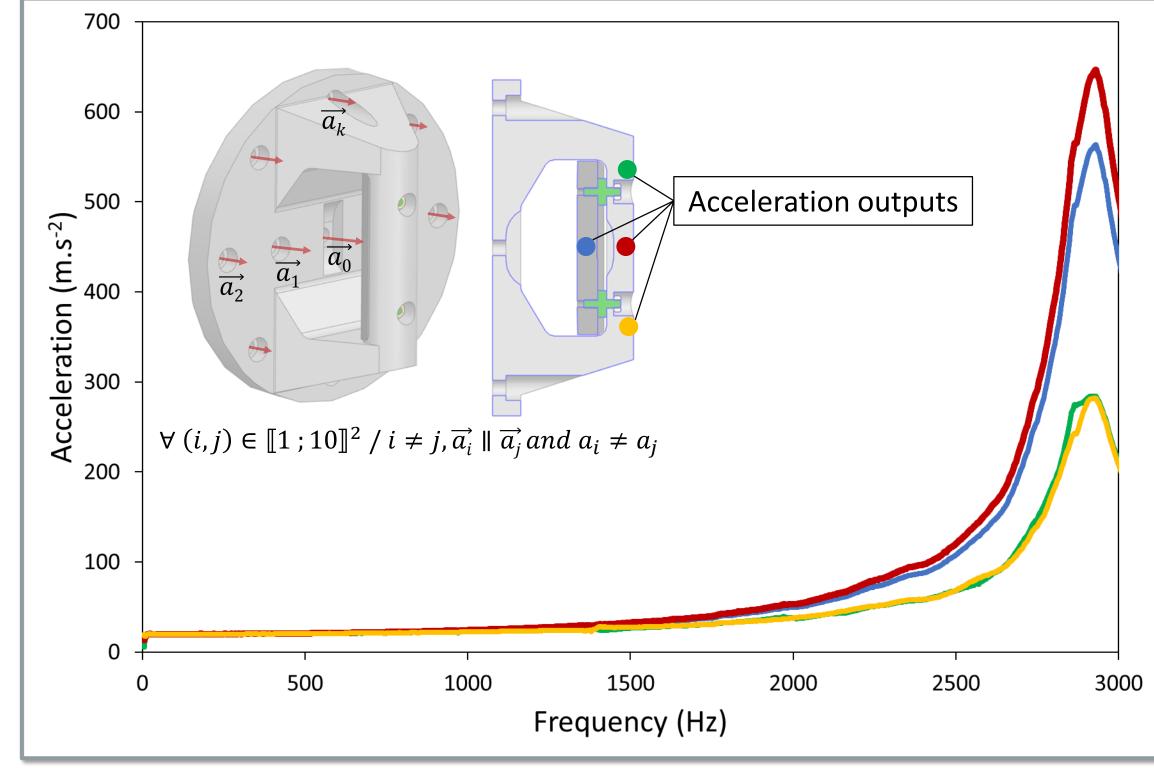


Figure 4. Simulated acceleration response in the grip area due to measured shaker excitation

### References

[1] FD CR 12349:1996. Vibrations mécaniques – Guide concernant les effets des vibrations sur la santé du corps humain. Paris : AFNOR; 1996. 20 p.

[2] C., Noel. Une stratégie de modélisation multi-échelles pour la prédiction de certains effets des vibrations sur le réseau vasculaire digital. Première étape : validation d'un modèle éléments finis à l'échelle macroscopique d'une phalange précontrainte vibrée. Notes scientifiques et techniques NS 339, Institut National de Recherche et de Sécurité(INRS). 2015, 78p.

[3] L. Zhi Chan. Estimation of Finger Joint Center of Rotation Using Finger Motion and Hand Anthropometry. Master's Thesis. Department of Industrial and Management Engineering (Human Factors and Ergonomics Program). Pohang University of Science and Technology. South Korea. 2018.











