



HAL
open science

An Inverse Analysis Method Applied to Optimization of Specimen's Shape for Performing Hot Rapid Crushing Tests from Homogeneous Initial Temperature Field

Adinel Gavrus

► **To cite this version:**

Adinel Gavrus. An Inverse Analysis Method Applied to Optimization of Specimen's Shape for Performing Hot Rapid Crushing Tests from Homogeneous Initial Temperature Field. MATEC Web of Conferences, 2022, 368, pp.01020. 10.1051/mateconf/202236801020 . hal-03872890

HAL Id: hal-03872890

<https://hal.science/hal-03872890>

Submitted on 23 Jan 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

An Inverse Analysis Method Applied to Optimization of Specimen's Shape for Performing Hot Rapid Crushing Tests from Homogeneous Initial Temperature Field

Adinel Gavrus¹*[0000-0002-5444-0445]

¹ National Institute of Applied Sciences of Rennes, Rennes 35708 , France
*adinel.gavrus@insa-rennes.fr

Abstract. Specific experimental tests with loadings conditions close to those of industrial fast forming processes as rapid forging, rapid stamping or high speed machining, characterized by large plastic strains, localized deformations and important gradients of strain rates, strain and temperature, requires to analyses material flow behavior at different initial temperatures. One of the more important conditions to obtain intrinsic rheological constitutive equations is to have a quasi-homogenous initial temperature distribution and especially to keep constant the material microstructure during the specimens heating. The rapid induction heating seems to be one of the most reliable processes. This scientific study proposes an inverse analysis technique based on numerical finite element modelling to define on the thermal point of view, optimal specimen shapes for performing hot rapid crushing tests from homogenous initial temperature field.

Keywords: Hot SHPB pressing, Thermal Cooling, FEM, Inverse Analysis.

1 Experimental and Computational Principles

Metals with high thermal diffusivity as aluminum or copper alloys require short times between the stop of the heating process and the start of mechanical loadings.

Outside the possibility to have a real time loop to launch a mechanical experimental test, generally a short thermal cooling period occurs between the two different stages: thermal heating and mechanical loading. Identification of thermomechanical behavior properties requires to control the homogeneity of specimen initial temperature field and to keep the initial material microstructure. According to these needs this scientific paper proposes to analyses shape optimization of material specimen for a hot rapid crushing test. An Inverse Analysis Method [1-3] will be applied to a Non-Linear Finite Element Model describing here the short thermal cooling during a specified time period, in order to obtain specimen's shape sizes corresponding to the need to have initial material temperatures close to an imposed value, minimizing the temperature gradient on all the useful sample area. All thermal phenomena as conduction, convection and tool's heat transfers will be taken into account. To avoid mechanical buckling and contact friction during the specimen deformation, corresponding constraints will be added along a specific formulation of the cost function. A strong nu-

merical coupling between the direct FE model and an improved gradient Gauss-Newton optimization algorithm, based on a multi-objective cost function formulation, is performed. Starting from standard uniform specimens generally used by mechanical tests, optimal dumbbell samples and cap specimen shape are identified to be the most reliable in order to can achieved SHPB hot rapid crushing tests from a quasi-homogeneous distribution of material initial temperatures.

2 Results and Conclusions

After a short presentation of the problem formulation, details will be making for the corresponding thermal finite element model, the numerical optimization strategy and especially concerning the used inverse analysis technique. Based on specific numerical simulations and optimizations applications for the optimal design of AA5083 specimens shape will be given concerning a hot rapid SHPB crushing test [1].

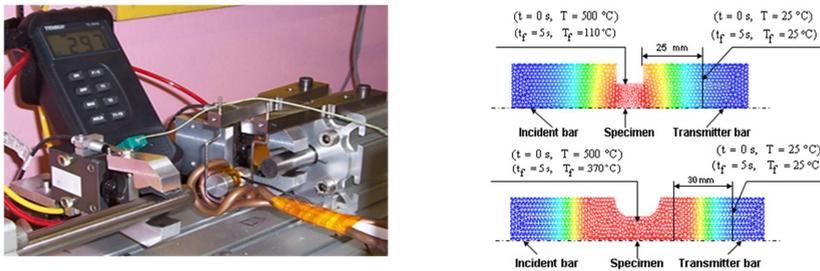


Fig. 1. a) Hot SHPB rapid compression test device, b) Comparisons of Finite Element temperature fields obtained after a time of 5s corresponding to a material cooling from a setting temperature of 500°C reached by a rapid induction heating in the case of an uniform cylindrical specimen and of a dumbbell shape sample [1].

It is shown that the dumbbell specimen with identified specific geometric dimensions permits to have a quasi-homogeneous initial temperature field with average material temperature close to the rapid induction heating's setting value.

References

1. Davoodi, B., Gavrus, A., Ragneau, E., An experimental and numerical analysis of the heat transfer problem in SHPB at elevated temperatures, *Measurement Sci. and Tech.*, 16, 2101–2108 (2005).
2. Gavrus, A., Bucur, F., Rotariu, A., Cananau, S., Mechanical Behavior Analysis of Metallic Materials using a Finite Element Modeling of the SHPB Test, a Numerical Calibration of the Bar's Elastic Strains and an Inverse Analysis Method, *Int. J. of Material Forming*, 8(4), 567 -579 (2015).
3. Gavrus A., Marco, F., Guegan, S., Experimental Design, Modelling and Numerical Calibration of a High Speed SHPB Mechatronic System Using a Pneumatic Propulsion Device, In: 23th Int. Conf. on Hydraulics and Pneumatics Proceedings, HERVEX 2017, pp. 8-10, INOE 2000 IHP Publisher, Baile Govora (2017).