



HAL
open science

Crystal-Crystal transitions in poly(VDF-ter-TrFE-ter-CTFE): Influence of CTFE termonomers

François Bargain, Damien Thuau, Pierre Panine, Georges Hadziioannou,
Fabrice Domingues Dos Santos, Sylvie Tencé-Girault

► **To cite this version:**

François Bargain, Damien Thuau, Pierre Panine, Georges Hadziioannou, Fabrice Domingues Dos Santos, et al.. Crystal-Crystal transitions in poly(VDF-ter-TrFE-ter-CTFE): Influence of CTFE termonomers. European Polymer Congress, EPF 2019, European Polymer Federation, Jun 2019, Heraklion - Crète, Greece. hal-03978465

HAL Id: hal-03978465

<https://hal.science/hal-03978465>

Submitted on 8 Feb 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Crystal-Crystal transitions in poly(VDF-*ter*-TrFE-*ter*-CTFE): Influence of CTFE termonomers

François Bargain,^{1,2} Damien Thuau,³ Pierre Panine,⁴ Georges Hadziioannou,³ Fabrice Domingues Dos Santos,⁵ Sylvie Tencé-Girault^{1,2,6,*}

¹MMC, CNRS UMR-7167 ESPCI Paris, PSL Research University, 10 rue Vauquelin, 75005 Paris, France

²Arkema, CERDATO, Route du Rilsan, 27470 Serquigny, France

³LCPO, ENSCPB, Université de Bordeaux, 16 Avenue Pey-Berland, F-33607 Cedex Pessac, France

⁴Xenocs SA, 19, rue François Blumet, 38360 Sassenage, France

⁵Piezotech S.A.S., Arkema - CRRA, rue Henri Moissan, 69493 Pierre-Bénite Cedex, France

⁶PIMM, Arts et Metiers ParisTech, CNRS, Cnam, HESAM Université, 151 Bd de l'Hôpital, 75013 Paris, France

* E-mail: sylvie.girault@ensam.eu

The increasing industrial interest for printed organic electronics these last years has led to the development of VDF-based electroactive polymers for numerous energy-related applications (sensors, actuators, capacitors) [1]. Depending on their CTFE content (from 0 to 10 mol %), poly(VDF-*ter*-TrFE-*ter*-CTFE), poly(vinylidene fluoride-*ter*-trifluoroethylene-*ter*-chlorotrifluoroethylene) copolymers exhibit ferroelectric (FE) or relaxor ferroelectric (RFE) properties at low temperature whereas they all present paraelectric (PE) behavior at high temperature. This thermal evolution of their electro-active properties is related to reversible crystal-crystal transitions.

Using simultaneous SAXS-WAXS experiments along thermal cycles, we studied these structural transitions for three different copolymers with various amount of CTFE (0, ~ 5 and ~ 10 mol %).

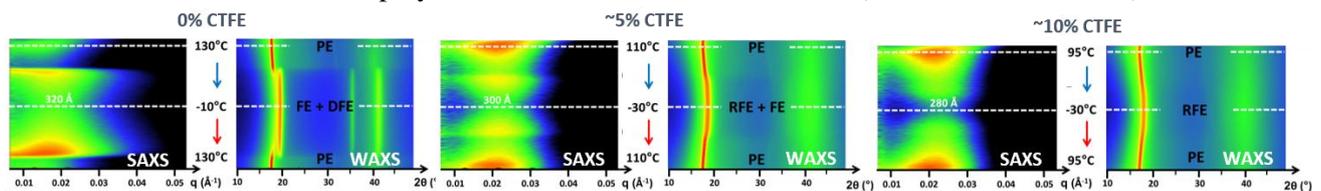


Fig. 1: Results of simultaneous SAXS-WAXS experiments during cooling and heating for poly(VDF-*ter*-TrFE-*ter*-CTFE) with various amount of CTFE. The ordinate axis is the temperature and the abscissa axis is q (SAXS) or 2θ (WAXS). Each line represents the scattering intensity coded with color from black to red for lowest to highest intensity.

We identified two types of crystalline phase at low temperature with their proper crystal-crystal transition: the first one containing all-*trans* conformations (orthorhombic FE phase) presents a discontinuous transition towards the hexagonal PE phase, the second one which incorporates *gauche* disordered conformations (orthorhombic DFE (Defective Ferroelectric) or RFE) transits continuously towards the same hexagonal PE phase. The discontinuous FE to PE transition is the predominant transition observed in the copolymer without CTFE, it is the well-known Curie transition. The unique transition observed in the terpolymer with 10 mol % of CTFE is the continuous RFE to PE transition. For the intermediate composition, we observe the coexistence of these two simultaneous phase transitions, FE to PE and RFE to PE.

These observations are well correlated with the ferroelectric and relaxor-ferroelectric behaviors of each terpolymer. All the conclusions and discussion of this study were recently published in Polymer [2]. At the epf2019 congress, we will focus on the SAXS-WAXS structural study.

ACKNOWLEDGEMENTS:

The authors are grateful to French National Agency of Research and Technology (ANRT) and Arkema for supporting this work at the MMC laboratory (CIFRE convention no. 2014/0573). We are also thankful to ELORPrintTec ANR-10-EQPX-28-01 and to Arkema/ANR INDUSTRIAL CHAIR "HOMERIC" ANR-13-CHIN-0002-01. Ilias Iliopoulos (PIMM) and Michel Cloitre (MMC) are sincerely and warmly thanked for enlightening discussions.

REFERENCES:

1. T. Soulestin, V. Ladmiral, F. Domingues Dos Santos, B. Améduri, Progr. Polym. Sci. 72 16-60 (2017)
2. F. Bargain, D. Thuau, P. Panine, G. Hadziioannou, F. Domingues Dos Santos, S. Tencé-Girault, Polymer 161 64-77 (2019)