

#### Multi-site comparison of gravel travel distance by RFID tracking in large rivers: methodological and practical feedback

Alexandre Peeters, Daniel Vázquez-Tarrío, Mathieu Cassel, Christophe Mora,

Hervé Piégay

#### ▶ To cite this version:

Alexandre Peeters, Daniel Vázquez-Tarrío, Mathieu Cassel, Christophe Mora, Hervé Piégay. Multi-site comparison of gravel travel distance by RFID tracking in large rivers: methodological and practical feedback. International Conference on Fluvial Sedimentology 2023, Jul 2023, Riva del Garda, France. hal-04183223

#### HAL Id: hal-04183223 https://hal.science/hal-04183223v1

Submitted on 18 Aug 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - ShareAlike 4.0 International License



International Conference on Fluvial Sedimentology 2023 2 – 7 July 2023 | Riva del Garda, Italy

# Multi-site comparison of gravel travel distance by RFID tracking in large rivers: methodological and practical feedback

Alexandre Peeters<sup>1</sup>, Daniel Vázquez-Tarrío<sup>2</sup>, Mathieu Cassel<sup>1</sup>, Christophe Mora<sup>3</sup>, Hervé Piégay<sup>1</sup>

<sup>1</sup>University of Lyon, CNRS UMR 5600 EVS, Lyon, France *(contact: alexandre.peeters@ens-lyon.fr)* <sup>2</sup> Dept of Geodynamics, Stratigraphy and Paleontology, Geology Faculty, Complutense University of Madrid, Spain <sup>3</sup> Compagnie nationale du Rhône, Direction de l'ingénierie et des grands projets, Lyon, France



# I. Context and objectives


The hydro-sedimentary processes of the Rhône River have been severely altered by human activities since the 19th century (i.e., incision, armouring, sediment supply interruption). Several restoration actions have been implemented to mitigate the physical effect (i.e., gravel augmentation, groyne fields removal to promote bank re-erosion and sediment supply).



# II. Study sites

6 study sites located along bypassed channel of 4 diversion dam systems

Site	Issue	Type of RFID	Date of tracer seeding (+ number of tracers)	Number of surveys
CHA	Gravel augmentation (15000 m³) in a reach being starved of sediment	PIT tags 23/32 mm	Dec. 2016 (888)	5
LYM	Evaluation of bedload transport (reference reach) and continuity	a-UHF tags: COIN-HC	Oct. 2016 (200) August 2020 (199)	2 2
NEY	Evaluation of bedload transport (reference reach)	a-UHF tags: COIN-ID	January 2017 (100)	2
PDR -Ga	Gravel augmentation (6885 m³) in a sediment-starved reach	PIT tags 12/23/32 mm	March 2017 (991)	3
PDR -SC	Groyne fields removal in a sediment-starved reach	PIT tags 23/32 mm	February 2019 (999)	3
DZM	Gravel augmentation (30000 m³) in a sediment-starved reach	PIT tags 23/32 mm	April 2019 (1199)	5

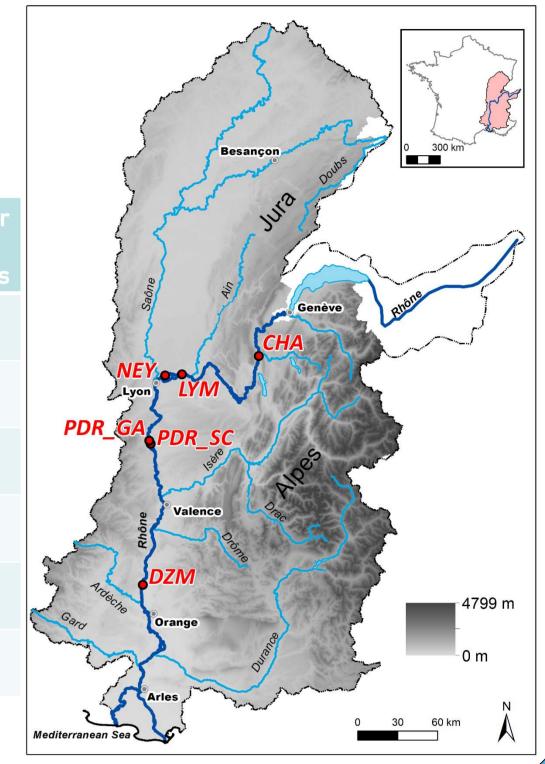



#### le fields along 1200 m o bank at PDR (March 2017



### **Objectives** of this study:

- measuring gravel displacement by RFID particle tracking in a multi-site context (which differ according to their natural setting and human impacts)
- monitoring and evaluating the restoration projects


**RFID** antenna

# III. Material & methods

## **RFID particle tracking** using:

- PIT tags


a-UHF tags

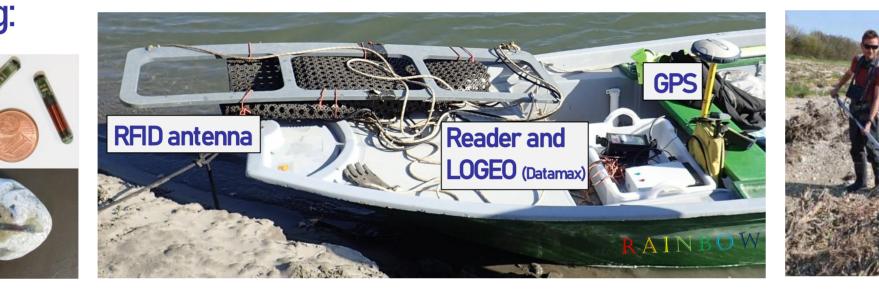



# IV. Example of PDR : 2 sites, 3 surveys

### 2 tracer seeding sites:

- 991 tracers in the gravel augmentation site (GA), including 100 tracers around the augmentation site
- 999 tracers in the side channel (SC) formed by the removal of groyne fields

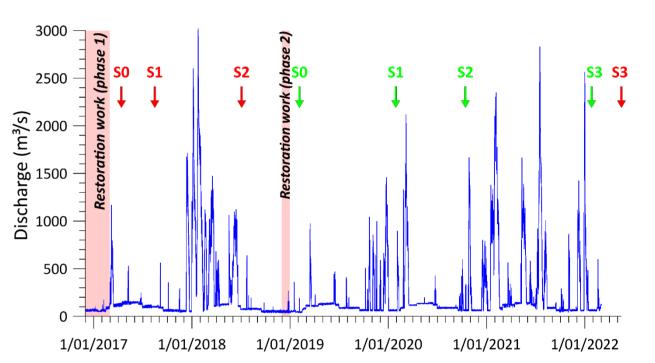

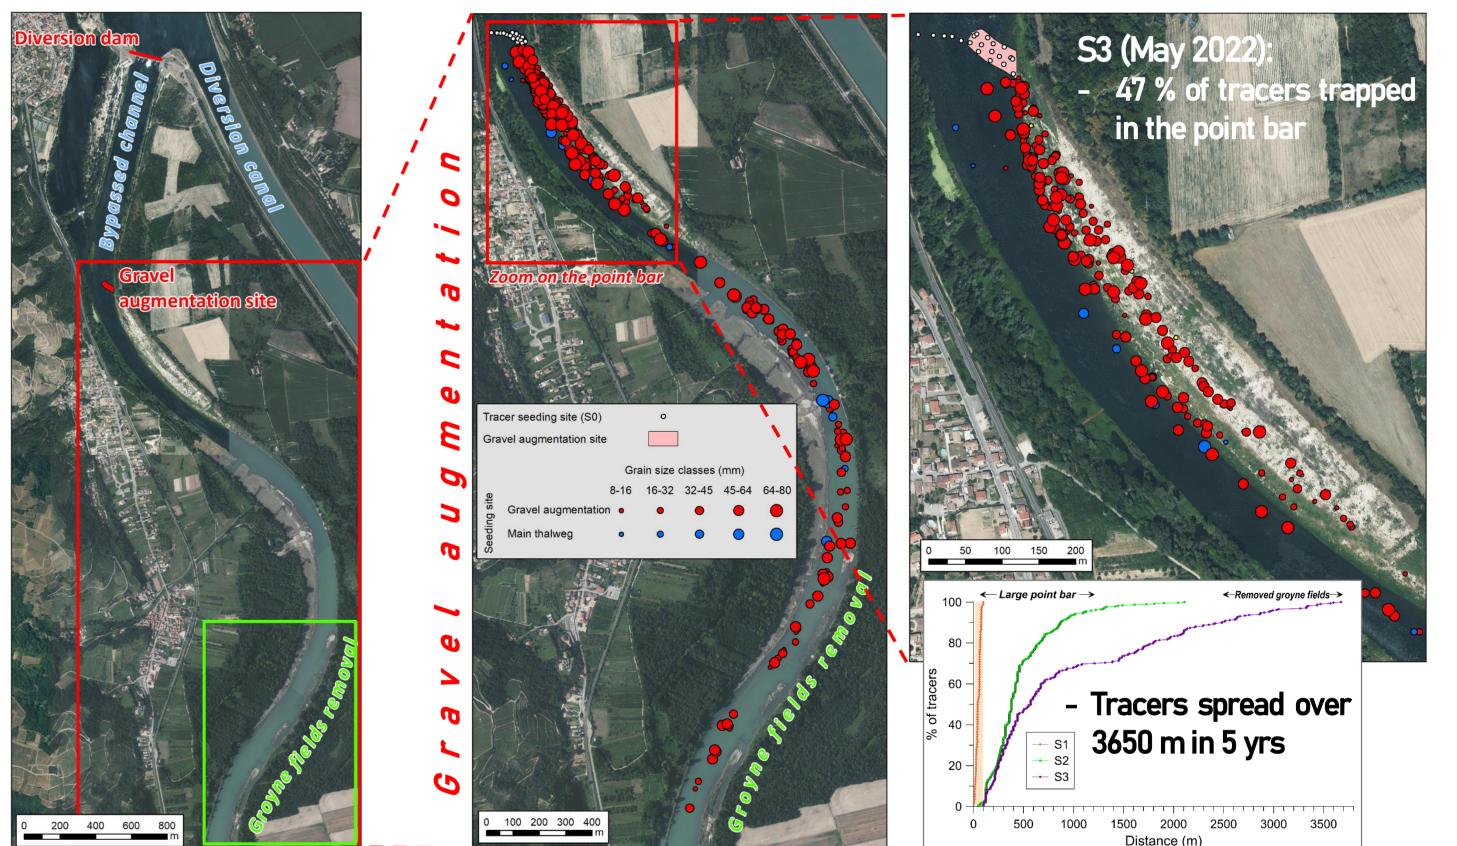

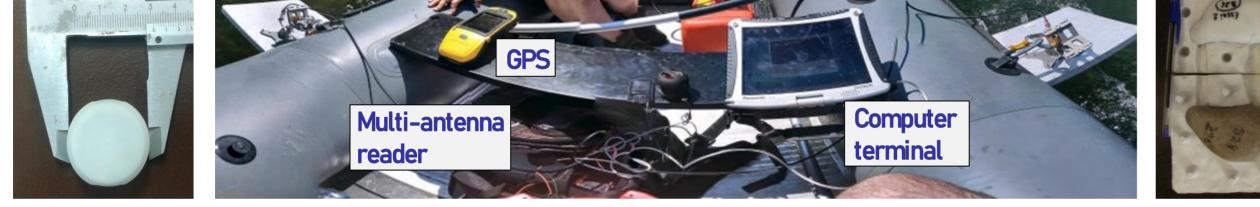

Cassel et al., 2017

#### Calculation of:

- travel distances (mean, max. + four grain size classes) between individual tracers found:
  - in two successive surveys  $(S_{i-1} \text{ and } S_i)$ ;
  - in a given survey (S<sub>i</sub>) compared with the initial tracer seeding position  $(S_n)$ ;
- virtual velocity

## • flow metrics:

- unit stream power ( $\omega$ ; *Bagnold*, 1977)
- Cumulative excess stream power


**RFID** antenna

- $(\Sigma(\omega_{t} \omega_{c}); Hassan et al., 1992)$
- dimensionless unit stream power ( $\omega^*$ ; Eaton et Church, 2011)


# V. Reach comparison

Travel distances are higher in dynamic reaches (LYM, NEY, CHA) than in sedimentstarved reaches (PDR\_GA, PDR\_SC, DZM)



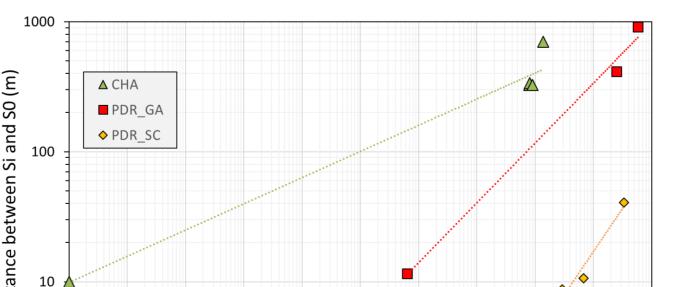


### Groyne fields removal

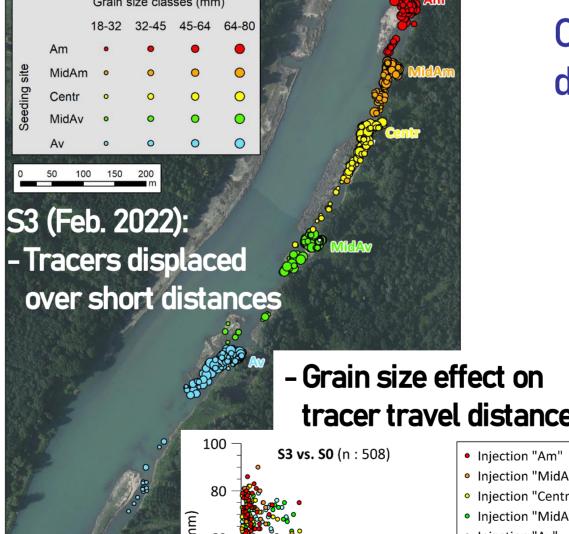


### Comparison of local virtual velocities shows major disparities between the different parts of the channel

S3 vs. S0	GA (thalweg + point bar)	GA (thalweg)	GA (point bar)	SC (groyne fields removal)
Period length (yrs)	5.1	5.1	5.1	3
Time Q > $Q_c$ (h)	6012	6012	6012	3603
Q <sub>max</sub> (m³/s)	3021	3021	3021	2828
Number of recovered tracers	317	169	148	508
Number of mobile tracers	317	169	148	244
% of mobile tracers	100	100	100	48
Mean distance	915	1395	373	61

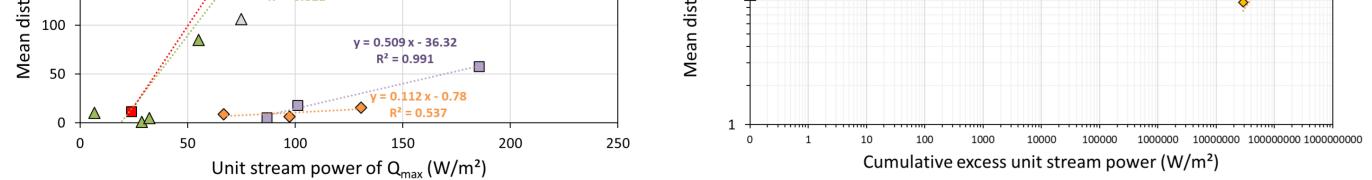

Mobility is also controlled by particle arrangement and bed texture: 1<sup>st</sup> survey after tracer seeding (unconstrained exp.) vs. other surveys (constrained exp.)

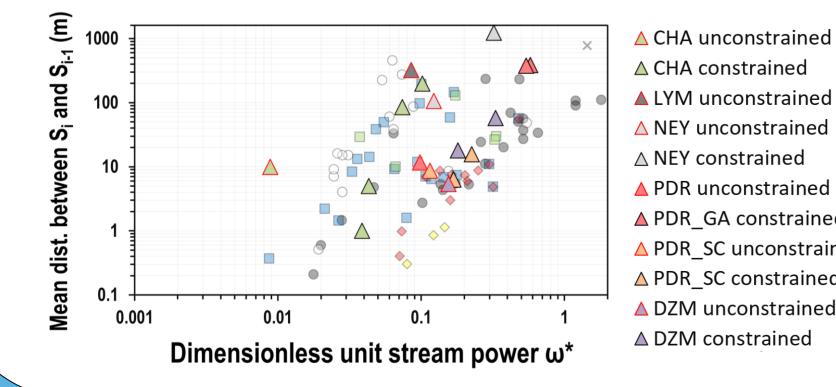


Data from literature (Vázquez-Tarrío et al., 2019)

 SP ('Constrained' exp.)  $\triangle$  NEY constrained SP ('Unconstrained' exp.) PDR unconstrained RP ('Constrained' exp.) ▲ PDR GA constrained RP ('Unconstrained' exp.) △ PDR SC unconstrained PB ('Constrained' exp.) △ PDR SC constrained PB ('Unconstrained' exp.) ▲ DZM unconstrained × MT ('Unconstrained' exp.) ▲ DZM constrained

#### • Bagnold, R. A., 1977. Bed load transport by natural rivers, Water Resour. Res. 13(2), 303–312

- Cassel M., Dépret T., Piégay H., 2017. Assessment of a new solution for tracking pebbles in rivers based on active RFID: a new solution for tracking pebbles in rivers based on active RFID. Earth Surf. Process. Landforms 42 : 1938–1951
- Eaton B., Church M., 2011. A rational sediment transport scaling relation based on dimensionless stream power. Earth Surf. Process. Landforms 36 (7), 901–910. • Hassan M.A., Church M., Ashworth P.J., 1992. Virtual rate and mean distance of travel of individual clasts in gravel-bed channels. Earth Surf. Process. Landforms 17(6), 617-627.

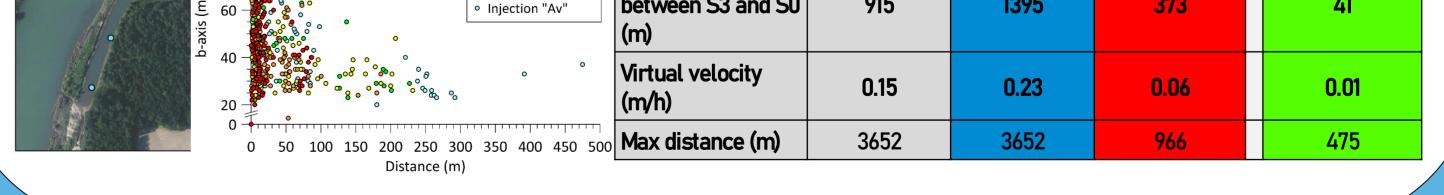

# VI. Outcomes

This study provides a better understanding of bedload transport in the Rhône River and highlights its specific features according to the natural setting and human impacts. It also provides:

- useful information for evaluating the success of restoration projects

Injection "Mid

- recommendations for designing gravel augmentation projects in terms of site selection (sites with sufficient shear stress; not upstream of point bars), volume of gravel (1-2 X the mean annual bedload transport capacity), etc.
- methodological feedback for applying such technique in a large non-wadable rivers (i.e., decrease in recovery rates over time, suitability of tracer types and sizes)