



HAL
open science

A metaheuristic approach for the configuration of heterogeneous multistatic sonar networks

Owein Thuillier, Nicolas Le Josse, Alexandru-Liviu Olteanu, Marc Sevaux,
Hervé Tanguy

► **To cite this version:**

Owein Thuillier, Nicolas Le Josse, Alexandru-Liviu Olteanu, Marc Sevaux, Hervé Tanguy. A metaheuristic approach for the configuration of heterogeneous multistatic sonar networks. 24ème congrès annuel de la Société Française de Recherche Opérationnelle et d'Aide à la Décision (ROADEF 2023), Rennes School of Business, Feb 2023, Rennes, France. hal-04237326

HAL Id: hal-04237326

<https://hal.science/hal-04237326>

Submitted on 12 Oct 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

A metaheuristic approach for the configuration of heterogeneous multistatic sonar networks

Owein THUILLIER^{a,b}, Nicolas LE JOSSE^a, Alexandru-Liviu OLTEANU^b,
Marc SEVAUX^b, Hervé TANGUY^a

^aThales, Defence and Mission Systems (DMS), Brest, France

firstname.lastname@fr.thalesgroup.com

^bUniversité Bretagne-Sud (UBS), Lab-STICC, UMR CNRS 6285, Lorient, France

firstname.lastname@univ-ubs.fr

Keywords: *OR in defense, multistatic sonar networks, area coverage problem, metaheuristic*

In the context of Anti-Submarine Warfare (ASW), sonar systems have been used extensively for decades as an efficient way to probe the dimness of the ocean in an effort to search, locate and track underwater threats.

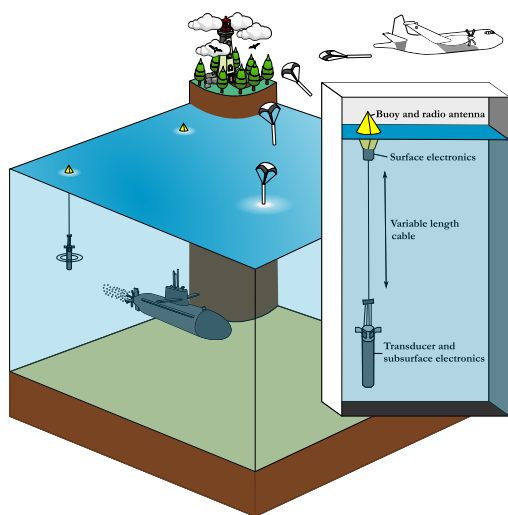


Figure 1: A simplified illustration of the operational context.

More precisely, there are two main types of sonar systems: passive and active. A passive sonar is made up of a receiver listening to sounds emitted by a target, while an active sonar system has a source emitting a sound pulse (ping) and a receiver listening to the reflection of the wave on the target, known as the echo [1]. Within the scope of this study, we focus solely on the case of active sonar systems, which are further divided into two distinct configurations [2]. The first one, named monostatic, is made up of a colocated source and receiver, while the second one, referred to as bistatic, is based on a non-colocated source and receiver. By extension, a Multistatic Sonar Network (MSN) is thus comprised of a set of sources and receivers deployed across a given Area of Interest (AoI), which, taken in pairs, form system units in monostatic and/or bistatic configuration. Herein, the active sonars will be exclusively sonobuoys, a portmanteau for sonar and buoy. These are disposable acoustics units dropped from an airborne carrier onto the AoI in the form of cylinder-shaped containers that unfolds upon impact with the water surface, immersing the core of the system to a predetermined depth. The simplified operational context depicted here is illustrated in figure 1.

In this work, we therefore propose a metaheuristic approach to the Area Coverage (AC) problem [3] in the context of heterogeneous MSNs while taking into account existing coastlines. To date and to the best of our knowledge, there are no works concerning the resolution of this problem for heterogeneous MSNs (see most recent works [4, 5]). For this problem, the objective is to determine the optimal spatial layout of the MSN, i.e. the one that maximize the overall coverage of the AoI with regard to a limited number of sensors and a given probabilistic detection model. In order to do so, an AoI is first discretized through a Digital Elevation Model

(DEM), i.e. a regular rectangular grid where the maritime cells are the ones with an elevation less than or equal to zero (arbitrary choice). Then, a target and a deployment position are placed in the center of each grid cell, which are said to be covered when the probability of detection of the target in its center exceeds a certain threshold set upstream (usually close to 1). For the metaheuristic part, an initial solution will be obtained using an efficient constructive heuristic through a sector-based approach and which will then be improved using a local search procedure that may improve the solution up to 10%. Whenever possible, these solutions will also be compared with exact solutions obtained by solving a Mixed Integer Linear Program (MILP) with a state-of-the-art solver. An example of solution is given in figure 2.

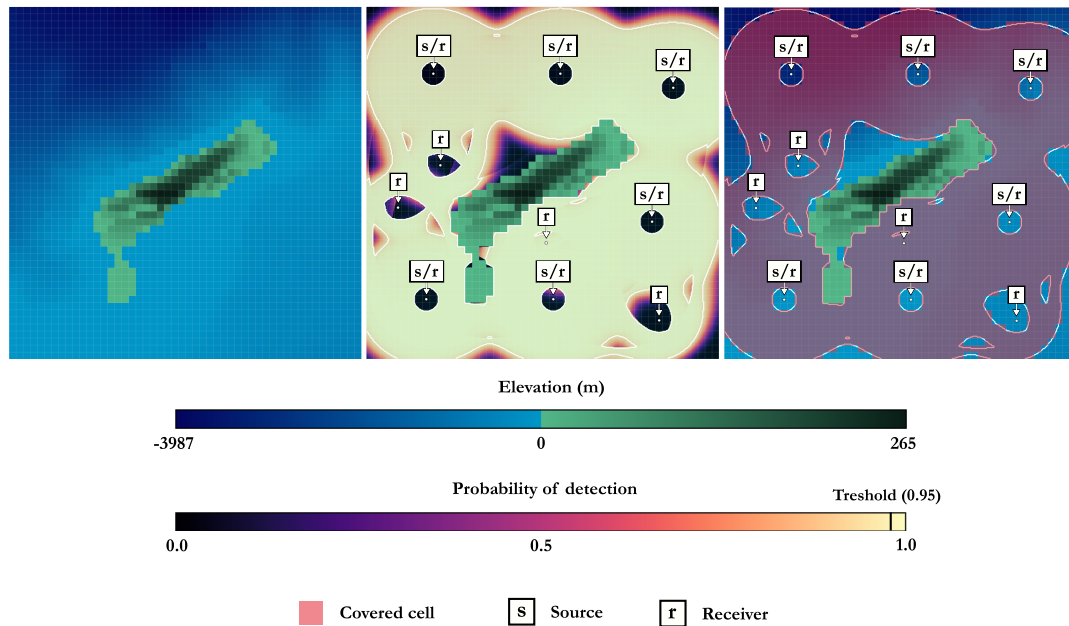


Figure 2: Example of a spatial configuration of an MSN.

References

- [1] Robert J. Urick. *Principles of underwater sound*. 3rd ed. New York: McGraw-Hill, 1983. ISBN: 9780070660878.
- [2] Alan R. Washburn. *A multistatic sonobuoy theory*. Tech. rep. NPS-OR-10-005. Monterey, California: Naval Postgraduate School, 2010.
- [3] Bang Wang. “Coverage problems in sensor networks: A survey”. en. In: *ACM Computing Surveys* 43.4 (Oct. 2011), pp. 1–53. ISSN: 0360-0300, 1557-7341. DOI: 10.1145/1978802.1978811. (Visited on 10/25/2022).
- [4] Armin R. Fügenschuh et al. “Solving multistatic sonar location problems with mixed-integer programming”. en. In: *Optimization and Engineering* 21.1 (Mar. 2020), pp. 273–303. ISSN: 1389-4420, 1573-2924. DOI: 10.1007/s11081-019-09445-2. (Visited on 10/25/2022).
- [5] Emily M. Craparo and Mumtaz Karatas. “Optimal source placement for point coverage in active multistatic sonar networks”. en. In: *Naval Research Logistics* 67.1 (Feb. 2020), pp. 63–74. ISSN: 0894-069X, 1520-6750. DOI: 10.1002/nav.21877. (Visited on 10/25/2022).