



**HAL**  
open science

# RCS reduction method with anomalous reflection metasurfaces using Floquet analysis: design modelling and measurement

Matthieu Elineau, Renaud Loison, Stéphane Méric, Raphaël Gillard, Pascal Pagani, Geneviève Mazé-Merceur, Philippe Pouliguen

## ► To cite this version:

Matthieu Elineau, Renaud Loison, Stéphane Méric, Raphaël Gillard, Pascal Pagani, et al.. RCS reduction method with anomalous reflection metasurfaces using Floquet analysis: design modelling and measurement. 2023. hal-04320319v3

**HAL Id: hal-04320319**

**<https://hal.science/hal-04320319v3>**

Preprint submitted on 2 May 2024 (v3), last revised 13 Nov 2024 (v5)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# RCS reduction method with anomalous reflection metasurfaces using Floquet analysis : design modelling and measurement

Matthieu Elineau<sup>1,2,\*</sup>, Renaud Loison<sup>1</sup>, Stéphane Méric<sup>1</sup>, Raphaël Gillard<sup>1</sup>, Pascal Pagani<sup>2</sup>, Geneviève Mazé-Merceur<sup>2</sup>, and Philippe Pouliguen<sup>3</sup>

<sup>1</sup>Univ-Rennes, INSA Rennes, CNRS, IETR-UMR 6164, F-35 000 Rennes, France

<sup>2</sup>CEA, DAM, CESTA, Le Barp, France

<sup>3</sup>DGA, AID, Paris, France

\*e-mail : matthieu.elineau.scholar@gmail.com

## Abstract

This letter proposes the design and measurement of a periodic metasurface that achieves anomalous reflection with reduced RCS in a given direction. A previous study proposed a semi-analytical model to predict the RCS behaviour of such a metasurface. This work focuses the discussion on manufacturing and measurement issues. The synthesis, design specifications, fabrication method and experimental setup are presented and discussed. Measurement results are also examined in detail, highlighting some limitations in metasurfaces RCS measurements. The proposed metasurface effectively achieves the predicted RCS level reduction in the Floquet direction considered. The agreement between simulation and experimental results demonstrates the accuracy of the modelling and the efficiency of the optimisation procedure.

## I. INTRODUCTION

Radar cross-section (RCS) is a measure of a target's reflectivity [1]. For stealth purposes, we may want to reduce the RCS of an object. The classic method is to use shape concepts or volume-absorbing materials. Another type of material has recently emerged : metasurfaces. They have generated a wide variety of applications for wave front shaping [2]. Among them, the classical gradient metasurface leading to anomalous reflection has been particularly studied [3]. It allows reflecting an incoming wave in a non specular direction, which may prove useful for stealth purposes. Such a metasurface consists of the juxtaposition of sub-wavelength scattering elements (the cells) introducing a linearly varying phase shift at the surface of the object. However, these classical gradient metasurfaces exhibit parasitic reflection directions because of the periodic nature of the phase gradient [4]. The scatterers used to cover a gradient period form a supercell that, when periodically replicated to pave the overall surface, excite Floquet harmonics [5]. Such translational invariances and associated symmetries in metasurfaces are now widely studied [6].

Recently, we proposed a method [7] to mitigate parasitic reflections of an anomalous reflecting metasurface with a monodimensionally varying gradient, using Floquet analysis. Simulating a supercell in a Floquet environment allows the computation of the  $S_{m,n}$  scattering parameters between the different Floquet modes.

Assuming  $n = 0$  corresponds to the fundamental mode impinging on the metasurface, there is a direct correlation between  $S_{m,0}$  and the resulting RCS level in the propagation direction of reflected mode  $m$ , defined by an angle  $\theta_m$ . This means that the outputs of the Floquet simulation (light to simulate) may be sufficient to correctly describe the behaviour of the whole structure (requiring a much heavier simulation) in terms of RCS. Going further in this direction, the Floquet simulation  $S$  parameters have been incorporated into an analytical model to calculate the total RCS of the structures. This approach has been presented in [8] proving that the outputs of the Floquet type simulation are indeed sufficient to estimate the RCS of the metasurfaces. The purpose of the present letter is to conclude the demonstration by providing the design and measurement of such a metasurface and, more generally speaking, to address the associated practical fabrication and measurement issues.

## II. METASURFACES SYNTHESIS

The metasurface initial objective is to reflect a normally incident plane wave into the  $\theta_1 = 60^\circ$  direction, with a classical gradient metasurface. The wave reflection occurs in the plane normal to the surface and containing the direction of the gradient. The incoming plane wave is TM polarised and the working frequency is 8 GHz. The initial surface is created by designing three cells that produce the linear phase variation required along a gradient period, constituting the supercell. Each cell

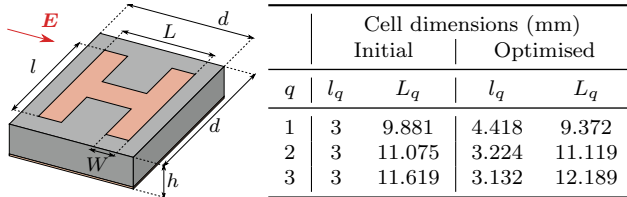


Figure 1: The H shape phase shifting cell. Fixed parameters are  $\epsilon_r = 2.17$ ,  $h = 1.6$  mm,  $d = 14.43$  mm and  $W = 2$  mm. The  $l$  and  $L$  dimensions are used as degrees of freedom to produce the required phase values.

phase response is simulated using local periodicity assumption, under normal illumination. Cells dimensions are found in the table of Figure 1, with the description of the cell geometrical parameters. The surface is created by replicating the supercell nine times to create an array that is approximately  $10\lambda$  long. Figure 4 shows the simulated RCS of the initial surface, in blue dashed line. The surface mainly radiates in the intended  $\theta_1 = 60^\circ$  direction but also shows a quite high parasitic reflection level in the Floquet direction  $\theta_{-1} = -60^\circ$ .

An optimised surface is proposed by following the optimisation procedure of [8]. The optimisation is performed at a unique frequency  $f = 8$  GHz and consists of the maximisation of the difference between the  $S_{1,0}$  and  $S_{-1,0}$  parameters, using cell dimensions as degrees of freedom. This process gives an optimised supercell whose dimensions are also listed in Figure 1. Numerical simulations show that the use of this optimised supercell results in a 6.80 dB reduction of the RCS level in the  $\theta_{-1} = -60^\circ$  direction, as shown in Figure 4. Dashed line corresponds to the initial surface and solid line corresponds to the optimised one.

### III. METASURFACES FABRICATION

Both surfaces, initial and optimised are fabricated with printed copper patches on a Neltec NY9217 copper backed substrate. The relative permittivity of such a substrate is low ( $\epsilon_r = 2.17$ ) which provides smooth varying phase variations of the cells with their geometrical parameter as well as with  $\theta$  variations. This helps under these two aspects, at least. In one hand, finding converging optimisations is made easier and, in the other hand, measurements are made less sensitive to uncertainties about the angle  $\theta$ . A  $27 \times 27$  cells surface is fabricated and gives an array of approximately  $10\lambda \times 10\lambda$  (or approximately  $40 \times 40$  cm<sup>2</sup>). A close view of each surface is found in Figure 2 where a supercell is enclosed by a dashed line.

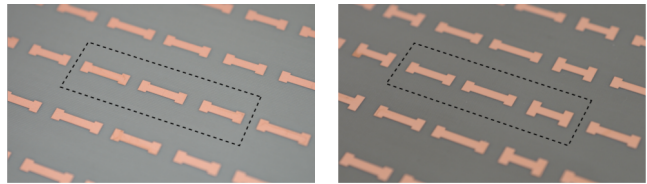


Figure 2: Close view of the fabricated metasurfaces. Initial (left) and optimised (right) surfaces. A supercell is represented with dashed lines.

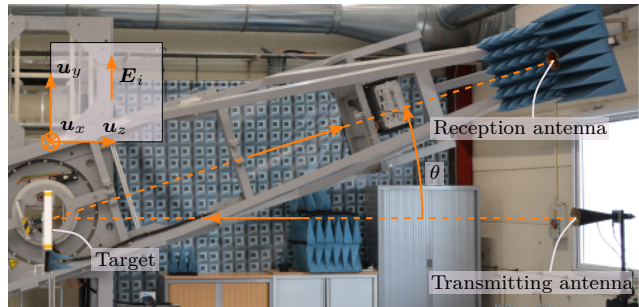


Figure 3: RCS measurement facility with target under test. Transmitting and reception antennas, bistatic angle  $\theta$  and  $\mathbf{E}$  field polarisation.

### IV. MEASUREMENT FACILITY

The RCS measurements have been made with a specific 3D measurement facility at the CEA-CESTA, presented in [9]. The transmitting antenna is fixed and illuminates the plate under normal incidence, the reception antenna is mounted on a rotating axis. A motor drives the rotation of the whole structure giving access to bistatic RCS measurements. The situation is depicted in Figure 3 where both antennas are at a distance  $r = 4$  m from the target.

For obvious obstruction reasons, bistatic angles  $\theta$  for which  $|\theta| < 10^\circ$  are not accessible. This is not a problem since the incidences of interest are  $\theta = \pm 60^\circ$ . The facility in this configuration then gives access to angles from  $10^\circ$  to  $90^\circ$ . The target was flipped after the first angular sweep to reach negative incidences. Despite the fact that the optimisation has been performed at a unique frequency, measurements are made over a 2 GHz to 18 GHz frequency range to apply spatial filtering, hence removing the contribution of the measurement environment to the received signal.

### V. RESULTS

The measured RCS of the initial and optimised surfaces are represented in Figure 4, along with the simulated ones. The measured RCS in the  $\theta = -60^\circ$  direction is 9.05 dB for the initial surface and 2.20 dB for the optimised one. This is a 6.85 dB reduction

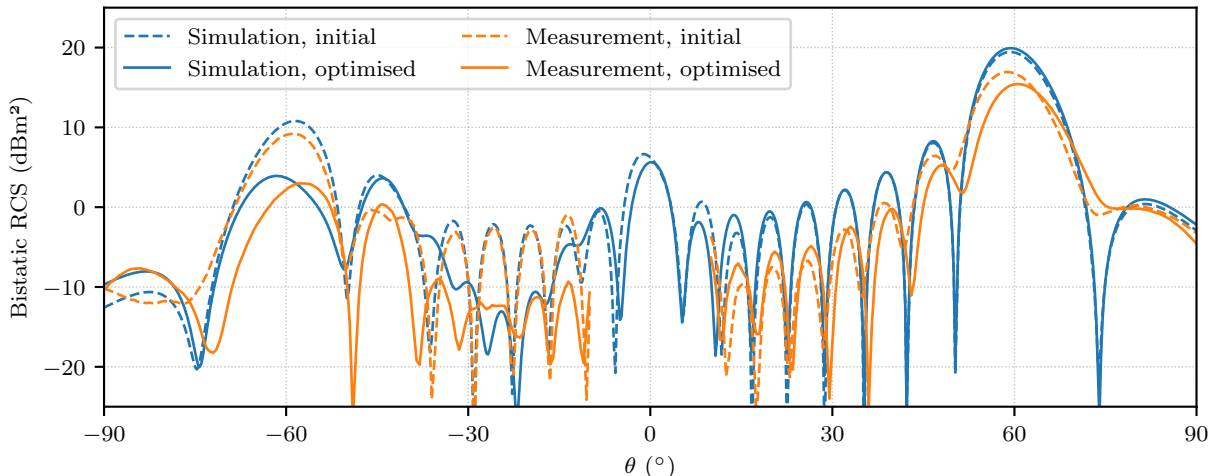


Figure 4: Bistatic RCS of both initial and optimised metasurfaces, obtained with a full wave simulation or with RCS measurement.

while the simulation predicted a 6.80 dB reduction. The agreement between the simulated reduction and the measured reduction is excellent. Globally, the simulation is overestimating RCS values. Actually, the number of assumptions for the synthesis of the surfaces is important (local periodicity, infinite environment, description with only a phase response, phase response computed at only one frequency). This large number of assumptions lightens the optimisation process to make it highly efficient.

For the synthesis and simulation steps, every computation is made with far field considerations. From a measurement point of view, with an object that is approximately 40 cm long and an antenna at 4 m from the target, the far field hypothesis is not accurate. It is possible to estimate some consequences of the far field hypothesis violation during measurements. The phase difference between the centre and an edge of the surface can easily be estimated. In the configuration of the experimental setup presented in Figure 3 with a wave number  $k$  associated with the frequency  $f = 8$  GHz, we found an approximate phase difference of  $\pi$  rad. In contrast, the phase response variations with the dimension  $L$  of a cell as observed in [8] is of  $280^\circ \cdot \text{mm}^{-1}$  at its maximum. For a fabrication tolerance of  $50 \mu\text{m}$  this gives, in the worst case, an uncertainty of  $14^\circ$  which is way under the calculated phase difference of  $\pi$  rad.

Figure 5 shows the evolution of  $\Delta\text{RCS}$ , the optimisation performance with frequency. It is defined as  $\Delta\text{RCS}(f, \theta) = \text{RCS}_{\text{opti.}}(f, \theta) - \text{RCS}_{\text{init.}}(f, \theta)$  where  $f$  is the working frequency and  $\theta$  is the direction of observation (the bistatic angle). The evolution of  $\Delta\text{RCS}(f, \theta = -60^\circ)$  is in orange thick line in Figure 5. For clarity

purposes the trace domain is restricted to the 6 GHz to 10 GHz frequency band, while the measurement was, as said earlier, conducted in the 2 GHz to 18 GHz band. It is observed that the optimisation is performing well in a very narrow frequency band, since no design rule has been followed toward the synthesis of a wide band device. We report a reduction larger than 3 dB in a thin band of 200 MHz, that is represented by a grey rectangle in Figure 5. If any wideband performance is required, the supercell optimisation has to be performed over the desired frequency band. More generally, metasurfaces devices fail to handle wideband phenomena, or at a cost of sophisticated synthesis procedures (multi scales or multi layer devices [10]) that are not practical for stealth applications. For completeness,  $\Delta\text{RCS}(f, \theta = \theta_{-1})$  has been calculated, where  $\theta_{-1}$  is the  $m = -1$  Floquet mode direction which varies with frequency. This curve is shown as a thin grey line in the same figure. The trace shows a similar behaviour around the central frequency.

## VI. CONCLUSION

This study demonstrates the efficiency of the RCS reduction metasurface optimisation method by proposing a measurement of such a surface. The simulation and measurement exhibit a RCS reduction of almost 7 dB, in the direction of the parasitic lobe, with an excellent agreement between them. It has been made possible by the simplicity of the Floquet type simulation and the correct use of the outputs of these simulations to predict the behaviour of the surface. The method should not be limited to the RCS reduction in a particular direction. One could consider applying this method for any Floquet mode distribution, addressing one or multiple modes. The literature provides various recent analyses

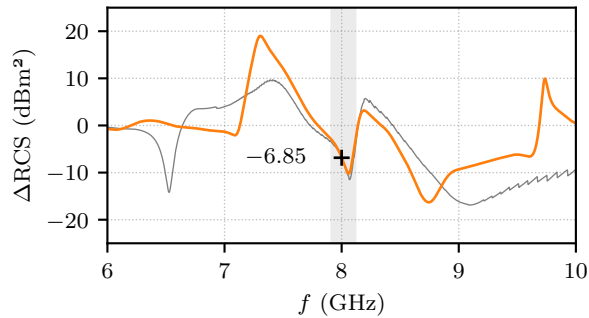


Figure 5: Evolution of the RCS reduction over the frequency range, in the  $\theta = -60^\circ$  direction (thick orange line) or in the  $\theta = \theta_{-1}$  direction (thin grey line).

of multichannel Floquet metasurfaces (in [11] for example), but none of them approaches the problem from a RCS point of view. We think that this end to end study builds the bridge between Floquet analysis and RCS estimation. Multichannel RCS reduction should not show more limitations than the ones already coming from classical multichannel Floquet metasurfaces.

#### ACKNOWLEDGMENTS

The authors thank Guillaume Cartesi and Olivier Raphael for their great contribution during the measurement campaign.

#### REFERENCES

- [1] E. F. Knott, J. F. Schaeffer, and M. T. Tulley, *Radar cross section*. SciTech Publishing, 2004.
- [2] S. B. Glybovski, S. A. Tretyakov, P. A. Belov, Y. S. Kivshar, and C. R. Simovski, “Metasurfaces: From microwaves to visible,” *Physics Reports*, vol. 634, May 2016.
- [3] N. Yu, P. Genevet, M. A. Kats, *et al.*, “Light propagation with phase discontinuities: Generalized laws of reflection and refraction,” *Science*, vol. 334, 2011.
- [4] A. Díaz-Rubio, V. S. Asadchy, A. Elsakka, and S. A. Tretyakov, “From the generalized reflection law to the realization of perfect anomalous reflectors,” *Science advances*, vol. 3, 8 2017.
- [5] A. K. Bhattacharyya, *Phased Array Antennas*. John Wiley & Sons, 2006.
- [6] O. Quevedo-Teruel, Q. Chen, F. Mesa, N. J. G. Fonseca, and G. Valerio, “On the benefits of glide symmetries for microwave devices,” *IEEE Journal of Microwaves*, vol. 1, 1 Jan. 2021.

- [7] M. Elineau, R. Loison, S. Méric, *et al.*, “Multi-mode scattering matrix optimisation for the mitigation of harmonics in anomalous reflection metasurfaces,” in *2021 51st European Microwave Conference (EuMC)*, 2022.
- [8] M. Elineau, R. Loison, S. Méric, *et al.*, “Rcs prediction and optimization for anomalous reflection metasurfaces using floquet analysis,” *International Journal of Microwave and Wireless Technologies*, vol. 15, no. 6, 2023.
- [9] P. Massaloux, P. Minvielle, and J.-F. Giovannelli, “Indoor 3d spherical near field rcs measurement facility: Localization of scatterers,” in *The 8th European Conference on Antennas and Propagation (EuCAP 2014)*, 2014.
- [10] F. Samadi and A. Sebak, “Wideband, very low rcs engineered surface with a wide incident angle stability,” *IEEE Transactions on Antennas and Propagation*, vol. 69, 3 Mar. 2021.
- [11] S. K. R. Vuyyuru, L. Hao, M. Rupp, S. A. Tretyakov, and R. Valkonen, “Modeling ris from electromagnetic principles to communication systems—part i: Synthesis and characterization of a scalable anomalous reflector,” *arXiv*, 2024.