



HAL
open science

Electromagnetic Methodology for Mechanical Stress Evaluation of Anisotropic Ferromagnetic Materials

Safae Bouterfas, Yann Le Bihan, Laurent Santandrea, Laurent Daniel

► **To cite this version:**

Safae Bouterfas, Yann Le Bihan, Laurent Santandrea, Laurent Daniel. Electromagnetic Methodology for Mechanical Stress Evaluation of Anisotropic Ferromagnetic Materials. 25th International Workshop on Electromagnetic Nondestructive Evaluation (ENDE'22), Jun 2022, Budapest, Hungary. hal-04368748

HAL Id: hal-04368748

<https://hal.science/hal-04368748>

Submitted on 1 Jan 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Electromagnetic Methodology for Mechanical Stress Evaluation of Anisotropic Ferromagnetic Materials

Safae BOUTERFAS, Yann LE BIHAN, Laurent SANTANDREA and Laurent DANIEL
*Université Paris-Saclay, CentraleSupélec, CNRS, Geeps,
91192 Gif-sur-Yvette, France.
Université Sorbonne, CNRS, Geeps, 75252 Paris, France*

Abstract. This work presents an electromagnetic method for mechanical stress evaluation using a U-shaped eddy current (EC) sensor. This technique exploits the magneto-elastic constitutive laws of ferromagnetic materials. Observing the sensor impedance provides information on both the initial magnetic anisotropy and the stress-induced magnetic anisotropy. Measurements from API-5L X52 steel pipelines in the longitudinal (DL) and transverse (DT) directions are used to validate this methodology.

Keywords. Magneto-elastic coupling, Eddy current non-destructive testing, anisotropy, API-5L X52.

1. Introduction

In this paper the EC non-destructive testing using a U-shaped sensor (Fig. 1.a) is employed to detect mechanical stress \mathbf{T} in anisotropic ferromagnetic material. For a magneto-dynamic problem, the key parameter to include the stress effect is the magnetic permeability μ [1]. μ is sensitive to stress [2], and the electrical conductivity is assumed constant within an applied stress range from 0 MPa to 160 MPa [3]. Therefore, any variation of the measured impedance signal is from magnetic properties once the lift-off is constant.

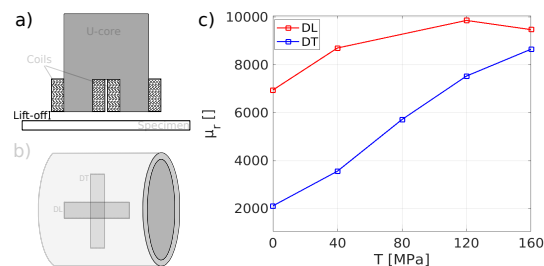


Figure 1. a) Sensor geometry. b) Schematic of specimens cut-out. c) μ_r of DL and DT specimens under stress.

2. Stress effect on the EC sensor impedance

The magneto-elastic characterization of two specimens extracted from an API-5L X52 pipeline¹ in the directions DL and DT Fig. 1.b, shows that the material is anisotropic and that $\mu_r(\mathbf{T})$ increases with respect to uni-axial tensile stresses(Fig. 1.c). Thus the sensor impedance depends on stress. Using a U-shaped EC sensor provides information on the direction of the initial magnetic anisotropy as well as the direction of the induced magnetic anisotropy from uni-axial stresses (Fig. 2). The anisotropy can be estimated by comparing the measured sensor impedance $Z_\theta(\mathbf{T})$ to a reference impedance Z_0 to calculate the relative variation $|\Delta Z_\theta(\mathbf{T})|$, where θ is the angle between the uniaxial stress direction and the sensor orientation, and Z_0 is the impedance for an unstressed material at $\theta = 0$.

3. Results

Z_0 is measured after demagnetizing the specimen. Then a frequency sweep of the impedance is performed for each stress state. Good sensitivity was found for anisotropy detection (Fig. 2.a) and stress evaluation (Fig. 2.b); however, the latter depends on material magnetization M_r . A numerical model of impedance computation will be included in the extended version.

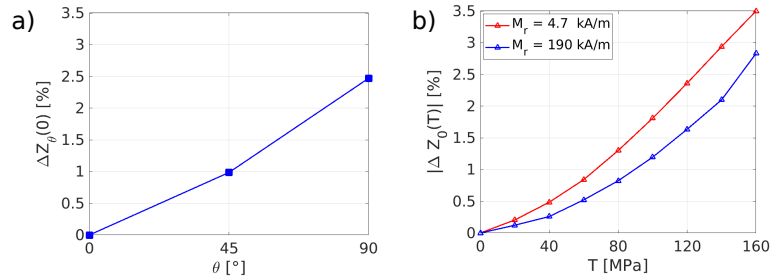


Figure 2. Magnetic anisotropy evaluation at 180 kHz. a) Initial magnetic anisotropy in DL. b) Stress-induced magnetic anisotropy in DL.

References

- [1] A. Dahia, E. Berthelot, Y. Le Bihan, and L. Daniel, "A model-based method for the characterisation of stress in magnetic materials using eddy current non-destructive evaluation," *J. Phys. D: Appl. Phys.*, vol. 48, 195002 (2015).
- [2] B. D. Cullity, C. D. Graham, Introduction to magnetic materials, 2nd edition, Wiley, New Jersey, 2011.
- [3] M. Morozov, G. Yun Tian, and P. J. Withers, "The pulsed eddy current response to applied loading of various aluminium alloys," *NDT & E Int.*, vol. 43, pp. 493–500 (2010).

¹The specimens were provided by GRTgaz Research & Innovation Center for Energy. Address: 1-3 rue du commandant d'Estienne d'Orves, 92390 Villeneuve La Garenne, France.