



**HAL**  
open science

# Nonlinear Model Predictive Control based on K-step Control Invariant Sets

Zhixin Zhao, Antoine Girard, Sorin Oлару

► **To cite this version:**

Zhixin Zhao, Antoine Girard, Sorin Oлару. Nonlinear Model Predictive Control based on K-step Control Invariant Sets. European control conference, Jun 2024, Stockholm, Sweden. hal-04514594v1

**HAL Id: hal-04514594**

**<https://hal.science/hal-04514594v1>**

Submitted on 21 Mar 2024 (v1), last revised 17 Jun 2024 (v2)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Nonlinear Model Predictive Control based on $K$ -step Control Invariant Sets

Zhixin Zhao<sup>1</sup>, Antoine Girard<sup>1</sup>, Sorin Olaru<sup>1</sup>

**Abstract**— One of the fundamental issues in Model Predictive Control (MPC) is to be able to guarantee the recursive feasibility of the underlying receding horizon optimization. In other terms, the primary condition for a NMPC design is to ensure the closed-loop solution remains indefinitely within a safe set. This issue can be addressed by introducing a terminal constraint described in terms of a control invariant set. However, the control invariant sets of nonlinear systems are often impractical to use due to their complexity. The  $K$ -step control invariant sets are representing generalizations of the classical one-step control invariant sets and prove to retain the useful properties for MPC design, but often with simpler representations, and thus greater applicability. In this paper, a novel NMPC scheme based on  $K$ -step control invariant sets is proposed. We employ symbolic control techniques to compute a  $K$ -step control invariant set and build the NMPC framework by integrating this set as a terminal constraint, thereby ensuring recursive feasibility.

## I. INTRODUCTION

Model predictive control (MPC) is a widely used control strategy [5] in which the current control action is obtained by solving, at each sampling instant, a finite horizon open-loop control problem, using the current state of the plant as the initial state. The iterative procedure yields an optimal control sequence [9], and the first component in this sequence is applied to the plant before reiterating the procedure thus obtaining a closed-loop control formulation [13].

One of the fundamental problems in MPC is the lack of guarantee for recursive feasibility for the receding horizon optimization [10]. This desideratum can be translated in terms of a certificate that the closed-loop solutions remain indefinitely within a safe set which in turn represents a classical notion of positive set-invariance [3]. Recursive feasibility is classically obtained by introducing a control invariant set as the terminal constraint at the end of the prediction horizon [14]. However, the construction and practical use of such sets is difficult, especially for the nonlinear case, leading either to computationally involving procedures or to complex set representations [4], [7], [12], [15].

In this context, the  $K$ -step control invariant sets were recently proposed for the constrained control design [17]. The  $K$ -step control invariant sets represent a generalization of the control invariant set by the fact that they employ a finite sequence of sets for monitoring the inclusion of trajectories or in a broad sens a inner-outer counterpart for the classical 1-step forward invariance [6]. The  $K$ -step control invariant sets ensure the existence of a control

sequence such that the system trajectory cannot leave the given set for more than  $K$  time steps and can be linked to the  $K$ -step constructiveness studied in early research works [1].

The first contribution of the present paper is to propose an NMPC scheme based on  $K$ -step control invariant sets. A theoretical comparison of NMPC with control invariant sets and  $K$ -step control invariant sets is provided to determine the equivalence of the two approaches in terms of closed-loop behavior.

From the point of view of practical construction, a symbolic control design procedure is employed. It leverages on the recent advancements on the computation of the maximum control invariant set in this framework proposed in [16], [18]. As one of the main contributions of the present paper, it is shown that  $K$ -step control invariant sets can be computed using a similar principles. It is worth to be mentioned that symbolic control is a computational approach for synthesizing controllers for general nonlinear systems with state and input constraints and thus is not suffering from the structural constraints of the classical invariant set constructions. More precisely, the continuous dynamics of the system are approximated using a finite-state dynamical system called symbolic abstraction. The key advantage of symbolic abstractions is the ability to use algorithmic techniques to synthesize controllers that enforce various specifications such as safety and reachability [8].

The newly proposed NMPC framework, which combines symbolic control through the use of  $K$ -step invariant sets, capitalizes on the control performance benefits offered by NMPC while ensuring safety.

The paper is structured as follows. Section II provides an introduction to the relevant preliminary theory. Section III provides the novel NMPC scheme. Section IV outlines the way in which the NMPC framework demonstrated in Section III can be accomplished through offline and online computation. Finally, Section V offers a numerical example that demonstrates the computation of  $K$ -step control invariant sets and a reference tracking problem.

## II. PRELIMINARIES

In this section, we recall some classical results on nonlinear model predictive control, which will be useful for subsequent discussions.

### A. Nonlinear model predictive control

We consider a nonlinear discrete-time system of the form:

$$x_{t+1} = f(x_t, u_t), \quad t \in \mathbb{N} \quad (1)$$

<sup>1</sup> Université Paris-Saclay, CNRS, CentraleSupélec, Laboratoire des signaux et systèmes, 91190, Gif-sur-Yvette, France. `firstname.lastname@centralesupelec.fr`

where  $x_t \in \mathbb{R}^n$  is the state of the system and  $u_t \in \mathbb{R}^m$  is the control input.

The constrained control problem accounts for state and input limitations given by compact sets  $\mathbb{X} \subseteq \mathbb{R}^n$  and  $\mathbb{U} \subseteq \mathbb{R}^m$ . The goal is to design a nonlinear model predictive control (NMPC) scheme enforcing the constraints while optimizing some performance criteria. For that purpose, we consider at each discrete-time instant  $t \in \mathbb{N}$  the following optimization problem parameterized by the current state vector assumed to be measurable  $x \in \mathbb{X}$ :

$$\begin{aligned} \min_{\mathbf{u}_t^{[0, N-1]}} J(t, x_t^0, \underbrace{u_t^0, \dots, u_t^{N-1}}_{\mathbf{u}_t^{[0, N-1]}}, \underbrace{x_t^1, \dots, x_t^N}_{\mathbf{x}_t^{[1, N]}}) \\ \text{s.t.} \quad \begin{aligned} x_t^0 &= x, \\ x_t^{i+1} &= f(x_t^i, u_t^i), \quad i = 0, \dots, N-1 \\ u_t^i &\in \mathbb{U}, \quad i = 0, \dots, N-1 \\ x_t^i &\in \mathbb{X}, \quad i = 0, \dots, N \\ x_t^N &\in \mathbb{X}_0. \end{aligned} \end{aligned} \quad (2)$$

In this classical NMPC formulation (2),  $N$  is a positive integer defining the horizon for the evaluation of a (possibly time-varying) performance cost function

$$J : \mathbb{R} \times \mathbb{R}^n \times \mathbb{R}^{N \times m} \times \mathbb{R}^{N \times n} \rightarrow \mathbb{R}.$$

$J(t, x_t^0, \mathbf{u}_t^{[0, N-1]}, \mathbf{x}_t^{[1, N]})$  is parameterized by the current state  $x_t^0$  while  $\mathbf{u}_t^{[0, N-1]}$  and  $\mathbf{x}_t^{[1, N]}$  represent the optimization arguments linked through the constraints. Finally,  $\mathbb{X}_0 \subseteq \mathbb{X}$  is a compact set defining terminal constraints.

The *feasible set* of (2), is the set of states  $x \in \mathbb{X}$  such that (2) has a feasible solution. Note that constraints in (2) are time-invariant so the feasible set does not depend on the time  $t$ . We denote the feasible set by  $\mathbb{F}_{\mathbb{X}_0}$  to emphasize its dependence on the set of terminal constraints  $\mathbb{X}_0$ . For  $x \in \mathbb{F}_{\mathbb{X}_0}$ , let  $\bar{\mathbf{u}}_t^{[0, N-1]} = \{\bar{u}_t^0, \dots, \bar{u}_t^{N-1}\}$  be a minimizer of (2). We assume that a minimizer exists, even though it may not be unique. This is the case e.g. if  $J(t, \dots)$  and  $f$  are continuous, due to the compactness of sets involved in (2). Then, we denote  $\lambda_{\mathbb{X}_0}(t, x)$  the optimal value of (2) and the control action to be effectively implemented as the system input is selected as the first component of an optimal argument, i.e.  $u_t \in \mu_{\mathbb{X}_0}(t, x_t)$ , where:

$$\mu_{\mathbb{X}_0}(t, x) = \left\{ \bar{u}_t^0 \in \mathbb{U} \left| \begin{array}{l} \bar{\mathbf{u}}_t^{[0, N-1]} = \{\bar{u}_t^0, \dots, \bar{u}_t^{N-1}\} \\ \text{is a minimizer of (2)} \end{array} \right. \right\} \quad (3)$$

Clearly the following claim holds:

*Proposition 1:* Let us consider  $\mathbb{X}_0 \subseteq \mathbb{X}'_0 \subseteq \mathbb{X}$ , then

- $\mathbb{F}_{\mathbb{X}_0} \subseteq \mathbb{F}_{\mathbb{X}'_0}$ ;
- For all  $t \in \mathbb{N}$ , for all  $x \in \mathbb{F}_{\mathbb{X}_0}$ ,

$$\lambda_{\mathbb{X}'_0}(t, x) \leq \lambda_{\mathbb{X}_0}(t, x).$$

*Proof:* These claims follow from the fact that  $\mathbb{X}_0 \subseteq \mathbb{X}'_0 \subseteq \mathbb{X}$  enlarges the feasible set. All the optimal solutions with terminal constraints  $\mathbb{X}_0$  are feasible solutions with terminal constraints  $\mathbb{X}'_0$ . ■

Consider now the closed-loop system given by (1) and (2) with

$$u_t \in \mu_{\mathbb{X}_0}(t, x_t). \quad (4)$$

We denote by  $\bar{\mathbb{F}}_{\mathbb{X}_0}$  the *recursive feasible set* of (1)-(2)-(4), that is the set of states  $x_0 \in \mathbb{X}$  such that  $x_t \in \mathbb{F}_{\mathbb{X}_0}$  for all  $t \in \mathbb{N}$ . Clearly,  $\bar{\mathbb{F}}_{\mathbb{X}_0} \subseteq \mathbb{F}_{\mathbb{X}_0}$ . To show that the closed-loop system is well-posed and satisfies the constraints at all time, it is important to guarantee that  $\bar{\mathbb{F}}_{\mathbb{X}_0} \neq \emptyset$ .

### B. Recursive feasibility using control invariant sets

Let us recall a classical result on the use of control invariant sets as terminal constraints in (2), see e.g. [14].

*Definition 1:*  $\mathbb{X}_0 \subseteq \mathbb{X}$  is a *control invariant set* of (1) if

$$\forall x \in \mathbb{X}_0, \exists u \in \mathbb{U}, f(x, u) \in \mathbb{X}_0.$$

A control invariant set  $\mathbb{X}_0$  is said to be the *maximal control invariant set* of (1) if any control invariant set is a subset of  $\mathbb{X}_0$ .

The following proposition is reminiscent from classical results (see e.g. [11, Theorem 5.4]). It is therefore stated without proof:

*Proposition 2:* If  $\mathbb{X}_0 \subseteq \mathbb{X}$  is a control invariant set of (1) then  $\mathbb{X}_0 \subseteq \mathbb{F}_{\mathbb{X}_0}$  and  $\bar{\mathbb{F}}_{\mathbb{X}_0} = \mathbb{F}_{\mathbb{X}_0}$ . Moreover, if  $\mathbb{X}_0$  is the maximal control invariant set, then  $\mathbb{F}_{\mathbb{X}_0} = \mathbb{X}_0$ .

Control invariant sets are thus a powerful tool to enforce recursive feasibility in NMPC scheme. From Proposition 1, it follows that considering larger control invariant sets leads to larger feasible sets and better performances. Hence, it is important to consider a control invariant set that is as close as possible to the maximal one. Unfortunately, for nonlinear systems with potentially nonconvex sets of constraints, the maximal control invariant set maybe very complex. Accurate approximations require complex representations (see e.g; [4], [7], [12], [15]) and are therefore impractical to consider in real-time optimization.

## III. AN NMPC SCHEME BASED ON $K$ -STEP CONTROL INVARIANT SETS

In this section, we present an alternative NMPC scheme based on  $K$ -step control invariant sets. We then compare the feasibility and the performances with respect to the approach presented in the previous section.

### A. $K$ -step control invariant sets

Let us consider system (1) with state and input constraints given by  $\mathbb{X}$  and  $\mathbb{U}$ . Given a set  $\mathbb{T} \subseteq \mathbb{X}$  we define the set of *controllable predecessors* of  $\mathbb{T}$  as

$$\text{CPre}(\mathbb{T}) = \{x \in \mathbb{X} \mid \exists u \in \mathbb{U}, f(x, u) \in \mathbb{T}\}.$$

Then, for  $k \in \mathbb{N}$ , we define  $\text{CPre}_k(\mathbb{T})$  inductively as follows:

$$\text{CPre}_0(\mathbb{T}) = \mathbb{T}, \quad \text{CPre}_{k+1}(\mathbb{T}) = \text{CPre}(\text{CPre}_k(\mathbb{T})), \quad k \in \mathbb{N}.$$

Finally, for  $K \geq 1$ , let

$$\text{CPre}_{[1:K]}(\mathbb{T}) = \bigcup_{k=1}^K \text{CPre}_k(\mathbb{T}).$$

Intuitively,  $\text{CPre}_{[1:K]}(\mathbb{T})$  denotes the set of states from which (1) can reach the set  $\mathbb{T}$  in  $K$  steps or less, while respecting state and input constraints.

*Definition 2:*  $\mathbb{T} \subseteq \mathbb{X}$  is a  $K$ -step control invariant set of (1) if  $\mathbb{T} \subseteq \text{CPre}_{[1:K]}(\mathbb{T})$ .

In words,  $\mathbb{T}$  is  $K$ -step control invariant set if from any state of  $\mathbb{T}$  there exists a control sequence allowing to come back to  $\mathbb{T}$  in at most  $K$  time steps.

*Proposition 3:* Let  $\mathbb{T} \subseteq \mathbb{X}$  be a  $K$ -step control invariant set of (1). Then,  $\text{CPre}_{[1:K]}(\mathbb{T})$  is a control invariant set of (1).

*Proof:* Let us consider  $x_0 \in \text{CPre}_{[1:K]}(\mathbb{T})$ . Then, there exists an input sequence  $u_0, \dots, u_{k-1} \in \mathbb{U}$  with  $k \in \{1, \dots, K\}$  such that the associated trajectory of (1),  $x_0, x_1, \dots, x_k$  satisfies  $x_i \in \mathbb{X}$ , for all  $i \in \{1, \dots, k\}$  and  $x_k \in \mathbb{T}$ . Then, it follows that  $x_1 \in \text{CPre}_{k-1}(\mathbb{T})$ . If  $k > 1$ , we get that  $x_1 \in \text{CPre}_{[1:K]}(\mathbb{T})$ . If  $k = 1$ , then  $x_1 \in \mathbb{T}$ , which since  $\mathbb{T}$  is  $K$ -step control invariant set yields  $x_1 \in \text{CPre}_{[1:K]}(\mathbb{T})$ . It follows that  $\text{CPre}_{[1:K]}(\mathbb{T})$  is a control invariant set of (1). ■

### B. A novel NMPC scheme

We now present the NMPC scheme based on  $K$ -step control invariant sets. We consider at all time  $t \in \mathbb{N}$  the following optimization problem parameterized by  $x \in \mathbb{X}$ :

$$\begin{aligned} \min_{\mathbf{u}_t^{[0, N+K-1]}} & J(t, x_t^0, \mathbf{u}_t^{[0, N-1]}, \mathbf{x}_t^{[1, N]}) \\ & x_t^0 = x, \\ & x_t^{i+1} = f(x_t^i, u_t^i), \quad i = 0, \dots, N+K-1 \\ \text{s.t.} \quad & u_t^i \in \mathbb{U}, \quad i = 0, \dots, N+K-1 \\ & x_t^i \in \mathbb{X}, \quad i = 0, \dots, N+K \\ & \exists k \in \{1, \dots, K\}, \quad x_t^{N+k} \in \mathbb{T}. \end{aligned} \quad (5)$$

In (5),  $N$  and  $K$  are positive integers,  $J$ ,  $\mathbb{X}$  and  $\mathbb{U}$  are the same as in (2) and  $\mathbb{T} \subseteq \mathbb{X}$  is a compact set. Let us remark that while the constraints in (5) involves the predicted behavior of (1) on a time horizon of length  $N+K$ , the cost function only involves the value of the input and state on the first  $N$  time steps.

We denote by  $\mathbb{F}_{\mathbb{T}}^K$  the *feasible set* of (5), that is the set of states  $x \in \mathbb{X}$  such that (5) has a feasible solution. Note that constraints in (5) are time-invariant so the feasible set does not depend on the time  $t$ . For  $x \in \mathbb{F}_{\mathbb{T}}^K$ , let  $\bar{\mathbf{u}}_t^{[0, N+K-1]}$  be a minimizer of (5). We assume that a minimizer exists, even though it may not be unique. As for (2), this is the case e.g. if  $J(t, \dots, \dots)$  and  $f$  are continuous, due to the compactness of sets involved in (5). Then, we denote  $\lambda_{\mathbb{T}}^K(t, x)$  the optimal value of (5) and the non-empty set of optimizers:

$$\mu_{\mathbb{T}}^K(t, x) = \left\{ \bar{u}_t^0 \in \mathbb{U} \left| \bar{\mathbf{u}}_t^{[0, N+K-1]} = \{\bar{u}_t^0, \dots, \bar{u}_t^{N+K-1}\} \right. \begin{array}{l} \text{is a minimizer of (5)} \\ \end{array} \right\} \quad (6)$$

Consider now the closed-loop system given by (1) with

$$u_t \in \mu_{\mathbb{T}}^K(t, x_t). \quad (7)$$

We denote by  $\bar{\mathbb{F}}_{\mathbb{T}}^K$  the *recursive feasible set* of (1)-(5)-(7), that is the set of all states  $x_0 \in \mathbb{X}$  such that  $x_t \in \mathbb{F}_{\mathbb{T}}^K$  for all  $t \in \mathbb{N}$  subject to  $x_{t+1} = f(x_t, u_t)$  when  $u_t \in \mu_{\mathbb{T}}^K(t, x_t)$ . Clearly,

$\bar{\mathbb{F}}_{\mathbb{T}}^K \subseteq \mathbb{F}_{\mathbb{T}}^K$ . The next result describes the main property of the proposed NMPC scheme.

*Theorem 1:* Let  $\mathbb{T} \subseteq \mathbb{X}$  be a  $K$ -step control invariant set of (1). Then,

- $\bar{\mathbb{F}}_{\mathbb{T}}^K = \mathbb{F}_{\mathbb{T}}^K = \mathbb{F}_{\text{CPre}_{[1:K]}(\mathbb{T})}$ ;
- For all  $x_0 \in \bar{\mathbb{F}}_{\mathbb{T}}^K$ ,

$$\mu_{\mathbb{T}}^K(t, x_t) = \mu_{\text{CPre}_{[1:K]}(\mathbb{T})}(t, x_t)$$

and

$$\lambda_{\mathbb{T}}^K(t, x_t) = \lambda_{\text{CPre}_{[1:K]}(\mathbb{T})}(t, x_t)$$

for all  $t \in \mathbb{N}$ .

*Proof:* Let  $x \in \mathbb{F}_{\mathbb{T}}^K$ , let  $\bar{\mathbf{u}}_t^{[0, N+K-1]}$  be a minimizer of (5). Then, considering the associated optimal sequence  $\bar{\mathbf{x}}_t^{[0, N+K]}$  with  $\bar{x}_t^0 = x$ , it is clear from the last constraint of (5) that  $\bar{x}_t^N \in \text{CPre}_{[1:K]}(\mathbb{T})$ . Hence,  $\bar{\mathbf{u}}_t^{[0, N-1]}$  is a feasible solution of (2) with

$$\mathbb{X}_0 = \text{CPre}_{[1:K]}(\mathbb{T}).$$

This implies that  $x \in \mathbb{F}_{\text{CPre}_{[1:K]}(\mathbb{T})}$  and that

$$\lambda_{\mathbb{T}}^K(t, x) \geq \lambda_{\text{CPre}_{[1:K]}(\mathbb{T})}(t, x).$$

Conversely, consider  $x \in \mathbb{F}_{\text{CPre}_{[1:K]}(\mathbb{T})}$  and let  $\bar{\mathbf{u}}_t^{[0, N-1]}$  be a minimizer of (2) with  $\mathbb{X}_0 = \text{CPre}_{[1:K]}(\mathbb{T})$  and let  $\bar{\mathbf{x}}_t^{[0, N]}$  with  $\bar{x}_t^0 = x$  be the associated trajectory of (1). Then,  $\bar{x}_t^N \in \text{CPre}_{[1:K]}(\mathbb{T})$  which means that there exists an input sequence  $\bar{\mathbf{u}}_t^{[N, N+k-1]} \in \mathbb{U}$ , with  $k \in \{1, \dots, K\}$  such that

$$\bar{\mathbf{x}}_t^{[N, N+k]} \in \mathbb{X}$$

and  $\bar{x}_t^{N+k} \in \mathbb{T}$ . Since  $\mathbb{T}$  is a  $K$ -step controlled invariant we have that  $\mathbb{T} \subseteq \text{CPre}_{[1:K]}(\mathbb{T})$ . Moreover, from Proposition 3, we have that  $\text{CPre}_{[1:K]}(\mathbb{T})$  is a control invariant set of (1). If  $k < K$ , it follows that there exists an input sequence  $\bar{\mathbf{u}}_t^{[N+k, N+K-1]} \in \mathbb{U}$  such that

$$\bar{\mathbf{x}}_t^{[N+k+1, N+K]} \in \text{CPre}_{[1:K]}(\mathbb{T}) \subseteq \mathbb{X}.$$

Hence,  $\bar{\mathbf{u}}_t^{[0, N+K-1]}$  is a feasible solution of (5). This implies that  $x \in \mathbb{F}_{\mathbb{T}}^K$  and that

$$\lambda_{\mathbb{T}}^K(t, x) \leq \lambda_{\text{CPre}_{[1:K]}(\mathbb{T})}(t, x).$$

Consequently, one can conclude that

$$\mathbb{F}_{\mathbb{T}}^K = \mathbb{F}_{\text{CPre}_{[1:K]}(\mathbb{T})}$$

and that for all  $x \in \mathbb{F}_{\mathbb{T}}^K$ ,  $\lambda_{\mathbb{T}}^K(t, x) = \lambda_{\text{CPre}_{[1:K]}(\mathbb{T})}(t, x)$ . Moreover, it follows from above that the first  $N$  elements of the minimizers of (5) coincide with the minimizers of (2) with  $\mathbb{X}_0 = \text{CPre}_{[1:K]}(\mathbb{T})$ . This yields for all

$$\mu_{\mathbb{T}}^K(t, x) = \mu_{\text{CPre}_{[1:K]}(\mathbb{T})}(t, x), \forall x \in \mathbb{F}_{\mathbb{T}}^K.$$

Then, the closed-loop behaviors of (1)-(2)-(4) coincide with those of (1)-(5)-(7). This yields that

$$\bar{\mathbb{F}}_{\mathbb{T}}^K = \bar{\mathbb{F}}_{\text{CPre}_{[1:K]}(\mathbb{T})}.$$

Moreover, since  $\text{CPre}_{[1:K]}(\mathbb{T})$  is a control invariant set of (1), we get from Proposition 2 that

$$\bar{\mathbb{F}}_{\text{CPre}_{[1:K]}(\mathbb{T})} = \mathbb{F}_{\text{CPre}_{[1:K]}(\mathbb{T})}$$

which together with  $\mathbb{F}_{\mathbb{T}}^K = \mathbb{F}_{\text{CPre}_{[1:K]}(\mathbb{T})}$  gives  $\bar{\mathbb{F}}_{\mathbb{T}}^K = \mathbb{F}_{\mathbb{T}}^K$ . ■

The previous result shows the equivalence in term of closed-loop behaviors, between NMPC scheme (1)-(5)-(7) and (1)-(2)-(4) with  $\mathbb{X}_0 = \text{CPre}_{[1:K]}(\mathbb{T})$ . It also implies the following result:

*Corollary 1:* Let  $\mathbb{X}_0 \subseteq \mathbb{X}$  be a control invariant set of (1), let us consider  $\mathbb{T} \subseteq \mathbb{X}_0$  such that  $\mathbb{X}_0 \subseteq \text{CPre}_{[1:K]}(\mathbb{T})$ . Then,

- $\bar{\mathbb{F}}_{\mathbb{T}}^K = \mathbb{F}_{\mathbb{T}}^K$  and  $\mathbb{F}_{\mathbb{X}_0} \subseteq \mathbb{F}_{\mathbb{T}}^K$ ;
- For all  $x_0 \in \mathbb{F}_{\mathbb{X}_0}$ ,  $\lambda_{K,\mathbb{T}}(t, x_t) \leq \lambda_{\mathbb{X}_0}(t, x_t), \forall t \in \mathbb{N}$ .

*Proof:* Since  $\mathbb{T} \subseteq \mathbb{X}_0 \subseteq \mathbb{X}$  and  $\mathbb{X}_0 \subseteq \text{CPre}_{[1:K]}(\mathbb{T})$ , it follows that  $\mathbb{T}$  is a  $K$ -step control invariant set. Then, we get from Theorem 1 that

$$\bar{\mathbb{F}}_{\mathbb{T}}^K = \mathbb{F}_{\mathbb{T}}^K = \mathbb{F}_{\text{CPre}_{[1:K]}(\mathbb{T})}$$

and for all  $t \in \mathbb{N}$ , for all  $x \in \mathbb{F}_{\mathbb{T}}^K$ ,  $\lambda_{\mathbb{T}}^K(t, x) = \lambda_{\text{CPre}_{[1:K]}(\mathbb{T})}(t, x)$ . Then,  $\mathbb{X}_0 \subseteq \text{CPre}_{[1:K]}(\mathbb{T})$  gives from Claim 1 that

$$\mathbb{F}_{\mathbb{X}_0} \subseteq \mathbb{F}_{\text{CPre}_{[1:K]}(\mathbb{T})}$$

and for all  $t \in \mathbb{N}$ , for all  $x \in \mathbb{F}_{\mathbb{X}_0}$ ,  $\lambda_{\text{CPre}_{[1:K]}(\mathbb{T})}(t, x) \leq \lambda_{\mathbb{X}_0}(t, x)$ . From above, it follows that

$$\mathbb{F}_{\mathbb{X}_0} \subseteq \mathbb{F}_{\mathbb{T}}^K$$

and for all  $t \in \mathbb{N}$  and  $x \in \mathbb{F}_{\mathbb{X}_0}$ ,  $\lambda_{\mathbb{T}}^K(t, x) \leq \lambda_{\mathbb{X}_0}(t, x)$ . ■

In this section, we have compared NMPC schemes based on control invariant sets and on  $K$ -step control invariant sets. Corollary 1 that the approach based on  $K$ -step control invariant sets can lead to larger recursive feasible sets and to better performances than an approach based on classical 1-step control invariant sets. This discussion rejoins the analysis [6] on the inner-outer approximation of robust control invariant sets.

#### IV. ALGORITHMS FOR EFFECTIVE IMPLEMENTATION

In this section, we discuss the computational aspects of the NMPC scheme based on  $K$ -step control invariant sets. Firstly, we focus on offline computations and describe a method to compute  $K$ -steps control invariant sets using symbolic control techniques. Secondly, we discuss the online computation aspects and we describe a method to initialize the optimization problem (5) with a feasible solution.

##### A. Offline computation

This subsection describes the offline computational part required to apply the framework introduced in the previous section. This includes the use of symbolic control to compute the  $K$ -step control invariant set and symbolic controllers that will be used in online computations. First, we briefly recall the symbolic control technique (see e.g. [16], [18] for more details).

1) *Symbolic control:* Symbolic control involves discretizing the state space and the control input, representing the set of states as a finite number of symbols that transition between each other under the influence of control input. The first step involved constructing the symbolic system dynamics of (1). Let us consider:

- A finite partition  $(\mathbb{X}_q)_{q \in \mathbb{Q}}$  of  $\mathbb{R}^n$  such that  $\mathbb{Q} = \mathbb{Q}_{\mathbb{X}} \cup \{q_{\text{out}}\}$  and  $\bigcup_{q \in \mathbb{Q}_{\mathbb{X}}} \mathbb{X}_q \subseteq \mathbb{X}$ ;
- A finite number of samples  $(u_p)_{p \in \mathbb{P}}$  providing a grid of  $\mathbb{U}$ .

The symbolic model is based on the transition:

$$q_{t+1} \in F(q_t, p_t), \quad q_t \in \mathbb{Q}, \quad p_t \in \mathbb{P} \quad (8)$$

where  $\mathbb{Q}$  and  $\mathbb{P}$  are the finite sets of symbolic states and inputs;  $F : \mathbb{Q} \times \mathbb{P} \rightarrow 2^{\mathbb{Q}}$  is the set-valued transition map defined by

$$q_{t+1} \in F(q_t, p_t) \iff \mathbb{X}_{q_{t+1}} \cap \hat{f}(\mathbb{X}_{q_t}, u_{p_t}) \neq \emptyset$$

where  $\hat{f}$  is an over-approximation of  $f$  ensuring:

$$f(\mathbb{X}_q, u_p) \subseteq \hat{f}(\mathbb{X}_q, u_p), \quad \forall q \in \mathbb{Q}, \quad p \in \mathbb{P}.$$

For each symbolic state  $q$  and input  $p$ , we compute the over-approximation of the successor of  $\mathbb{X}_q$  under the influence of each input  $u_p$  using system dynamics. One can show that the dynamics of (8) is an over-approximation of that of (1), so control invariant sets and  $K$ -step control invariant sets of (1) can be obtained from those of (8), see e.g. [8].

In order to compute  $K$ -step control invariant sets, we need to first compute the control invariant set.

2) *Computation of control invariant set:* Let us remark that (8) has finite sets of states and inputs. Then, its maximal control invariant set can be easily computed using a fixed-point algorithm [18], where starting from the set  $\mathbb{Q}_{\mathbb{X}}$ , we iteratively remove the states from which we cannot keep the system state in  $\mathbb{Q}_{\mathbb{X}}$ . Then, since the dynamics of (8) is an over-approximation of that of (1), the maximal control invariant set of (8) provides a control invariant set of (1).

3) *Computation of  $K$ -step control invariant sets :* Once we obtain the maximum control invariant set, our next step is to select a subset as large as possible as a candidate for the  $K$ -step control invariant set. Choosing a  $K$ -step control invariant set with a simple shape will facilitate its integration into the NMPC framework. Therefore, one can choose a hyperrectangle inside the control invariant set that is as large as possible<sup>1</sup> and denote it as  $\mathbb{T}$ . Using symbolic control, the set  $\text{CPre}_{[1:K]}(\mathbb{T})$  can be conveniently computed. Further, a progressive increase of the value of  $K$  is considered up to the validation of the relationship in Definition 2:  $\mathbb{T} \subseteq \text{CPre}_{[1:K]}(\mathbb{T})$ , which allows to certify that  $\mathbb{T}$  is a  $K$ -step control invariant set.

<sup>1</sup>A measure for the enlargement needs to be defined and the largest candidate may not be unique thus providing degrees of freedom for the design. We don't dwell here on this aspect for space reasons and simply assume the largest hyperrectangle has been selected by enlarging each direction sequentially.

4) *Computation of symbolic controllers*: As with most complex optimization problems, initial values have a considerable impact on the results in (5). Therefore we would like to provide the optimization problem with an initial value that satisfies the constraints at each moment, and allow the iterative procedure to focus on its improvement. One needs to compute the following controllers offline using a symbolic approach:

$$\begin{aligned}
& C_i : Q \rightarrow U, \text{ such that} \\
& \forall x \in \text{CPre}_i(\mathbb{T}), F(q, C_i(q(x))) \in \text{CPre}_{i-1}(\mathbb{T}) \\
& i \in [1, K] \\
& C^* : Q \rightarrow U, \text{ such that} \\
& \forall x \in \text{CPre}_{[1:K]}(\mathbb{T}), F(q, C^*(q(x))) \in \text{CPre}_{[1:K]}(\mathbb{T})
\end{aligned} \tag{9}$$

where  $q(x)$  denote the symbolic state  $q \in Q$  such that  $x \in \mathbb{X}_q$ . Without entering into algorithmic details, is worth mentioning that both controllers can be obtained while computing the  $K$ -step control invariant sets. Generally there is freedom in the design of such symbolic controllers that satisfy the above requirements (depending on the number of control symbols and the structure of the dynamics). No particular criterion is imposed here, a random choice or ad hoc criteria can be employed.

### B. Online computation

This section presents the online computational part of NMPC based on the  $K$ -step control invariant sets.

1) *Solving optimization problem (5)*: If we denote problem (5) as  $\mathcal{O}(t, x_t)$  we can define a collection of simpler<sup>2</sup> optimization problems  $\mathcal{O}_k(t, x_t), k \in \{1, \dots, K\}$ :

$$\begin{aligned}
& \min_{\mathbf{u}_t^{[0, N+K-1]}} J(t, x_t^0, \mathbf{u}_t^{[0, N-1]}, \mathbf{x}_t^{[1, N]}) \\
& x_t^0 = x, \\
& x_t^{i+1} = f(x_t^i, u_t^i), \quad i = 0, \dots, N + K - 1 \\
\text{s.t.} \quad & u_t^i \in \mathbb{U}, \quad i = 0, \dots, N + K - 1 \\
& x_t^i \in \mathbb{X}, \quad i = 0, \dots, N + K \\
& x_t^{N+K} \in \mathbb{T}.
\end{aligned} \tag{10}$$

Figure 1 illustrates the fact that solving these  $K$  optimization problems online can be done either sequentially or concurrently. Then, we select the index  $k$  that minimizes the costs  $\lambda_{\mathbb{T}}^k(t, x_t)$  and we return the first component of the sequence of inputs corresponding to the minimizer.

2) *Initialization strategy for NMPC*: For nonlinear optimization solvers to be successful, it is often required to provide a feasible initial point on which the solver can improve. The following proposition shows points to such a selection using the symbolic controllers computed offline.

*Proposition 4*: Given an initial position  $x_0$  located within the set  $\text{CPre}_{[1:K]}(\mathbb{T})$ , an initial control sequence for the optimization problem that ensures constraint satisfaction can be computed at time 0 using Algorithm 1, and at time  $t$  using the Algorithm 2.

<sup>2</sup>Simpler is understood here in terms of terminal constraints.

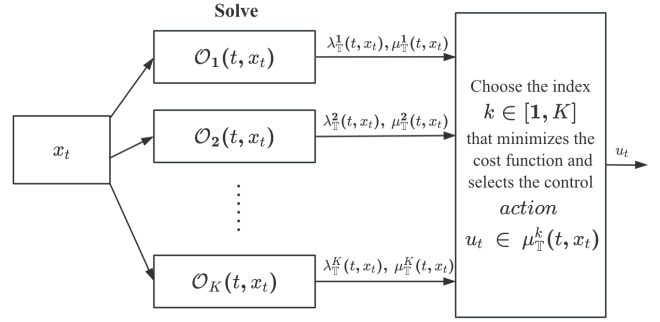


Fig. 1: Practical implementation of (5)

---

### Algorithm 1: Initialization for t=0

---

**Input** :  $x_0$  s.t.  $q(x_0) \in \text{CPre}_{[1:K]}(\mathbb{T}) \subseteq \mathbb{X}$   
**Output**: The computed initial control sequence at time 0:  $\hat{\mathbf{u}}_0^{[0, N+K-1]}$

```

// Initialize  $\hat{\mathbf{u}}_0^{[0, N-1]}$ 
1  $\hat{x}_0^0 \leftarrow x_0$ ;
2 for  $j \leftarrow 1$  to  $N$  do
3    $\hat{u}_0^{j-1} \leftarrow C^*(q(\hat{x}_0^{j-1}))$ ;
4    $\hat{x}_0^j \leftarrow f(\hat{x}_0^{j-1}, \hat{u}_0^{j-1})$ ;
// Initialize  $\hat{\mathbf{u}}_0^{[N, N+\bar{i}-1]}$ 
// We have  $\hat{x}_0^{N+\bar{i}} \in \mathbb{T}$ ,  $\bar{i}$  is the minimal
// step to reach  $\mathbb{T}$ 
5  $\bar{i} \leftarrow \min\{i | \hat{x}_0^N \in \text{CPre}_i(\mathbb{T})\}$ ;
6 for  $i \leftarrow 1$  to  $\bar{i}$  do
7    $\hat{u}_0^{N+i-1} \leftarrow C_{\bar{i}-i+1}^*(\hat{x}_0^{N+i-1})$ ;
8    $\hat{x}_0^{N+i} \leftarrow f(\hat{x}_0^{N+i-1}, \hat{u}_0^{N+i-1})$ ;
// Initialize  $\hat{\mathbf{u}}_0^{[N+\bar{i}, N+K-1]}$ 
9 for  $j \leftarrow N + \bar{i}$  to  $N + K - 1$  do
10   $\hat{u}_0^j \leftarrow C^*(q(\hat{x}_0^j))$ ;
11   $\hat{x}_0^{j+1} \leftarrow f(\hat{x}_0^j, \hat{u}_0^j)$ ;

```

---

*Proof*: For  $t = 0$ ,  $q(x_0)$  is the initial symbolic state, and the associated control  $\hat{u}_0^0 = C^*(q(x_0))$ . According to the definition of the controller  $C^*$ , we have  $\hat{u}_0^0 \in \mathbb{U}$ , and  $\hat{x}_0^1 = f(x_0, \hat{u}_0^0) \in \text{CPre}_{[1:K]}(\mathbb{T})$ . In the same way one can calculate  $\hat{\mathbf{u}}_0^{[1, N-1]}$ , and all states in  $\hat{\mathbf{x}}_0^{[1: N]} \in \text{CPre}_{[1:K]}(\mathbb{T})$ .

Then the minimum number of steps to reach the set  $\mathbb{T}$ :  $\bar{i} = \min\{i | \hat{x}_0^N \in \text{CPre}_i(\mathbb{T})\} \in [1, K]$  is available and  $\hat{u}_0^N = C_{\bar{i}}^*(q(\hat{x}_0^N))$ . According to the definition of controller  $C_i$ , we have  $\hat{u}_0^N \in \mathbb{U}$  and  $\hat{x}_0^{N+1} = f(\hat{x}_0^N, \hat{u}_0^N) \in \text{CPre}_{\bar{i}-1}(\mathbb{T})$ . By iteratively employing these controllers, we can obtain the control sequence  $\hat{\mathbf{u}}_0^{[N, N+\bar{i}-1]}$  and we can ensure that the set  $\mathbb{T}$  can be reached at  $\hat{x}_0^{N+\bar{i}}$ .

Since  $\mathbb{T} \subseteq \text{CPre}_{[1:K]}(\mathbb{T})$  the available control  $C^*$  is used to fill in the sequence  $\hat{\mathbf{u}}_0^{[N+\bar{i}, N+K-1]}$ . Up to this point, we have ensured that all constraints are satisfied at  $t = 0$ .

For any instant  $t$ , we have the solution of the optimization problem at instant  $t - 1$ , which yields a control sequence  $\mathbf{u}_{t-1}^{[0, N+K-1]} \in \mathbb{U}$ , the corresponding states  $\mathbf{x}_{t-1}^{[0, N+K]} \in \mathbb{X}$

---

**Algorithm 2: Initialization at any t**


---

**Input :**  $\mathbf{u}_{t-1}^{[0,N+K-1]}$ ,  $\mathbf{x}_{t-1}^{[0,N+K]}$ , state within the  $K$ -step control invariant sets at previous moment  $x_{t-1}^{N+k} \in \mathbb{T}$

**Output:** Initial control sequence  $\hat{\mathbf{u}}_t^{[0,N+K-1]}$

- 1  $\hat{\mathbf{u}}_t^{[0,N+k-2]} \leftarrow \mathbf{u}_{t-1}^{[1,N+k-1]}$ ;  
//  $\hat{x}_t^{N+k-1} = x_{t-1}^{N+k}$
- 2 **if**  $k \neq 1$  **then**
- 3     **for**  $j \leftarrow N+k-1$  **to**  $N+K-1$  **do**
- 4          $\hat{u}_t^j \leftarrow C^*(q(\hat{x}_t^j))$ ;
- 5          $\hat{x}_t^{j+1} \leftarrow f(\hat{x}_t^j, \hat{u}_t^j)$ ;
- 6 **else**
- 7     // if  $k=1$  it means that  $\hat{x}_t^N \in \mathbb{T}$
- 8      $\bar{i} \leftarrow \min\{i | \hat{x}_t^i \in \text{CPre}_i(\mathbb{T})\}$ ;
- 9     **for**  $i \leftarrow 1$  **to**  $\bar{i}$  **do**
- 10          $\hat{u}_t^{N+i-1} \leftarrow C_{i-i+1}^*(q(\hat{x}_t^{N+i-1}))$ ;
- 11          $\hat{x}_t^{N+i} \leftarrow f(\hat{x}_t^{N+i-1}, \hat{u}_t^{N+i-1})$ ;
- 12     **for**  $j \leftarrow N+\bar{i}$  **to**  $N+K-1$  **do**
- 13          $\hat{u}_t^j \leftarrow C^*(q(\hat{x}_t^j))$ ;
- 14          $\hat{x}_t^{j+1} \leftarrow f(\hat{x}_t^j, \hat{u}_t^j)$ ;

---

and the state  $x_{t-1}^{N+k} \in \mathbb{T}$ .

We let  $\hat{\mathbf{u}}_t^{[0,N+k-2]} = \mathbf{u}_{t-1}^{[1,N+k-1]}$  then we can get  $\hat{x}_t^{N+k-1} \in \mathbb{T}$  with  $k \in [1, K]$ . If  $k$  is equal to 1, one can find  $\bar{i} = \min\{i | \hat{x}_t^i \in \text{CPre}_i(\mathbb{T})\} \in [1, K]$  then use the previous method to calculate the control sequence  $\hat{\mathbf{u}}_t^{[N,N+K-1]}$ . If  $k$  is not equal to 1, one can calculate  $\hat{\mathbf{u}}_t^{[N+k-1,N+K-1]}$  with the controller  $C^*$ . Such initial control sequence obtained at time  $t$  will satisfy all the constraints. ■

## V. NUMERICAL EXAMPLE

Consider a mobile cart model as a numerical example, similar to [2]. The state vector  $x \in \mathbb{R}^3$  and the control input vector  $u \in \mathbb{R}^2$ . The system dynamics are given as:

$$\begin{aligned} x_1(t+1) &= x_1(t) + u_1(t) \cos(x_3(t)) \\ x_2(t+1) &= x_2(t) + u_1(t) \sin(x_3(t)) \\ x_3(t+1) &= x_3(t) + u_2(t) \pmod{2\pi} \end{aligned} \quad (11)$$

The model describes the behavior of a mobile cart with  $(x_1, x_2)$  representing the 2D Cartesian coordinates in meters.  $x_3$  represents the angular orientation of the velocity vector around the  $x$  direction in radians,  $u_1$  is the linear velocity in  $m/s$ , and  $u_2$  is the angular velocity in  $rad/s$ . Note that by convention, we consider the angle  $x_3 \in [-\pi, \pi]$ .

The system is subjected to state and control input constraints:

$$\mathbb{X} = \left\{ (x_1, x_2)^T \in \mathbb{R}^2 \mid \begin{array}{l} x_1^2 - x_2^2 \leq 4 \\ 4x_2^2 - x_1^2 \leq 16 \end{array} \right\} \quad (12)$$

$$\mathbb{U} = [0.2, 2] \times [-1, 1]. \quad (13)$$

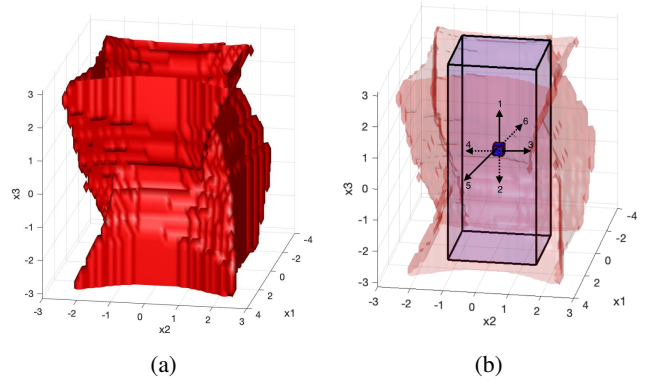


Fig. 2: On the left is the approximation of the maximal control invariant set computed using symbolic control, on the right is the stretching method, the direction of stretching is in order 1-6.

Figure 2a illustrates the approximation of the maximal control invariant set computed using symbolic techniques. Its construction procedure used a symbolic model with 109,200 symbolic states and 40 symbolic inputs. The computation time is about 2 minutes with a PC 1.4 GHz Intel Core i5.

This control invariant set has a relatively complex shape and is obviously not suitable for direct use as terminal constraint in nonlinear MPC design according to the framework (2). Aside the fact that the control invariant set is highly nonlinear and thus impacts the real-time optimization performances, it should be noted that the symbolic procedure represents it in terms of a large union of convex sets.

Figure 2b shows that a large hyperrectangle can be found inside the maximum control invariant set. Its practical construction follow an intuitive procedure, starting with a small rectangle and stretching it in different directions. We use  $[x_l, x_u]$ , the coordinates of the minimal and maximal vertices to represent this hyperrectangle. In this 3 dimensional case  $x_l = [-1.3; -1.3; -\pi]$ ,  $x_u = [1.3; 1.4; \pi]$ .

Once we have identified this large hyperrectangle candidate for  $k$ -step control invariance, we can proceed to find its corresponding index  $K$ . In Figure 3 we find that  $\mathbb{T} \subseteq \text{CPre}_{[1:K]}(\mathbb{T})$  is obtained when  $K=5, 6$  and  $7$ . When  $K=7$ ,  $\text{CPre}_{[1:7]}(\mathbb{T})$  is identical to the control invariant set shown in Figure 2a. This numerical certification of  $K$ -step control invariance was obtained in 14s on the same PC, an attractive off-line computation time given the complexity of the maximal control invariant set. We will use the minimum value of  $K$  by default in the following.

For the optimization problem (5), the prediction horizon was chosen to be  $N=20$ , the penalty terms for position and control input were set to 100 and 1, respectively.  $P\mathbf{x}_t^{[0,N]}$  is the projection of  $\mathbf{x}_t^{[0,N]}$  on the first two coordinates  $(x_1, x_2)$ ,  $x_{ref} \in \mathbb{R}^2$  is the reference point. With the previously computed hyperrectangle  $[x_l, x_u]$ , we have the following optimization problem :

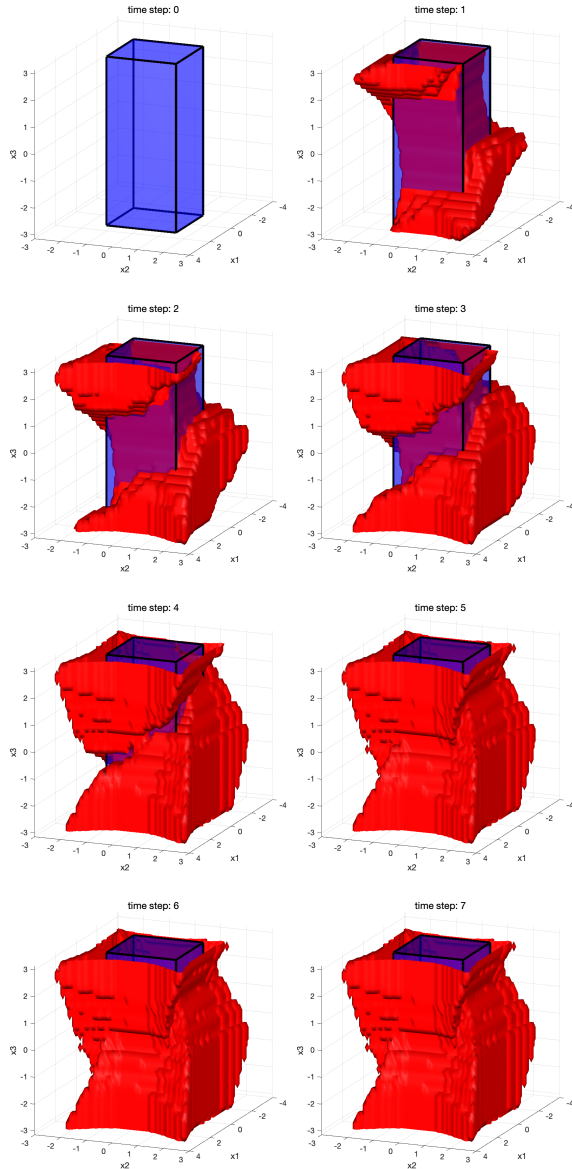


Fig. 3: The evolution of the set  $CPref_{[1:K]}$  (red parts) with  $K$  is depicted in the figure, where  $K = 0, 1, 2, \dots, 7$ . By the fifth iteration step, the hyperrectangle is completely contained in the computed states, and by the seventh iteration step, the computed states are identical to the maximum control invariant set.

$$\begin{aligned}
 & \min_{\mathbf{u}_t^{[0, N+K-1]}} 100 \| P\mathbf{x}_t^{[0, N]} - x_{ref} \|^2 + \|\mathbf{u}_t^{[0, N-1]}\|^2 \\
 & \quad x_0^i = x, \\
 & \quad x_t^{i+1} = f(x_t^i, u_t^i), \quad i = 0, \dots, N+K-1 \\
 \text{s.t.} \quad & \quad u_t^i \in \mathbb{U}, \quad i = 0, \dots, N+K-1 \\
 & \quad x_t^i \in \mathbb{X}, \quad i = 0, \dots, N+K \\
 & \quad \exists k \in \{1, \dots, K\}, \quad x_t^{N+k} \in [x_l, x_u].
 \end{aligned} \tag{14}$$

Figure 5 presents a comparison between NMPC without terminal constraints and NMPC based on  $K$ -step control invariant sets. A reference point for the position  $x_{ref} =$

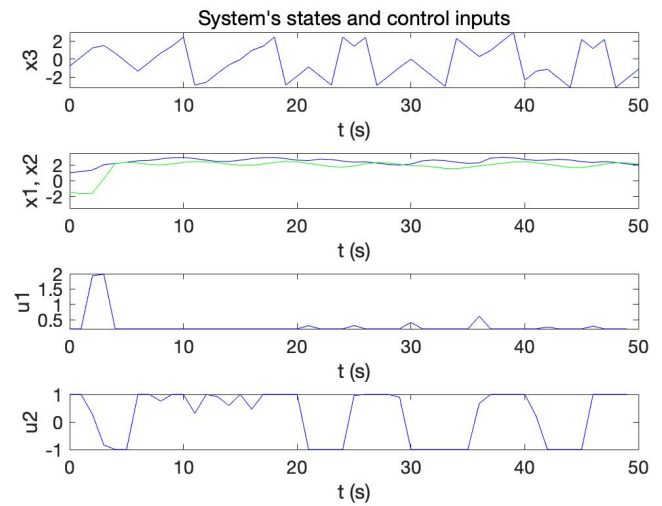


Fig. 4: Evolution of system's states and control inputs for (d) in Figure 5

$(0.5, 0.5)$  is considered in a first case, the third component (orientation) not being penalized in the cost index. One can observe that the two methods exhibit equivalent performance.

It should be noted that the optimal trajectory after transitory should be circle around the reference point (due to speed constraints  $u_1 \geq 0.2m/s$ ). The closed loop may however not reach such a behaviour when the receding optimization problem is initialized by means of randomly generated control sequence (converge to local minima). Using the symbolic control-based initialization method described in the previous section, the trajectories in Figure 5(c) are obtained with same performances of a costly NMPC formulation (2), see trajectories in Figure 5(a).

For the reference  $x_{ref} = (\sqrt{32/3}, \sqrt{32/3})$ , the NMPC without terminal constraints fails in the tracking process of target points which is located at the corner point. The optimization problem became infeasible at time instant  $t = 13$ . In comparison, the NMPC strategy based on the  $K$ -step control invariant set enables the cart to move continuously without encountering safety issues, thus confirming the recursive feasibility properties. The time evolution of the state and inputs signals for the position trajectories depicted in Figure 5(d) are represented in Figure 4.

## VI. CONCLUSIONS

Ensuring the recursive feasibility of MPC is a widely discussed challenge and this paper offers a novel perspective to address this issue. By further developing computational methods based on symbolic control, we effectively compute the  $K$ -step control invariant sets and utilize them as constraints within the NMPC framework. This approach, which is straightforward and easy to implement, was shown to achieve promising results. The approach can be extended to solve path planning problems in complex environments. From the theoretical point of view, the robust  $K$ -step invariance and its used in MPC deserves further attention.



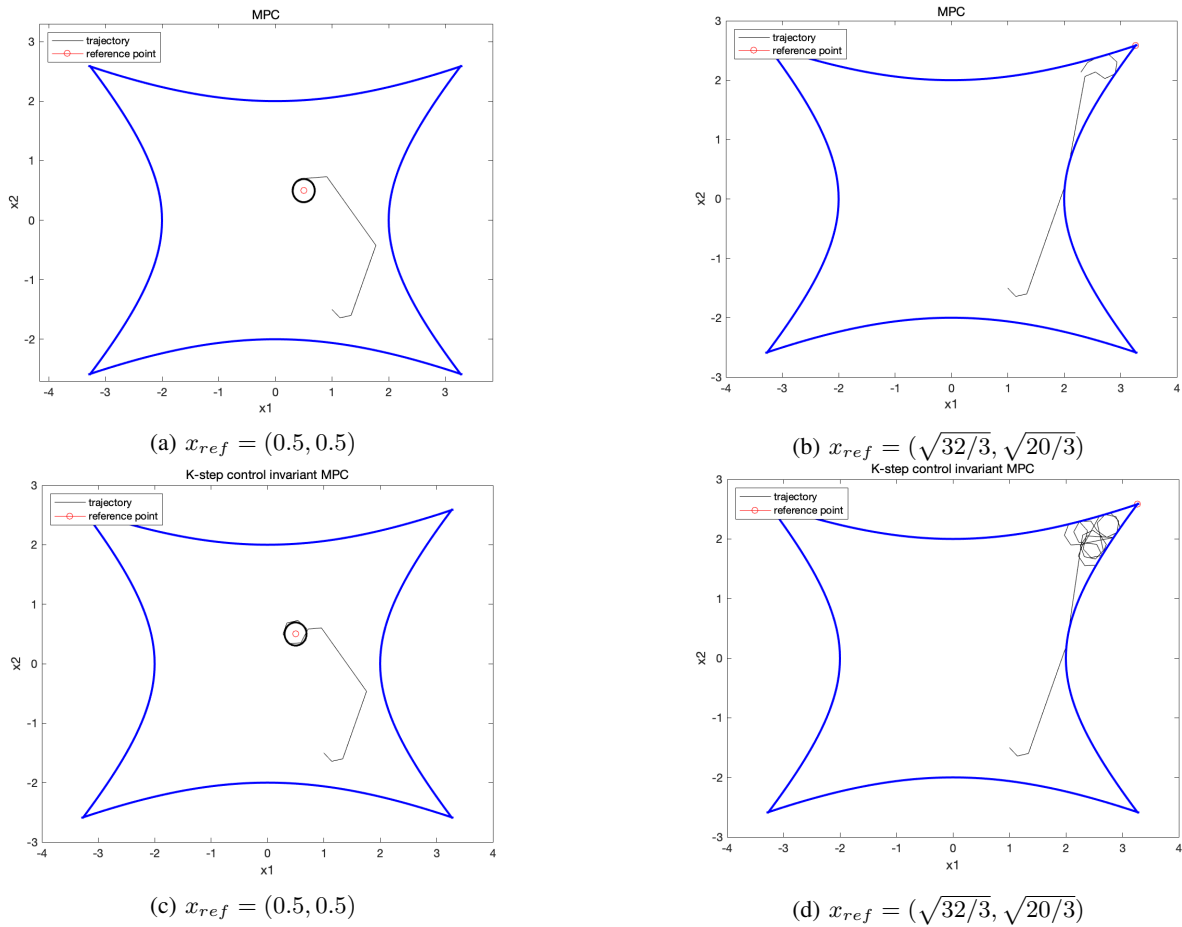


Fig. 5: Trajectory of moving carts. The upper two figures show the NMPC approach without terminal constraints and the two figures below show the NMPC using a  $K$ -step control invariant set ( $K=5$ ) as terminal constraint.

## REFERENCES

- [1] Nikolaos Athanopoulos, Alina I Doban, and Mircea Lazar. On constrained stabilization of discrete-time linear systems. In *21st Mediterranean Conference on Control and Automation*, pages 830–839. IEEE, 2013.
- [2] Zakeye Azaki, Antoine Girard, and Sorin Olaru. Predictive and symbolic control: Performance and safety for non-linear systems. *IFAC-PapersOnLine*, 55(16):290–295, 2022.
- [3] Franco Blanchini. Set invariance in control. *Automatica*, 35(11):1747–1767, 1999.
- [4] José Manuel Bravo, Daniel Limón, Teodoro Alamo, and Eduardo F Camacho. On the computation of invariant sets for constrained nonlinear systems: An interval arithmetic approach. *Automatica*, 41(9):1583–1589, 2005.
- [5] Eduardo F Camacho and Carlos Bordons. *Model predictive control (advanced textbooks in control and signal processing)*. Springer, 1999.
- [6] Román Comelli, Sorin Olaru, and Ernesto Kofman. Inner-outer approximation of robust control invariant sets. (hal-04143739). 2023.
- [7] Benjamin Decardi-Nelson and Jinfeng Liu. Computing robust control invariant sets of constrained nonlinear systems: A graph algorithm approach. *Computers & Chemical Engineering*, 145:107177, 2021.
- [8] Antoine Girard and Alina Eqtami. Least-violating symbolic controller synthesis for safety, reachability and attractivity specifications. *Automatica*, 127:109543, 2021.
- [9] Graham Goodwin, María M Seron, and José A De Doná. *Constrained control and estimation: an optimisation approach*. Springer Science & Business Media, 2006.
- [10] Lars Grüne, Jürgen Pannek, Lars Grüne, and Jürgen Pannek. *Nonlinear model predictive control*. Springer, 2017.
- [11] Eric Colin Kerrigan. *Robust constraint satisfaction: Invariant sets and predictive control*. PhD thesis, University of Cambridge UK, 2001.
- [12] Benoît Legat, Paulo Tabuada, and Raphaël M Jungers. Computing controlled invariant sets for hybrid systems with applications to model-predictive control. *IFAC-PapersOnLine*, 51(16):193–198, 2018.
- [13] Jan Marian Maciejowski. *Predictive Control: With Constraints*. Pearson Education, 2002.
- [14] David Q Mayne, James B Rawlings, Christopher V Rao, and Pierre OM Scokaert. Constrained model predictive control: Stability and optimality. *Automatica*, 36(6):789–814, 2000.
- [15] Meeko Oishi, Ian Mitchell, Claire Tomlin, and Patrick Saint-Pierre. Computing viable sets and reachable sets to design feedback linearizing control laws under saturation. In *Proceedings of the 45th IEEE Conference on Decision and Control*, pages 3801–3807. IEEE, 2006.
- [16] Gunther Reissig, Alexander Weber, and Matthias Runger. Feedback refinement relations for the synthesis of symbolic controllers. *IEEE Transactions on Automatic Control*, 62(4):1781–1796, 2016.
- [17] Martin Soyer, Sorin Olaru, and Zhou Fang. From constraint satisfactions to periodic positive invariance for discrete-time systems. In *59th IEEE Conference on Decision and Control*, pages 4547–4552, 2020.
- [18] Paulo Tabuada. *Verification and control of hybrid systems: a symbolic approach*. Springer Science & Business Media, 2009.