



HAL
open science

Cellulose valorization in biorefinery: integration of fast pyrolysis and fermentation for building blocks production

Felipe Buendia, Charles Greenhalf, Franco Berruti, Cedric Briens, Emmanuel Guedon, Anthony Dufour

► To cite this version:

Felipe Buendia, Charles Greenhalf, Franco Berruti, Cedric Briens, Emmanuel Guedon, et al.. Cellulose valorization in biorefinery: integration of fast pyrolysis and fermentation for building blocks production. Pyroliq 2019: Pyrolysis and Liquefaction of Biomass and Wastes, Jun 2019, Cork, Ireland. hal-04518909

HAL Id: hal-04518909

<https://hal.science/hal-04518909v1>

Submitted on 24 Mar 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

CELLULOSE VALORIZATION IN BIOREFINERY: INTEGRATION OF FAST PYROLYSIS AND FERMENTATION FOR BUILDING BLOCKS PRODUCTION

Felipe BUENDIA-KANDIA, Reactions and Chemical Engineering Laboratory (LRGP), CNRS, University of Lorraine, 1 Rue Grandville, 54000 Nancy, France

E-mail: andres-felipe.buendia-kandia@univ-lorraine.fr

Charles GREENHALF, ICFAR, Western University, Ilderton ON N0M 2AO, Canada

Emmanuel GUEDON, LRGP, CNRS, University of Lorraine, Nancy, France

Anthony DUFOUR, LRGP, CNRS, University of Lorraine, Nancy, France

Cedric BRIENS, ICFAR, Western University, Ilderton ON N0M 2AO, Canada

Franco BERRUTI, ICFAR, Western University, Ilderton ON N0M 2AO, Canada

Key Words: Cellulose, biorefinery, pyrolysis, fermentation, building blocks

A combination of thermochemical and biological conversion of cellulosic materials is a promising alternative for the production of biofuels and building blocks in an integrated biorefinery. Indeed, enzymatic depolymerization is selective but slow and expensive. It would be of interest to associate thermochemical conversion for a fast depolymerization of biomass with biochemical conversion for a selective conversion of depolymerized liquid streams. In this work, cellulose is pyrolyzed to produce sugars that can be used as substrate for a fermentation process. This work is the result of a scientific collaboration between ICFAR (London, Canada) and CNRS (Nancy, France).

Pyrolysis was performed in a fluidized bed reactor at 475°C with a bio-oil yield of 73.4 wt.% (Figure 1). Different fractions of bio-oil were recovered with a set of 5 condensers. Levoglucosan and total sugars were quantified by GC-FID-MS and phenol/sulphuric acid method respectively. The maximum yields of levoglucosan (43.7 %) and total sugars (80.4 %) were found in the first condenser that was kept at 70°C.

Due to the non-fermentable condition of levoglucosan, all the oil fractions, as well as a mixture of them, were hydrolyzed to obtain fermentable glucose. The different bio-oil fractions and a mixture of all fractions were used as substrate in a fermentation reactor to produce acetone, butanol and ethanol (ABE). The talk will present the mass yields obtained for the integrated process combining pyrolysis, hydrolysis and fermentation (figure 2). The microorganisms were not able to grow in the mixture of all fractions. On the contrary, fractions from condenser 1 and 2 lead to normal bacterial growth and fermentation products pattern. Maximum yields (per gram of oil) of acetone=4.6 %, butanol=13.2 % and ethanol=0.1 % were found for the bio-oil collected in the first condenser. These results put in evidence the importance of pyrolysis with staged condensation as an entry for fermentation processes.

The methodology proposed in this work could be applied to other biochemical conversion of bio-oils to produce higher added-value products.

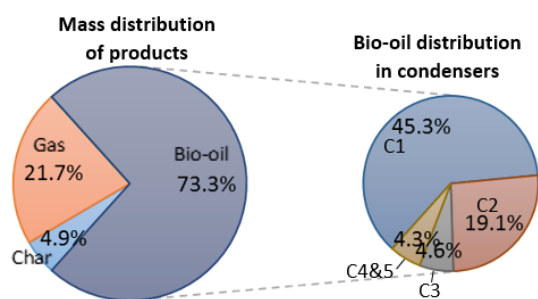


Figure 2. Fate of cellulose and its products along the integrated process including pyrolysis, hydrolysis and fermentation

Figure 1. Product distribution of cellulose pyrolysis and condenser mass fractions of bio-oil. C=Condenser. C1=70°C, C2=45°C, C3, C4&5=5°C.

