



**HAL**  
open science

# Maximizing the Potential of an Hybrid Renewable Energy System including hydrogen: A Multi-Criteria Approach

Sarad Basnet, Karine Deschinkel, Marie-Cécile Péra, Luis Le Moyne

► **To cite this version:**

Sarad Basnet, Karine Deschinkel, Marie-Cécile Péra, Luis Le Moyne. Maximizing the Potential of an Hybrid Renewable Energy System including hydrogen: A Multi-Criteria Approach. Congrès annuel de la société Française de Recherche Opérationnelle et d'Aide à la Décision, Mar 2024, Amiens, France. hal-04584409

**HAL Id: hal-04584409**

**<https://hal.science/hal-04584409>**

Submitted on 23 May 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Maximizing the Potential of an Hybrid Renewable Energy System including hydrogen : A Multi-Criteria Approach

Sarad Basnet<sup>1</sup>, Karine Deschinkel<sup>1</sup>, Marie-Cécile Péra<sup>1</sup>, Luis Le Moyne<sup>2</sup>

<sup>1</sup> Affiliation

{Sarad.Basnet,Karine.Deschinkel,Marie-cecile.Pera}@univ-fcomte.fr

<sup>2</sup> Affiliation

Luis.Le-Moyne\_isat@u-bourgogne.fr

**Mots-clés** : *hydrogen, genetic algorithm, sizing, energy management*

## 1 Introduction

The main goal of this work is to precisely delineate the hydrogen ecosystem, covering all aspects of production, storage, and application, [1] while also simulating and optimizing these aspects based on technical, economic, and environmental parameters. As part of the hydrogen ecosystem, a hybrid renewable energy system is proposed. This system comprises solar photovoltaic panels, wind turbines, an electrolyzer, hydrogen storage tanks, fuel cells, and a grid to fulfill the electricity demand of the city and hydrogen demand of the vehicles. We propose a mathematical model involving multi-objectives to minimize the carbon emission, grid dependency and total annual costs of this system.

## 2 Implementation Steps

### 2.1 Data collection

Dijon, France was chosen as the case study location from the Bourgogne Franche Comté region. The first step of this study commenced with data mining activities to gather information on the electricity and hydrogen demand in Dijon, as well as wind speed and solar irradiance data. The study case consider high peak demand of about 395 MW of electricity taken from the "Open Data Réseaux Énergies (ODRÉ)" and peak hydrogen demand of about 85 kg for 50 vehicles. The economic and technical parameters of all the components were extracted. Power profiles for solar PV and wind were generated using the PVLlib [4] and Windpowerlib [3] platforms available in Python.

### 2.2 Optimization Model

The need for an optimization model capable of handling multi-objective functions and various energy management was identified. In the context of our model, our primary sources of renewable energy are photovoltaic (PV) panels and wind turbines (WT). Their numbers are decision variables, respectively  $N_{pv}$  and  $N_{wt}$ . The numbers of electrolyzers and the capacity of the tank are decision variables as well. To ensure a reliable energy supply, we have implemented a grid system (where  $P_{grid}(t)$  denote the grid power at time period  $t$ ) in our model as shown in the proposed architecture in Figure 1, treating it as an ultimate power source. This approach allows us to supply and extract power to and from the grid as needed, ensuring that electricity and hydrogen demand are met at all times, regardless of fluctuations in pv and wind power output. The key to achieving this dual fulfillment lies in the dynamic allocation decision variables  $\alpha(t)$ ,  $\beta(t)$  allowing a flexible distribution of available power.

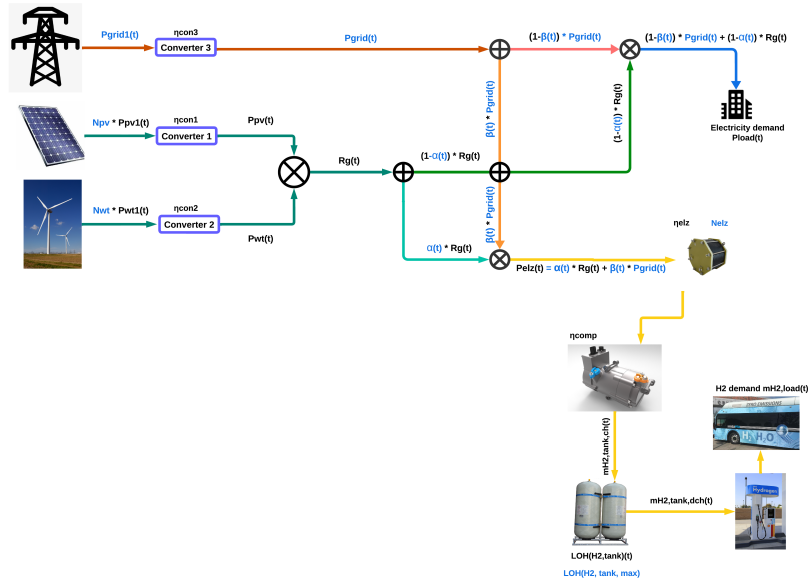


FIG. 1 – Flow Chart of the renewable energy system

All equations and constraints related to the various components of the architecture have been formulated. Several objective functions have been proposed, those related to the total cost of operating the architecture, the one linked to minimal reliance on the grid, and the one focused on grid consumption stability.

### 2.3 Resolution Method

The optimization problem and its resolution have been implemented using the DEAP framework [2] which allow to test different types of evolutionary algorithms present in the literature.

## 3 Conclusions and perspectives

The upcoming goals for this work include extracting carbon emission data for the various components from different sources. Additionally, the smooth functioning of the simulation and optimization tool, particularly in handling multi-objective functions, is a priority. Finally, the results obtained from the tool will be validated.

## Références

- [1] Sarad Basnet, Karine Deschinkel, Luis Le Moyne, and Marie Cécile Péra. A review on recent standalone and grid integrated hybrid renewable energy systems : System optimization and energy management strategies. *Renewable Energy Focus*, 46 :103–125, 2023.
- [2] François-Michel De Rainville, Félix-Antoine Fortin, Marc-André Gardner, Marc Parizeau, and Christian Gagné. Deap : A python framework for evolutionary algorithms. In *Proceedings of the 14th annual conference companion on Genetic and evolutionary computation*, pages 85–92, 2012.
- [3] Sabine Haas, Birgit Schachler, and Uwe Krien. windpowerlib - a python library to model wind power plants (v0.1.2). <https://doi.org/10.5281/zenodo.3254810>, 2019.
- [4] William F Holmgren, Robert W Andrews, Antonio T Lorenzo, and Joshua S Stein. Pvlib python 2015. In *2015 IEEE 42nd photovoltaic specialist conference (pvsc)*, pages 1–5. IEEE, 2015.