



Liquid plugs in narrow tubes: application to airway occlusion

Georg F. Dietze

► To cite this version:

Georg F. Dietze. Liquid plugs in narrow tubes: application to airway occlusion. *Journal of Fluid Mechanics*, 2024, 998, pp.A50. <10.1017/jfm.2024.607>. <hal-04737193>

HAL Id: hal-04737193

<https://hal.science/hal-04737193v1>

Submitted on 16 Oct 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

Banner appropriate to article type will appear here in typeset article

Liquid plugs in narrow tubes: application to airway occlusion

Georg F. Dietze^{1†}

¹Université Paris-Saclay, CNRS, FAST, 91405, Orsay, France.

(Received 8 August 2024; revised xx; accepted xx)

We study liquid plugs in the pulmonary airways based on the two-phase axisymmetric weighted residual integral boundary layer model of Dietze, Lavalley and Ruyer-Quil (*J. Fluid Mech.*, vol. 894, 2020, A17), which was originally developed to study liquid films coating the inner surface of a cylindrical tube in interaction with a core gas flow. The augmented form of this model, which was never applied beyond a proof of concept, allows representing liquid pseudo-plugs. Here, we demonstrate its predictive power versus experiments and direct numerical simulations, in terms of the dynamics of plug formation and the characteristics of developed liquid plugs, such as their shape, flow field, speed, and length, as well as the associated wall stresses and their spatial derivatives. In particular, we show that the augmented model allows to establish a direct continuation path from travelling-wave solutions (TWS) to travelling-plug solutions (TPS). We then apply the model to predict mucus plugs in the conducting zone of the tracheobronchial tree, based on the lung architecture model of Weibel. We proceed by numerical continuation of travelling-state solutions in terms of the airway generation, whereby we impose the wavelength of the linearly most-amplified convective instability (CI) mode or that of the absolute instability (AI) mode. We identify the critical airway generation for liquid plug formation (TWS/TPS transition), maximum potential for wall-stress-induced epithelial cell damage, and CI/AI transition, and investigate how these phenomena are affected by the main control parameters, i.e. airway orientation versus gravity, air flow rate, mucus properties, and airway size.

Key words: Thin films, pulmonary fluid mechanics, instability

1. Introduction

Liquid plugs forming as a result of the Plateau-Rayleigh instability from a liquid film coating the inner surface of a cylindrical tube (figure 1) occur in several applications, e.g. in pulsating heat pipes as a result of phase transition (?), in concepts for cleaning contaminated surfaces (??), in surfactant replacement therapy (SRT), where a surfactant-rich liquid is injected into the lungs (?), and in airway occlusion (??), typically when the mucus film lining the pulmonary airways exceeds the threshold volume for liquid unduloids (?).

† Email address for correspondence: georg.dietze@universite-paris-saclay.fr

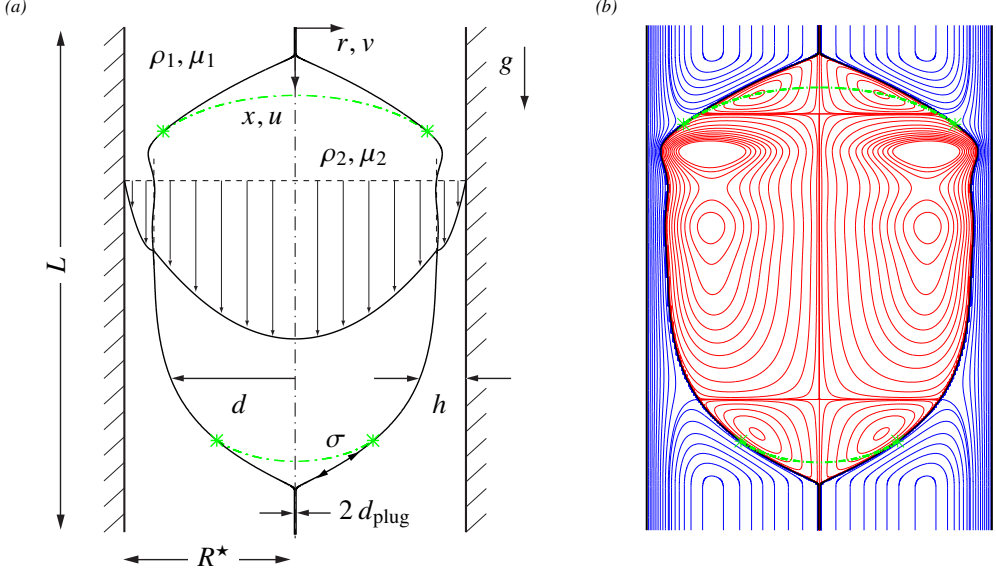


Figure 1: Liquid plugs (subscript 1) enclosing a gas bubble (subscript 2) formed by the occlusion of a narrow cylindrical tube by a falling liquid film lining its inner surface. (a) Problem sketch and notations. The tube radius R^* is used as the length scale, the star superscript designating dimensional quantities; (b) travelling-state solution obtained from our model (2.13) for a vertical configuration: $Ka=121.4$ (silicone oil II in table 1), $R^*=1.5$ mm, $L=\Lambda=5.4$, $V_1/\pi/R^3=2.85$, $M=1$, $d_{\text{plug}}=0.01$, $Re_1=14.6$, $Re_2=30.8$. Streamlines in the moving reference frame within the liquid (blue lines) and gas (red lines). Dot-dashed green lines correspond to spherical-cap reconstruction (2.14) between patching points marked by asterisks.

In the current manuscript, we are mainly interested in airway occlusion, where hydrodynamical studies have focused on two key issues: (1) predicting the threshold for liquid plug formation under increasingly realistic operating conditions, which is essential for designing effective assisted ventilation protocols (?); and (2) predicting the wall stresses associated with liquid plugs, which are known to cause epithelial cell damage (?). We aim to contribute to these tasks by applying the two-phase axisymmetric WRIBL (weighted residual integral boundary layer) model of ?, which was augmented in ? for the representation of liquid plugs.

We start by describing the state of the art on the fluid mechanics of liquid plugs, with particular attention to their occurrence in the human lung. The modelling of liquid plugs was initiated by ?, who predicted the shape of a long Taylor bubble (?) propagating in a liquid-filled narrow cylindrical capillary, in the absence of gravity and for a passive gas, i.e. $\Pi_\mu=\Pi_\rho=0$, where $\Pi_\rho=\rho_2/\rho_1$ and $\Pi_\mu=\mu_2/\mu_1$ denote the gas/liquid density and dynamic viscosity ratios. This solution was based on the lubrication equations describing the thin liquid film enclosing the gas bubble, which are obtained by truncating the governing equations at order ϵ^0 in the long-wave parameter, $\epsilon=h^*/\Lambda^*$ (stars will denote dimensional quantities throughout), which relates the liquid film thickness, h^* , to the wavelength, Λ^* , of the bubble/plug arrangement (see figure 1). This lubrication solution is matched to two spherical caps at the leading and trailing ends of the bubble. Subsequent works retained the assumption of inertialess flow, but made technical improvements, such as accounting for the finite thickness of the residual film (??), or by accounting for higher-order viscous effects, via asymptotic expansions in terms of the capillary number, $Ca=\mu_1 \mathcal{U}_2/\sigma$, where μ_1 and $\mathcal{U}_2$ denote the liquid dynamic viscosity and the gas superficial velocity, and/or in terms of the long-wave parameter, ϵ (??). Other

works accounted for the effect of gravity (???), a contact line at the leading front of the liquid plug (??), or a flexible tube wall (?).

Lubrication models following the above-described approach have been applied to simulate liquid plugs in the pulmonary airways. For example, ? investigated the effect of gravity on the liquid distribution within a liquid plug upstream of an inclined airway bifurcation, in order to quantify the maldistribution into the daughter airways. More recently, ? introduced a three-zone model for long liquid plugs, where the non-interacting leading and trailing menisci were represented via lubrication solutions from the literature (?). The authors applied their model, which compares favourably with direct numerical simulations (DNS) in regimes with negligible inertia, to study the transient evolution of pressure-driven liquid plugs, leading up to plug rupture. Throughout the manuscript, we will designate numerical simulations based on the full Navier-Stokes equations as DNS, even though these simulations do not concern turbulent flows. The authors also determined correlations for the maximum wall stresses and their spatial derivatives, in order to predict the potential for epithelial cell damage.

When inertia is not negligible, the low-dimensional representation of liquid plugs in cylindrical tubes needs to be extended beyond the lubrication approximation (?). For example, ? extended the lubrication solution of ? based on an empirical approach by incorporating the Weber number, which relates inertia to capillarity. A different approach was followed in ?, where we introduced an augmented simplified order- ϵ^2 WRIBL model that represents the dynamics of a liquid film coating the inner surface of a cylindrical tube of radius, R^* , in contact with a core gas flow. A repulsive source term in the integral momentum equation (see Π_φ (2.13c) in equation (2.13a), which will be introduced in section 2) allows to stabilize the liquid-gas interface when the core radius, d^* , becomes very small, i.e. $d^* = d_{\text{plug}}^* \ll R^*$. The source term becomes noticeable only when the liquid-gas interface evolves toward occluding the tube under the driving effect of the Plateau-Rayleigh instability, and it eventually stabilizes the solution in the form of a pseudo-plug, consisting of a liquid annulus filling almost the entire cross-section of the tube and an arbitrarily thin gas filament at the tube axis. This approach is similar to using a precursor film for simulating contact line problems with thin-film models (?). The augmented WRIBL model was introduced in the appendix of ?, but never applied beyond a proof of concept. In the current manuscript, we validate it versus experiments and DNS and apply it to predict liquid plugs in the pulmonary airways.

Low-dimensional models for liquid plugs have often been used as building blocks in fluid-mechanical multi-scale models representing the entire tracheobronchial tree. For example, ? modelled the respiratory network by considering that the airway diameter, airway cross section, and ventilation flow rate all vary as continuous functions of the airway generation, n , according to the lung architecture model of ?. Using this approach, the authors mimicked SRT by simulating the delivery of surfactant-rich liquid from a liquid plug propagating through the model lung, based on an inertialess low-dimensional solution for the deposited film thickness. Later, ? extended this work by accounting for the gravity-induced maldistribution of liquid at airway bifurcations, and investigated the effect of patient orientation on the effectiveness of SRT protocols. ? constructed a multi-scale model of the conducting zone of the tracheobronchial tree ($n \leq 16$) based on the lubrication model of ? for representing liquid plugs. This multi-scale model was used to simulate the dynamics of airway occlusion and reopening during assisted ventilation. It accounts for interactions between different airways, but not for the effect of gravity. In the current manuscript, we follow the approach of ? for representing the tracheobronchial tree, but we use our augmented WRIBL model from ?, which accounts for inertia, gravity, axial viscous diffusion, and full dynamic coupling between liquid and gas, to represent the liquid plugs.

In addition to work on low-dimensional modelling, many studies have been dedicated

to the DNS of liquid plugs, i.e. based on the full Navier-Stokes equations. We provide a brief summary of such works next, whereby we focus on studies that have demonstrated the relevance of the additional effects included in our WRIBL model, and on liquid plug features that have been identified as critical in airway occlusion, and thus need to be accurately predicted by any low-dimensional model. ? simulated pressure-driven travelling-plug solutions (TPS), i.e. solutions that do not change in the reference frame of the plug, in a plane channel for liquids used in different medical settings, i.e. Survanta (for SRT) and Peflubron (for PLV, partial liquid ventilation). The authors observed the loss of TPS, constituting the occlusion/reopening limit, at large values of the capillary number, Ca , and they discovered the existence of a large vortex in the reference frame of the liquid plug. Further, it was shown that the tangential wall shear stress varies greatly along the axial dimension of the liquid film and that its maximum magnitude is attained at the precursory capillary ripple preceding the front of the liquid plug, which is visible in figure 1. ? later demonstrated for this configuration that inertia reduces the thickness of the trailing liquid film deposited by the liquid plug. Further, inertia was shown to increase the amplitude of the precursory capillary ripple, and, consequently, the maximum wall stresses. ? constructed a stability diagram for pressure-driven TPS in a cylindrical tube for $\Pi_\mu=\Pi_\rho=0$. In a transient setting, unstable TPS can be associated with plug rupture, i.e. airway reopening. The authors also confirmed the existence of a moving-frame vortex in the liquid plug for their cylindrical configuration.

Another group of works has focused on transient DNS of liquid plug dynamics. ? simulated pressure-driven liquid plugs in a cylindrical tube for $\Pi_\mu=\Pi_\rho=0$, where the leading film thickness was imposed as a control parameter, which is representative of SRT conditions. Based on this, the authors determined how different control parameters affect the long-term fate of a liquid plug, i.e. whether the plug ruptures, attains a TPS, or grows indefinitely. Further, the authors demonstrated via a dimensional analysis that inertial effects cannot necessarily be neglected in the case of airway closure, where the liquid viscosity is lower than for SRT. Finally, the authors confirmed that the precursory capillary ripple in front of the liquid plug develops the largest wall stresses and showed that the axial wall pressure derivative attains very large values there. Further, these different stress measures were shown to attain values sufficiently large to cause epithelial cell damage in the case of SRT, and to increase with increasing surface tension. ? extended the work of ? by accounting for an active gas phase and showed that this effect, as well as the effect of inertia, modifies the critical conditions for plug rupture. ? performed similar simulations in order to mimic SRT in a subregion of the tracheobronchial tree, i.e. $7 \leq n \leq 19$, and evaluated the associated maximum wall stresses. The authors concluded that the most dangerous conditions w.r.t. epithelial cell damage occur in the most distal airways (farthest from the trachea).

In the context of airway occlusion, ? performed DNS of pressure-driven liquid plugs and studied the effect of a soluble surfactant. The authors showed that the surfactant reduces the maximum stress magnitudes associated with plug rupture, i.e. airway reopening, by approximately 20%, whereas it delays plug rupture by about 10%. Other authors performed DNS that account for the non-Newtonian rheology of mucus. For example, ? showed that the presence of a yield stress delays plug rupture. And, ? showed that the visco-elastic rheology of mucus, which in the case of cystic fibrosis becomes dominated by the elastic response, can cause a second very significant wall stress peak after initial airway occlusion, thus they increasing the danger of epithelial cell damage.

We turn now to experimental investigations of liquid plugs in narrow geometries, focussing again on works related to airway occlusion. ? modelled pulmonary airways via horizontal single-channel and branched microfluidic networks and studied airway reopening scenarios in trains of liquid plugs under imposed pressure drop. The authors showed that the first plug

rupture entrains and accelerates the next rupture events in the form of a cascade. Later, ? performed similar experiments with a viscoelastic test liquid, mimicking conditions in an $n=12$ airway. ? and ? performed landmark occlusion experiments that identified the threshold for liquid plug formation in vertical cylindrical tubes. These experiments are particularly challenging to reproduce via low-dimensional models, as high-viscosity liquids were used, where axial viscous diffusion becomes relevant. In ?, we showed that accounting for this effect in our WRIBL model was necessary to capture the experimental occlusion threshold, which we predicted based on the loss of travelling-wave solutions (TWS). In the current manuscript, we will show that our augmented WRIBL model accurately captures the liquid plugs observed in these experiments.

? studied pressure-driven liquid plugs in an individual horizontal narrow cylindrical tube, mimicking airways with $n \geq 9$, at moderate values of Ca . The authors introduced a lubrication model similar to ? with which they identified TPS. Then, they showed experimentally that liquid plugs evolve towards plug rupture when their initial length is shorter than the TPS, whereas they keep accumulating liquid when their initial length is longer than the TPS. ? used the same experimental setup, this time focussing on plug rupture under cyclic forcing in the case of an initially dry tube wall. The authors found that cyclic gas flow rate variations lead to a periodic plug motion, whereas cyclic gas pressure variations lead to a cascading reduction of the plug volume and, eventually, plug rupture. The authors caution that their study is not fully representative of mucus plug dynamics under breathing conditions. Although their forcing frequency, $f^*=0.25$ Hz, was close to the typical breathing frequency, $f^*=0.33$ Hz, the viscosity of the employed liquid, $\mu_1=5.1 \times 10^{-3}$ Pa s, was much smaller than the representative viscosity of mucus, i.e. $\mu_1=13 \times 10^{-3}$ Pa s (?). Later, similar experiments were performed in channels with square cross-section (??) or by using a visco-elasto-plastic liquid (?).

We conclude our review of experimental works by discussing a series of highly-sophisticated experiments that have clearly established a link between liquid plugs and epithelial cell damage (?????). In these experiments, which were initiated by ?, real epithelial cell tissue was subjected to pressure-driven liquid plugs within micro-channels, and both the degree of cell damage, via two dyes that allow distinguishing between live and dead cells, and the associated maximum magnitudes of wall stresses and their spatial derivatives, were measured. It was concluded in ?, that the maximum of the axial pressure derivative, $\partial_{x^*} p_w^*$, which occurs near the plug front, is responsible for the main cell damage, i.e. high cell damage was observed for $\partial_{x^*} p_w^* \sim 0.6$ Pa μm^{-1} , and that the exposure time to critical stress conditions is not relevant. Interestingly, the maximum magnitude of the axial derivative of the tangential wall shear stress, $\partial_{x^*} \tau_w^*$, was an order of magnitude lower in these experiments. By contrast, both stress derivatives were of comparable magnitude in the lubrication model computations of ?. In our current manuscript, we come to the same conclusion based on our WRIBL model computations, which we have validated with DNS. These results are supported by the work of ?, who performed DNS for conditions corresponding to their own cell damage experiments in a micro-channel, showing that $\partial_{x^*} p_w^* \sim 0.6$ Pa μm^{-1} and $\partial_{x^*} \tau_w^* \sim 0.6$ Pa μm^{-1} attain similar levels. The authors concluded that both quantities are linked to cell damage and showed that the level of cell damage can be greatly reduced by adding a surfactant. In ?, the experiments of ? were extended by generating dynamic plug rupture events and it was shown that these events are linked to substantial epithelial cell damage.

In the current manuscript, we introduce a low-dimensional approach for predicting liquid plugs in the pulmonary airways, as well as the associated maximum wall stresses and their spatial derivatives. Our approach relies on the augmented WRIBL model of ? for the representation of liquid plugs, which we apply to track solutions via numerical continuation across the entire conducting zone of the tracheobronchial tree. In particular, we will show

that this model allows us to establish a direct continuation path from TWS to TPS. Earlier studies based on thin-film models could only capture TWS. Although this allows us to predict a conservative threshold for plug formation, i.e. based on the limit point (LP) of TWS (????), the properties of TPS, in particular the wall stresses they generate, and their range of existence could not be captured. We refer to ? for a thorough review of such works and mention here only works that have been published since, i.e. ?, who studied the stability of TWS, ?, who accounted for an additional liquid layer representing the PCL (periciliary liquid), which bathes the beating cilia responsible for mucus clearance in the conducting zone, and ?, who studied the effect of a surfactant.

Further, our augmented WRIBL model was developed up to order ϵ^2 in the long-wave parameter, which allows accounting for axial viscous diffusion. In ?, we showed that this is important for representing the dynamics of high-viscosity annular liquid films, and this was confirmed by ?. In the current manuscript, we will show that accounting for both inertia and axial viscous diffusion is necessary to accurately represent liquid plugs over a large liquid viscosity range, thus distinguishing our model from liquid plug models based on the lubrication approximation.

In comparison with previous studies relying on the DNS of liquid plugs, our continuation approach distinguishes itself by enabling a low-cost high-fidelity prediction of how travelling-state solutions (TSS), i.e. TWS and TPS, evolve across the conducting zone of the tracheobronchial tree, as the airway generation, n , is increased. In particular, it allows to predict critical conditions for airway occlusion and the occurrence of wall stresses with high potential for epithelial cell damage, as well as the effect of the relevant control parameters thereon. This may prove useful in the design of drugs and protocols for the treatment of pulmonary diseases. We use the approach of ? to represent the branching nature of the tracheobronchial tree, i.e. we assume that all airway properties evolve continuously with n , according to the lung architecture model of ?. Importantly, we track TSS that are most likely to emerge in a real system, by imposing the linearly most-amplified wavelength in our continuation calculations, which is obtained by simultaneously solving the linear stability problem. Thereby, we distinguish between convective instability (CI) and absolute instability (AI) regimes, which allows identifying the critical airway generation for CI/AI transition. Also, our WRIBL calculations account for gravity and an active gas phase, which were neglected in most of the above-discussed DNS studies. Gravity is not necessarily negligible, e.g. for airway generation $n=7$, the Bond number, $Bo=\rho_1 g R^2/\sigma=1.6$, where we have taken $\rho_1=1000 \text{ kg/m}^3$ for the mucus density and $\sigma=0.02 \text{ N m}^{-1}$ for the surface tension of mucus, according to ?. And, in the presence of surfactant, this value further increases (?).

Our manuscript is structured as follows. In section 2, we will introduce the employed augmented WRIBL model, followed by §3, where we will describe the numerical approaches used to solve the model equations, i.e. linear stability analysis, numerical continuation of nonlinear TSS, and transient computations of liquid plug formation on periodic or open domains. In section 4, we will demonstrate the predictive power of the augmented WRIBL model in terms of representing liquid plugs, by comparing with experiments and DNS. In section 5, we will present our results. There, we will use numerical continuation of TSS to predict the effect of different parameters, i.e. airway generation, n , airway orientation versus gravity, mucus properties, air flow rate, and airway radius, on the threshold for airway occlusion (sub-section 5.1) and on the maximum wall stresses and spatial wall stress derivatives (sub-section 5.2). Conclusions will be drawn in section 6.

Fluids	ρ (kg/m ³)	μ (Pa s)	σ (N m ⁻¹)	Ka	Reference
silicone oil I	970	12.9	0.0215	3.3×10^{-3}	?
silicone oil II	900	4.5×10^{-3}	0.020	121.4	?
glycerol(89%)- water	1223.9	0.167	0.065	3.5	?
mucus I	1000	13×10^{-3}	0.020	30.6	?
air I	1.2	1.8×10^{-5}	-	-	-

Table 1: Properties of the fluids used in our computations. The Kapitza number, Ka, is defined as $Ka = \sigma / (\rho_1 g^{1/3} \nu_1^{4/3})$, where σ , ρ_1 , and ν_1 denote the surface tension, density and kinematic viscosity of the liquid, and $g = 9.81 \text{ m/s}^2$ designates the gravitational acceleration.

2. Mathematical description

We consider the flow sketched in figure 1a, a liquid film (subscript, $k=1$) lining the inner surface of a narrow cylindrical tube of radius, R^* , (the star symbol denotes dimensional quantities throughout) in contact with a gas phase in the core (subscript, $k=2$). Both fluids are considered Newtonian with constant fluid properties and the flow as laminar. As a result of the Plateau-Rayleigh instability, the liquid can come to occlude the tube in the form of travelling plugs that enclose a gas bubble in between. Figure 1b represents streamlines within such a flow for a gravity-driven vertical configuration.

We denote as, d , the core radius, i.e. the radial distance between the tube axis and the liquid-gas interface, and as, h , the liquid film thickness. We describe the flow in the framework of the long-wave approximation, which implies $\varepsilon = R^*/\Lambda^* \ll 1$, introducing the long-wave parameter ε and the wavelength, Λ^* , of the plug/bubble arrangement. Based on the most-amplified wavelength of the classical Plateau-Rayleigh instability, $\Lambda^* = 2\sqrt{2}\pi d_0^*$, where the subscript zero denotes the primary flow, we obtain $\varepsilon = (R^*/d_0^*)/(2\sqrt{2}\pi)$. As we will see, liquid plug formation occurs for $d_0^*/R^* \sim 0.8$ in our study, yielding $\varepsilon \sim 10^{-1}$.

The studied flow is governed by the phase-specific (subscript k) Navier-Stokes and continuity equations truncated at $O(\varepsilon^2)$, and written here in non-dimensional form:

$$X_k \varepsilon \partial_t u_k + \varepsilon u_k \partial_x u_k + \varepsilon v_k \partial_r u_k = -\varepsilon \partial_x p_k + \frac{1}{\text{Re}_k} \left\{ \varepsilon^2 \partial_{xx} u_k + \frac{1}{r} \partial_r (r \partial_r u_k) \right\} + \frac{X_k^2}{\text{Fr}^2}, \quad (2.1a)$$

$$0 = -\varepsilon \partial_r p_k + \varepsilon^2 \frac{1}{\text{Re}_k} \partial_r \left\{ \frac{1}{r} \partial_r (r v_k) \right\}, \quad (2.1b)$$

$$\partial_x u_k + \frac{1}{r} \partial_r (r v_k) = 0, \quad (2.1c)$$

where x and r denote the axial and radial coordinates, u_k , v_k , and p_k the corresponding velocity components and pressure in phase k , and t denotes time. Also, we have $X_1 = 1$ and $X_2 = \Pi_u^{-1}$, and $\Pi_u = \mathcal{U}_2/\mathcal{U}_1$ denotes the velocity scale ratio, $\text{Re}_k = \mathcal{U}_k \mathcal{L}/\nu_k$ denotes the phase-specific Reynolds number, and $\text{Fr} = \mathcal{U}_1/\sqrt{g\mathcal{L}}$ denotes the Froude number. Here, we have applied the following scaling:

$$u_k = \frac{u_k^*}{\mathcal{U}_k}, \quad v_k = \frac{v_k^*}{\varepsilon \mathcal{U}_k}, \quad x = \varepsilon \frac{x^*}{\mathcal{L}}, \quad r = \frac{r^*}{\mathcal{L}}, \quad t = \varepsilon t^* \frac{\mathcal{U}_1}{\mathcal{L}}, \quad p_k = \frac{p_k^*}{\rho_k \mathcal{U}_k^2}, \quad (2.2)$$

choosing the tube radius as the length scale, $\mathcal{L}=R^\star$, and the phase-specific superficial velocities, $\mathcal{U}_k=\bar{q}_k^\star/\pi/R^{\star 2}$, as the velocity scales, where $\bar{q}_k^\star$ denotes the phase-specific average cross-sectional flow rate. The truncated inter-phase coupling conditions for the normal and tangential stresses at $r=d$ are:

$$\varepsilon p_1 + \varepsilon \text{We} \varepsilon^2 \kappa - \frac{2 \varepsilon^2}{\text{Re}_1} \partial_r v_1 = \Pi_\rho \Pi_u^2 \varepsilon p_2 - \Pi_\mu \Pi_u \frac{2 \varepsilon^2}{\text{Re}_1} \partial_r v_2, \quad (2.3a)$$

$$\begin{aligned} & - \left(\partial_r u_1 + \varepsilon^2 \partial_x v_1 \right) + 2 \varepsilon^2 \partial_x d \left(\partial_x u_1 - \partial_r v_1 \right) = \\ & \Pi_u \Pi_\mu \left\{ - \left(\partial_r u_2 + \varepsilon^2 \partial_x v_2 \right) + 2 \varepsilon^2 \partial_x d \left(\partial_x u_2 - \partial_r v_2 \right) \right\}, \end{aligned} \quad (2.3b)$$

where $\Pi_\mu=\mu_2/\mu_1$ and $\Pi_\rho=\rho_2/\rho_1$ denote the viscosity and density ratios, $\text{We}=\sigma/\rho_1/\mathcal{U}_1^2/\mathcal{L}$ the Weber number, and κ the (truncated) surface curvature:

$$\kappa = \frac{1}{d} - \frac{1}{2} \frac{\partial_x d^2}{d} - \partial_{xx} d = \kappa_\varphi - \partial_{xx} d. \quad (2.4)$$

We will also use the Kapitza number, $\text{Ka}=\sigma/(\rho_1 g^{1/3} \nu_1^{4/3})$, to characterize the working liquid. Further, we have the kinematic coupling conditions at $r=d$:

$$u_1 = \Pi_u u_2, \quad (2.5a)$$

$$v_1 = \Pi_u v_2, \quad (2.5b)$$

$$X_k^{-1} v_k = \frac{dd}{dt} = \partial_t d + X_k^{-1} u_k \partial_x d, \quad (2.5c)$$

and the radial boundary conditions:

$$u_1|_{r=R} = 0, \quad \partial_r u_2|_{r=0} = 0, \quad (2.6a)$$

$$v_1|_{r=R} = 0, \quad v_2|_{r=0} = 0. \quad (2.6b)$$

We simplify the truncated governing equations further by applying the weighted residual integral boundary layer (WRIBL) technique (?). We only sketch the procedure here, referring the reader to ? for details. First, we substitute p_k in (2.1a) via an integration of (2.1b), yielding the phase-specific boundary-layer equations, BLE_k:

$$\begin{aligned} \text{BLE}_k : \quad X_k \varepsilon \partial_t u_k + \varepsilon u_k \partial_x u_k + \varepsilon v_k \partial_r u_k = & -\varepsilon \partial_x [p_k|_d] + \frac{X_k^2}{\text{Fr}^2} \\ & - \varepsilon^2 \frac{1}{\text{Re}_k} \partial_x [\partial_x u_k|_d] + \frac{1}{\text{Re}_k} \{ 2 \varepsilon^2 \partial_{xx} u_k + \partial_{rr} u_k \}. \end{aligned} \quad (2.7)$$

Next, we decompose the velocity components according to:

$$u_k(x, r, t) = \underbrace{\hat{u}_k(x, r, t)}_{O(\varepsilon^0)} + \underbrace{u_k^{(1)}(x, r, t)}_{O(\varepsilon^1)}, \quad (2.8a)$$

$$v_k(x, r, t) = \underbrace{\hat{v}_k(x, r, t)}_{O(\varepsilon^0)} + \underbrace{v_k^{(1)}(x, r, t)}_{O(\varepsilon^1)}, \quad (2.8b)$$

introducing the leading-order velocity $\hat{u}_k$, which is governed by:

$$\frac{1}{r} \partial_r (r \partial_r \hat{u}_k) = Z_k, \quad (2.9a)$$

$$\partial_r u_1|_d = \Pi_\mu \Pi_u \partial_r u_2|_d, \quad u_1|_d = \Pi_u u_2|_d, \quad u_1|_R = \partial_r u_2|_0 = 0, \quad (2.9b)$$

$$2\pi \int_{d(x,t)}^R r \hat{u}_1 dr = q_1(x, t), \quad 2\pi \int_0^{d(x,t)} r \hat{u}_2 dy = q_2(x, t), \quad (2.9c)$$

where q_k denotes the phase-specific cross-sectional flow rate. This leads to:

$$\hat{u}_k = f_{ki}(r, d) q_i(x, t), \quad (2.10a)$$

$$\hat{v}_1 = -\frac{1}{r} \int_r^1 \tilde{r} \partial_x \hat{u}_1 d\tilde{r}, \quad \hat{v}_2 = \frac{1}{r} \int_0^r \tilde{r} \partial_x \hat{u}_2 d\tilde{r}, \quad (2.10b)$$

where $\hat{v}_k$ is obtained via integration of (2.1c). Then, we introduce (2.8) in the BLE_k from (2.7), and combine the resulting equations via a weighted integration:

$$\int_{d(x,t)}^R r w_1(r) \text{BLE}_1 dr + \Pi_\rho \Pi_u^3 \int_0^{d(x,t)} r w_2(r) \text{BLE}_2 dr, \quad (2.11)$$

where the weight functions, w_k , satisfy:

$$w_k(r, d) = f_{k1}(r, d) - \Pi_u^{-1} f_{k2}(r, d). \quad (2.12)$$

Finally, truncating (2.11) at $O(\varepsilon^2)$, dropping inertial corrections of order $O(\text{Re}_k \varepsilon u_k^{(1)})$, and introducing the source term Π_φ , yields the final integral momentum equation rescaled by setting $\varepsilon=1$:

$$\begin{aligned} S_i \partial_t q_i + F_{ij} q_i \partial_x q_j + G_{ij} q_i q_j \partial_x h = & \frac{\text{We}}{2\pi} \partial_x \kappa + \Pi_\varphi + \frac{1}{2\pi} \text{Fr}^{-2} (1 - \Pi_\rho) + \frac{1}{2\pi} C_i q_i \\ & + J_i q_i \partial_x h^2 + K_i \partial_x q_i \partial_x h + L_i q_i \partial_{xx} h + M_i \partial_{xx} q_i, \end{aligned} \quad (2.13a)$$

to which are added the integral continuity equations:

$$\partial_t d - \frac{1}{2\pi d} \partial_x q_1 = 0, \quad \partial_t d + \frac{\Pi_u}{2\pi d} \partial_x q_2 = 0, \quad (2.13b)$$

obtained through integration of (2.1c), with the help of (2.5c). The model coefficients S_i , F_{ij} , G_{ij} , C_i , J_i , K_i , L_i , and M_i are known functions of d (?). Equations (2.13a) and (2.13b) constitute the 3-equation WRIBL model of ? for the three unknowns, d , q_1 , and q_2 .

The source term, Π_φ , is designed to represent liquid pseudo-plugs:

$$\Pi_\varphi = -\frac{\text{We}}{2\pi} \Pi_{\text{CRL}} \exp \left[\lambda \left(1 - \frac{d(x, t)}{d_{\text{plug}}} \right) \right] \partial_x \kappa_\varphi, \quad (2.13c)$$

where Π_{CRL} sets the magnitude of Π_φ , λ is a slope coefficient ($\lambda=1$ in all our computations), and d_{plug} designates the core radius of a pseudo-plug. By pseudo-plug, we mean a liquid annulus that fills the entire tube cross section except for an arbitrarily thin filament of core fluid with $d=d_{\text{plug}} \ll 1$ ($d_{\text{plug}}=0.01$ in our computations). Thanks to this approach, liquid plugs can be represented without violating the mathematical requirement of a finite core radius $d(x)$.

The source term, Π_φ , is comparable with the so-called disjoining pressure typically used for imposing a precursor film in lubrication models for contact line problems (?). At $d=d_{\text{plug}}$ and $\Pi_{\text{CRL}}=1$, Π_φ exactly cancels the azimuthal capillary term, $\frac{\text{We}}{2\pi} \partial_x \kappa_\varphi$, in (2.13a), which is responsible for the Plateau-Rayleigh instability, thus rendering the cylindrical surface of the pseudo-plug stable. For $d > d_{\text{plug}}$, $\Pi_\varphi < \frac{\text{We}}{2\pi} \partial_x \kappa_\varphi$ and the Plateau-Rayleigh mechanism remains dominant, whereas the opposite holds for $d < d_{\text{plug}}$. As a result, the film surface is attracted toward $d=d_{\text{plug}}$ from both sides. Because Π_φ varies very sharply around d_{plug} , this effect is

felt only when d is close to d_{plug} , and it translates into a very strong repulsion of the film surface in the limit $d \rightarrow 0$. Moreover, the cylindrical surface $d=d_{\text{plug}}$ can be rendered entirely stable in the presence of a mean flow via an appropriate choice of $\Pi_{\text{CRL}} \geq 1$ (see section 3.1).

At the limit points of a real liquid plug, $d \rightarrow 0$ and $\partial_x d \rightarrow \pm \infty$. Of course, such an infinitely steep liquid-gas interface cannot be represented in the framework of the long-wave approximation. Consequently, the leading and trailing fronts of pseudo-plugs computed with our augmented WRIBL model (2.13a) are less steep than for real plugs. We will show in section 4 that this does not prevent our model from producing excellent estimates of different plug measures (see e.g. figure 5). Nonetheless, a static approximation (?) can improve our prediction of the plug shape. Here, following (?), we approximate the liquid-gas interface by a spherical cap (see e.g. figure 6), denoted by the subscript sc , in regions where the interface slope, $\partial_x d$, is too large for the long-wave approximation to hold, i.e. for $|\partial_x d| \geq \epsilon^{\text{max}}$, whereby we choose $\epsilon^{\text{max}} \sim 1$. The radius, R_{sc} , and center, x_{sc} , of the spherical cap are obtained by requiring continuity of d and $\partial_x d$ across the patching point, (x_p, d_p) :

$$d_p = d|_{x=x_p} \equiv \left\{ R_{\text{sc}}^2 - (x_p - x_{\text{sc}})^2 \right\}^{1/2}, \quad (2.14)$$

$$\partial_x d|_{x=x_p} = \epsilon^{\text{max}} \equiv -\frac{x_p - x_{\text{sc}}}{d_p}. \quad (2.15)$$

We point out that a spherical approximation is valid only when the effect of gravity is weak over the axial length scale of the cap and liquid viscous stresses are dominated by surface tension (small capillary number, Ca), which turns out to be the case for typical conditions of liquid plug formation in the pulmonary airways (see figures 13d and 15c).

Our WRIBL model can be extended with a fourth evolution equation for the gas pressure at the liquid-gas interface, $p_2|_d$. This is obtained by performing the operation in (2.11) with the modified weight functions, $\tilde{w}_k = f_{k1}(r, d) + \Pi_u^{-1} f_{k2}(r, d)$, in which case $p_2|_d$ does not cancel from (2.7) and can be solved for, yielding:

$$\begin{aligned} 2\Pi_\rho \Pi_u^2 \partial_x [p_2|_d] &= -\tilde{S}_i \partial_t q_i + \text{NLP}(x, t), \\ \text{NLP}(x, t) &= -\tilde{F}_{ij} q_i \partial_x q_j - \tilde{G}_{ij} q_i q_j \partial_x h \\ &\quad + \frac{\text{We}}{2\pi} \partial_x \kappa + \frac{1}{2\pi} \text{Fr}^{-2} (1 + \Pi_\rho) + \frac{1}{2\pi} \tilde{C}_i q_i \\ &\quad + \tilde{J}_i q_i \partial_x h^2 + \tilde{K}_i \partial_x q_i \partial_x h + \tilde{L}_i q_i \partial_{xx} d + \tilde{M}_i \partial_{xx} q_i, \end{aligned} \quad (2.16)$$

where the tilde distinguishes coefficients from their counterparts in the momentum equation (2.13a). Introducing the total flow rate, $q_{\text{tot}} = q_1 + \Pi_u q_2$, this pressure equation (2.16) can be integrated across the domain length L (Einstein's summation convention is applied below):

$$\begin{aligned} \Delta p_2 &= \int_0^L \partial_x [p_2|_h] dx = \frac{1}{2\Pi_\rho \Pi_u^2} \left\{ \int_0^L \text{NLP}(x, t) dx - \int_0^L \tilde{S}_i \partial_t q_i dx \right\} \\ &= \frac{1}{2\Pi_\rho \Pi_u^2} \left\{ \int_0^L \text{NLP}(x, t) dx - \int_0^L \left(\tilde{S}_1 - \frac{\tilde{S}_2}{\Pi_u} \right) \partial_t q_1 dx - \partial_t q_{\text{tot}} \int_0^L \frac{\tilde{S}_2}{\Pi_u} dx \right\}, \end{aligned} \quad (2.17)$$

and then used as an integral condition on the pressure drop Δp_2 , or, when q_2 is imposed, to

382 evaluate Δp_2 a posteriori. For this, we introduce the normalized pressure gradient M :

$$383 \quad M = \frac{\Delta p_2}{\rho_2 g L}. \quad (2.18)$$

384 In (2.13a), the velocity corrections, $u_k^{(1)}$, were eliminated via truncation and an appropriate
 385 choice of the weight functions, w_k (2.12). However, they can be reconstructed a posteriori,
 386 after having obtained a solution for d and q_k . For this, we insert (2.8) and (2.10a) into (2.1a),
 387 (2.1b), (2.3b), (2.5a), and (2.6a), eliminate p_k via cross-differentiation, truncate at $O(\varepsilon^2)$,
 388 and drop terms of $O(\text{Re}_k \varepsilon u_k^{(1)})$. The resulting boundary value problem can be readily solved
 389 for $u_k^{(1)}$:

$$390 \quad u_1^{(1)} = C_1 r^6 + C_2 r^4 + C_3 r^2 + C_4 + \ln(r)^2 \{C_5 r^2 + C_6\} + \ln(r) \{C_7 r^4 + C_8 r^2 + C_9\}, \quad (2.19a)$$

391

$$392 \quad u_2^{(1)} = D_1 r^6 + D_2 r^4 + D_3 r^2 + D_4, \quad (2.19b)$$

393 where the coefficients, C_i and D_i , are known functions of d , q_k , and their derivatives. The
 394 cross-stream velocity corrections $v_k^{(1)}$ are again obtained via integration of (2.1c), using
 395 (2.8), (2.10a), and (2.19). The velocity corrections $u_k^{(1)}$ and $v_k^{(1)}$ will be useful for producing
 396 accurate predictions of the wall stresses and their spatial derivatives in sections 4 and 5.2.

397 3. Numerical methods

398 We perform three types of numerical computations based on our WRIBL model (2.13).
 399 Linear stability calculations, which allow to identify the most-dangerous surface structures
 400 (waves or liquid plugs) emanating from interfacial instability. Numerical continuation of
 401 travelling-state solutions (TSS) with the continuation software Auto07P (?), which allows
 402 to identify the threshold at which nonlinear travelling wave solutions (TWS) transform into
 403 travelling plug solutions (TPS). And, thirdly, spatio-temporal computations using custom
 404 codes based on a finite-differences spatial discretization. In the latter case, we distinguish
 405 computations with periodicity boundary conditions on a domain spanning one wavelength,
 406 Λ , from computations on an open domain with inlet/outlet conditions.

407 3.1. Linear stability analysis

408 We consider the primary flow of an annular liquid film of core radius, d_0 , and flow rate, q_{10} ,
 409 in contact with a gas of flow rate, q_{20} , and perturb it in terms of d and q_k :

$$410 \quad d = d_0 + d' = d_0 + \hat{d} \exp \{i(kx - \omega t)\}, \quad (3.1a)$$

411

$$412 \quad q_k = q_{k0} + q'_k = q_{k0} + \hat{q}_k \exp \{i(kx - \omega t)\}, \quad (3.1b)$$

413 where $i = \sqrt{-1}$, and where we have assumed the infinitesimal perturbations, d' and q'_k , to
 414 grow according to exponential modes with wave number, k , and angular frequency, ω . Their
 415 amplitudes, $\hat{d}$ and $\hat{q}_k$, are linked via the continuity equations (2.13b):

$$416 \quad \hat{q}_1 = -2\pi d_0 \hat{d} \frac{\omega}{k}, \quad \hat{q}_2 = 2\pi d_0 \Pi_u^{-1} \hat{d} \frac{\omega}{k}. \quad (3.2)$$

417 Inserting (3.1) into (2.13a), and linearizing around the primary flow, we obtain the dispersion
 419 relation:

$$\begin{aligned}
 \text{DR} = & i \omega^2 2\pi d \left\{ \Pi_u^{-1} S_2 - S_1 \right\} \\
 & + i k \omega 2\pi d \left\{ -\Pi_u^{-1} F_{22} q_2 + F_{21} q_2 - \Pi_u^{-1} F_{12} q_1 + F_{11} q_1 \right\} \\
 & + i k^2 \left\{ G_{22} q_2^2 + 2 G_{12} q_2 q_1 + G_{11} q_1^2 \right\} \\
 420 & - \left\{ \omega C_1 d + k \frac{1}{2\pi} \partial_d C_1 q_1 \right\} + \left\{ \omega \Pi_u^{-1} C_2 d - k \frac{1}{2\pi} \partial_d C_2 q_2 \right\} \quad (3.3) \\
 & - i^2 k^3 \left\{ L_1 q_1 + L_2 q_2 \right\} + i^2 k^2 \omega 2\pi d \left\{ \Pi_u^{-1} M_2 - M_1 \right\} \\
 & - i^3 k^4 \text{We} \frac{1}{2\pi} - i k^2 \text{We} \frac{1}{2\pi} \frac{1}{d^2} \left\{ 1 - \Pi_{\text{CRL}} \exp \left[\lambda \left(1 - \frac{d}{d_{\text{plug}}} \right) \right] \right\} = 0,
 \end{aligned}$$

421 where we have dropped the subscript 0 for convenience.

422 The capillary term involving $i k^2 \text{We}$ is due to the azimuthal curvature of the film surface,
 423 and it includes the source term, Π_ϕ , introduced in (2.13c). Through Π_{CRL} , this term can be
 424 tuned to fully stabilize a cylindrical surface at $d=d_{\text{plug}} \ll 1$.

425 In the classical Plateau-Rayleigh configuration, where $q_k=\Pi_\mu=\Pi_\rho=0$, assuming temporally
 426 growing modes, i.e. $k, \omega_i \in \mathbb{R}$ and $\omega=i\omega_i \in \mathbb{C}$, the cut-off wave number, k_c , is given by:

$$427 \quad k_c = \frac{1}{d} \left\{ 1 - \Pi_{\text{CRL}} \exp \left[\lambda \left(1 - \frac{d}{d_{\text{plug}}} \right) \right] \right\}^{1/2}. \quad (3.4)$$

428 In the limit $\Pi_{\text{CRL}}=0$, our model recovers the analytical cut-off wavenumber $k_c=1/d$ for all core
 429 radii, d . By contrast, when setting $\Pi_{\text{CRL}}=1$, full stabilization ($k_c=0$) is achieved for $d/d_{\text{plug}}=1$,
 430 without affecting stability for $d/d_{\text{plug}} \ll 1$. This makes it possible to produce nonlinear pseudo-
 431 plug solutions with our WRIBL model, where the plug is represented via a liquid annulus
 432 filling almost the entire tube cross section, except for a narrow cylindrical gas filament of
 433 radius $d \sim d_{\text{plug}}$ around the tube axis, which is stable and does not pinch.

434 Conditions for obtaining stable pseudo-plugs may change when there is a sufficiently
 435 strong primary flow, in which case the stability limit may be affected by inertia, in contrast to
 436 the classical Plateau-Rayleigh configuration discussed above. We discuss this based on figure
 437 2, which represents stability calculations for spatially growing modes, i.e. $k=k_r+ik_i \in \mathbb{C}$ and
 438 $\omega \in \mathbb{R}$. Panel 2a compares dispersion curves of the spatial growth rate, $-k_i$, obtained from (3.3)
 439 with the solution of the full Orr-Sommerfeld eigenvalue problem (?), for three examples of
 440 stratified gravity-driven liquid films within a cylindrical tube. For all three working liquids,
 441 which correspond to different experiments (???) and cover a wide Ka range, our model
 442 predictions are in good agreement with the Orr-Sommerfeld solution.

443 For the low-viscosity silicone oil (blue open circles), the cut-off wave number $k_c d_0$ is
 444 shifted w.r.t. the classical Plateau-Rayleigh solution, $k_c d_0=1$, as a result of the inertia-driven
 445 Kapitza instability. Thus, in the passive-core limit ($\Pi_\mu=\Pi_\rho=0$), $\Pi_{\text{CRL}} > 1$ is required to
 446 fully stabilize a pseudo-plug at $d=d_{\text{plug}}$. We show this in figure 2b, which represents $-k_i(\omega)$
 447 curves for a pseudo-plug of $d=d_{\text{plug}}=0.01$. Comparing the dashed and dot-dashed curves, we
 448 see that full stabilization is achieved by changing Π_{CRL} from 1 to 1.01. In the case of an
 449 active core fluid, e.g. air, full stabilization is already achieved at $\Pi_{\text{CRL}}=1$ (solid curve), but
 450 the growth rate is only very slightly negative in this case ($-k_i$ has been multiplied by 10^3 in
 451 the graph).

452 Above, we have used linear stability analysis to demonstrate that stable pseudo-plug

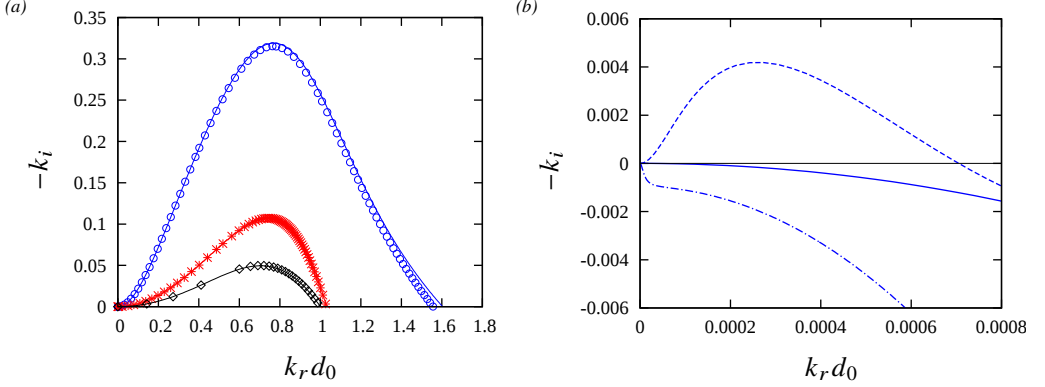


Figure 2: Spatial linear stability of an annular liquid film in contact with air. Symbols: WRIBL; solid lines: Orr-Sommerfeld. (a) Falling liquid film. Circles: $R^*=1.5$ mm, $Ka=121.4$ (silicone oil II/air I in table 1), $Re_1=15.4$, $M=1$; asterisks: run 13 in 2, $R^*=3.175$ mm, $Ka=3.5$ (glycerol(89%)-water/air I), $Re_1=0.258$, $M=1$, diamonds: experiment from figure 3c of 2, $Ka=3.3 \times 10^{-3}$ (silicone oil I, air I in table 1), $R^*=5$ mm, $Re_1=4.5 \times 10^{-4}$, $M=1$; (b) stability of a pseudo-plug obtained with our augmented WRIBL model (2.13c). Silicone oil film from panel a: $d_0=d_{plug}=0.01$, $\lambda=1$. Dashed: $\Pi_{CRL}=1$, $\Pi_\mu=\Pi_\rho=0$; dot-dashed: $\Pi_{CRL}=1.01$, $\Pi_\mu=\Pi_\rho=0$; solid: $\Pi_{CRL}=1$ ($-k_i$ has been multiplied by 10^3).

solutions can be obtained with our WRIBL model (2.13). In addition, we will use linear stability calculations to identify the most-dangerous linear instability modes, i.e. those that are most likely to emerge in a real system, and thus select the nonlinear solutions that will be of interest in the next section. In such calculations, we will distinguish between convective instability (CI) and absolute instability (AI) modes. We will discuss this in detail in section 3.2.

3.2. Travelling-state solutions (TSS)

To construct TSS, we introduce the wave/plug celerity, c , and express the space and time derivatives in (2.13b) and (2.13a) via the wave coordinate ξ :

$$\xi = x - c t, \quad \partial_x = \partial_\xi, \quad \partial_t = -c \partial_\xi, \quad (3.5)$$

thus transforming our system of PDEs into a dynamical system given by:

$$d''' = NL(d, d', d'', q_1^{MF}, q_{tot}), \quad (3.6a)$$

$$q_1^{MF} = q_1 - \pi(R^2 - d^2) c = \bar{q}_1 - \pi(R^2 - \bar{d}^2) c, \quad (3.6b)$$

$$q_{tot} = q_1 + \Pi_u q_2 = \bar{q}_1 + \Pi_u \bar{q}_2, \quad (3.6c)$$

where primes denote differentiation w.r.t. ξ , bars signify averaging over the wavelength Λ in terms of ξ , the superscript MF refers to the wave-fixed moving reference frame, and where we have used (3.6b) and (3.6c) to replace derivatives $q_k^{(j)}$ by derivatives $d^{(j)}$ in (3.6a). Equations (3.6b) and (3.6c) were obtained from the phase-specific continuity equations in (2.13b). Further, $\bar{q}_k = \pi$ for the scaling used here.

The system is closed through the periodicity boundary conditions:

$$d^{(j)} \Big|_{\xi=0} = d^{(j)} \Big|_{\xi=\Lambda}, \quad j = 0, 1, 2, \quad (3.6d)$$

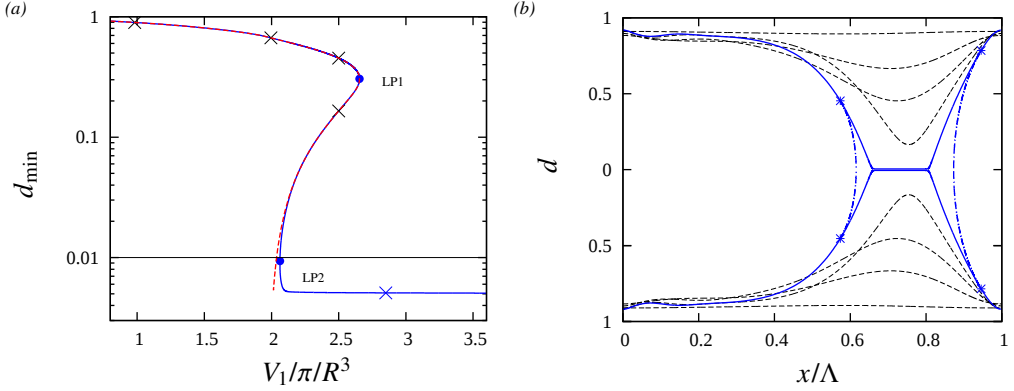


Figure 3: Transition from TWS to TPS. TSS based on our augmented WRIBL model (2.13a). Annular liquid film in contact with air within a vertical cylindrical tube: $Ka=121.4$ (silicone oil II and air I in table 1), $R^*=1.5$ mm, $M=1$, $\Lambda=5.4$. (a) Minimal core radius, $d_{\min}$, in terms of the normalized liquid volume. Solid blue: $\Pi_{\text{CRL}}=\lambda=1$, $d_{\text{plug}}=0.01$; dashed red: $\Pi_{\text{CRL}}=0$; (b) profiles of TSS corresponding to crosses in panel a. Toward the tube axis: $V_1/\pi/R^3=1, 2, 2.5, 2.5, 2.85$. Dot-dashed blue lines correspond to spherical-cap reconstruction (2.14) between the patching points (blue asterisks), where $|\partial_x d|=\epsilon^{\max}=0.75$.

and it is solved for fixed values of $\bar{q}_1^*$ (controlled via Re_1), which is enforced through the integral condition:

$$\Lambda^{-1} \int_0^\Lambda q_1 d\xi = \bar{q}_1, \quad (3.7)$$

and q_{tot}^* (via Re_2), which is imposed either explicitly, or indirectly through an integral condition on the pressure drop (2.17):

$$\Delta p_2 2\Pi_p \Pi_u^2 = \int_0^\Lambda \text{NLP}(d, d', d'', d''', q_1^{\text{MF}}, q_{\text{tot}}) d\xi - \int_0^\Lambda \left(\tilde{S}_1 - \Pi_u^{-1} \tilde{S}_2 \right) d'c d\xi. \quad (3.8)$$

The equation system given by (3.6) and (3.7), or by (3.6) and (3.8), is solved via numerical continuation using Auto07P (?). Figure 3 represents TSS obtained this way for the silicone oil and tube radius, $R^*=1.5$ mm, used in the experiments of ?, only that the cylindrical tube is oriented vertically here and that we have air and not water as the core phase. The dashed red line in panel 3a, where we have plotted the minimal core radius, $d_{\min}$, of TSS versus the liquid volume, V_1 , corresponds to the standard model, i.e. $\Pi_{\text{CRL}}=0$. The limit point of this curve (LP1) corresponds to the occlusion bound identified in ?. Its upper branch corresponds to stable travelling-wave solutions (TWS) and its lower branch to unstable TWS, as has been demonstrated by the stability calculations of ?. Thus, even though there is multiplicity of TWS for a fixed V_1 , only TWS on the upper branch should prevail in an experiment. The lower TWS branch stops abruptly as the core radius tends to zero ($d_{\min} \rightarrow 0$). By contrast, the solid blue curve, which corresponds to our augmented model ($\Pi_{\text{CRL}}=1$, $d_{\text{plug}}=0.01$), displays a second limit point (LP2), from which a branch of travelling-plug solutions (TPS) originates. Panel 3b represents selected profiles (corresponding to crosses in figure 3a) of the liquid-gas interface along this curve, illustrating the evolution from TWS (dashed curves) to a TPS (solid blue curve). The dot-dashed blue curves correspond to the spherical-cap approximation (2.14), using $\epsilon^{\max}=0.75$, which allows to represent more accurately the leading and trailing fronts of the liquid plug. We will use this approximation from here on to reconstruct these portions of TPS, i.e. starting from the patching points marked by asterisks in figure 3b.

In our numerical continuation of TSS, we can impose the linearly most-dangerous wavenumber, $k=2\pi/\Lambda=k_{\max}$, which is obtained by simultaneously solving the dispersion relation (3.3) governing the linear response of the liquid film. Depending on the flow conditions, we distinguish between convective and absolute instability modes. In the case of convective instability (CI), we choose a spatial stability formulation, $\omega \in \mathbb{R}$, $k \in \mathbb{C}$, and $k_{\max}$ corresponds to the spatially most-amplified wavenumber:

$$\text{DR}(\omega, k_{\max}) = 0, \quad \partial_{\omega} k_i|_{k=k_{\max}} = 0, \quad (3.9a)$$

where the expression for $\partial_{\omega} k_i$ is obtained by rearranging $\partial_{\omega} \text{DR}=0$. In the case of absolute instability (AI), we choose a spatio-temporal stability formulation (?), $\omega \in \mathbb{C}$, $k \in \mathbb{C}$, and $k_{\max}$ corresponds to the absolute wavenumber:

$$\text{DR}(\omega, k_{\max}) = 0, \quad \frac{d}{dk} \text{DR}(\omega, k)|_{k=k_{\max}} = 0, \quad \left. \frac{d\omega}{dk} \right|_{k=k_{\max}} = 0, \quad (3.9b)$$

where $d\omega/dk \in \mathbb{C}$ denotes the group velocity in the wall-fixed reference frame. For most of our calculations in section 5, a CI/AI transition is observed on a given TSS branch (marked by crosses, e.g. in figure 10). The transition point can be readily identified by detecting $\omega_i=d\omega/dk=0$.

The primary flow underlying the solution of (3.9a) and (3.9b) is set according to the properties of the corresponding nonlinear TSS, i.e. $d_0=d_{\text{VE}}$ and $q_{20}=\bar{q}_2$ or $M_0=M$, depending on whether the gas flow rate (figure 10) or the gas pressure drop (figure 11) are imposed. Here, d_{VE} is the volume-equivalent core radius:

$$d_{\text{VE}} = \left\{ 1 - \frac{1}{\Lambda} \int_0^{\Lambda} (1 - d^2) dx \right\}^{1/2}. \quad (3.10)$$

3.3. Transient periodic computations

We perform transient periodic computations to represent the dynamics of liquid plug formation from an initially uniform liquid film. For this, our model equations (2.13a) and (2.13b) are solved by numerically advancing the solution in time, i.e. from $t=t_{\text{old}}$ to $t=t_{\text{new}}$. Our equations are recast by eliminating q_2 via (3.6c):

$$\partial_t q_1 + S_2 (\Pi_u S_1 - S_2)^{-1} \partial_t q_{\text{tot}} = \text{NL}(\partial_{x^j} d, \partial_{x^i} q_1) + \Pi_{\varphi} (\Pi_u S_1 - S_2)^{-1}, \quad (3.11a)$$

$$\partial_t d = \frac{1}{2\pi d} \partial_x q_1, \quad (3.11b)$$

and then integrated over the time increment $\Delta_t=t_{\text{new}}-t_{\text{old}}$:

$$q_1|_{\text{new}} - q_1|_{\text{old}} + S_2 (\Pi_u S_1 - S_2)^{-1} \partial_t q_{\text{tot}} \Delta_t = \int_{t_{\text{old}}}^{t_{\text{new}}} \text{NL} dt, \quad (3.12a)$$

$$h_{\text{new}} - h_{\text{old}} = \int_{t_{\text{old}}}^{t_{\text{new}}} \partial_x q_1 dt. \quad (3.12b)$$

The time evolution of the RHS terms in (3.12) is represented via the semi-implicit Crank-Nicolson approximation (?):

$$\text{NL} = \text{NL}|_{\text{old}} + \frac{t - t_{\text{old}}}{\Delta_t} \{ \text{NL}|_{\text{new}} - \text{NL}|_{\text{old}} \}, \quad (3.13a)$$

$$\partial_x q_1 = \partial_x q_1|_{\text{old}} + \frac{t - t_{\text{old}}}{\Delta_t} \{ \partial_x q_1|_{\text{new}} - \partial_x q_1|_{\text{old}} \}, \quad (3.13b)$$

and all spatial derivatives are approximated with central finite differences. Further, it is assumed in (3.12) that the model coefficients, S_i , F_{ij} , G_{ij} , C_i , J_i , K_i , L_i , and M_i (evaluated at t_{old}), as well as $\partial_t q_{\text{tot}}$ are constant over the time step. The nonlinear operator $\text{NL}|_{\text{new}}$ of the momentum equation at $t_{\text{new}}=t_{\text{old}} + \Delta_t$ is linearized in terms of the dependent variables, $h=R-d$ and q_1 , and their derivatives, $h^{(j)}$ and $q_1^{(i)}$:

$$\begin{aligned} \text{NL}|_{\text{new}} = \text{NL}|_{\text{old}} &+ \frac{\partial \text{NL}|_{\text{old}}}{\partial h^{(j)}} \left\{ h^{(j)} \Big|_{\text{new}} - h^{(j)} \Big|_{\text{old}} \right\} \\ &+ \frac{\partial \text{NL}|_{\text{old}}}{\partial q^{(i)}} \left\{ q^{(i)} \Big|_{\text{new}} - q^{(i)} \Big|_{\text{old}} \right\}, \end{aligned} \quad (3.14)$$

where the bracketed superscripts denote the power of differentiation w.r.t. x . The thus obtained discretized evolution equations are evaluated at the N_x-1 points of an equidistant grid spanning from $x=\Delta_x$ to $x=\Lambda$ with grid spacing $\Delta_x=\Lambda/(N_x-1)$. The point $x=0$ is excluded as it coincides with $x=\Lambda$ due to streamwise periodicity. The periodicity conditions:

$$h^{(j)} \Big|_{x=0} = h^{(j)} \Big|_{x=\Lambda}, \quad q^{(i)} \Big|_{x=0} = q^{(i)} \Big|_{x=\Lambda}, \quad (3.15a)$$

are imposed directly, by making use of the nodes at and downstream of $x=0$ in the formulation of spatial derivatives at and upstream of $x=\Lambda$, and vice versa. We thus obtain a linear system of $2(N_x - 1)$ algebraic difference equations with a cyclic pentadiagonal structure (?) for the unknowns $q_1|_{ix}$ and $h|_{ix}$. This system is solved through LU decomposition at each time step, starting from the initial condition:

$$d(x, t = 0) = d_0 [1 + \epsilon_1 \sin(2\pi x/\Lambda)], \quad q_1(x, t = 0) = q_{10}(q_{\text{tot}}(t = 0), d_0), \quad (3.16)$$

where ϵ_1 denotes the initial perturbation amplitude. Alternatively, the computation can be started from a TSS constructed with Auto07P, e.g. to study its stability.

The control parameters are Λ , q_{tot} , and the liquid volume V_1 :

$$V_1 = \pi R^2 \Lambda \left\{ 1 - \frac{1}{2} \frac{d_0^2}{R^2} (2 + \epsilon_1^2) \right\}. \quad (3.17)$$

The total flow rate q_{tot} is either prescribed explicitly, or it results from an integral condition on the pressure drop (2.17). In the second case, (2.17) is recast to isolate $\partial_t q_{\text{tot}}$:

$$\begin{aligned} \partial_t q_{\text{tot}} \frac{1}{\Pi_u} \left\{ \int_0^L S_2 \frac{\Pi_u \tilde{S}_1 - \tilde{S}_2}{\Pi_u S_1 - S_2} dx - \int_0^L \tilde{S}_2 dx \right\} &= 2\Pi_\rho \Pi_u^2 \Delta p_2 - \int_0^L \text{NLP}(x, t) dx \\ &+ \int_0^L \left(\tilde{S}_1 - \frac{\tilde{S}_2}{\Pi_u} \right) \text{NL}(x, t) dx, \end{aligned} \quad (3.18)$$

where $\partial_t q_1$ has been eliminated via (3.11) in the limit $\Pi_{\text{CRL}}=0$, and then used to update q_{tot} at each time step:

$$q_{\text{tot}}|_{\text{new}} = q_{\text{tot}}|_{\text{old}} + \partial_t q_{\text{tot}}|_{\text{old}} \Delta_t. \quad (3.19)$$

Figure 4 represents results of a transient periodic computation for parameters according to figure 3. In particular, we have set $V_1/\pi/R^3=2.85$, which lies far beyond the occlusion limit of TSS in panel 3a. As shown in panel 4b, our transient periodic computation, which was started from a virtually uniform film ($\epsilon_1=0.015$), evolves toward the TSS, represented here with a dashed blue profile and marked by a blue cross on the TPS branch in panel 3a. Thus, we expect this branch to be representative of liquid plugs forming as a result of interfacial

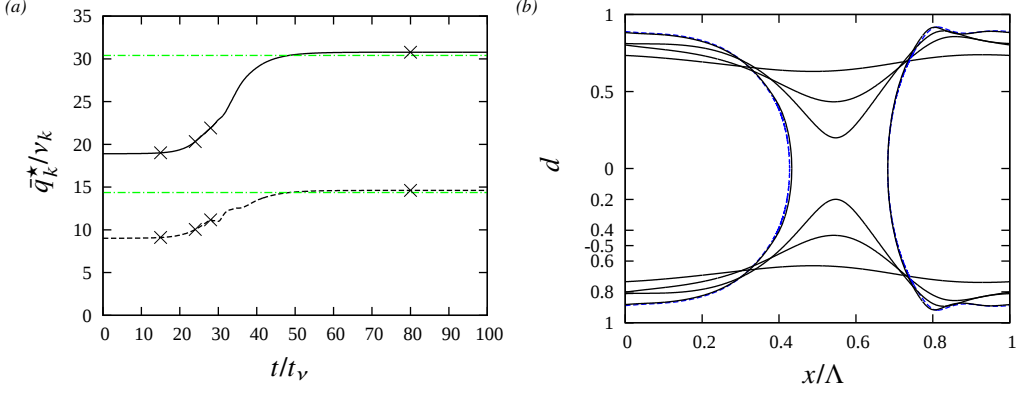


Figure 4: Transient periodic computation of a liquid plug forming from an initially quasi-uniform film. Parameters according to figure 3: $V_1/\pi/R^3=2.85$, $\epsilon_1=0.015$. (a) Time traces of the instantaneous Reynolds numbers, $\bar{q}_k^*/\nu_k$, with $\bar{q}_k=\Lambda^{-1}\int_0^\Lambda q_k dx$, in the liquid (solid) and gas (dashed). Dot-dashed green lines: final values for the DNS in figure 6b; (b) profiles corresponding to crosses in panel a (solid) and to the TSS in figure 3b (dashed).

instability in a real system (comparisons with experiments are reported in section 4). The dot-dashed green curves in panel 4a correspond to the converged values for the instantaneous Reynolds numbers, $\bar{q}_1^*/\nu_1$ and $\bar{q}_2^*/\nu_2$, obtained from our own transient periodic DNS (which will be introduced in figure 6b), using the solver Gerris (?). The time traces of $\bar{q}_1^*/\nu_1$ and $\bar{q}_2^*/\nu_2$ obtained from our transient periodic WRIBL computation (solid and dashed black curves) converge to these values (more comparisons with DNS are reported in section 4).

3.4. Open-domain computations

To represent the spatio-temporal evolution of liquid plugs, we apply the numerical procedure discussed in the previous section to an open domain with inlet and outlet conditions at $x=0$ and $x=L$. Inlet conditions are set by prescribing d and q_1 at the first two grid points ($i_x=1,2$) based on the primary flow:

$$d|_{i_x=1} = d|_{i_x=2} = d_0, \quad (3.20a)$$

$$q_1|_{i_x=1} = q_1|_{i_x=2} = q_{10} [1 + F(t)], \quad (3.20b)$$

The function $F(t)$ in (3.20b) allows to apply a tailored inlet forcing:

$$F(t) = \epsilon_1 \sin(2\pi f t) + \epsilon_2 \sum_{k=1}^N \sin(2\pi k \Delta f t + \varphi_{\text{rand}}), \quad \Delta f = 2 f_c / N. \quad (3.21)$$

The first term constitutes a harmonic perturbation of frequency, f , and the second one mimics white noise through a series of $N=1000$ Fourier modes that are shifted by a random phase shift, $\varphi_{\text{rand}}=\varphi_{\text{rand}}(k) \in [0, 2\pi]$, and that span a frequency range of twice the linear cut-off frequency, f_c (?). All our computations were run with the same $\varphi_{\text{rand}}(k)$ number series, which was generated once and for all with the pseudo random number generator `RandomReal` in ?. The strength of the two terms in (3.21) is determined through their amplitudes, ϵ_1 and ϵ_2 . When $\epsilon_1=0$, the inlet perturbation consists of only white noise. This setting will be used to simulate the noise-driven formation of liquid plugs, as it would occur in an experiment.

At the outlet, we apply boundary conditions inspired by those of ?, which ensure that liquid is always sufficiently drained from the domain, by introducing two downstream ghost

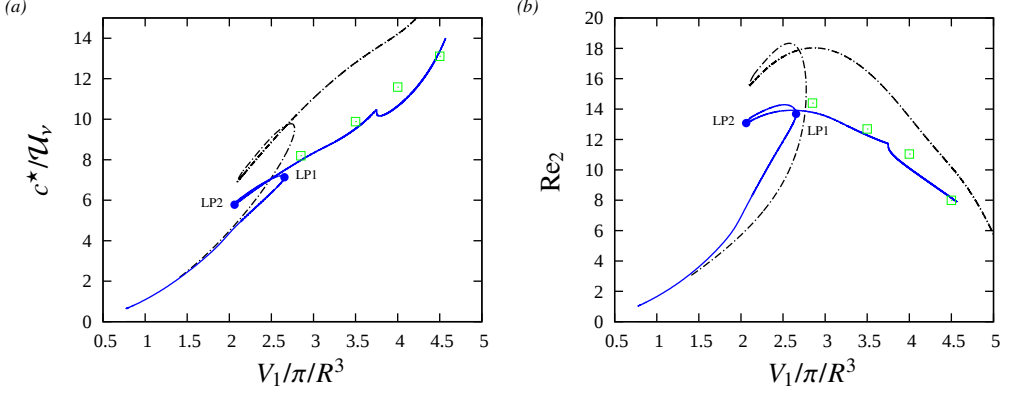


Figure 5: TSS from figure 3 (curves) compared with our own DNS (symbols) using Gerris (?): $Ka=121.4$, $R^*=1.5$ mm, $M=1$, $\Lambda=5.4$. Solid blue curve: full model (2.13), dot-dashed black curve: inertialess limit ($S_k=F_{kj}=G_{kj}=0$). (a) Plug celerity c ; (b) gas Reynolds number, Re_2 , quantifying the gas flow rate transported by the gas bubbles in between two liquid plugs.

596 nodes at $i_x=N_x+1$ and $i_x=N_x+2$:

$$597 \quad d|_{i_x=N_x+1} = d|_{i_x=N_x+2} = d|_{i_x=N_x}, \quad (3.22a)$$

$$598 \quad q_1|_{i_x=N_x+1} = q_{10} \frac{q_{10}^{PG}(d|_{i_x=N_x})}{q_{10}^{PG}(d_0)}, \quad (3.22b)$$

599 where $q_{10}^{PG}(d)=q_{10}(\Pi_\rho=\Pi_\mu=0,d)$ is the passive-gas limit of the primary flow rate q_{10}
600 for a given d , which is known analytically. Our computations are started from the initial
601 condition:

$$602 \quad d(x,t=0)=d_0, \quad q_1(x,t=0)=q_{10}. \quad (3.23)$$

603 We point out that no information for the interface height in the second downstream ghost
604 cell ($d|_{i_x=N_x+2}$ in our case) was given in ?. Our choices for $d|_{i_x=1}$ (3.20) and $d|_{i_x=N_x+2}$
605 (3.22) were guided by numerical convenience. The twice removed ghost cells only affect the
606 discretized form of the third derivative, $\partial_{xxx}d$, which is negligible at the inlet. At the outlet,
607 the flow is dominated by the imposed flow rate, $q_1|_{i_x=N_x+1}$, and, thus, the effect of $d|_{i_x=N_x+2}$
608 is weak.

609 4. Validation versus DNS and experiments

610 We validate our approach for computing liquid plugs, by confronting our WRIBL model
611 (2.13) with experiments and DNS. We start with the configuration from figure 3a, which
612 corresponds to silicone oil II in table 1, subject to an aerostatic pressure drop ($M=1$). Figure
613 5 represents TSS in terms of two important measures, i.e. the plug speed, c , and the gas
614 Reynolds number, Re_2 , which quantifies the entrained gas flow rate. As discussed in figure
615 3a, liquid plug solutions lie beyond LP1 on the solid blue curves in figures 5a and 5b, which
616 represent our WRIBL predictions. The green squares in the same graphs mark data points
617 obtained via transient periodic DNS with Gerris (see ? for details of such runs), evidencing
618 very good agreement with the WRIBL model. For the low-viscosity liquid considered here,
619 Re_1 is quite large, and, thus, inertia is not negligible. This is evidenced by the substantial
620 difference (approx. 25%) between our full-model predictions (solid blue curves) and the black

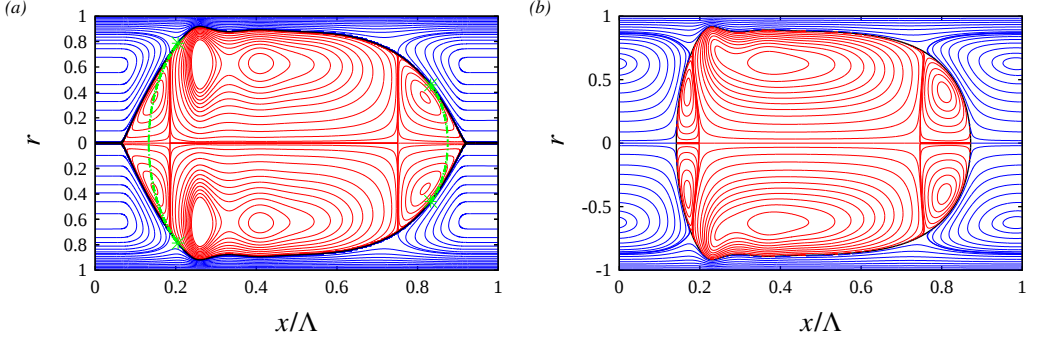


Figure 6: TPS forming in a vertical cylindrical tube. Streamlines in the reference frame moving with the plug speed, c . Parameters according to figure 3a: $\Lambda=5.4$, $V_1/\pi/R^3=2.85$, $M=1$. (a) Transient periodic computation with our augmented WRIBL model (2.13): $\text{Re}_1=30.8$, $\text{Re}_2=14.6$, $c^*=0.31$ m/s. Dashed green lines correspond to spherical-cap approximation (2.14) between patching points (marked by green asterisks), using $\varepsilon^{\max}=0.75$; (b) periodic DNS with Gerris: $\text{Re}_1=30.4$, $\text{Re}_2=14.4$, $c^*=0.30$ m/s.

dashed curves, which represent the inertialess limit of our WRIBL model ($S_k=F_{kj}=G_{kj}=0$ in equation 2.13).

Figure 6 shows streamlines in the moving reference frame for one of the liquid-plug solutions from figure 5 ($V_1/\pi/R^3=2.85$), as obtained from our WRIBL model (figure 6a) and our DNS (figure 6b), respectively. Our model captures all relevant flow features, in particular the toroidal vortex within the liquid plug (?) and the three main toroidal vortices within the gas bubble. The shape of the liquid-gas interface is predicted accurately in the thin portion of the liquid film, whereas agreement deteriorates in the steepest parts of the leading and trailing front of the liquid plug. In these regions, the spherical-cap approximation (2.14) allows to recover good agreement (dashed green lines).

In figure 7a, the solid black line represents the thus reconstructed liquid-gas interface for the system in figure 6 (crosses mark patching points), evidencing good agreement with the DNS profile (green line with open circles). The other three panels in figure 7 compare spatial profiles of different quantities related to the stress field at the tube wall. We start with the excess pressure Δp_w :

$$\Delta p_w = \frac{\Delta p_w^*}{\rho_1 \mathcal{U}_1^2}, \quad \Delta p_w^* = p^*|_{r^*=R^*} - p^*|_{r^*=0}, \quad (4.1)$$

which is obtained by integrating (2.1b), substituting (2.8), truncating at order $O(\varepsilon^2)$, introducing (2.10b), and setting $\varepsilon=1$. As shown in panel 7b, our WRIBL model (solid curves) accurately predicts both the Δp_w profile and its maximum absolute value compared to the DNS (open green circles). The segment between the apex of the spherical-cap (marked by plus sign) and the start of the pseudo-plug (marked by filled diamond) is not drawn, as it has no physical meaning.

Experiments of ? and ? have shown that liquid-plug-induced epithelial cell damage is controlled by the magnitude of the axial derivatives of wall pressure, p_w , and wall shear stress, τ_w :

$$\partial_x p_w = \partial_x [p_1]_{r=1} = \text{Re}_1^{-1} \left[\frac{1}{r} \partial_r (r \partial_r u_1) \right]_{r=1} + \text{Fr}^{-1}, \quad (4.2a)$$

$$\tau_w = \partial_r u_1|_{r=1}, \quad \partial_x \tau_w = \partial_x [\partial_r u_1]_{r=1}, \quad (4.2b)$$

where (4.2a) is obtained by evaluating (2.1a) at $r=1$ (and setting $\varepsilon=1$), and where u_1 is reconstructed according to (2.8), using (2.10a) and (2.19), which ensures consistency at

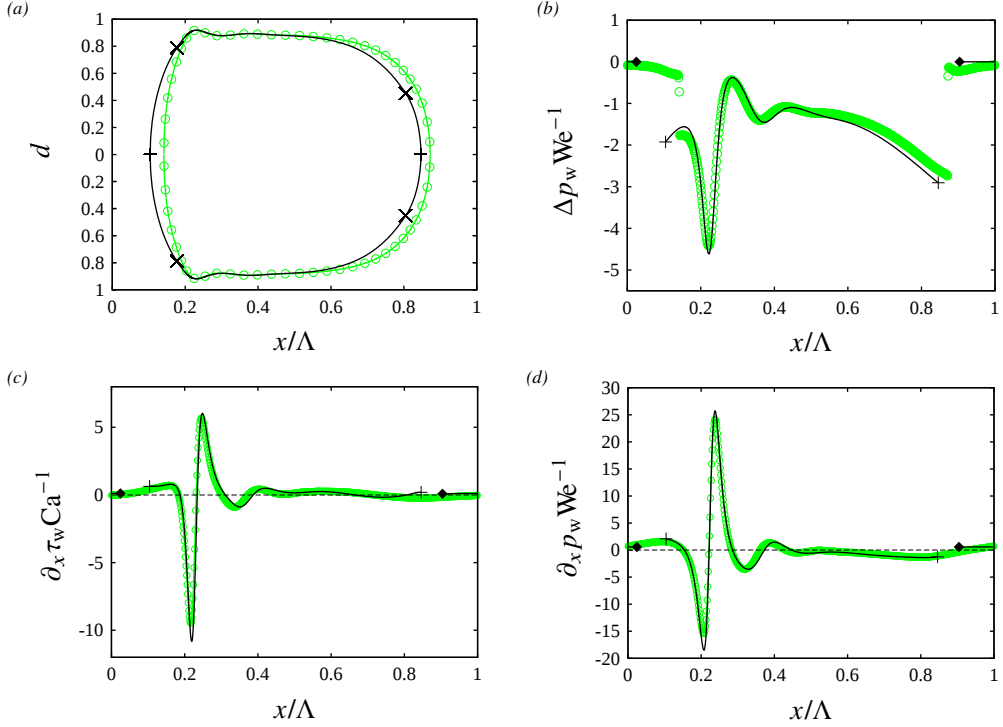


Figure 7: Liquid stresses at the tube wall, $r=1$, within a TPS. Parameters according to figure 6. Open green circles: DNS; solid black lines: WRIBL model. (a) Liquid-gas interface, showing gas bubble in between two liquid plugs; (b) pressure difference across the tube, Δp_w (4.1); (c) axial wall shear stress derivative, $\partial_x \tau_w$, according to (4.2b); (d) axial wall pressure derivative, $\partial_x p_w$, according to (4.2a). Crosses mark patching points for spherical-cap reconstruction (2.14), using $\varepsilon^{\max}=0.75$, plus signs mark apex of spherical cap, and diamonds mark limits of pseudo plug.

order $\mathcal{O}(\varepsilon^2)$. Panels 7c and 7d plot profiles of $\partial_x \tau_w$ and $\partial_x p_w$ obtained from our WRIBL model (solid curves) based on (4.2b) and (4.2a), in comparison with our DNS predictions (green curves with open circles). Our WRIBL model predicts the spatial variation and the maximum magnitude of both quantities, in good agreement with the DNS.

All three quantities, Δp_w (panel 7b), $\partial_x \tau_w$ (panel 7c), and $\partial_x p_w$ (panel 7d), exhibit pronounced extrema around the first capillary trough preceding the leading front of the liquid plug. Also, $\partial_x \tau_w$ and $\partial_x p_w$ change sign over a very short length scale in this region, implying a temporally oscillatory stress field during the passage of a liquid plug. Spatio-temporal variations increase the potential of mechanical damage to epithelial cells in the pulmonary airways (?). In section 5.2, we will use our WRIBL predictions obtained from (4.1), (4.2b), and (4.2a), and the corresponding time derivatives, $\partial_t \tau_w = -c \partial_x \tau_w$ and $\partial_t p_w = -c \partial_x p_w$, to assess the potential for epithelial cell damage linked to TPS under representative flow conditions in the conducting zone of the tracheobronchial tree.

Further validation of our WRIBL model (2.13) is provided in figure 8, where we have reproduced numerically the experiment in figure 3c of ?, who studied liquid plug formation in a narrow vertical tube, using a high-viscosity liquid (silicone oil I in table 1) in contact with air.

Our WRIBL computation (figure 8b) was performed on an open domain, applying the noisy inlet perturbation (3.21) to mimic experimental noise. Occlusion in the present case

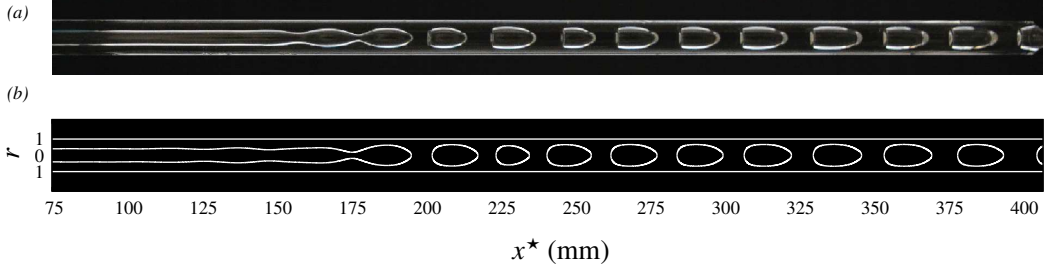


Figure 8: Highly-viscous falling liquid film in contact with air: $Ka=3.3 \cdot 10^{-3}$ (silicone oil I, air in table 1), $R^*=5$ mm, $Re_1=4.5 \cdot 10^{-4}$, $M=1$. (a) Experiment from figure 3c of ?, reproduced here with permission from Cambridge University Press. (b) Open-domain WRIBL computation (true to scale) using inlet noise (3.21): $\epsilon_1=0$, $\epsilon_2=10^{-4}$. Leading and trailing portions of the liquid plugs were reconstructed with the spherical-cap approximation (2.14), using $\epsilon^{\max}=0.68$.

occurs according to scenario I in ?, i.e. the liquid Reynolds number, $Re_1=4.5 \cdot 10^{-4}$, lies beyond the limit point of the linearly most-amplified TWS, and liquid plugs form as a result of surface waves emerging from linear wave selection. This limit point is marked by LP1 in figure 9a, which represents TSS at $f=f_{\max}$, where $f_{\max}$ denotes the spatially most-amplified frequency obtained from linear stability analysis. Comparing the upper panel (experiment) and lower panel (WRIBL) in figure 8, we conclude that our model correctly represents this occlusion regime. In particular, the spatial evolution of precursory surface waves, their pinch-off to form liquid plugs (subsequently convected downstream), and the number and shape of these plugs, are predicted quite well.

Further, we show in figure 9 that several liquid-plug measures from the experiment can be predicted accurately based on TSS at $f=f_{\max}$ obtained with our WRIBL model. Both the wavelength, Λ (combined length of liquid plug and gas bubble), represented in panel 9b, and the plug speed, $c=\Lambda f_{\max}$, represented in panel 9c, lie within the experimental error bars (experimental points are marked by filled squares), which were determined graphically from the variation of Λ between different plug/bubble pairs in figure 3c of ?. Crosses and asterisks on the TSS branches in panels 9a, 9b, and 9c mark the experimental conditions corresponding to figures 3c and 3d in ?, whereby the former figure is reproduced here in figure 8a.

The dot-dashed black curves in panels 9a, 9b, and 9c represent TSS obtained in the absence of axial viscous diffusion, i.e. when setting $J_k=K_k=L_k=M_k=0$ in (2.13). In this limit, agreement with the experiments is greatly deteriorated. Thus, accounting for axial viscous diffusion, by developing our WRIBL model up to order ϵ^2 , has proven necessary in order to accurately capture liquid plugs of highly-viscous liquids.

Finally, we point out that our open-domain computation in figure 8b was run with an imposed total flow rate q_{tot} , corresponding to the TPS at $M=1$ in panel 9a. For this high-viscosity working liquid, gas liquid coupling is very weak ($\Pi_\mu=1.4 \times 10^{-6}$) and thus imposing $M=1$ via (2.17) requires a very fine grid resolution around the liquid plug, which is prohibitive in open-domain computations.

5. Results: application to airway occlusion

We apply our WRIBL model (2.13) to study liquid plug formation by a mucus film lining the inner surface of a respiratory airway. We assume a mucus rheology corresponding to healthy conditions, where neither viscoelasticity (?) nor shear thinning (?) play a significant role.

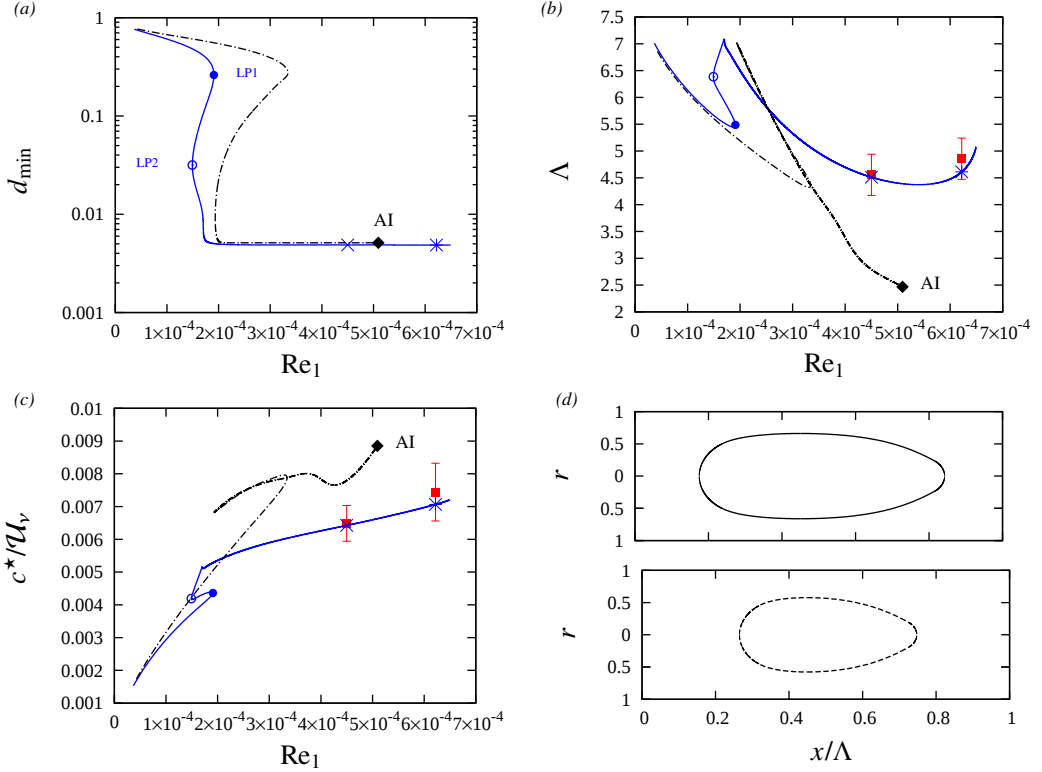


Figure 9: TSS at $f=f_{\max}$ and $M=1$ obtained with our WRIBL model (2.13) for the configuration in figure 8. Solid blue curves with circles: full model; dot-dashed black: $J_k=K_k=L_k=M_k=0$ in (2.13). Filled black diamonds mark absolute instability (AI) limit. Lower branch beyond LP2 in panel *a* corresponds to TPS, which are compared with experiments (filled red squares) from figures 3c ($Re_1=4.5 \times 10^{-4}$) and 3d ($Re_1=6.22 \times 10^{-4}$) of ?. (a) Minimal core radius; (b) wavelength; (c) wave/plug speed; (d) plug profiles corresponding to cross and asterisk in panels *a*, *b*, and *c*. Solid: $Re_1=4.5 \times 10^{-4}$, $f_{\max}^*=0.145$ Hz; dashed: $Re_1=6.22 \times 10^{-4}$, $f_{\max}^*=0.155$ Hz.

In particular, our computations are based on a Newtonian model-mucus according to ?, i.e. mucus I in table 1. For the gas phase, we assume ambient air, i.e. air I in table 1.

We focus on the conducting zone of the human respiratory network, i.e. the first 16 airway generations according to the lung architecture model of ?:

$$R^* = R_{\text{Weib}}^* = R_0^* 2^{-\frac{n}{3}}, \quad (5.1a)$$

$$L^* = L_{\text{Weib}}^* = L_0^* 2^{-\frac{n}{3}}, \quad (5.1b)$$

$$Re_2 = Re_2^{\text{Weib}} = Re_{20} 2^{-\frac{2}{3}n} = \frac{Q_{20}^*}{\pi R_0^* v_2} 2^{-\frac{2}{3}n}, \quad (5.1c)$$

where n denotes the airway generation, R^* and L^* the radius and length of the airway, Q_2^* and Re_2 the corresponding gas flow rate and gas Reynolds number, and the subscript 0 refers to the trachea, i.e. $n=0$, for which we set $R_0^*=9$ mm and $L_0^*=120$ mm, according to a typical adult (?).

In the current manuscript, we do not account for the time variation of the air flow rate during the breathing cycle. Instead, we set a time-constant tracheal gas flow rate, which is based on

the reference value $Q_{20}^* = \pm V_T^* f_T^* = \pm 2.5 \times 10^{-4} \text{ m}^3/\text{s}$, with a tidal volume, $V_T^* = 500 \times 10^{-6} \text{ m}^3$, and a tidal frequency, $f_T^* = 0.5 \text{ Hz}$, according to typical settings for assisted ventilation (?), yielding $\text{Re}_{20} = \pm 590$. Based on this, the gas flow is always laminar for generations $n > 2$, and we restrict our investigation to this range, as our WRIBL model does not account for turbulence.

The sign of Q_{20}^* and Re_{20} allows to distinguish between situations where the gas flow is oriented in the direction of gravity ($Q_{20}^*, \text{Re}_{20}^* > 0$) or opposite to gravity ($Q_{20}^*, \text{Re}_{20}^* < 0$). We will designate these as co-current and counter-current configurations throughout. Due to the branching nature of the lung architecture, two airways of the same generation can be oriented in opposite directions, and, thus, the co- and counter-current configurations can occur both during expiration and inspiration. Of course, the direction of the gas flow is relevant only when gravity plays a role, and we will show that this is the case here. Strictly speaking, our WRIBL model, which is based on an axisymmetric formulation (2.13), is valid only for airways aligned with gravity, and we will focus on this situation. Thus, we cannot account for cross-stream gravity, which can lead to asymmetric liquid distribution about the airway equator (?). For this, a full three-dimensional model is required.

Further, we neglect the effect of beating cilia lining the airway walls, which are responsible for mucociliary clearance (?), as well as the periciliary liquid (PCL) in which they are immersed. These effects are assumed to be negligible for conditions in the vicinity of liquid plug formation. For reference, the thickness of the PCL layer is $h_{\text{PCL}}^* \sim 8 \mu\text{m}$ for $n=16$, i.e. $h_{\text{PCL}}/R \sim 4 \%$. Finally, we assume the inner surface of the airways to be perfectly cylindrical.

5.1. Liquid plug formation based on TSS

We apply the numerical continuation procedure introduced in section 3.2 to advance TSS in terms of the airway generation n (see e.g. figure 10). For this, we assume that all quantities evolve continuously with n (?), based on the lung architecture model (5.1) of ?. In particular, we are interested in predicting the transition from TWS to TPS, which allows to identify in what airway generation liquid plugs may arise. In generations where TPS do not exist, plug formation is highly unlikely, even in a transient setting. In addition to the airway generation, n , there is one other free control parameter in our problem, for which we choose the liquid holdup, $h_{\text{VE}} = h_{\text{VE}}^*/R^*$:

$$h_{\text{VE}} = 1 - d_{\text{VE}}, \quad (5.2)$$

which controls the thickness of the mucus film. This parameter can increase significantly in the case of mucus overproduction or impeded mucociliary clearance caused by respiratory diseases (?).

In our calculations, we track the linearly most-dangerous TSS by setting $k = k_{\text{max}}$, where k_{max} is the most-dangerous wave number, as obtained by simultaneously solving the linear stability problem (3.9). Thus, for each airway generation, we obtain the TSS most likely to emerge in a real system, and we have checked that the corresponding most dangerous wavelength, $\Lambda_{\text{max}} = 2\pi/k_{\text{max}}$, satisfies $\Lambda_{\text{max}} \leq L_{\text{Weib}}$, i.e. that the most-dangerous TSS fits into the typical length of the considered airway generation (see figure 12, which will be introduced later). Further, our spatio-temporal stability formulation introduced in section 3.2 allows to distinguish between: (1) convective instability (CI), where we set $\omega_i = \partial_{\omega} k_i = 0$ via (3.9a), and k_{max} corresponds to the linear mode with maximum spatial growth rate, and (2) absolute instability (AI), where we set $d\omega/dk = 0$ via (3.9b), and k_{max} corresponds to the absolute mode, i.e. a perturbation growing in time at fixed axial position, x . TPS in the AI regime are particularly dangerous, as the linear perturbation in that case cannot be advected out of the airway, and plug formation is thus more likely in a transient setting. Therefore, the CI/AI transition is highlighted by crosses in all figures of the current section, i.e. figures 10 to 16.

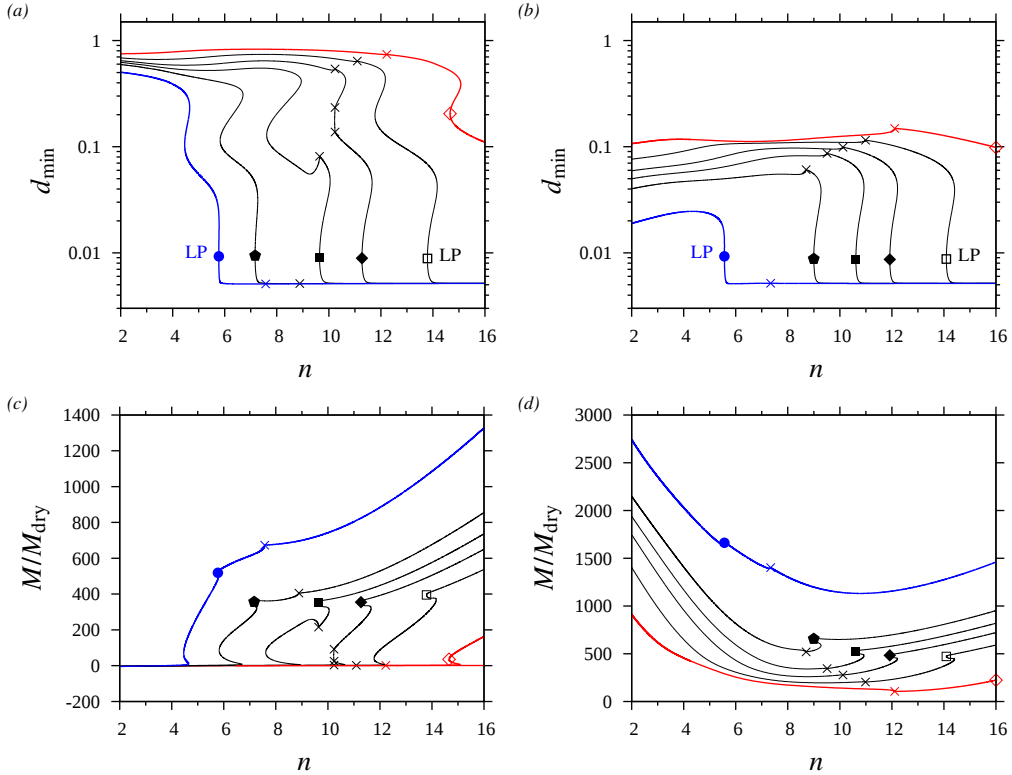


Figure 10: Airway occlusion under imposed gas flow rate for different h_{VE} . Linearly most-dangerous TSS versus airway generation n based on lung architecture (5.1) of ? : $Ka=30.6$ (mucus I and air I in table 1), $Re_{20}=\pm 590$, $k=k_{max}$, $R^*=R_{Weib}^*$, $Re_2=Re_2^{Weib}$. Crosses mark transition between CI, where $\omega_i=\partial_\omega k_i=0$ is imposed (3.9a), and AI, where $d\omega/dk=0$ (with $k, \omega \in \mathbb{C}$) is imposed (3.9b). Filled circles to open diamonds: $h_{VE}=0.4, 0.3, 0.267, 0.24, 0.2$, and 0.15 . (a,c) Co-current configuration: $Re_{20}=590$, $M_{dry}<0$; (b,d) counter-current configuration: $Re_{20}=-590$, $M_{dry}>0$. (a,b) Minimum core radius; (c,d) normalized pressure drop, where M_{dry} (5.3) corresponds to dry airways ($h_{VE}=0$).

Figure 10 represents TSS versus the airway generation n for imposed $R^*=R_{Weib}^*$ and $Re_2=Re_2^{Weib}$, according to (5.1), for different values of the liquid hold up, h_{VE} . And, we confront the co-current ($Re_{20}=590$, panels 10a and 10b) and counter-current ($Re_{20}=-590$, panels 10c and 10d) configurations. Panel 10a represents TSS in terms of the minimum core radius, d_{min} (solid curves). Upon decreasing h_{VE} (from $h_{VE}=0.4$ to $h_{VE}=0.2$), the critical generation for TPS formation (LPs, marked by symbols) shifts significantly toward distal airways (from $n=6$ to $n=14$). At the same time, the CI/AI transition (marked by crosses) increasingly shifts from the TPS branch to the TWS branch, making liquid plug formation in a transient setting more and more likely. In particular, for $h_{VE} \leq 0.267$, the entire TPS branch lies in the AI regime. We point out that the observed multiplicity of TSS at fixed h_{VE} and n is similar to the one discussed in figure 3a. It is quite probable that the TWS on the intermediate branches between the upper LP and the TPS are unstable here as well. To check this rigorously, the approach of ? for investigating the stability of TWS needs to be applied to the continuation results in figure 10a, where the continuation parameter is different. This is outside the scope of the current manuscript.

According to panel 10c, the TPS from panel 10a are associated with a spectacular increase of the normalized gas pressure gradient, M (2.18), versus its reference value, M_{dry} , for dry

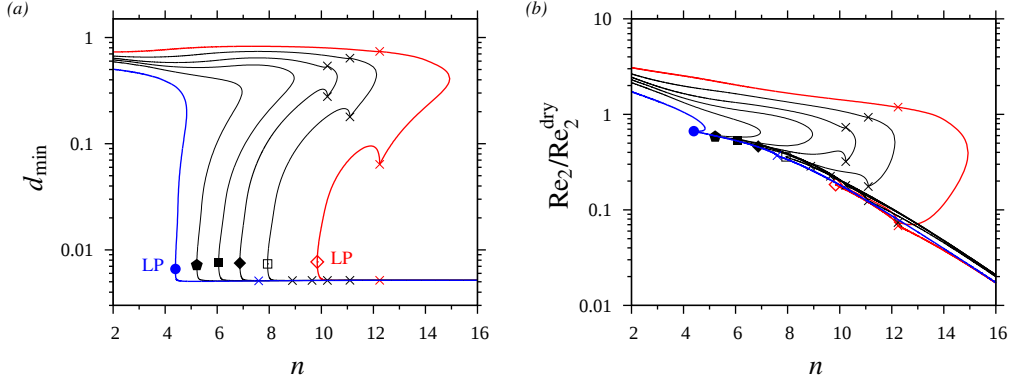


Figure 11: Airway occlusion under imposed pressure drop for different values of the liquid holdup, h_{VE} . Linearly most-dangerous TSS versus airway generation, n , based on lung architecture (5.1) of ? : $Ka=30.6$ (mucus I and air I in table 1), $M/M_{dry}=20$, $Re_{20}^{dry}=590$ ($M_{dry}<0$), $k=k_{max}$, $R^*=R_{Weib}^*$. Filled circles to open diamonds: $h_{VE}=0.4, 0.3, 0.267, 0.24, 0.2$, and 0.15 . (a) Minimum core radius; (b) normalized gas Reynolds number. M_{dry} (5.3) and Re_2^{dry} correspond to dry airways ($h_{VE}=0$) in the absence of gravity ($Fr^{-1}=0$). LPs mark onset of TPS. Crosses mark transition between CI, where $\omega_i=\partial_\omega k_i=0$ is imposed (3.9a), and AI, where $d\omega/dk=0$ (with $k, \omega \in \mathbb{C}$) is imposed (3.9b).

780 gravity-free airways:

$$781 \quad M_{dry} = \lim_{\substack{d \rightarrow R \\ 1/Fr \rightarrow 0}} \left\{ \partial_x p_2^* \right\} \frac{1}{\rho_2 g} = -8 \frac{Re_2}{Ga_2}, \quad Ga_2 = \frac{R^{*3} g}{\nu_2^2}, \quad (5.3)$$

782 where Ga_2 denotes the gas Galileo number. Conversely, when M/M_{dry} is imposed instead
 783 of Re_{20} , as shown in figure 11, occlusion leads to a virtual halt of the gas flow through the
 784 affected airway, as demonstrated via the Re_2 versus n plot in panel 11b, where we have fixed
 785 $M/M_{dry}=20$ based on $Re_{20}^{dry}=590$ ($M_{dry} < 0$), keeping all other parameters as in panel 10a.
 786 Indeed, when moving from the upper TWS branches to the TPS branches at constant n
 787 in panel 11b, Re_2 drops by one order of magnitude. This underlines the extremely noxious
 788 implications of airway occlusion for the proper operation of the respiratory tract.

789 We turn now to panels 10b and 10d, which represent TSS for the same parameters as in
 790 panels 10a and 10c, but for the counter-current configuration. Comparing panels 10a and 10b,
 791 we see that the critical n for airway occlusion shifts by one or two generations between the co- and counter-current configurations. Based on this, we may conclude that gravity affects
 792 the occlusion limit up to generation $n=10$, where $Bo=\rho_1 g R^{*2}/\sigma \sim 0.4$. This relatively small
 793 gravitational effect is contrasted by the spectacular difference in the core radius, d_{min} , for
 794 the TWS branches associated with these two configurations. While TWS do not significantly
 795 obstruct the airways for the co-current configuration (panel 10a), d_{min} attains values that
 796 are smaller by one order of magnitude for the counter-current configuration (panel 10b). As
 797 shown in panel 10d, this translates to extremely large gas pressure drops, even before the onset
 798 of TPS. Thus, in contrast to the co-current configuration, breathing in the counter-current
 799 configuration can be drastically impaired even in the absence of liquid plug formation.

800
 801 In figure 12, we characterize different length scales associated with the TSS obtained in
 802 figure 10 versus the airway generation, n , by comparing them with the airway length, L_{Weibel}
 803 (5.1). Panels 12a and 12b represent the distance, $L_T=c/2f_T$, which a TSS would travel
 804 during one half of the breathing cycle, i.e. $2/f_T$, where c is the nonlinear TSS speed. Both
 805 for the co-current configuration (panel 12a) and for the counter-current configuration (panel

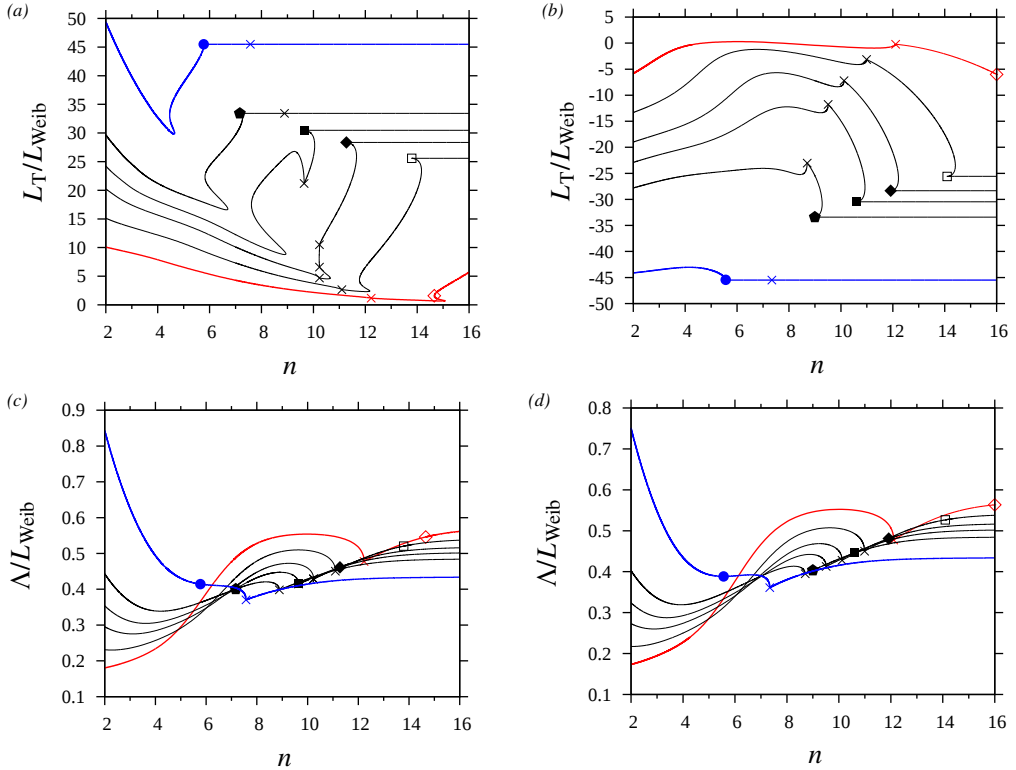


Figure 12: Length scales of TSS from figure 10, as compared to the airway length, L_{Weib} (5.1). (a,b) Relative distance of propagation, L_T/L_{Weib} , during half of one breathing period, $1/f_T$, where $L_T=c/2/f_T$; (c,d) relative wavelength, Λ/L_{Weib} . (a,c) Co-current: $\text{Re}_{20}=590$; (b,d) counter-current: $\text{Re}_{20}=-590$.

12b), TPS are associated with very large values of $|L_T|/L_{\text{Weib}}$. This implies that liquid plugs can easily propagate into more distal airways, thus exacerbating the noxious implications of airway occlusion. Of course, Re_2 is not constant in time during a real breathing cycle, and thus our predictions in panels 12a and 12b provide only a conservative estimate.

In panels 12c and 12d, we compare the wavelength, Λ , of the TSS from figures 10a and 10b with the corresponding airway length, L_{Weib} . First of all, we observe that $\Lambda < L_{\text{Weib}}$ is satisfied across the first 16 airway generations, implying that at least one TSS fits into every airway. At small n , where TWS prevail, that number can increase to five. At large n , where TPS prevail, we observe approximately two liquid plugs per airway, independent of the liquid holdup h_{VE} . Thus, nonlinear interactions between liquid plugs may need to be accounted for when modelling the dynamics of airway occlusion.

Figure 13 compares the liquid volume, V_1 , of the TSS in figure 10a with two thresholds corresponding to static equilibrium shapes that do not fully wet the inner surface of the airway. Quasi-static conditions can occur when the gas flow rate becomes zero in between the inspiration and expiration strokes, provided the effect of gravity is negligible. Firstly, panel 13a compares V_1 to the threshold, V_U (?), for the formation of liquid unduloids (?):

$$V_U = 1.73\pi R^3. \quad (5.4)$$

Unduloids are always shorter than the most-amplified wavelength of the classical Plateau-Rayleigh instability, and, thus, inevitably lead to a dewetting of the liquid film for $V_1 \leq V_U$, as a result of the subcritical nature of the instability. Panel 13a shows that $V_1 \leq V_U$ can indeed

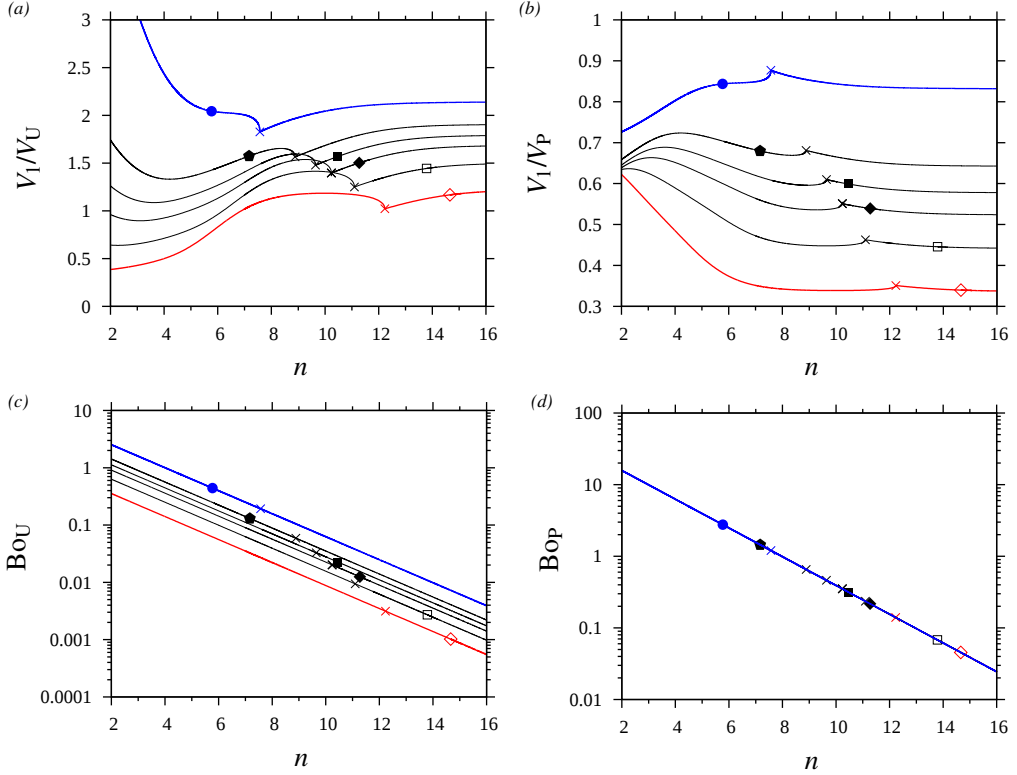


Figure 13: Liquid volume, V_1 , of TSS in figure 10a compared to different static dewetting thresholds, V_U (5.4) and V_P (5.5). From filled circles to open diamonds: $h_{VE}=0.4, 0.3, 0.267, 0.24, 0.2, \text{ and } 0.15$. (a) Compared to critical volume for the existence of unduloids: $V_U=1.73\pi R^3$ (5.4); (b) compared to critical volume for the existence of fully-wetting spherical liquid plugs: $V_P=\pi R^3(\Lambda-4/3)$ (5.5); (c,d) Bond numbers for liquid unduloids, $Bo_U=\rho_1 g h_{VE}^{*2}/\sigma$, and liquid plugs, $Bo_P=Bo=\rho_1 g R^{*2}/\sigma$.

occur within the airways, i.e. for $n < 7$ and $h_{VE} \leq 0.24$. However, the corresponding Bond number, $Bo_U = \rho_1 g h_{VE}^{*2}/\sigma$, which is plotted in panel 13c, indicates that quasi-static conditions can be reached only for $n > 5$, where $Bo_U < 0.1$, at least for the considered values of h_{VE} . Widespread conditions for dewetting due to unduloid formation are limited to much smaller values of h_{VE} , but the growth rate of the Plateau-Rayleigh instability may be very small there, versus the frequency of the breathing cycle.

Secondly, panel 13b compares V_1 to the threshold, V_P , for the existence of fully-wetting static spherical liquid plugs:

$$V_P = \pi R^3 \left\{ \Lambda - \frac{4}{3} \right\}, \quad (5.5)$$

and we see that all represented TSS satisfy $V_1/V_P < 1$. Assuming that quasi-static conditions can be reached over the course of the breathing cycle, dewetting due to plug formation is thus possible in all airway generations. However, according to panel 13d, which represents the corresponding Bond number, $Bo_P = Bo = \rho_1 g R^{*2}/\sigma$, such conditions are limited to the most distal airways, i.e. $n > 13$, where $Bo_P < 0.1$.

We proceed with figures 14 and 15, where we discuss the effect of different control parameters that are important in the treatment of diseases involving airway occlusion, i.e. Re_{20} , which is representative of the tracheal breathing flow rate imposed during assisted

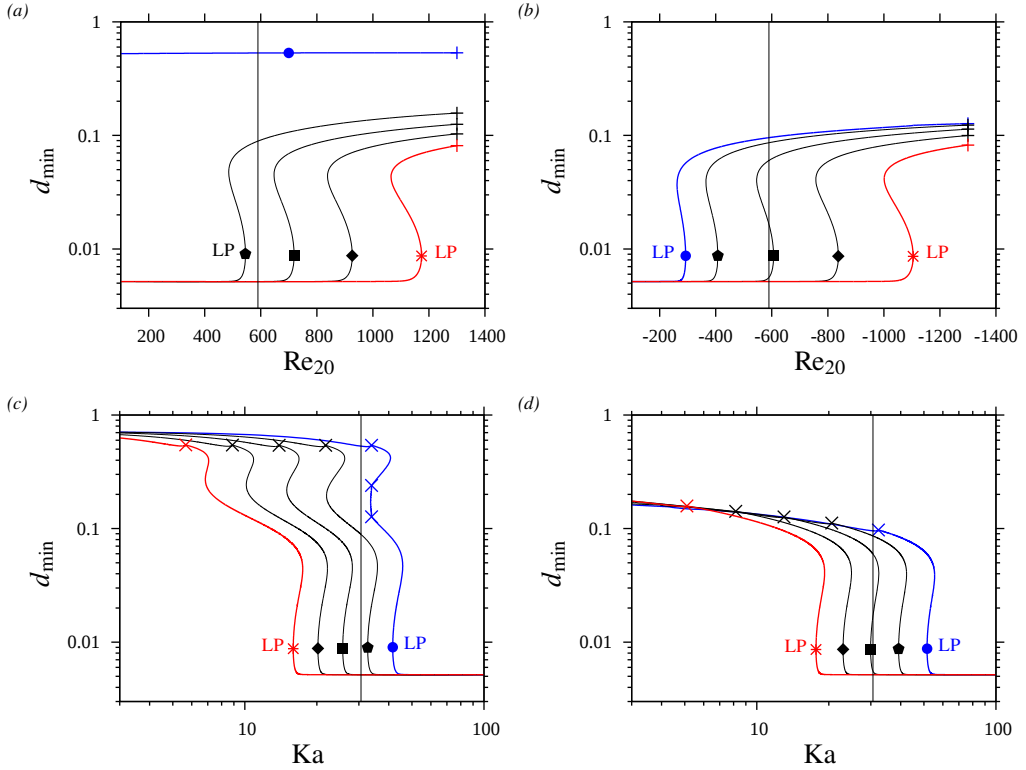


Figure 14: Effect of air flow and mucus properties on airway occlusion. TSS for reference parameters from figure 10: $k=k_{\max}$, $R^*=R_{\text{Weib}}^*$, $Re_2=Re_2^{\text{Weib}}$, $h_{VE}/R=0.24$, air I in table 1. Circles: $n=10$, pentagons: $n=11$, squares: $n=12$, diamonds: $n=13$ asterisks: $n=14$. Reference state (thin vertical lines): $Ka=30.6$, $Re_{20}=\pm 590$. (a) Versus Re_{20} , co-current; (b) versus Re_{20} , counter-current; (c) versus Ka at fixed $Ga=R^{*3}g/v_1^2$: $Re_{20}=590$; (d) versus Ka at fixed Ga : $Re_{20}=-590$. Pluses in panels a, b mark turbulence onset.

ventilation, and the Kapitza number, Ka , Laplace number, $La=R^*\sigma\rho_1/\mu_1^2$, and capillary number, $Ca=\mathcal{U}_2\mu_1/\sigma$, which characterize the hydrodynamic physical properties of mucus and can typically be modified via medication, e.g. via mucolytics (acting on the mucus viscosity) or surfactants (acting on the surface tension). We consider the same reference parameters as in figure 10, focusing on one liquid holdup, $h_{VE}=0.24$, and we vary Re_{20} (panels 14a and 14b), Ka (panels 14c and 14d), La (panels 15a and 15b), and Ca (panels 15c and 15d) around their reference values (marked by thin vertical lines in figure 14 and open circles in figure 15).

Panels 14a and 14b represent the minimum core radius of TSS versus Re_{20} for $h_{VE}=0.24$. The curve parameter is the airway generation n , which we have varied from $n=10$ (filled circles) to $n=14$ (asterisks), and, as in figure 10, we track the linearly most-dangerous TSS by fixing $k=k_{\max}$. The considered range of Re_{20} is limited by the turbulence threshold, $|Re_{20}|\sim 1300$. Based on the curves in panels 14a and 14b, we observe that TPS can be effectively prevented by increasing $|Re_{20}|$ beyond a threshold that increases with increasing n . Further, for the proximal airways (closer to the trachea, e.g. pentagons, corresponding to $n=11$), we observe a non-negligible difference between the co-current (panel 14a, $Re_{20}>0$) and counter-current (panel 14b, $Re_{20}<0$) configurations. Once again, we point out that Re_{20} varies in time over the course of a real breathing cycle. Thus, even if the mean $|Re_{20}|$ lies

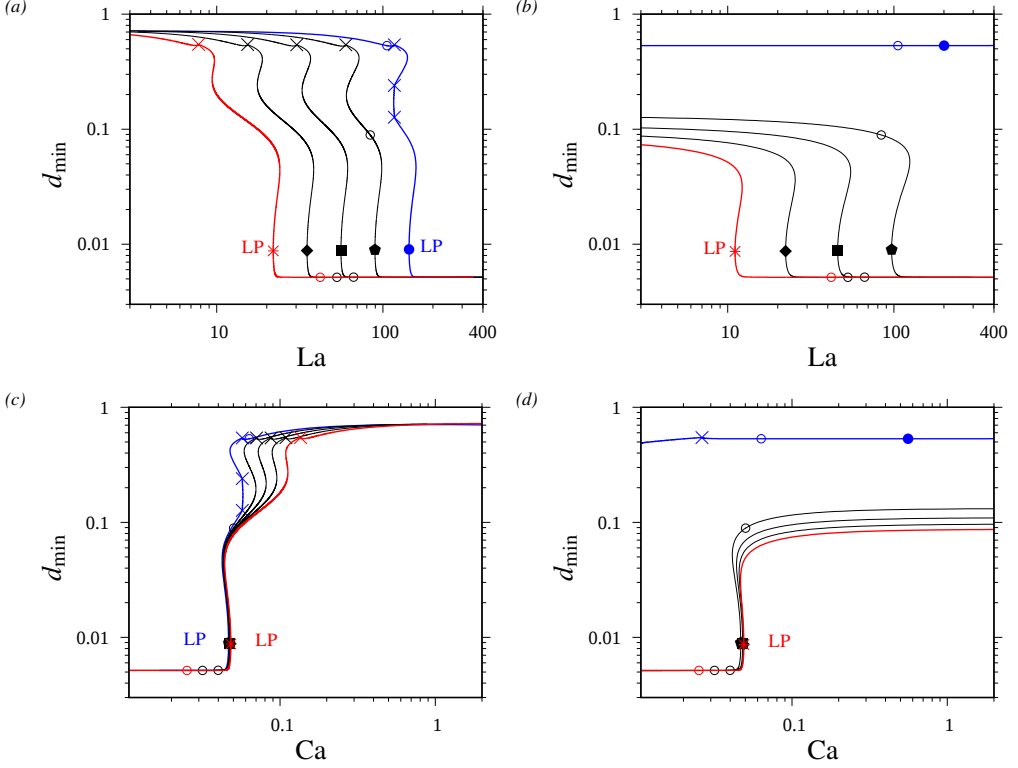


Figure 15: Effect of mucus surface tension and viscosity on airway occlusion. TSS for reference parameters of co-current configuration in figure 10: air I in table 1, $k=k_{\max}$, $R^*=R_{\text{Weib}}^*$, $\text{Re}_2=\text{Re}_2^{\text{Weib}}$, $R_0^*=9$ mm, $Q_{20}^*=2.5 \times 10^{-4}$ m³/s, $h_{\text{VE}}/R=0.24$. Circles: $n=10$, pentagons: $n=11$, squares: $n=12$, diamonds: $n=13$, asterisks: $n=14$. (a) Change in $\text{La}=R^*\sigma\rho_1/\mu_1^2$ at fixed $\text{Ga}=R^{*3}g/v_1^2$; (b) change in La at fixed $\text{Bo}=\rho_1gR^{*2}/\sigma$; (c) data from panel a versus $\text{Ca}=\mathcal{U}_2\mu_1/\sigma$; (d) data from panel b versus Ca . AI everywhere except on branch to the right of blue cross. In all panels, open circles correspond to $\text{Ka}=30.6$, i.e. mucus I in table 1.

beyond the TPS bound given in panels 14a and 14b, there is still a risk of airway occlusion between the inspiration and expiration strokes. In an effective assisted ventilation protocol, this can be avoided by applying a step-like variation of the air flow rate, with a rapid change from inspiration to expiration (?). Finally, as can be deduced from the absence of crosses in panels 14a and 14b, the nature of the instability remains unchanged during a variation of Re_{20} , i.e. CI for $n=10$ and AI for $n>10$.

We now turn to panels 14c and 14d, where we have plotted $d_{\min}$ versus Ka for TSS at $\text{Re}_{20}\pm 590$, $k=k_{\max}$, and n fixed according to panels 14a and 14b. Further, we have fixed the liquid Galileo number, $\text{Ga}=R^{*3}g/v_1^2$, and thus our variation of Ka mimics a change in mucus surface tension at fixed dynamic viscosity, i.e. via surfactants. Based on these results, we may conclude that the formation of TPS can be prevented by reducing Ka , e.g. by reducing surface tension. In particular, at the considered $h_{\text{VE}}=0.24$, airway occlusion can be avoided for $n\leq 14$ via reducing Ka by a factor of roughly 3 versus its reference value (marked by thin vertical lines). And, comparing panels 14c and 14d, we observe that slightly lower values of Ka are required to avoid occlusion in the co-current (panel 14c) versus the counter-current (panel 14d) configuration. Finally, we observe that increasing Ka causes a transition from CI to AI, and that all plotted TPS branches lie entirely in the AI regime.

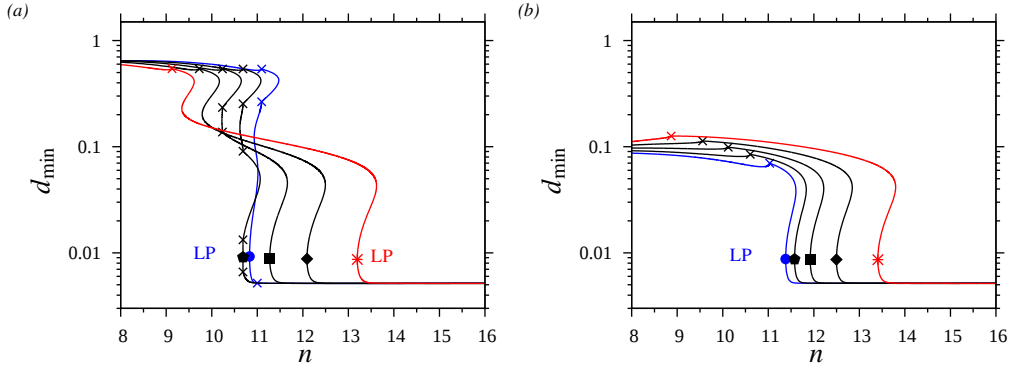


Figure 16: Self-similar airway contraction/expansion based on lung architecture model (5.1) of ?. Effect of R_0^* on TSS: $k=k_{\max}$, $R^*=R_{\text{Weib}}^*$, $\text{Re}_2=\text{Re}_2^{\text{Weib}}$, $\text{Ka}=30.6$ (mucus I and air I in table 1), $h_{\text{VE}}=0.24$. Circles: $R_0^*=11$ mm, pentagons: $R_0^*=10$ mm, squares: $R_0^*=9$ mm, diamonds: $R_0^*=8$ mm, asterisks: $R_0^*=7$ mm. (a) Co-current configuration: $M_{\text{dry}}<0$, $Q_{20}^*=2.5 \times 10^{-4} \text{ m}^3/\text{s}$; (b) counter-current configuration: $M_{\text{dry}}>0$, $Q_{20}^*=-2.5 \times 10^{-4} \text{ m}^3/\text{s}$.

In panels 15a and 15c, we have re-plotted the TSS from panel 14c, which corresponds to the co-current configuration, in terms of La and Ca. We recall that Ga is fixed in these calculations, so that they mimic a change in mucus surface tension at constant mucus dynamic viscosity, i.e. via surfactants. Interestingly, the onset of TPS in panel 15c collapses to a single threshold for all considered airway generations, i.e. $\text{Ca} \sim 0.05$.

By contrast, panels 15b and 15d represent TSS obtained by varying La and Ca at constant Bond number, $\text{Bo}=\rho_1 g R^{*2}/\sigma$. This mimics a change in mucus dynamic viscosity at constant mucus surface tension, e.g. via mucolytics. Based on these results, we may conclude that an increase in mucus viscosity allows to suppress TPS in favour of TWS. However, the resulting TWS are associated with small values of the core radius $d_{\min}$. Thus, although liquid plugs can be suppressed by increasing mucus viscosity, the airways nonetheless remain significantly obstructed, except for $n=10$ (blue curves with filled circles), where non-occluding TWS exist over the entire La and Ca ranges. This is in contrast to suppressing liquid plugs via surfactants (panels 15a and 15c).

Over the course of a breathing cycle, the lung expands during inspiration and contracts during expiration (?), according to a tidal volume of $V_{\text{T}}^* \sim 500 \times 10^{-6} \text{ m}^3$ in the case of an adult (?). Also, the lung geometry can differ quantitatively from one individual to another. Such geometrical effects are bound to modify the threshold for airway occlusion. We investigate this in a rudimentary way by changing the trachea radius R_0^* , while keeping the gas flow rate $Q_{20}^*=2.5 \times 10^{-4} \text{ m}^3/\text{s}$ constant. This amounts to assuming a self-similar contraction/expansion of the lung architecture, as controlled by R_0^* via (5.1).

Figure 16 represents TSS, in the form of $d_{\min}$ versus n curves, as obtained for different values of R_0^* , ranging from $R_0^*=7$ mm to $R_0^*=11$ mm, for the co-current (panel 16a) and counter-current (panel 16b) configurations. In both configurations, the onset of TPS is delayed toward distal airways upon decreasing R_0^* (compare curves with circles to curves with asterisks). This is because Re_{20} increases with decreasing R_0^* at constant Q_{20}^* , and we have seen in panels 14a and 14b that increasing the strength of the air flow delays airway occlusion. Comparing panels 16a and 16b, we observe that the effect of R_0^* is about the same for the co-current and counter-current configurations. Finally, we observe that the CI/AI transition moves to more distal airways as R_0^* is reduced, and that almost all TPS lie in the AI regime.

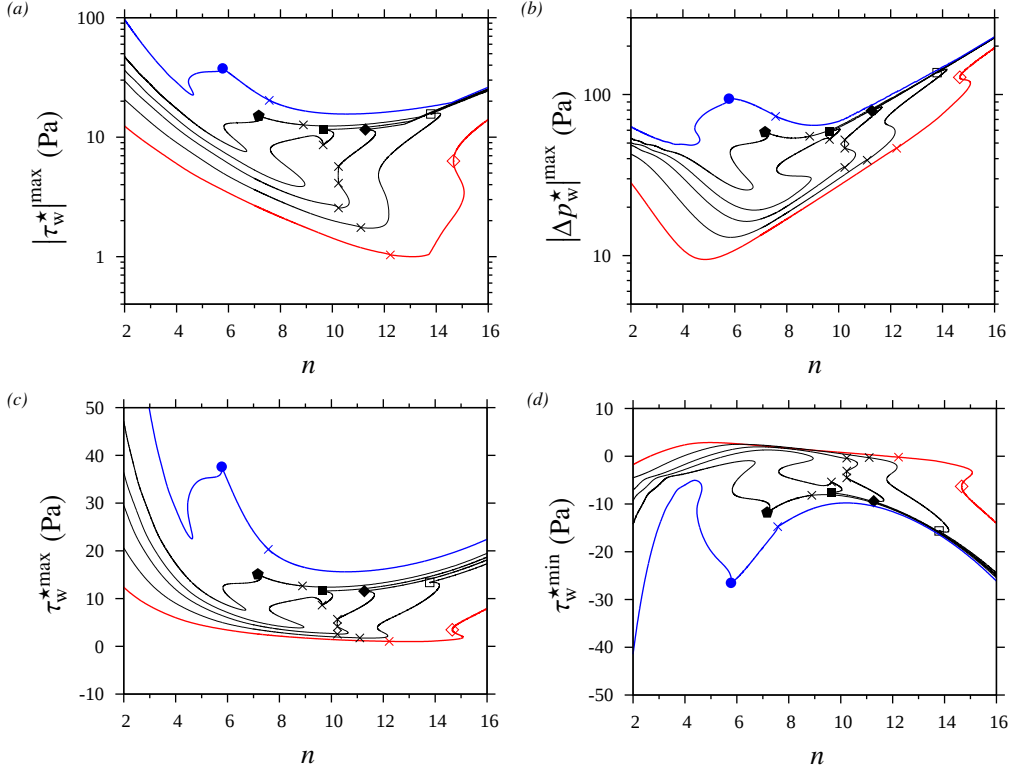


Figure 17: Wall stresses for TSS in figure 10a. Co-current configuration: $Re_{20}=590$, $Ka=30.6$, $k=k_{\max}$, $R^*=R_{\text{Weib}}^*$, $Re_2=Re_2^{\text{Weib}}$. Crosses mark CI/AI transition and other symbols correspond to LPs in figure 10a, marking the onset of TPS (except for open diamonds). Filled circles to asterisks: $h_{VE}=0.4, 0.3, 0.267, 0.24, 0.2$, and 0.15 . (a) Maximum magnitude of wall shear stress, τ_w (4.2b); (b) maximum magnitude of excess pressure, Δp_w (4.1); (c,d) maximum and minimum values of τ_w .

908

5.2. Wall stresses based on TSS

909 In section 4, we have shown that our WRIBL model (2.13) can accurately predict the wall
 910 stresses developed within the liquid film of a TPS, as well as the axial spatial derivatives
 911 of these stresses (see figure 7). Several studies have provided clear evidence that these
 912 mechanical quantities are responsible for damaging epithelial cells within the pulmonary
 913 airways, as a result of liquid plugs formed by the mucus film lining their inner surface.
 914 These studies either focused on a particular airway generation (?), or simplified the problem
 915 w.r.t. the pulmonary setting, e.g. by using rectangular instead of cylindrical channels (?????),
 916 or by neglecting gravity (????) or advection via the gas flow (?). Several of these works aimed
 917 at establishing correlations based on the fluid mechanical control parameters. In the current
 918 section, we aim to complement these works by accounting for how these parameters evolve
 919 throughout the respiratory network.

920 For this, we use our TSS from section 5.1 to investigate how the maximum magnitudes
 921 of the mechanical wall stresses and their space and time derivatives (calculated according
 922 to (4.1) and (4.2) section 4), evolve throughout the respiratory network, and how they are
 923 affected by the main control parameters. By comparing our WRIBL predictions of these
 924 measures with the ex vivo experimental data of ? and ?, we can assess the damage potential
 925 for epithelial cells.

In figure 17, we plot the maximum magnitudes of the wall shear stress (panel 17a), τ_w (4.2b), and excess pressure (panel 17b), Δp_w (4.1), versus the airway generation, n , for the TSS in figure 10a, where crosses mark the CI/AI transition and other symbols mark LPs corresponding to the onset of TPS (superscripts max and min will refer to extrema across the spatial profile of a TSS throughout). These maximum magnitudes are associated with the capillary ripple preceding the leading front of the liquid plug (??), which can be seen in figure 7a. From panel 17a, we may conclude that the maximum wall shear stress magnitude, $|\tau_w^*|^{\max}$, associated with TPS (curve portions to the right of polygonal symbols except for open diamonds) is an order of magnitude larger than in the ex vivo experiments of ?, i.e. $|\tau_w^*|^{\max} \sim 10$ Pa here versus $|\tau_w^*|^{\max} \sim 1$ Pa in the experiments, where significant epithelial cell damage was observed.

The trend of the $|\tau_w^*|^{\max}$ versus n curves in panel 17a is not trivial. Although the transition from TWS to TPS is always associated with a significant increase in the stress magnitude, $|\tau_w^*|^{\max}$, the latter quantity can intermediately decrease with increasing n for TPS (see e.g. curves with filled circle and filled pentagon). As a result, the overall maximum of $|\tau_w^*|^{\max}$ is not necessarily associated with the most distal airways. We also point out that for $n \geq 14$ the stress magnitude is dictated by the stress minimum, $\tau_w^{*\min}$, as can be deduced by comparing panels 17c and 17d, which represent $\tau_w^{*\min}$ and the stress maximum, $\tau_w^{*\max}$, with panel 17a. The excess pressure, $|\Delta p_w^*|^{\max}$, represented in panel 17b, displays more or less the same behaviour as $|\tau_w^*|^{\max}$, only that it attains considerably larger magnitudes in the most distal airways.

We now turn to figure 18, which represents the spatial and temporal derivatives of the wall shear stress, τ_w (panels 18a, 18c), and of the wall pressure, p_w (panels 18b, 18d) in terms of the airway generation, n , for the TSS in figure 10a. The landmark experiments of ? have proven that the maximum magnitude of the axial wall pressure derivative within a liquid plug, $|\partial_x p_w^*|^{\max}$ (panel 18b), is directly correlated with epithelial cell damage. According to our panel 18b, TSS attain the required level for high cell damage according to table 1 in ?, i.e. $|\partial_x p_w^*|^{\max} \sim 0.6$ Pa μm^{-1} , for all values of h_{VE} , i.e. in the most distal airways ($n \geq 14$). Further, the level for low but appreciable cell damage, $|\partial_x p_w^*|^{\max} \sim 0.3$ Pa μm^{-1} , can be attained in quite proximal airways, i.e. $n=6$ for $h_{VE}=0.4$ (blue line with filled circle).

According to panel 18a, the maximum magnitude of the wall shear stress derivative, $|\partial_x \tau_w^*|^{\max}$, is comparable in magnitude and behaves similarly to that of the wall pressure derivative in panel 18b. This is a significant difference with the experiments of ?, where the wall shear stress derivative was an order of magnitude smaller. This discrepancy could be due to the different flow configuration used in the experiment, i.e. a rectangular horizontal channel instead of a cylindrical tube. By contrast, our results in panel 18a imply that the spatial wall shear stress derivative is sufficiently large to cause significant epithelial cell damage. Moreover, as the loci of $|\partial_x \tau_w^*|^{\max}$ and $|\partial_x p_w^*|^{\max}$ do not coincide, but lie close to one another in the region of the capillary ripple downstream of the leading plug front (see figures 7c and 7d), the passage of a TPS subjects the epithelial cells to a double mechanical solicitation of lethal magnitude.

In that context, it is useful to evaluate the maximum magnitudes of the temporal derivatives of the wall stresses, $|\partial_t \tau_w^*|^{\max}$ and $|\partial_t p_w^*|^{\max}$, which are represented in panels 18c and 18d. For TSS, these quantities can be obtained from the spatial derivatives via the transformation $\partial_t = -c \partial_x$, where c denotes the TSS propagation speed. We observe that the overall maxima of $|\partial_t \tau_w^*|^{\max}$ and $|\partial_t p_w^*|^{\max}$ across the considered airway generation range can occur at significantly more proximal airways versus the spatial derivatives represented in panels 18a and 18b. For example, at $h_{VE}=0.4$ (curves with filled circles), the overall maximum of $|\partial_t \tau_w^*|^{\max}$ for TPS is reached at $n=6$ (panel 18c), whereas the overall maximum of $|\partial_x \tau_w^*|^{\max}$

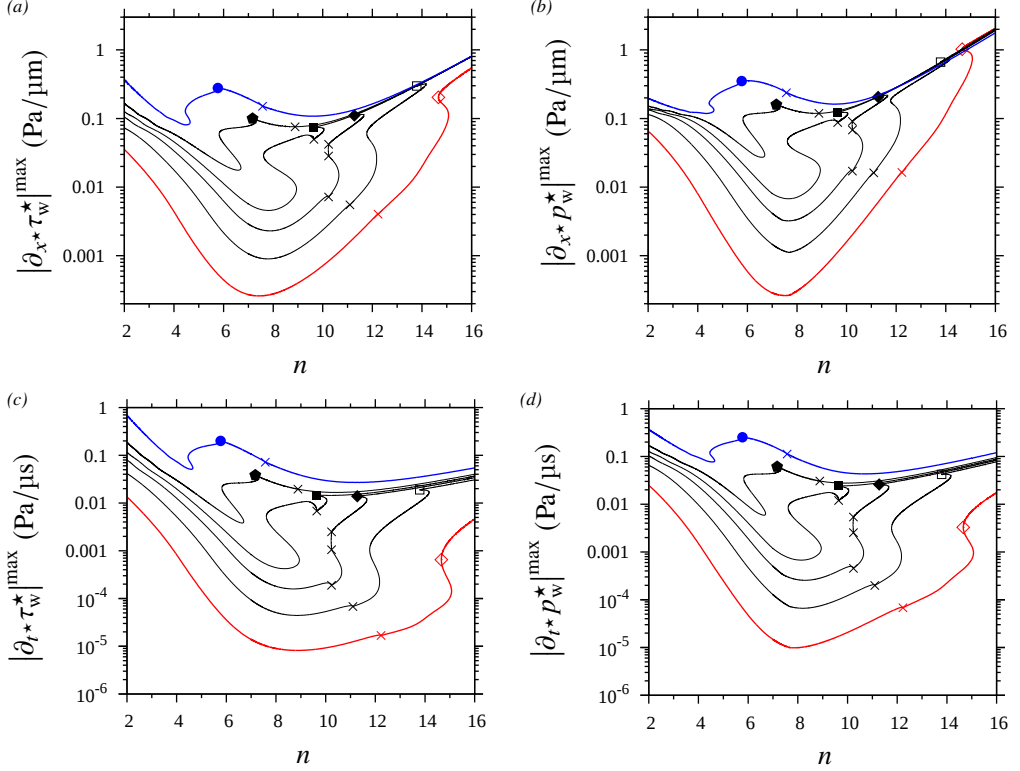


Figure 18: Maximum magnitudes of wall stress derivatives for TSS in figure 10a. Same parameters and attributions as in figure 17. (a,c) Wall shear stress τ_w according to (4.2b); (b,d) wall pressure p_w according to (4.2a); (a,b) spatial derivative ∂_x ; (c,d) temporal derivative $\partial_t = -c \partial_x$.

is reached at $n=16$ (panel 18a). Thus, the question arises as to whether epithelial cell damage is mainly driven by the temporal or the spatial variation of wall stresses.

Figure 19 represents the maximum magnitudes of the spatial wall stress derivatives for the counter-current configuration, i.e. for the TSS in figure 10b. In that case, TWS are associated with much smaller values of $d_{\min}$ and this greatly affects the wall stress derivatives. In particular, the overall maximum of $|\partial_x^* \tau_w^*|^{\max}$ is reached in the most proximal airways for almost all values of h_{VE} (panel 19a), and lies well above the threshold for significant epithelial cell damage ($|\partial_x^* \tau_w^*| \sim 1 \text{ Pa } \mu\text{m}^{-1}$), whereas it is always reached in the most distal airways for the co-current configuration (panel 18a). Also, the overall minimum of $|\partial_x^* \tau_w^*|^{\max}$ for the counter-current configuration (panel 19a) is greater by one order of magnitude versus the co-current configuration (panel 18a), meaning that the average level of mechanical solicitation is much greater in the counter-current configuration. Similar observations can be made for $|\partial_x^* p_w^*|^{\max}$ in panel 19b versus panel 18b. Thus, the orientation of a particular airway w.r.t. gravity may have a significant effect on the level of epithelial cell damage.

We proceed with figure 20, which reports the effects of the tracheal Reynolds number, Re_{20} , the Kapitza number, Ka , and the tracheal airway radius, R_0^* , on the maximum magnitude of the spatial derivative of the tangential wall shear stress, $|\partial_x^* \tau_w^*|^{\max}$. According to panels 20a and 20b, which correspond to the TSS for the co-current and counter-current configurations in figures 14a and 14b, the effect of Re_{20} is rather weak for all considered airway generations (from filled blue circles, marking $n=10$, to red asterisks, marking $n=14$). Thus, avoiding

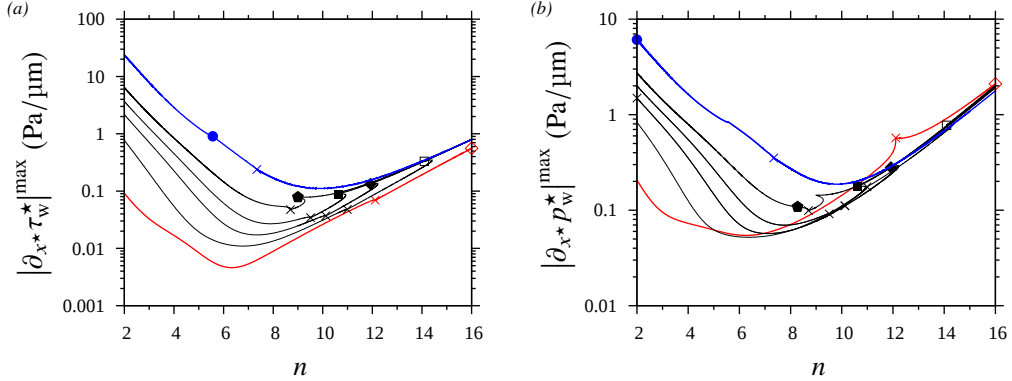


Figure 19: Maximum magnitudes of spatial wall stress derivatives for TSS in figure 10b. Counter-current configuration: $Re_{20} = -590$, $Ka = 30.6$, $k = k_{\max}$, $R^* = R_{\text{Weib}}^*$, $Re_2 = Re_2^{\text{Weib}}$. Crosses mark CI/AI transition and other symbols correspond to LPs in figure 10a, marking the onset of TPS (except for open diamonds). Filled circles to asterisks: $h_{VE} = 0.4, 0.3, 0.267, 0.24, 0.2$, and 0.15 . (a) Derivative of wall shear stress, τ_w , according to (4.2b); (b) derivative of wall pressure, p_w , according to (4.2a).

airway occlusion by increasing $|Re_{20}|$, as discussed w.r.t. figures 14a and 14b, comes at the expense of producing an additional wall shear stress, so that epithelial cell damage cannot be reduced in the end.

By contrast, panel 20c, which reports the effect of the Kapitza number based on the TSS in the counter-current configuration of figure 14c, shows that avoiding TPS by reducing Ka at constant Ga is associated with a very significant reduction in $|\partial_{x^*} \tau_w^*|^{\max}$, i.e. by one order of magnitude. Also, on the TPS branches (curve portions to the right of the symbols marking LPs in panel 20c), $|\partial_{x^*} \tau_w^*|^{\max}$ diminishes with decreasing Ka according to a power law, i.e. $|\partial_{x^*} \tau_w^*|^{\max} \propto Ka^C$, where $C > 0$ is a constant. Thus, decreasing Ka , i.e. by reducing the mucus surface tension, may help to significantly reduce the level of epithelial cell damage. We point out that we have compared our TPS data from panel 20c with the correlation in equation (33) of ? by re-plotting these in terms of the modified capillary number, $\bar{Ca} = \mu_1 c^* / \sigma$, and evaluating the minimum film thickness, $h_{\min}$. Although the trend of $|\partial_{x^*} \tau_w^*|^{\max}$ versus $\bar{Ca}$ is similar, the trend in terms of the airway generation, n , is inverted. This may be due to the finite length of the TPS considered here (infinite plugs were considered in the reference), or the effect of inertia and/or axial viscous diffusion, which were not accounted for in the model of ?.

Finally, panel 20d demonstrates the effect of a self-similar expansion/compression of the lung, by plotting $|\partial_{x^*} \tau_w^*|^{\max}$ versus n for the TSS in figure 16a, which correspond to different values of the tracheal airway radius, R_0^* . Even though a reduction of R_0^* allows to delay the formation of TPS to more distal airways (as discussed w.r.t. figure 16a), its net effect is to increase the wall stress derivative for all n . This is due to the fact that the tracheal gas flow rate, Q_0^* , is kept constant in panel 20d, which means that Re_2 increases at a given n when decreasing R_0^* .

6. Conclusion

In the current manuscript, we have used the augmented cylindrical WRIBL model (2.13), which was proposed in the appendix of ?, to simulate liquid plugs in narrow cylindrical tubes. In the first part (section 4), we have extensively validated our model by comparing with occlusion experiments from the literature and with our own DNS. Thereby, we have

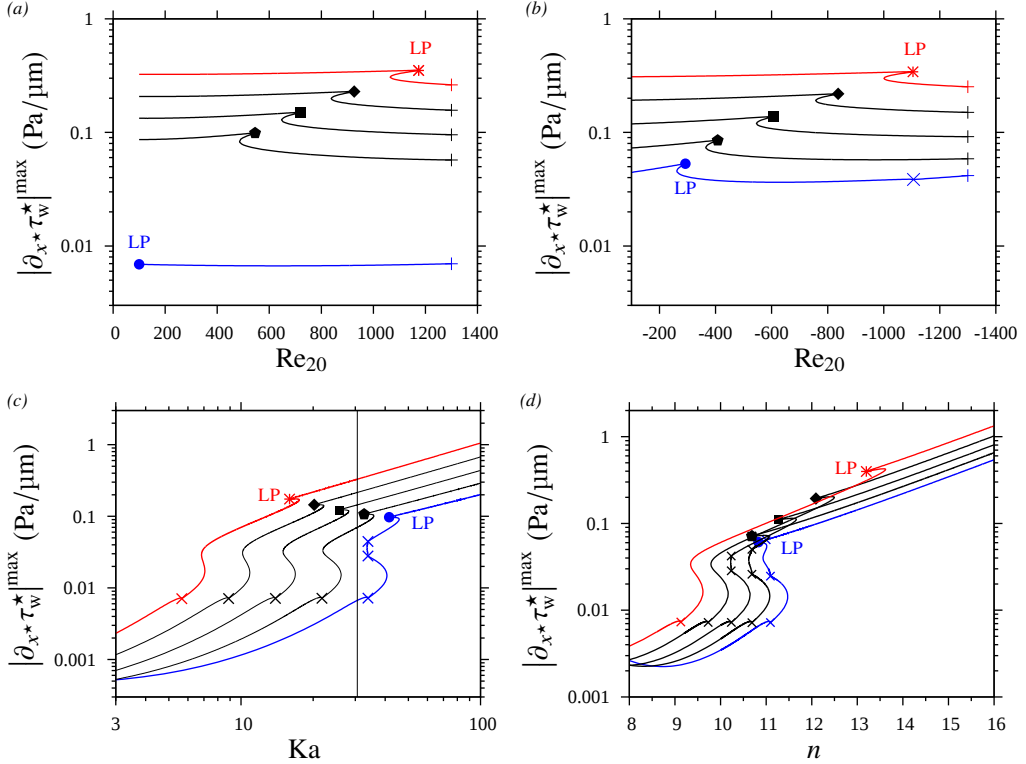


Figure 20: Effect of different control parameters on the maximum magnitude of the spatial wall shear stress derivative, $\partial_x \tau_w$ (4.2b). Parameters and symbols as in figures representing corresponding TSS. (a) Effect of air flow: co-current configuration. TSS according to figure 14a; (b) effect of air flow: counter-current configuration. TSS according to figure 14b; (c) change in Ka at fixed Ga : co-current. TSS according to figure 14c; (d) effect of trachea radius R_0^* : co-current. TSS according to figure 16a.

demonstrated that our model accurately captures: (1) the linear and nonlinear dynamics of liquid plug formation (figures 4 and 8); (2) the flow field associated with TPS (figure 6); (3) the speed and entrained gas flow rate of TPS and their variation with the liquid volume (figures 5 and 9); and (4) the associated tangential and normal wall stresses, as well as their spatial derivatives (figure 7). In the second part (section 5), we then applied our WRIBL model to predict liquid plug formation by the mucus film coating the inner surface of the pulmonary airways, based on a continuum representation of the tracheobronchial tree, using the lung architecture model (5.1) of ?, which describes how the airway radius, R^* , air Reynolds number, Re_2 , and airway length, L^* , vary with the airway generation, n . Here, we have assumed typical conditions for assisted ventilation (?), and taken into account the effect of gravity by comparing the co-current and counter-current configurations.

This was done via low-cost calculations based on numerical continuation that allow to track the evolution of travelling-state solutions (TSS), i.e. travelling-wave solutions (TWS) and travelling-plug solutions (TPS), in terms of n , throughout the conductive region of the tracheobronchial tree ($n < 16$). An important feature of our WRIBL model is that it provides a direct continuation path from TWS to TPS (see e.g. figure 3), which allows to readily identify the threshold for liquid plug formation, e.g. in terms of the airway generation, n (see e.g. figure 10). In our continuation calculations, we have imposed the most-dangerous wave number, $k = k_{\max}$, which is either given by the spatially most-amplified mode, in the case of

convective instability (CI), or by the absolute mode, in the case of absolute instability (AI). This wave number, $k_{\max}$, is determined via simultaneous (spatial or spatio-temporal) linear stability calculations based on the dispersion relation of our WRIBL model (3.3), which allow to identify the CI/AI transition (?). As a result, we were able to track TSS that are most likely to emerge in a real system. On the one hand, our WRIBL continuation calculations enabled us to identify the critical conditions for liquid plug formation in the conducting zone of the tracheobronchial tree, and the effect of the principal control parameters thereon (section 5.1). On the other hand, they allowed us to predict the maximum magnitude of the wall stresses (and their spatial and temporal derivatives) exerted by the mucus film on the airway wall and to compare these with the thresholds for epithelial cell damage (section 5.2), as identified in the landmark experiments of ?.

Our main conclusions are as follows. (1) Liquid plugs form for values of the liquid hold up, h_{VE} , larger than $h_{VE} \sim 0.15$, starting in the most distal airways ($n=16$), and moving toward more proximal airways with increasing h_{VE} . At $n=6$, a holdup of $h_{VE}=0.4$ would be required to reach occlusion, which is quite unlikely in a physiological setting. These observations are in agreement with postmortem studies identifying the major sites of airway obstruction in chronic obstructive pulmonary disease at $n \geq 8$ (?) and with the state of the art on this topic published by ?. (2) TPS are associated with a very significant increase in the pressure drop when the gas flow rate, Q_2^* , is imposed (figure 10c), and with a drastic reduction in Q_2^* when the gas pressure drop is imposed (figure 11b). (3) In most cases, TPS lie in the AI regime, i.e. the base flow is absolutely unstable and plug formation is highly likely. (4) Although the critical n for TPS formation is not significantly affected by the airway orientation w.r.t. gravity, TWS in the counter-current case display a much larger amplitude (compare figures 10a and 10b), which leads to a significant increase (by more than one order of magnitude) of the gas pressure drop (compare 10c and 10d). (5) In some regimes, the liquid volume associated with TWS and TPS can lie below the limit for liquid unduloids or fully-wetting spherical liquid plugs (figures 13a and 13b), making a dewetting of the mucus film possible, e.g. in between inspiration and expiration strokes. (6) While the typical wavelength of TPS corresponds to about half the length of a considered airway, $\Lambda/L_{Weibel} \sim 0.5$, their travelling distance is many times larger than L_{Weibel} (figure 12), meaning that liquid plugs can easily propagate into more distal airways. (7) Liquid plug formation can be avoided in all generations by increasing the air flow rate (figures 14a and 14b), e.g. via assisted ventilation, and by reducing the surface tension via surfactants (variation of Kapitza number at constant liquid Galileo number in figures 14c and 14d). Although TPS can also be suppressed by increasing mucus viscosity (reduction of Laplace number at constant Bond number in figure 15b), the resulting TWS still significantly obstruct the airways. For a given liquid holdup, the onsets of TPS in distal airway generations collapse to a single critical value for the capillary number, Ca (figures 15c and 15d). (8) Contraction/expansion of the lung, moves the critical airway generation for TPS formation to more distal/proximal airways (figure 16). (9) Transition from TWS to TPS is associated with a drastic increase in the maximum magnitudes, $|\partial_x \tau_w^*|^{\max}$ and $|\partial_x p_w^*|^{\max}$, of the spatial derivatives of the tangential and normal wall stresses (figure 18), and both magnitudes attain values well beyond the limit for epithelial cell damage according to the ex vivo experiments of ?, even in quite proximal airways ($n=6$). (10) Depending on the orientation of gravity, the wall stress derivative magnitudes attain their maxima in the most proximal (counter-current configuration, figure 19a) or in the most distal (co-current configuration, figure 18a) airways. (11) The temporal wall stress derivative magnitudes, $|\partial_t \tau_w^*|^{\max}$ and $|\partial_t p_w^*|^{\max}$, attain their maximum in much more proximal airways versus the spatial derivatives (figures 18c and 18d). Thus, determining which one of these measures is most representative to assess epithelial cell damage is an important future task. (12)

Preventing TPS formation by increasing the air flow rate (figures 14a and 14b) is associated with consistently high levels of the spatial wall shear stress derivative (figures 20a and 20b). In some cases, these lie beyond the threshold for epithelial cell damage. (13) A significant reduction in the wall stress derivatives can be achieved by reducing mucus surface tension (figure 20c).

Future work should focus on extending our WRIBL model to further approach the physiological setting of airway occlusion. In particular, the model should be extended to the fully three-dimensional case, in order to represent configurations where the airway is not aligned with gravity (?). Another promising direction is to study plug formation via transient computations (??). This would allow to simulate assisted ventilation regimes with the goal of predicting optimal operating conditions, where plug formation is avoided over the course of a breathing cycle while wall stresses (and the associated epithelial cell damage) are minimized. Also, the presence of the periciliary liquid layer (?), the effect of beating cilia (?), the non-Newtonian mucus rheology (?), and the secretion of mucus should be accounted for. On the other hand, our model could be applied to other configurations involving liquid plugs, e.g. for the cleaning of contaminated surfaces (??) or the filtering of particles (?). In the context of surfactant replacement therapy (SRT), it would be interesting to study the stability of the TPS predicted by our WRIBL model. Instability can represent a second route toward plug rupture, which may occur earlier than the loss of TPS at the LP connecting TWS and TPS (LP2 in figure 3a). Such an investigation would allow to extend the work of ?, where gravity was neglected.

Acknowledgements. The author wishes to thank Christian Ruyer-Quil and Marcel Filoche for fruitful discussions.

Declaration of Interests. The author reports no conflict of interest.

Funding. The author gratefully acknowledges funding provided by CNRS Ingénierie via équipe-project MUCUS.

Appendix A. Full expressions for coefficients introduced in section 2

The source terms, Z_k , in the boundary value problem (2.9) for the axial base velocity profiles, $\hat{u}_k$, are defined as follows:

$$Z_1 = -\text{Re}_1^{-1} \{C_{11}Q_1 + C_{12}Q_2\}, \quad Z_2 = -\text{Re}_2^{-1} \{C_{21}Q_1 + C_{22}Q_2\}, \quad (\text{A } 1a)$$

with the constants, C_{ij} , according to:

$$C_{11} = \frac{8}{\Xi} \{4\Pi_\mu [\ln(d) - \ln(R)] - 1\}, \quad (\text{A } 1b)$$

$$C_{12} = \frac{16}{\Xi} \frac{\Pi_\mu \Pi_u}{d^2} \{2d^2 [\ln(d) - \ln(R)] - d^2 + R^2\}, \quad (\text{A } 1c)$$

$$C_{21} = \frac{16}{\Xi} \frac{1}{d^2 \Pi_u} \{2d^2 [\ln(d) - \ln(R)] - d^2 + R^2\}, \quad (\text{A } 1d)$$

$$C_{22} = \frac{8}{\Xi} \frac{1}{d^4} \{4d^4 [\ln(d) - \ln(R)] - 3d^4 + 4d^2 R^2 - R^4\}, \quad (\text{A } 1e)$$

where the common term, Ξ , is defined as:

$$\Xi = \pi \{4 [d^4 (\Pi_\mu - 1) - \Pi_\mu R^4] (\ln(d) - \ln(r)) \quad (\text{A } 1f)$$

$$-(d^2 - R^2) [d^2 (4\Pi_\mu - 3) + (1 - 4\Pi_\mu) R^2]\}, \quad (\text{A } 1g)$$

1130 and where the chosen scaling implies $R=1$.

1131 The coefficients, f_{ki} , of the axial base velocity profiles, $\hat{u}_k$, according to (2.10a) are defined
 1132 as follows:

$$1133 \quad f_{11} = \frac{1}{4}C_{11}(r^2 - R^2) + D_{11} [\ln(r) - \ln(R)], \quad (\text{A } 2a)$$

$$1134 \quad f_{12} = \frac{1}{4}C_{12}(r^2 - R^2) + D_{12} [\ln(r) - \ln(R)], \quad (\text{A } 2b)$$

$$1135 \quad f_{21} = \Pi_u^{-1}F_{11} + \frac{1}{4}C_{21}(r^2 - d^2), \quad (\text{A } 2c)$$

$$1136 \quad f_{22} = \Pi_u^{-1}F_{12} + \frac{1}{4}C_{22}(r^2 - d^2), \quad (\text{A } 2d)$$

1137 where we have introduced the constants, D_{ij} :

$$1138 \quad D_{11} = -\frac{1}{2}d^2(C_{11} - \Pi_\mu \Pi_u C_{21}), \quad (\text{A } 2e)$$

$$1139 \quad D_{12} = -\frac{1}{2}d^2(C_{12} - \Pi_\mu \Pi_u C_{22}). \quad (\text{A } 2f)$$

1140