



**HAL**  
open science

## Towards a techno-economic and life-cycle assessment simulation tool for H2 / Natural gas CHP-based systems to help local energy policies

Paul Robineau, Maria Boltoeva, Nicolas Arbor, Gaétana Quaranta

### ► To cite this version:

Paul Robineau, Maria Boltoeva, Nicolas Arbor, Gaétana Quaranta. Towards a techno-economic and life-cycle assessment simulation tool for H2 / Natural gas CHP-based systems to help local energy policies. Brightcon 2024, Sep 2024, Hambourg, Germany. , 2024. hal-04812009

**HAL Id: hal-04812009**

**<https://hal.science/hal-04812009v1>**

Submitted on 29 Nov 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial - NoDerivatives 4.0 International License

**Paul Robineau, Maria Boltoeva, Nicolas Arbor and Gaetana Quaranta**

23 rue du Loess  
BP 28 67037 STRASBOURG CEDEX 2

Université de Strasbourg, CNRS, IPHC UMR 7178, F-67000 Strasbourg, France

paul.robineau@iphc.cnrs.fr  
paul-robineau.github.io

## Context and objectives

The **CO2Inno** project is a France-Germany cross-border living laboratory, one of its key objectives being an comprehensive assessment of H<sub>2</sub> use in potential decentralized energy systems<sup>[1]</sup>. It involves use of H<sub>2</sub> as a fuel for **combined heat & power (CHP) plants**, due to their high efficiency.

**The goal is to provide users (e.g. local authorities, NGO, companies, etc.) with a tool allowing to test various configurations of system components and functioning, evaluate their feasibility (technical), interest (economical), and impact (environmental).**

This is part of a contemporary trend to try and combine what is known as **techno-economic analysis (TEA)** and its environmental counterpart, the **life cycle assessment (LCA)**<sup>[2]</sup>. This combination is challenging due to methodological considerations, but also because there is nearly no operational tool at disposal to conduct such integrated assessments. Moreover, the most advanced propositions are based on proprietary software<sup>[3]</sup>.

### References


- [1] CO2Inno Project. Interreg Upper Rhine 2021–2027, A1.3. URL.
- [2] Mahmud et al. 2021. Integration of techno-economic analysis and life cycle assessment for sustainable process design – A review. JCP 317, 128247. DOI.
- [3] Sharma et al. 2023. Sizing a hybrid hydrogen production plant including life cycle assessment indicators by combining NSGA-III and principal component analysis (PCA). Energy Convers. Manag. X 18, 100361. DOI.
- [4] Beerlage et al. 2024. Decentralised hydrogen fuelled gas engine CHP units: a feasibility study with Modelica. Proc. American Modelica Conference. URL.
- [5] Mutel, C., 2017. Brightway: An open source framework for Life Cycle Assessment. J. Open Source Softw. 2, 236. DOI.
- [6] Sacchi et al. 2022. PRospective EnvironMental Impact asSEment (premise): A streamlined approach to producing databases for prospective life cycle assessment using integrated assessment models. Renew. Sustain. Energy Rev. 160, 112311. DOI.
- [7] Gerloff 2021. Comparative Life-Cycle-Assessment analysis of three major water electrolysis technologies while applying various energy scenarios for a greener hydrogen production. J Energy Storage 43, 102759. DOI.
- [8] Zhao et al. 2020. Life cycle assessment of H2O electrolysis technologies. Int. J. Hydrog. Energy 45, 23765–23781. DOI.

Our ongoing work propose a framework for such a task, while incorporating an **open science approach wherever possible**. It is built on a case study of the Offenburg municipality buildings energy requirements.

Firstly, a simulated energy system have been developed in **OpenModelica** by our project partners to investigate the boundaries of technical feasibility<sup>[4]</sup>. Based on these results, we are conducting a **parametric prospective LCA** of every system components<sup>[5-6]</sup>. Indeed, even though the burning of H<sub>2</sub> can be considered climate neutral if considered in the use phase only, the environmental impact during the whole life cycle is not – nor the assessment should be limited to CO<sub>2</sub> emissions<sup>[7-8]</sup>. Disaggregated results will then be imported back into the **OpenModelica** simulation to allow dynamic access to **LCA** results, depending on simulation parameters set by users. **This would act as a decision support tool helping these actors plan their local energy transition.**

## Currently missing regionalization

The IAM models (IMAGE/REMIND) used in the premise tool have slightly different geographical definitions and resolution. **None of them display a country-level resolution regarding Europe**. This prevents comparative assessment of the relevance of the H<sub>2</sub> / Natural Gas CHP-based systems to guide local planning policies in FR/DE.

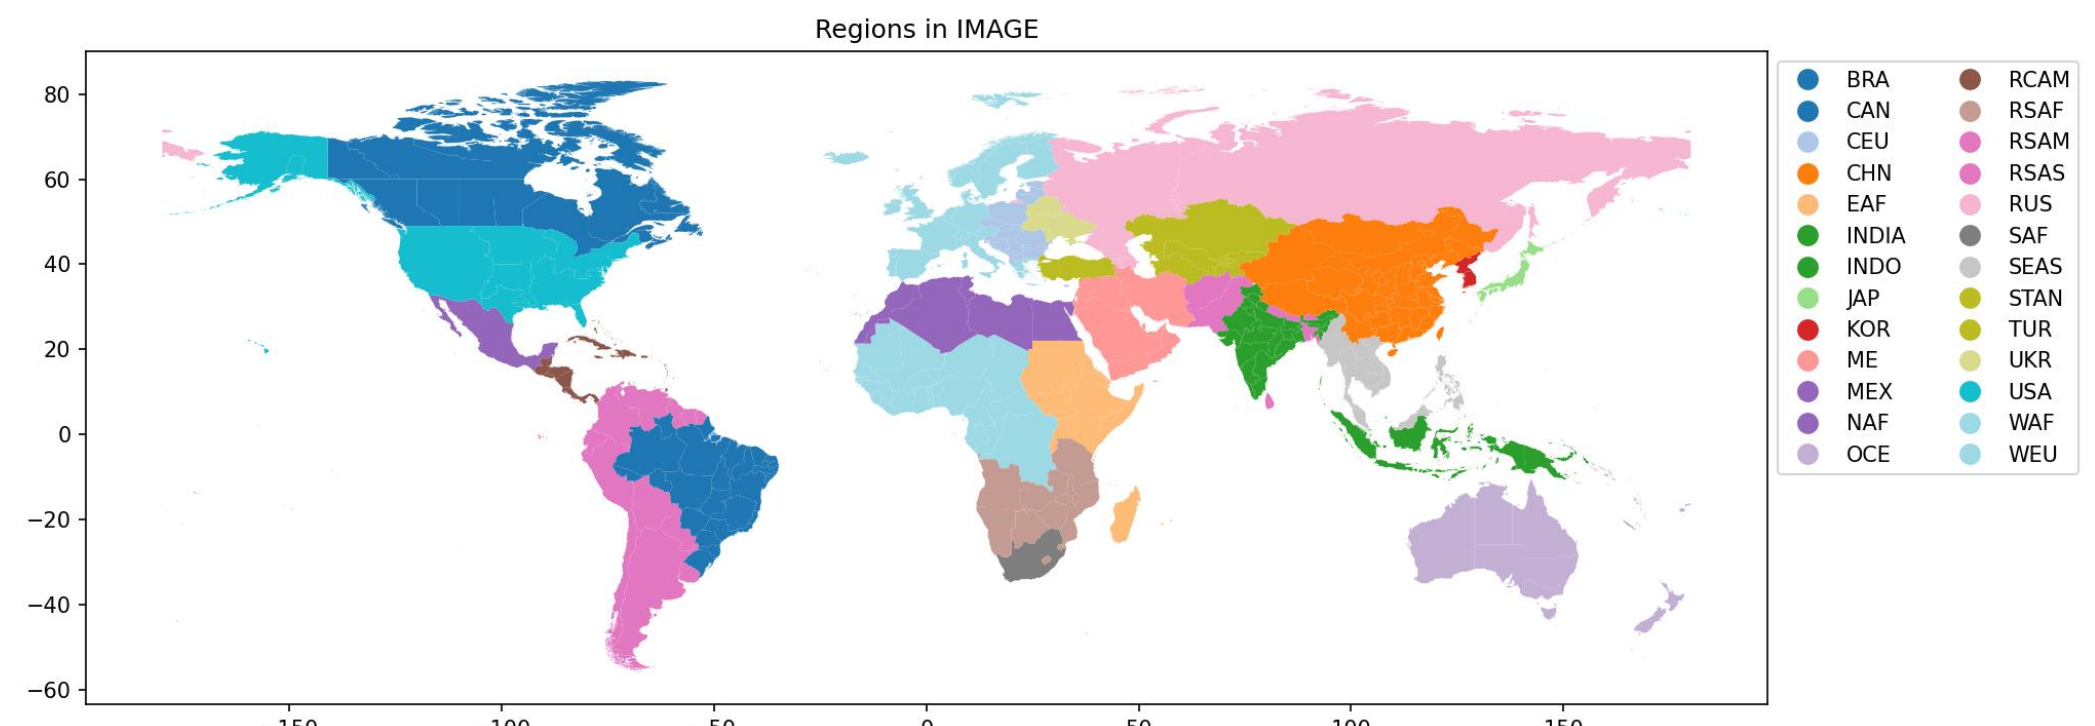

Premise documentation: Geographical mapping of IMAGE. <https://premise.readthedocs.io/en/latest/transform.html#geographical-mapping>

To resolve this limitation, **we need to integrate (via premise) additional specific scenarios regarding the evolution of the electricity mix in FR and DE**, on the model of what is already available for CH.


Creation of FR scenarios based on the RTE & ADEME reports have been realized by R. Sacchi and his colleagues, and should be available at the end of 2024.

**We are currently looking forward to realize the same kind of work for DE based on the Fraunhofer ISE & GEA reports.**

Indeed, based on the literature, it is reasonable to consider that this parameter is the most critical for the relevance of modeling the life-cycle impacts of such systems.

## System description



A simulated energy system have been developed in **OpenModelica** by partners in the **CO2Inno** project<sup>[4]</sup>.

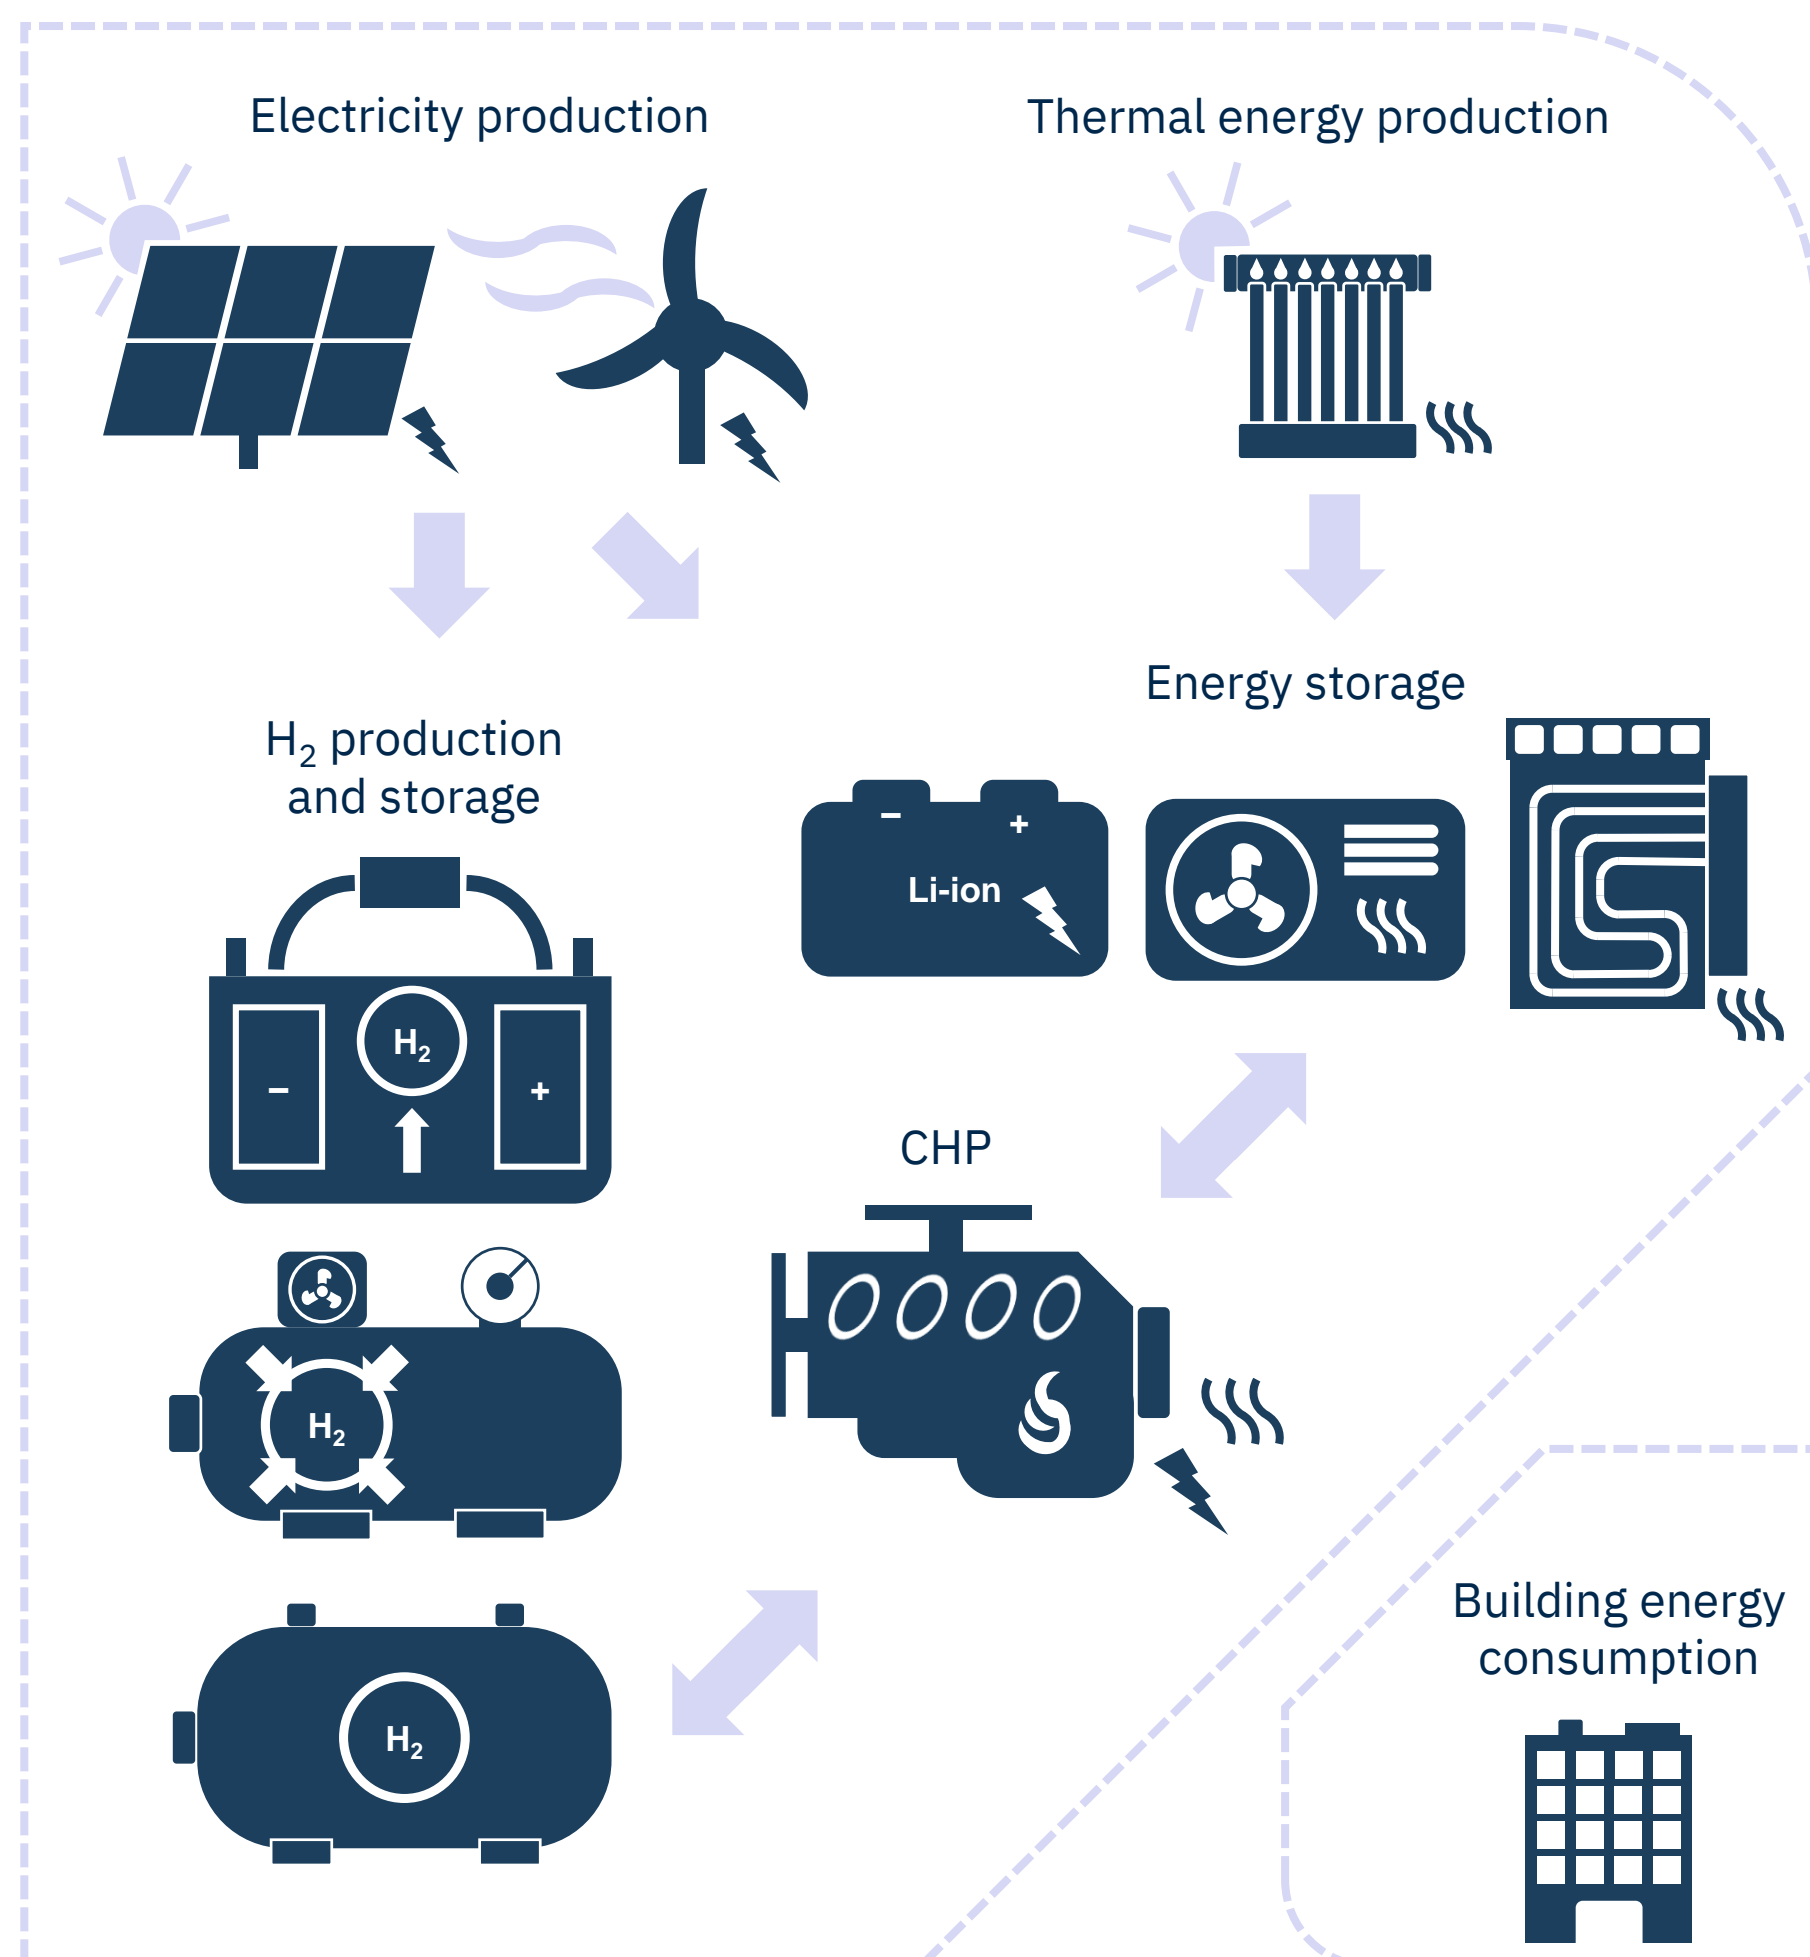

Real data of thermal and electrical energy consumption of municipality buildings Provided by the Offenburg city, with 1 h time resolution for one year  
 → Determination of energy system requirements for 2 main cases:  
 1 building alone (decentralization at building level)  
 5 buildings, shared equipment (decentralization at building complexes level)  
 → Multiple what-if situations tested to obtain reasonable dimensioning intervals for each single system component

	For 1 building			For all 5 buildings		
	From	To	Unit	From	To	Unit
PV	0	1000	m <sup>2</sup>	7000	15000	m <sup>2</sup>
Wind turbine	0	1	MW	0.5	1.5	MW
Battery	3	20	kWh	200	500	kWh
Electrolyzer	14	40	kW	400	700	kW
Thermal Storage	0,05	1	m <sup>3</sup>	10	20	m <sup>3</sup>
Gas Engine CHP	2,85	20	kW <sub>el</sub>	30	115	kW <sub>el</sub>
Heat Pump	5	40	kW <sub>th</sub>	135	220	kW <sub>th</sub>
Solar Thermal	5	15	m <sup>2</sup>	0	30	m <sup>2</sup>
H <sub>2</sub> Tank	1	100	m <sup>3</sup>	5	1000	m <sup>3</sup>
Compressor	80 bar and	4,44 Nm <sup>3</sup> /h		80 bar and	77 Nm <sup>3</sup> /h	

## Framework for integration of LCA results into the TEA tool

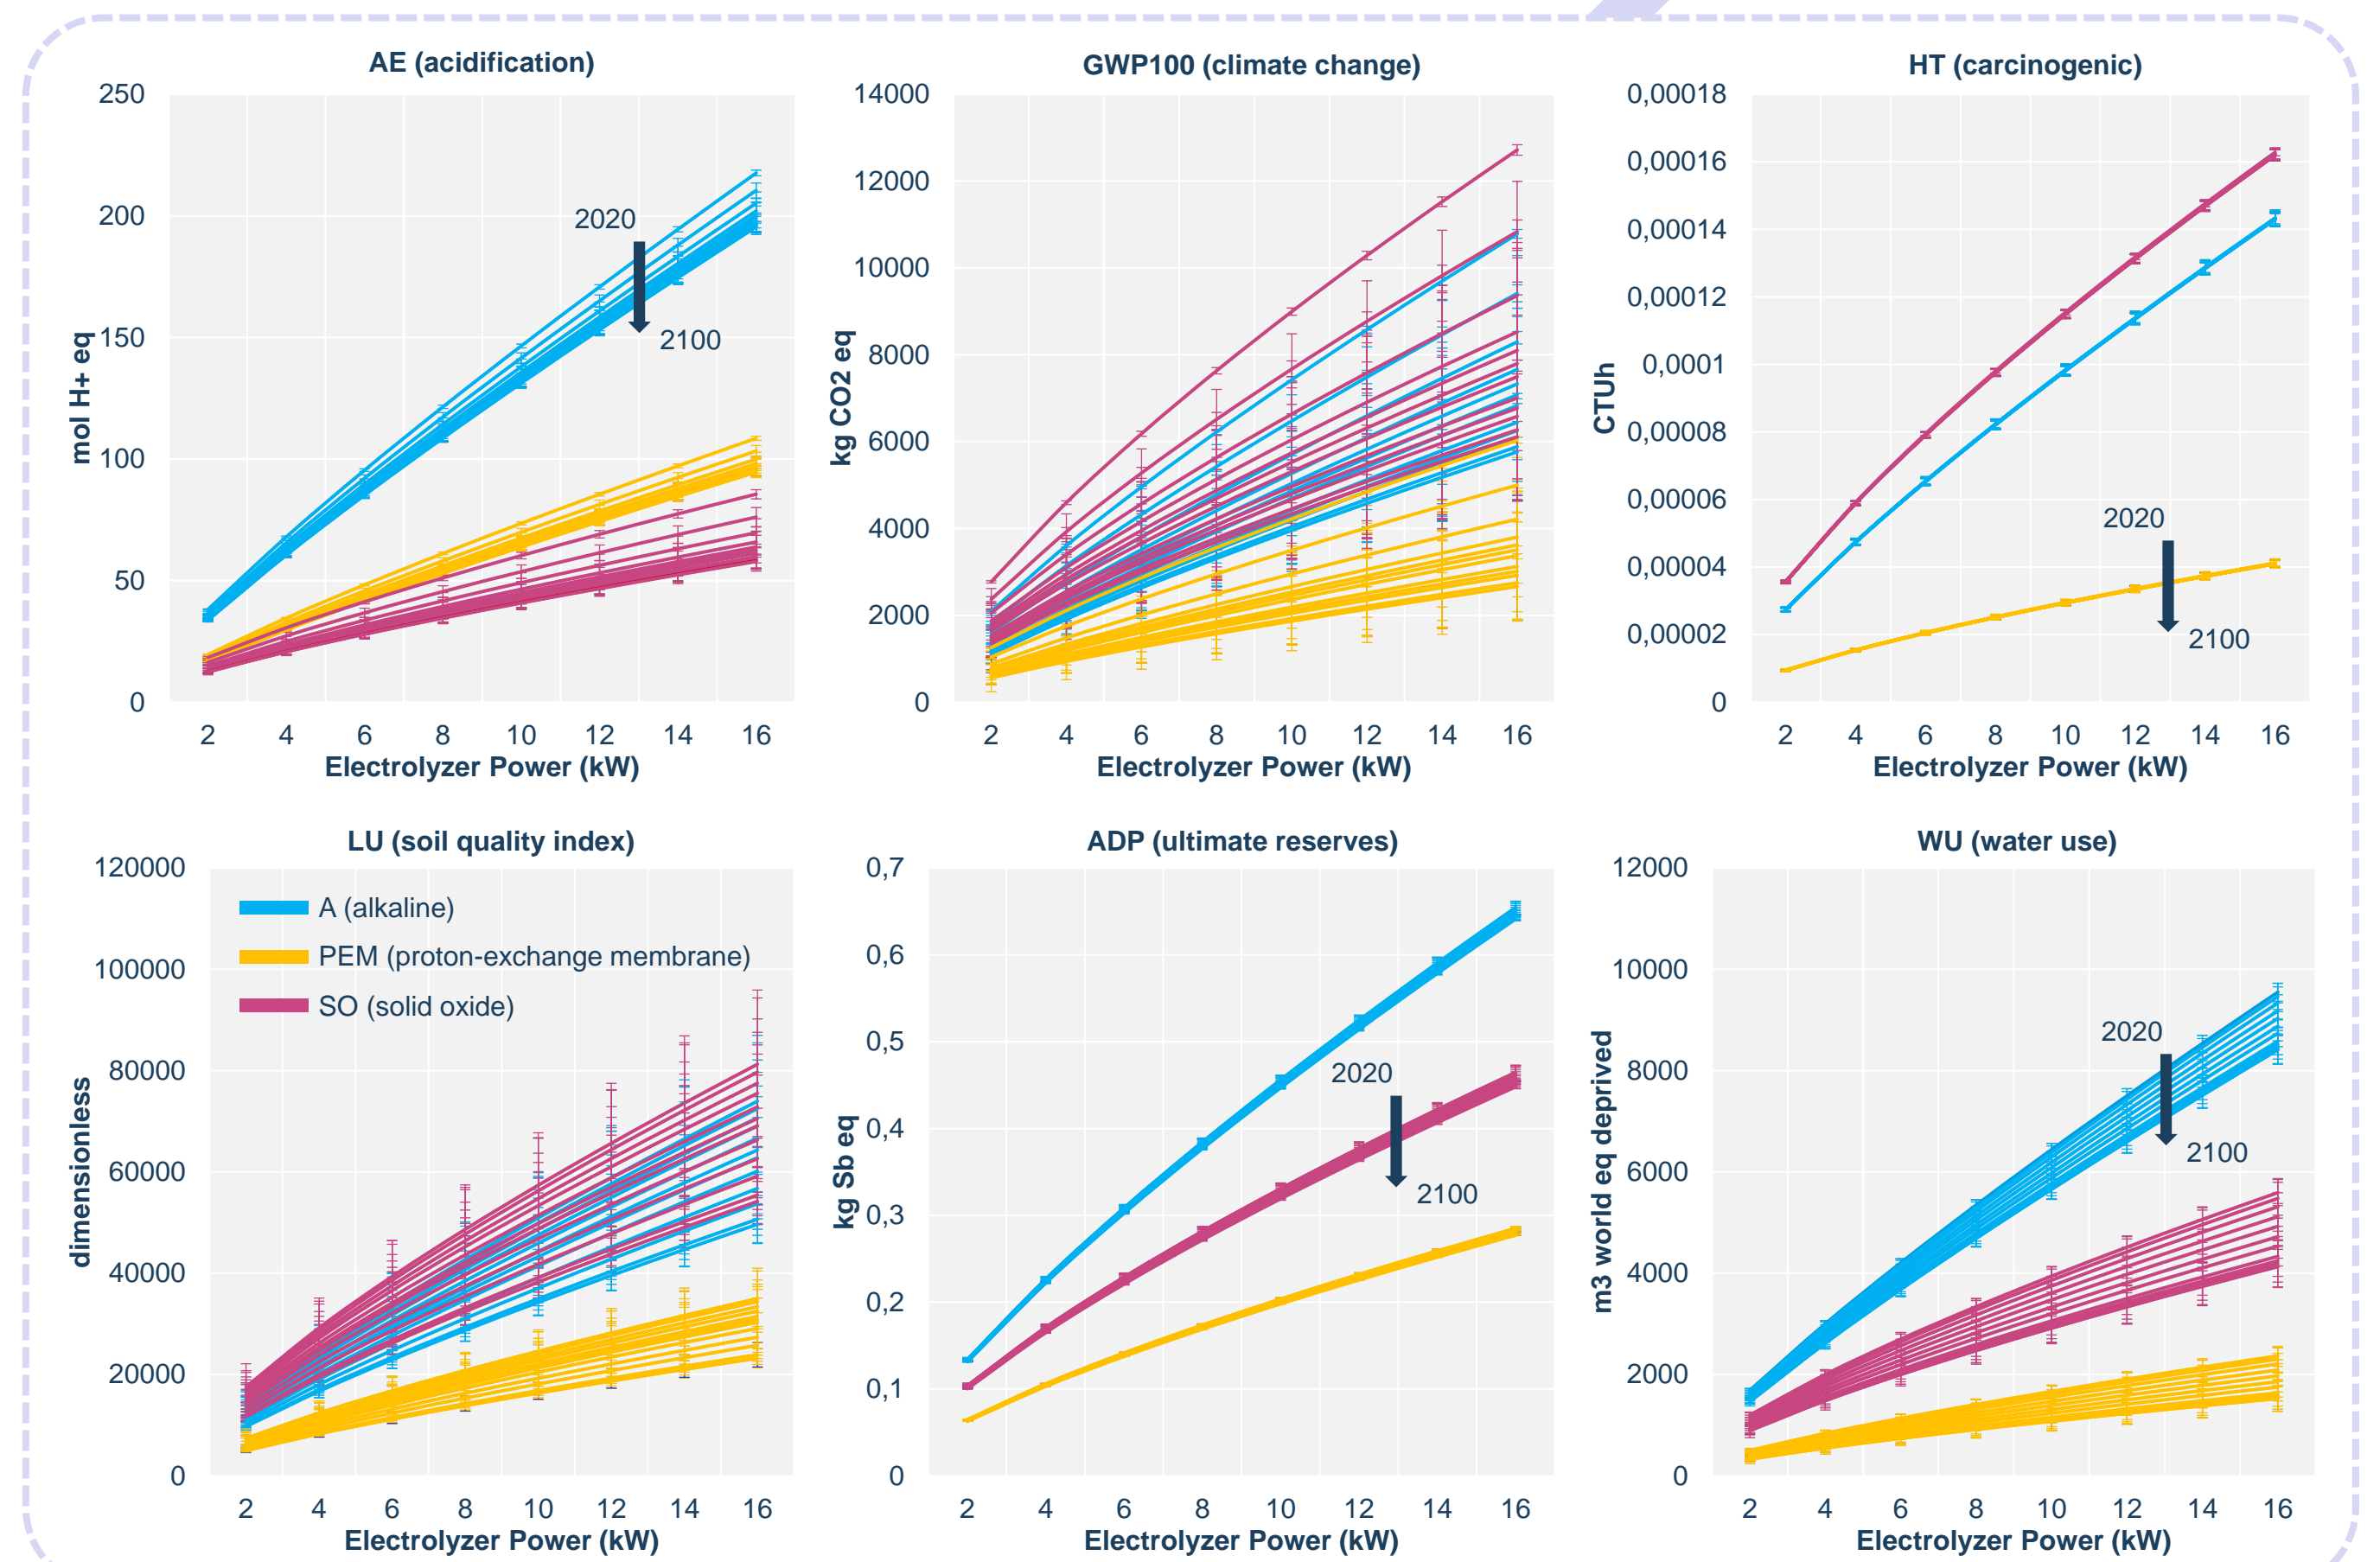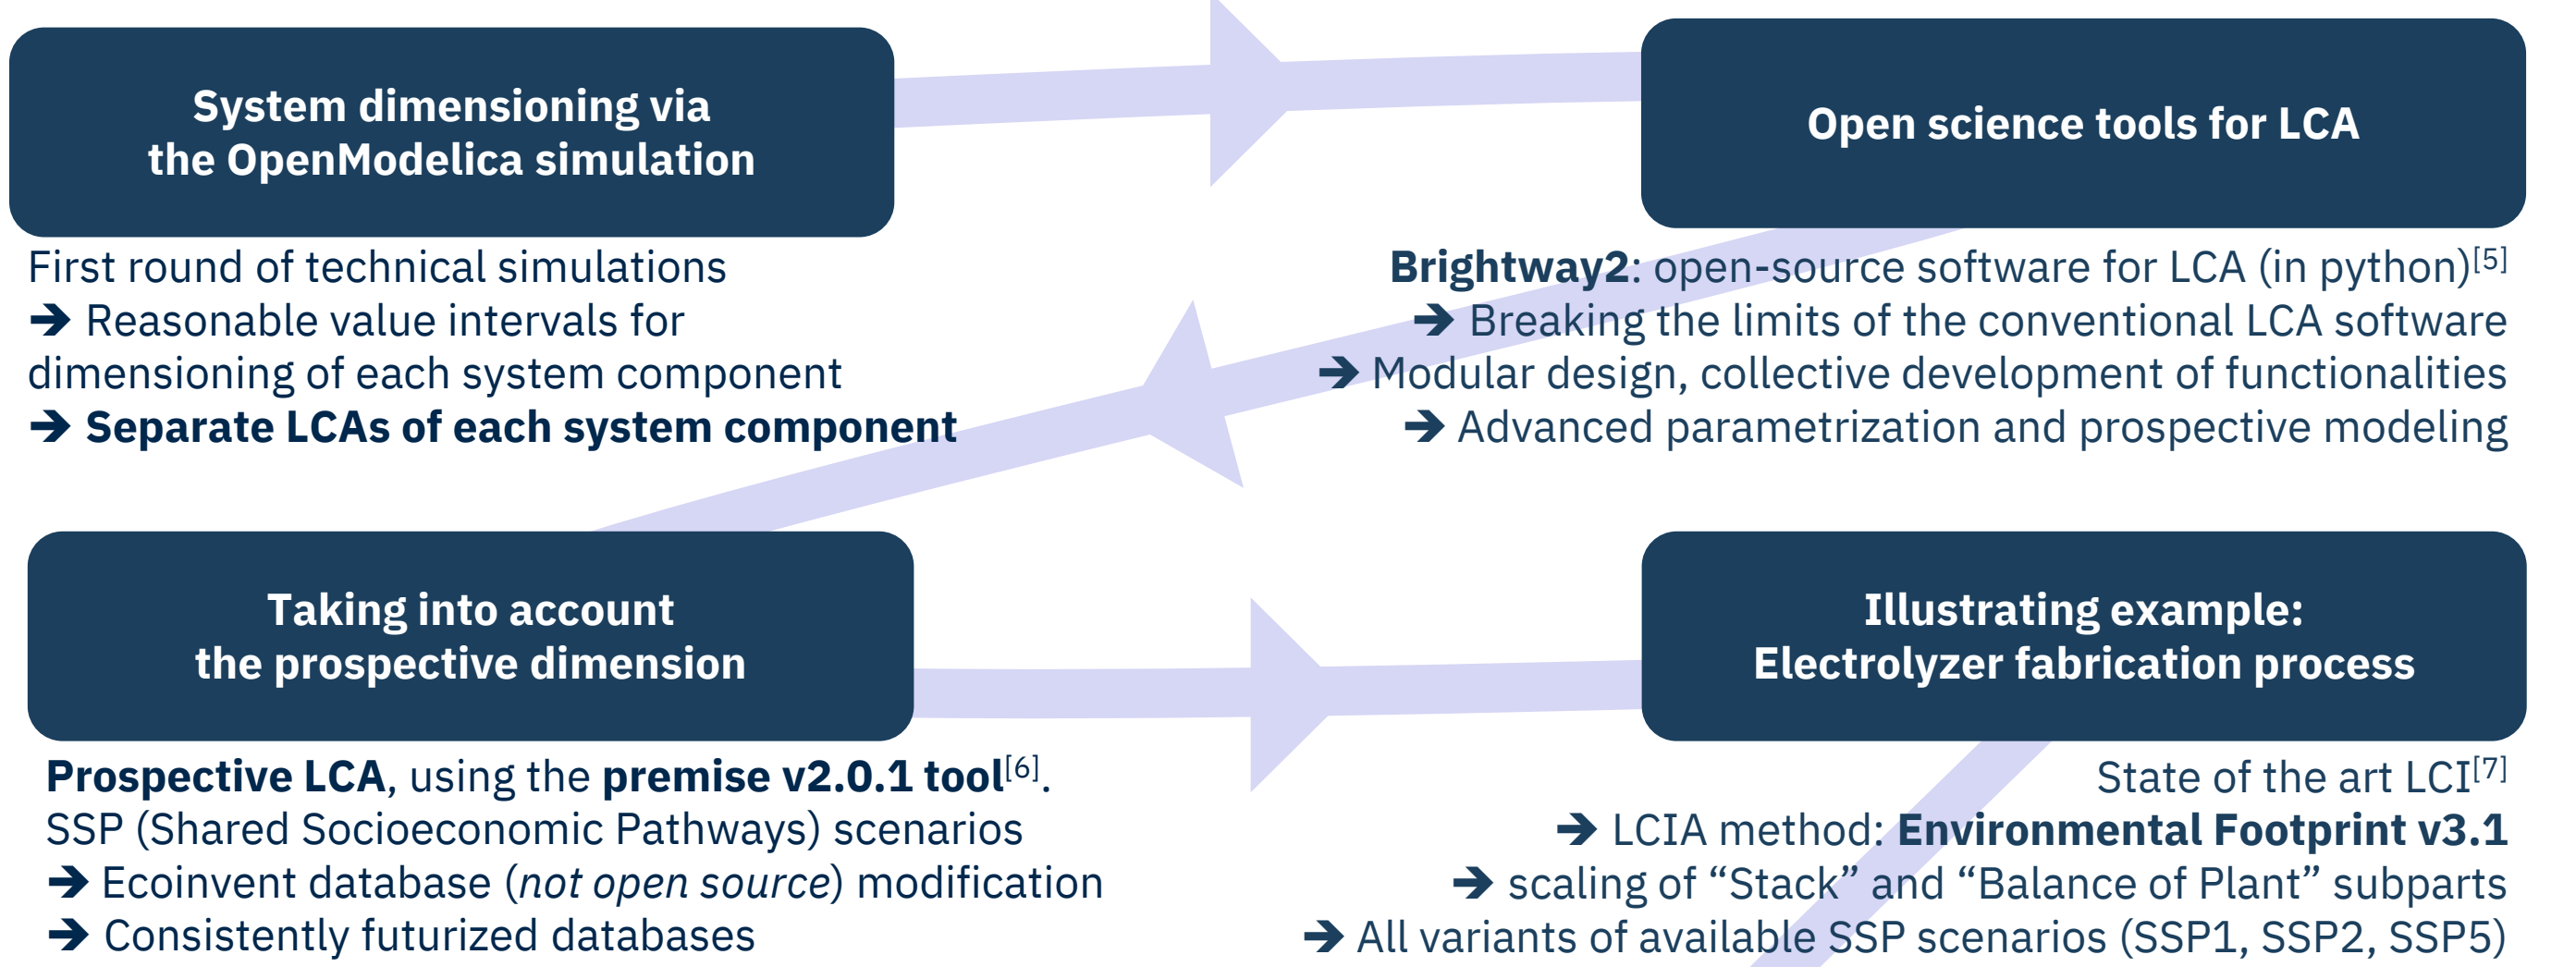

**CURRENT WORK**  
 Extension to all components for all stages of the life cycle  
 Pre-calculated results for the 2 main cases  
 Disaggregated database

**PERSPECTIVES**  
 Data imported back into OpenModelica simulation for combined TEA-LCA  
 Investigating optimization opportunities  
 Helping local plans for energy transition