



**HAL**  
open science

## **Studies on the Conservation of the Mona Lisa: numerical methods for future preservation**

Riparbelli Lorenzo, Fabrice Brémand, Paolo Dionisi-Vici, Jean-Christophe Dupré, Marco Fioravanti, Cécilia Gauvin, Giacomo Goli, Franck Hesser, Delphine Jullien, Patrick Mandron, et al.

### ► **To cite this version:**

Riparbelli Lorenzo, Fabrice Brémand, Paolo Dionisi-Vici, Jean-Christophe Dupré, Marco Fioravanti, et al.. Studies on the Conservation of the Mona Lisa: numerical methods for future preservation. 10es journées scientifiques du GDR Sciences du bois : Diversités du bois et de ses usages, Groupement de recherches des sciences du bois (GDR 3544), Nov 2021, Montpellier, France. pp.253-256. <hal-04825336>

**HAL Id: hal-04825336**

**<https://hal.science/hal-04825336v1>**

Submitted on 7 Dec 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

## Studies on the Conservation of the *Mona Lisa*: numerical methods for future preservation.

RIPARBELLI Lorenzo<sup>1</sup>, BREMAND Fabrice<sup>2</sup>, DIONISI-VICI Paolo<sup>1</sup>, DUPRE Jean-Christophe<sup>2</sup>, FIORAVANTI Marco<sup>1</sup>, GAUVIN Cécilia<sup>5</sup>, GOLI Giacomo<sup>1</sup>, HESSER Franck<sup>2</sup>, JULLIEN Delphine<sup>3</sup>, MANDRON Patrick<sup>4</sup>, MARCON Bertrand<sup>6</sup>, MAZZANTI Paola<sup>1</sup>, TOGNI Marco<sup>1</sup>, UZIELLI Luca<sup>1</sup>, GRIL Joseph<sup>7,8</sup>

<sup>1</sup>DAGRI, Univ. Florence, Florence, Italy

<sup>2</sup> Institut PPRIME, Univ. Poitiers, CNRS, France

<sup>3</sup> LMGC, Univ. Montpellier, CNRS, Montpellier, France

<sup>4</sup> Les Ateliers d'Enghien, Paris, France

<sup>5</sup> Science and Mechanics in Conservation and Heritage, Sainte Cécile les Vignes, F-84290

<sup>6</sup> LaBoMaP, Arts Et Metiers Institute of Technology, UBFC, HESAM, Cluny, France

<sup>7</sup> Université Clermont Auvergne, INRAE, PIAF, Clermont-Ferrand, France

Univ. Clermont Auvergne, CNRS, Clermont INP, Institut Pascal, Clermont-Ferrand, France

[lorenzo.riparbelli@unifi.it](mailto:lorenzo.riparbelli@unifi.it)

**Mots clefs :** digital twin ; Mona Lisa ; finite elements ; panel painting ; mechanical properties ; optimisation ; experimental tests

### Background and objectives

Since 2004, the *Mona Lisa* painting by Leonardo da Vinci has been studied by an international research group of wood scientists and several experimental campaigns have been carried out to understand its characteristics and provide suggestions for its conservation. Based on the collected data, a numerical model of the wooden panel has been developed to simulate its mechanical interaction with the framing system. The main objective of this modelling work, described in this paper, is to extract as much information as possible from the experimental tests carried out, and thus reach a sufficient level of scientific knowledge of the mechanical properties of the panel to build a predictive model. The model can be used to predict the effect of modified boundary conditions and as a tool for preventive conservation.

The artwork is painted on one face of a flat-sawn poplar (*Populus alba* L.) (Fig. 1a) panel doubly curved (longitudinally and transversally) towards the front face and pressed against the rebate of the auxiliary frame by the action of crossbars screwed on such frame (Fig. 1b) ; the external frame contributes to the stiffness of the whole through metal brackets (Fig 1c). An ancient crack runs through the wood thickness from the left upper edge of the panel down to the Lady's forehead.

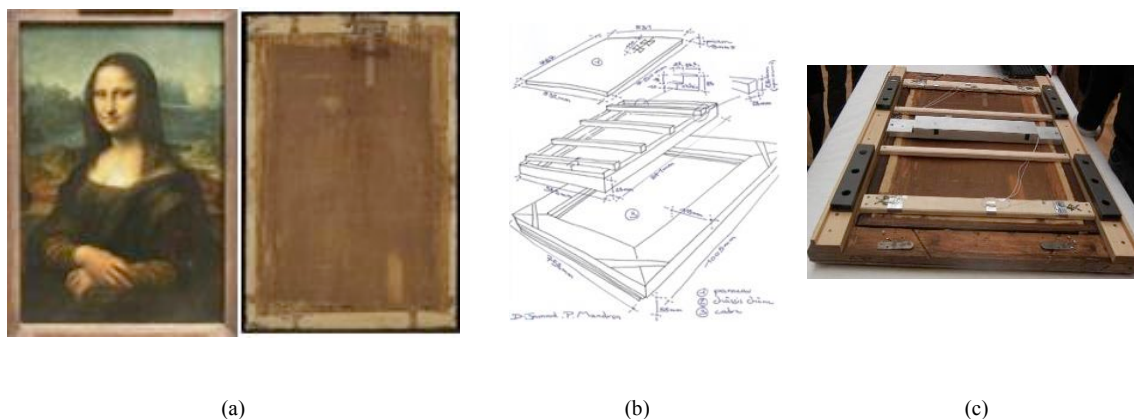


Fig. 1 : Mona Lisa panel painting (a) Painted face and back face; (b) Exploded view of the panel and its framing system (auxiliary frame with crossbars and gilded frame) until 2005; (c) Back face of the complete assembly in 2021, also showing some of the monitoring equipment

The observation methods, partly described in early reports (Mohen et al 2006, Gril et al 2015), include: (i) optical measurements of the shape (Brémand et al 2011); (ii) scientific and technological analysis of the wooden panel; (iii) continuous monitoring of the forces applied by the crossbars on the back of the panel, and of the deflections at mid-height with respect to an aluminium profile equipped with transducers (Fig. 1c); (iv) identification of contact areas between the front margins of the panel and the auxiliary frame's rebate using pressure-sensitive film (Goli et al. 2013).

## Material and Methods

The multidisciplinary approach that characterized the entire project has also been adopted for the numerical modeling of the panel. The modeling has been developed to answer two concurrent parallel questions:

1. To obtain as much information as possible from the experimental tests, thus extracting from them a deeper level of knowledge.
2. To build a predictive model of the behavior of the panel, to better understand its tensional and deformation states.

In this logic we have, firstly, focused on the use of modeling to couple experimental results and numerical methods to calculate the stiffness characteristics of the panel in a totally non-invasive way. The knowledge of the stiffness of the panel is a parameter of extreme interest; in fact, once the stiffness is known we can understand the deformation and tensional behavior of the artwork and its state of conservation. Usually, to determine the stiffness of a wood sample, invasive and sometimes destructive tests are used; in the case of the *Mona Lisa*, an ad hoc protocol has been developed to ensure completely non-invasive and respectful tests. Specifically, extremely slight approaches of any individual load cell towards the panel made it possible to detect small increases in force in all the cells and displacements in the transducers placed at mid-height of the panel. These variations were processed by means of a FEM simulation of the panel which made it possible to compute the actual stiffness of the panel itself. For this method to be considered reliable, it is necessary that the simulation model matches very accurately the physical reality of the panel. To achieve this goal the following steps have been implemented:

1. The shape of the panel has been reconstructed based on optical measurements.
2. The contact areas and pressures between the panel and the auxiliary frame have been precisely detected.
3. Some specific aspects of the panel's structure (e.g. its cylindrical symmetry and the position and geometry of an ancient crack) have been identified by technological analysis.

## Results and discussion

The stiffness characteristics of the panel's wood are shown below and compared with data from the literature.

Model	$E_L$ [MPa]	$E_R$ [MPa]	$E_T$ [MPa]
Numerical	9.7	1.39	0.83
Literature (Guitard, 1987)	10.1	1.19	0.58

Our model, which at this point is a Digital Twin (DT) of the original panel, is strengthened by the real characteristics of the material and reacts to forces and stresses in a way similar to the original panel; it makes it possible to evaluate the internal stress states in the panel's wood, and to test new possible framing configurations, without exposing the original artwork to any risk.

The first application studied is the modeling of the stresses and deformations orthogonal to the grain: both are in a safe range for the artwork, in its present conservation conditions.

Subsequently thanks to DT the dynamics of the ancient crack and the probability of its propagation have been studied in the light of Griffith's theory. Confirming a previous study (Gril et al 2006), the possibility of propagation of the crack appears remote in the current conservation situation.

Another application concerns the possibility of inserting a polymer foam between the panel and the auxiliary frame. In addition to the fact that there would be a decrease in the risk of damage to the paint's crests, the application of DT has shown a decrease, although low, in the stresses at the crack's tip.

Last but not least, based on the DT a device conceived to maintain the forces acting on the panel into a safe range and integrated in the auxiliary frame's crossbeams, has been proposed.

## References

Riparbelli L., Dionisi-Vici P., Dupré J.C., Goli G., Jullien D., Bremand F., Mazzanti P., Hesser F., Marcon B., Togni M., Gauvin C., Arnould O., Valle V., Dureisseix D., Cocchi L., Mandron P., Ravaud E., Uzielli L., Gril J. (2018) Mona Lisa's digital twin: identifying the mechanical properties of the panel combining experimental data and advanced finite-element modelling, 7<sup>èmes</sup> journées du GDR Sciences du bois, Nov. 2018, Cluny, France.

Brémand, P. Doumalin, J.C. Dupré, A. Germaneau, F. Hesser, V. Valle (2011) Mechanical structure analysis by Digital Image Correlation and Fringe Pattern Profilometry, Proceedings of Joint focused meeting, COST Actions IE0601 and IE0601 Non-destructive

# Actes des 10<sup>èmes</sup> journées scientifiques du GDR 3544 Sciences du Bois

## *Diversités du bois et de ses usages*



17, 18 et 19 Novembre 2021  
Université Montpellier, France

**Manifestation** : 10<sup>èmes</sup> journées scientifiques du GDR 3544 Sciences du Bois, Montpellier, Nov. 2021

**Collection** : Journées annuelles du GDR 3544 sciences du bois, Volume 10, 2021

**Coordination et édition des actes** : Tancrede Alméras, Delphine Jullien, Cédric Montéro (LMGC), Joseph Gril (Institut Pascal et PIAF), Eric Badel (PIAF)

techniques to study Wooden Cultural Heritage Objects (WCHOs), 6-7 May 2011, Cité de la Musique, Paris, France

Électricité De France - EDF. Finite element code\_aster, Analyse des Structures et Thermo-mécanique pour des Etudes et des Recherches, open source on [www.code-aster.org](http://www.code-aster.org), 1989-2018.

Goli, G., Dionisi-Vici, P., Uzielli, L. (2014) Locating contact areas and estimating contact forces between the “Mona Lisa” wooden panel and its frame, *Journal of Cultural Heritage*, 2013, vol. 15(4), 391-402.

Gril J., Cocchi L., Marcon B., Dionisi-Vici P., Goli G., Mazzanti P., Togni M., Uzielli L. (2015) The Mona Lisa Project: An update on the progress of measurement and monitoring activities, Euromech conference “Theoretical, Numerical, and Experimental Analyses in Wood Mechanics”, Dresden, DE, 27-29.05.15

Gril J., Ravaud E., Uzielli L., Dupré J.C., Perré P., Dureisseix D., Arnould O., Dionisi Vici P., Jaunard D., Mandron P. (2006), Mona Lisa saved by Griffith theory: assessing the crack propagation risk in the wooden support of a panel painting, International conference on integrated approach to wood structure, behaviour and application, joint meeting of ESWM and COST Action E35, Florence, Italy, 15-17.5.06, M. Fioravanti, N. Macchioni (Eds), 109-114.

Mohen J.P., Menu M., Mottin B. (Eds.) (2006) *Au Coeur de La Joconde*, Gallimard, Paris (English and German translations)

Dureisseix, D. and Marcon, B. (2011) A partitioning strategy for the coupled hygromechanical analysis with application to wood structures of cultural heritage. *Int. J. Numer. Meth. Engng.*, 88: 228-256. doi:[10.1002/nme.3173](https://doi.org/10.1002/nme.3173)

Marcon B, (2009) *Hygromécanique des panneaux en bois et conservation du patrimoine culturel. Des pathologies... aux outils pour la conservation*. Université Montpellier II - Sciences et Techniques du Languedoc. (in French)

Guitard, D. (1987) *Mécanique du matériau bois et composites*, Cepadues-Editions, Toulouse, 1987, ISBN 2854281527