



**HAL**  
open science

# A Set-Covering Approach for SONET Network Design

Nadia Brauner, Pierre Lemaire

► **To cite this version:**

Nadia Brauner, Pierre Lemaire. A Set-Covering Approach for SONET Network Design. 2002. hal-00082799

**HAL Id: hal-00082799**


**<https://hal.science/hal-00082799v1>**

Preprint submitted on 28 Jun 2006

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Les cahiers du laboratoire Leibniz

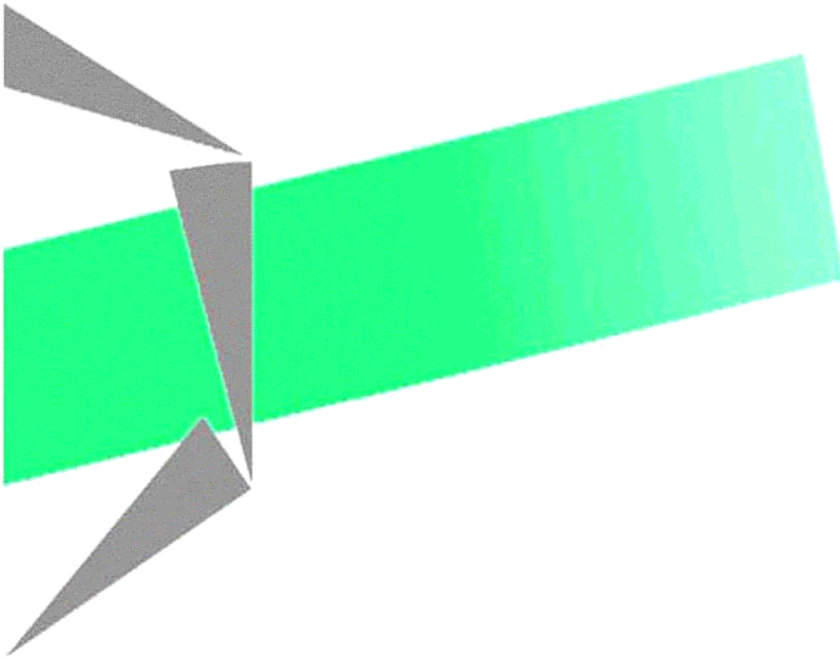

## A Set-Covering Approach for SONET Network Design

Nadia BRAUNER, Pierre LEMAIRE

Laboratoire Leibniz-IMAG, 46 av. Félix Viallet, 38000 GRENOBLE, France -  
ISSN : 1298-020X

Site internet : <http://www-leibniz.imag.fr/LesCahiers/>

n° 62  
Oct. 2002



# A Set-Covering Approach for SONET Network Design

Nadia BRAUNER\*      Pierre LEMAIRE\*

october 2002

## Abstract

In this paper we formalize a graph-partitioning problem that arises in the design of SONET networks as a Set-Covering problem. We then improve the general performance ratio of the Greedy Algorithm proved by Chvátal for this particular case.

**key-words:** set-covering, approximations, telecommunication networks.

## Introduction

SONET networks [5] are common and widely used telecommunication networks. For such networks, the first problem to cope with is to partition the edges of the demand graph into sub-graphs called *rings*. Nodes of a same ring are then linked together by two fibers so as to form a cycle and demands are routed automatically around this cycle on one of the fibers, according to possible failures. This is made possible by complex devices called ADM at every node. These devices have a limited capacity of treatment which constraints a ring to a maximum *capacity*  $C$ . In the scope of this paper, we consider that this capacity must be at least as big as the sum of the demands within a ring<sup>1</sup>.

ADMs have high cost, and in what follows we consider all other costs to be negligible. The cost of a ring is thus its number of nodes, and the global cost of a partition is the sum of the costs of the rings.

---

\*Laboratoire Leibniz-IMAG, 46 avenue Félix Viallet, 38031 Grenoble cedex. nadia.brauner@imag.fr, pierre.lemaire@imag.fr

<sup>1</sup>This corresponds to unidirectional rings, that is when a fiber is dedicated to normal work, the other one saved for failure cases; then all demands must go all around the ring, and therefore an ADM may have to deal with the sum of all demands when they are simultaneous.

In our model, a node may be shared by several rings. All demands are supposed to be unitary, and thus cannot be split between several rings, and they all must be satisfied.

With these restrictions, the SONET network design problem is indeed a special case of the well-known Set-Covering problem, as the first section of this paper formalizes it. In the literature, this special case is referred as  $k$ -EP ( $k$ -Edge Partition) or ADRL (Assignment of Demands to Rings, with Link-costs only). Complexity issues and some linear-time  $\mathcal{O}(\sqrt{C})$ -approximations are considered in [3, 1], and a tabu method is proposed in [4].

Here, we turn to Chvátal's Greedy Algorithm for set-covering and prove better guarantees for our special case than in the general case, which leads to the best known guarantee for this problem.

## 1 A Set-Covering problem

First, we formalize the partition problem we deal with. Let  $G = (V, E)$  be a simple graph and  $C$  a capacity. We aim at finding a minimum-cost partition of the edges of  $G$  into rings of capacity at most  $C$ . A ring is any subset of  $E$  with no more than  $C$  edges. Thus, let be:

$$\begin{aligned} \mathcal{A} &= \{A_i \subset E, |A_i| \leq C\} \\ v_i &= \text{the number of vertices of } A_i \\ a_{ei} &= \begin{cases} 1 & \text{if } e \in A_i \\ 0 & \text{otherwise} \end{cases} \end{aligned}$$

The problem is then:

$$[\mathbf{ADRL}] \begin{cases} \min \sum_{A_i \in \mathcal{A}} v_i x_i & (\mathbf{ADRL.0}) \\ s.t. \sum_{A_i \in \mathcal{A}} a_{ei} x_i \geq 1 \quad \forall e \in E & (\mathbf{ADRL.1}) \\ x_i \in \{0, 1\} \quad \forall A_i \in \mathcal{A} & (\mathbf{ADRL.2}) \end{cases}$$

The set  $\mathcal{A}$  is the set of all possible rings. Variables  $x_i$  are boolean variables, of value 1 if and only if the ring  $A_i$  is selected in the solution. The objective **(ADRL.0)** is thus to minimize the sum of the costs of the rings in the solution. Constraint **(ADRL.1)** forces every edge to be covered. This constraint could be an equality without changing the value of an optimal solution.

## 2 Performance of the Greedy Algorithm

To solve a Set-Covering problem, there exists a very intuitive greedy heuristic: at iteration  $k$ , select the ring  $A_i$  which minimizes the ratio  $\frac{v_i}{|A_i^c|}$ , where

$|A_i^k|$  is the number of edges in  $A_i$  which are still uncovered at iteration  $k$ .

If several such rings exist, we select a ring such that  $A_i = A_i^k$ , so that an edge is covered exactly once. Such a ring always exists since we allow any subgraph of at most  $C$  edges to be a ring. This is done for the sake of simplicity and indeed without loss of generality.

In the following, we call *Greedy* this algorithm.

Chvátal [2] proves that Greedy is a  $\mathcal{H}(C)$ -approximation algorithm, with  $\mathcal{H}(C) = \sum_{k=1}^C \frac{1}{k} \leq 1 + \ln(C)$ . For our particular case, this guarantee is improved:

**Theorem 1 :**

*The Greedy Algorithm has a worst-case performance-guarantee for ADRL of:*

$$\alpha(C) = \sum_{k=v_C}^C \frac{1}{k} + \frac{1}{v_C} \left( \frac{C+1}{C} \left\lfloor \frac{v_C-1}{2} \right\rfloor + 2 \left\lfloor \frac{v_C-1}{2} \right\rfloor \right)$$

where  $v_C = \left\lceil \frac{1+\sqrt{1+8C}}{2} \right\rceil$ . ◦

In the above theorem, the value  $v_C$  corresponds to the minimum number of vertices in a graph with  $C$  edges (*cf* appendix B).

This results may be detailed so as to give a better idea of the guarantee:

**Corollary 1 :**

*For  $C \geq 3$ :*

$$\begin{aligned} \Gamma(C) \leq \alpha(C) &\leq \Gamma(C) + \frac{3}{2v_C} - \frac{1}{2C} - \frac{1}{Cv_C} \\ &\leq \frac{14}{9} + \ln \left( \sqrt{\frac{C}{2}} \right) \end{aligned}$$

where  $\Gamma(C) = \ln \left( \frac{C}{v_C} \right) - \frac{3}{2v_C} + \frac{1}{C} + \frac{3}{2}$ . ◦

This comes from the comparison between  $\sum_{k=1}^x \frac{1}{k}$  and  $\ln(x)$ . The properties of composition of equivalents of the logarithm function then straightforwardly lead to this second corollary:

**Corollary 2 :**

$$\alpha(C) \sim_{+\infty} \ln \left( \sqrt{\frac{C}{2}} \right)$$

Let us now prove those results. The first idea is to use duality, as Chvátal does for its own proof.

Let  $H$  be a heuristic for the set-covering problem which returns a feasible solution for which an edge  $e$  has a cost<sup>2</sup>  $\theta^e$  (such a solution has a total cost  $\sum_{e \in E} \theta^e$ ). If there is a  $\alpha_H$  such that  $\frac{\theta^e}{\alpha_H}$  is a feasible solution of the dual problem, then  $\alpha_H$  is a performance ratio for  $H$ . This is formalized in the following lemma:

**Lemma 1 :**

Let the following primal problem  $P$  and its dual  $D$  be:

$$[P] \begin{cases} \min & cx \\ \text{s.t.} & Ax \geq b \\ & x \geq 0 \end{cases} \quad [D] \begin{cases} \max & yb \\ \text{s.t.} & yA \leq c \\ & y \geq 0 \end{cases}$$

Let  $\bar{x}$  be a feasible solution for  $[P]$  returned by an algorithm  $H$  and let be  $\alpha \geq 1$ . If there is a  $\theta$  such that:

1.  $y = \frac{\theta}{\alpha}$  is feasible for  $[D]$  (i.e.  $\theta A \leq \alpha c, \theta \geq 0$ ) and
2.  $\theta b \geq c\bar{x}$

then  $H$  is a  $\alpha$ -approximation for problem  $[P]$  (i.e.  $\bar{x} \leq \alpha x$  for all feasible solution  $x$  of  $[P]$ ). ◦

**proof :**

Let  $x$  be a feasible solution of  $[P]$ . We have:

$$\begin{aligned} \alpha \cdot cx &\stackrel{(\alpha \cdot c \geq \theta A)}{\geq} \theta Ax \\ &\stackrel{(Ax \geq b)}{\geq} \theta b \\ &\stackrel{(\theta b \geq c\bar{x})}{\geq} c\bar{x} \end{aligned}$$

This is true in particular for an optimal solution, and so  $\bar{x}$  is a  $\alpha$ -approximation of this optimum. ◻

Let us re-write these results in our particular case:

$$\left\{ \begin{array}{l} \min \quad \sum_{A_i \in \mathcal{A}} v_i \cdot x_i \\ \text{s.c.} \quad \sum_{A_i \in \mathcal{A}} a_{ei} \cdot x_i \geq 1 \quad \forall e \in E \\ x_i \geq 0 \end{array} \right. \quad [Primal] \quad \left\{ \begin{array}{l} \max \quad \sum_{e \in E} y_e \\ \text{s.c.} \quad \sum_{e \in A_i} y_e \leq v_i \quad \forall A_i \in \mathcal{A} \\ y_e \geq 0 \end{array} \right. \quad [Dual]$$

<sup>2</sup>This exact notion of cost of an edge is precised later.

(*[Primal]*) is indeed the continuous relaxation of the initial problem. We also drop the constraint  $x_i \leq 1$  which is always true for an optimal solution.) Intuitively,  $y_e$  is the cost that must not be overpaid to cover the edge  $e$ .

Let  $x$  be a feasible solution of the primal problem. Define the cost in  $x$  of the edge  $e$  as:  $\theta_x^e = \frac{v_e}{|A^e|}$ , where  $A^e$  is the unique ring that contains  $e$  in the solution  $x$  ( $v^e$  is the number of vertices — that is the cost — of  $A^e$ ). With this definition, we evenly divide the cost of a ring among the edges that compose it.

In what follows, we only consider solutions returned by Greedy, and thus we omit the index  $x$  and write  $\theta^e$  for the cost of the edge  $e$ . Notice that, as an edge belongs to a unique ring in a solution, we have:  $\theta^e = \sum_{A_i \in \mathcal{A}} a_{ei} \frac{v_i}{|A_i|} x_i$ .

Now, let us prove that  $\theta = (\theta^e)_{e \in E}$  verifies the hypotheses of lemma 1. We have<sup>3</sup>:

$$\begin{aligned} \sum_{e \in E} \theta^e &= \sum_{e \in E} \sum_{A_i \in \mathcal{A}} a_{ei} \frac{v_i}{|A_i|} x_i \\ &= \sum_{A_i \in \mathcal{A}} \left( \frac{v_i}{|A_i|} x_i \sum_{e \in E} a_{ei} \right) \\ &= \sum_{A_i \in \mathcal{A}} \frac{v_i}{|A_i|} x_i |A_i| = \sum_{A_i \in \mathcal{A}} v_i x_i \end{aligned}$$

and hence  $\theta$  verifies hypothesis 2 of lemma 1. If besides we suppose that, for an integer  $\alpha$ :

$$\forall A_i \in \mathcal{A} : \sum_{e \in A_i} \theta^e \leq \alpha \cdot v_i \quad (1)$$

then  $\theta$  also verifies the hypothesis 1. So, it is sufficient to prove that the value of  $\alpha(C)$  of theorem 1 is valid for equation (1) to conclude that Greedy is a  $\alpha(C)$ -approximation for *[Primal]*, and thus for ADRL.

Here are now two lemmas which allow to bound the cost of an edge according to the iteration it is selected by Greedy.

**Lemma 2 :**

*Let  $A_i$  be an element of  $\mathcal{A}$ . Let  $e_1, e_2, \dots, e_{|A_i|}$  be the edges in  $A_i$  numbered from 1 to  $|A_i|$ , with respect to the order of selection by Greedy. (i.e. there are at most  $k - 1$  edges of  $A_i$  selected before  $e_k$ ). We have:*

$$\theta^{e_k} \leq \frac{v_i}{|A_i| - k + 1}$$

o

---

<sup>3</sup>One should be careful not to confuse notations.  $A^e$  is the unique ring that contains  $e$  in the solution, whereas  $A_i$  is the  $i^{\text{th}}$  ring of  $\mathcal{A}$ . If  $e \in A_i$ , then  $A_i = A^e$ .



**proof :**

When the edge  $e_k$  is selected, at most  $k - 1$  edges had been taken from  $A_i$  by Greedy. So, there remain at least  $|A_i| - k + 1$  edges for at most  $v_i$  vertices in  $A_i$ . These edges form a ring  $A_i^k$  of cost  $\frac{v_i}{|A_i| - k + 1}$  by edge. If  $e_k$  has a higher cost, this implies that it has been selected with a more expensive ring, which contradicts the selection rule of Greedy.  $\square$

**Lemma 3 :**

Let  $A_i$  be an element of  $\mathcal{A}$ . Let  $S$  be a sub-set of  $A_i$  with  $v_i - 1$  edges. We have:

$$\sum_{e \in S} \theta^e \leq \frac{C+1}{C} \left\lfloor \frac{v_i - 1}{2} \right\rfloor + 2 \left\lceil \frac{v_i - 1}{2} \right\rceil$$

for every solution returned by Greedy.  $\circ$

**proof :**

First, remove from the graph  $G$  every edge that is selected by Greedy for a cost lower than (or equal to)  $\frac{C+1}{C}$ . Let  $a_0$  be the number of such edges in  $S$ . We note  $S'$  the set  $S$  with these edges removed.

Cycles of  $C$  (or less) edges would be removed for a cost  $1 \leq \frac{C+1}{C}$  per edge. A connected component of  $C$  (or more) edges would have at least  $C$  edges removed for a cost lower than  $\frac{C+1}{C}$  per edge. So, remains in  $G$  only a forest  $F$  of which trees have strictly less than  $C$  edges. Let  $t$  be the number of trees of  $F \cap S'$  (a tree of  $F$  may induce several trees in  $F \cap S'$ ).

Let  $a_1$  be the number of edges of  $S'$  which are isolated in  $F$ , and  $a_2$  the number of edges which are not; we have:  $v_i - 1 = a_0 + a_1 + a_2$ , or:

$$\left(a_1 + \frac{a_2}{2}\right) + \left(a_0 + \frac{a_2}{2}\right) = v_i - 1 \quad (\clubsuit)$$

There are  $t$  disjoint trees on  $v_i - 1 - a_0$  edges: they require at least  $v_i - 1 - a_0 + t$  vertices among those of  $S'$ , and  $S'$  has at most  $v_i$  vertices since it is included in  $A_i$ . As a consequence:  $v_i - 1 - a_0 + t \leq v_i$ , and hence:  $t \leq a_0 + 1$ . Because  $t \geq a_1$  (an isolated edge is a tree), we obtain:  $a_1 \leq a_0 + 1$ , which can be detailed since  $t = a_1$  if and only if  $a_2 = 0$ . All in all we get:

$$\text{or } \begin{cases} a_2 > 0 \text{ and } a_1 < a_0 + 1 \text{ (i.e. : } a_1 \leq a_0) \\ a_2 = 0 \text{ and } a_1 \leq a_0 + 1 \end{cases}$$

Besides, according to equation  $(\clubsuit)$ , we have:  $(a_1 + \frac{a_2}{2}) + (a_0 + \frac{a_2}{2}) = v_i - 1$ . From which:

- if  $a_2 > 0$  then  $a_1 \leq a_0$  and  $(a_1 + \frac{a_2}{2}) \leq \frac{v_i - 1}{2} \leq \lceil \frac{v_i - 1}{2} \rceil$  ;
- if  $a_2 = 0$  then  $a_1 \leq a_0 + 1$  and  $a_1 = (a_1 + \frac{a_2}{2}) \leq \frac{v_i}{2}$ . Since  $a_1$  and  $v_i$  are integers:  $(a_1 + \frac{a_2}{2}) \leq \lfloor \frac{v_i}{2} \rfloor = \lceil \frac{v_i - 1}{2} \rceil$ .

In all cases:

$$(a_1 + \frac{a_2}{2}) \leq \left\lceil \frac{v_i - 1}{2} \right\rceil \quad (\spadesuit)$$

Notice now that every edge  $e$  isolated in  $F$  is selected with a cost of  $\theta^e = 2$ . Any other edge of  $F$  may be selected with the whole tree to which it belongs for a cost  $\theta^e \leq \frac{1}{2}(2 + \frac{C+1}{C})$  (this tree has  $2 \leq p \leq C$  edges and thus costs  $\frac{p+1}{p} \leq \frac{3}{2} \leq \frac{1}{2}(2 + \frac{C+1}{C})$ ). This leads to a bound on the total cost for the edges of  $S$ :

$$\sum_{e \in S} \theta^e \leq \frac{C+1}{C} a_0 + 2a_1 + \frac{1}{2}(2 + \frac{C+1}{C}) a_2 = \frac{C+1}{C} (a_0 + \frac{a_2}{2}) + 2(a_1 + \frac{a_2}{2})$$

together with equation ():

$$\sum_{e \in S} \theta^e \leq \frac{C+1}{C} (v_i - 1) + \left(2 - \frac{C+1}{C}\right) \left(a_1 + \frac{a_2}{2}\right)$$

and with the inequality (), as  $\frac{C+1}{C} \leq 2$ , we obtain:

$$\begin{aligned} \sum_{e \in S} \theta^e &\leq \frac{C+1}{C} (v_i - 1) + \left(2 - \frac{C+1}{C}\right) \left\lceil \frac{v_i - 1}{2} \right\rceil \\ &\leq \frac{C+1}{C} (v_i - 1 - \left\lceil \frac{v_i - 1}{2} \right\rceil) + 2 \left\lceil \frac{v_i - 1}{2} \right\rceil \end{aligned}$$

that is:

$$\sum_{e \in S} \theta^e \leq \frac{C+1}{C} \left\lfloor \frac{v_i - 1}{2} \right\rfloor + 2 \left\lceil \frac{v_i - 1}{2} \right\rceil$$

□

Let us prove now, with an induction on  $C$ , that inequality (1) holds for  $\alpha = \alpha(C)$  as defined in theorem 1. What we have to prove is thus:

$$\forall A_i \in \mathcal{A} : \frac{1}{v_i} \sum_{e \in A_i} \theta^e \leq \sum_{k=v_C}^C \frac{1}{k} + \frac{1}{v_C} \left( \frac{C+1}{C} \left\lfloor \frac{v_C - 1}{2} \right\rfloor + 2 \left\lceil \frac{v_C - 1}{2} \right\rceil \right) \quad (1')$$

(we assume an empty sum — when  $v_C > C$  — to be zero.)

For  $C = 1$  or  $C = 2$ , the only rings have one edge less than their number of vertices; that is:  $\forall A_i \in \mathcal{A} : |A_i| = v_i - 1$ . Lemma 3 then applies with  $S = A_i$ . For rings such that  $v_i = v_C$ , the inequality (1') then holds. The other rings are indeed only single edges for  $C = 2$  and then we have:

$$\frac{1}{v_i} \sum_{e \in A_i} \theta^e = 1 \leq \frac{1}{v_C} \left( \frac{C+1}{C} \left\lfloor \frac{v_C - 1}{2} \right\rfloor + 2 \left\lceil \frac{v_C - 1}{2} \right\rceil \right) = \frac{7}{6}$$

and inequality (1') also holds. Therefore the induction hypothesis is true for  $C = 1, C = 2$ .

Let  $C \geq 3$  and assume that inequality (1') holds for every  $C', 1 \leq C' < C$ . Let  $A_i$  be a ring. Several cases may happen:

**Case 1:**  $|A_i| = C' \leq C - 1$

The induction hypothesis is that inequality (1') holds for every  $C'$ . Since  $\alpha$  is an increasing function of  $C$ , and  $v_i$  is positive, one has:

$$\sum_{e \in A_i} \theta^e \leq \alpha(C').v_i \leq \alpha(C).v_i$$

**Case 2:**  $|A_i| = C$

Ring  $A_i$  has  $v_i = v_C + x$  vertices. Remember that  $v_C$  is the minimum number of vertices for a graph with  $C$  edges; therefore  $x \geq 0$ .

Lemma 2 proves that the  $C - v_i + 1$  first edges of  $A_i$  are selected for a total cost of at most  $\sum_{k=1}^{C-v_i+1} \frac{v_i}{C-k+1}$ ; lemma 3 proves that the  $v_i - 1$  remaining edges have a total cost of at most  $\frac{C+1}{C} \lfloor \frac{v_i-1}{2} \rfloor + 2 \lceil \frac{v_i-1}{2} \rceil$ . It implies that:

$$\begin{aligned} \frac{1}{v_i} \sum_{e \in A_i} \theta^e &\leq \sum_{k=v_i}^C \frac{1}{k} + \frac{1}{v_i} \left( \frac{C+1}{C} \lfloor \frac{v_i-1}{2} \rfloor + 2 \lceil \frac{v_i-1}{2} \rceil \right) \\ &= \alpha(C) - \beta(C, x) \end{aligned}$$

where:

$$\begin{aligned} \beta(C, x) &= \sum_{k=v_C}^{v_i-1} \frac{1}{k} \\ &\quad - \frac{1}{v_C + x} \left( \frac{C+1}{C} \lfloor \frac{v_C + x - 1}{2} \rfloor + 2 \lceil \frac{v_C + x - 1}{2} \rceil \right) \\ &\quad + \frac{1}{v_C} \left( \frac{C+1}{C} \lfloor \frac{v_C - 1}{2} \rfloor + 2 \lceil \frac{v_C - 1}{2} \rceil \right) \end{aligned}$$

It is thus sufficient to prove that  $\beta(C, x)$  is always positive to get that equation (1) holds.

If  $x = 0$  then  $\beta(C, 0) = 0$ .

If  $x > 1$  then (note that  $\frac{1}{C}(C+1+C-1) = 2$ ) :

$$\begin{aligned}
\beta(C, x) &\geq \frac{1}{v_C} + \frac{1}{v_C+1} \\
&\quad + \frac{C+1}{C} \left[ \frac{1}{v_C} \left( \underbrace{\left\lfloor \frac{v_C-1}{2} \right\rfloor + \left\lfloor \frac{v_C-1}{2} \right\rfloor}_{=v_C-1} \right) \right. \\
&\quad \quad \left. - \frac{1}{v_C+x} \left( \underbrace{\left\lfloor \frac{v_C+x-1}{2} \right\rfloor + \left\lfloor \frac{v_C+x-1}{2} \right\rfloor}_{=v_C+x-1} \right) \right] \\
&\quad + \frac{C-1}{C} \left( \frac{1}{v_C} \underbrace{\left\lfloor \frac{v_C-1}{2} \right\rfloor}_{\geq \frac{v_C-1}{2}} - \frac{1}{v_C+x} \underbrace{\left\lfloor \frac{v_C+x-1}{2} \right\rfloor}_{\leq \frac{v_C+x}{2}} \right) \\
&\geq \frac{1}{v_C} + \frac{1}{v_C+1} + \frac{C+1}{C} \left[ 1 - \frac{1}{v_C} - 1 + \frac{1}{v_C+x} \right] + \frac{C-1}{C} \left( \frac{1}{2} - \frac{1}{2v_C} - \frac{1}{2} \right) \\
&\geq \frac{1}{v_C+1} - \frac{1}{2v_C} \underbrace{\left( 2\frac{C+1}{C} + \frac{C-1}{C} - 2 \right)}_{=\frac{C+1}{C} \leq \frac{4}{3} \text{ for } C \geq 3} + \underbrace{\frac{C+1}{C(v_C+x)}}_{\geq 0} \\
&\geq \frac{1}{v_C+1} - \frac{2}{3v_C} \\
&\geq \frac{v_C-2}{3v_C(v_C+1)} \\
&\geq 0
\end{aligned}$$

If  $x = 1$  then the first three inequalities above hold if removing the term  $\frac{1}{v_C+1}$ . We get:

$$\begin{aligned}
\beta(C, 1) &\geq -\frac{1}{2v_C} \left( 2\frac{C+1}{C} + \frac{C-1}{C} - 2 \right) + \frac{C+1}{C(v_C+x)} \\
&\geq \frac{C+1}{C} \left( \frac{1}{v_C+1} - \frac{1}{2v_C} \right) \\
&\geq \frac{C+1}{C} \frac{v_C-1}{2v_C(v_C+1)} \\
&\geq 0
\end{aligned}$$

From the two cases above, it follows that equation (1) holds for  $\alpha(C)$ . As a consequence, by the induction principle, this ends the proof of theorem 1.

With such performances, the *Greedy* algorithm has the best known guarantees for the ADRL problem. Moreover those guarantees are pessimistic, for the proved ratio does not seem to be tight.

We now prove the two corollaries. The first one is a consequence of the following lemma:

**Lemma 4 :**

$$\forall n \in \mathbb{N}, \forall p \in \mathbb{N}, p \geq n : \ln\left(\frac{p}{n}\right) + \frac{1}{p} \leq \sum_{k=n}^p \frac{1}{k} \leq \ln\left(\frac{p}{n}\right) + \frac{1}{n}$$

◦

**proof :**

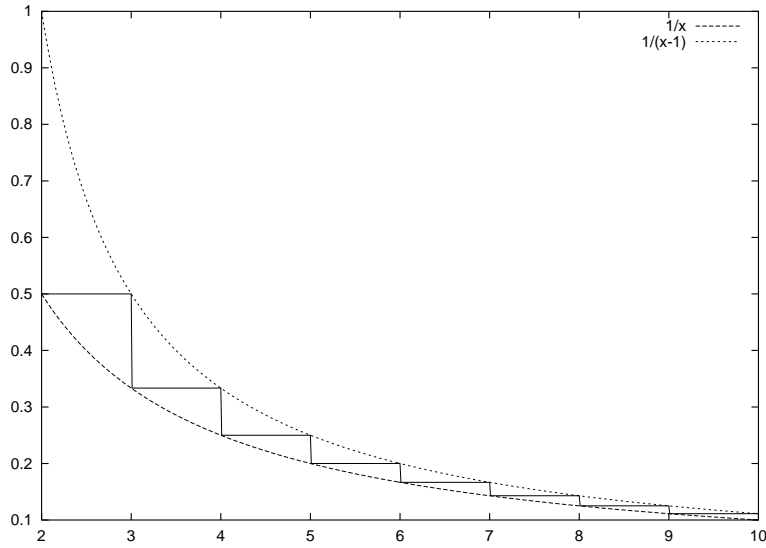


Figure 1: Comparison of the areas of  $\int_n^p \frac{1}{x}$ ,  $\sum_n^p \frac{1}{x}$  and  $\int_{n+1}^{p+1} \frac{1}{x-1}$

This interval is a mere comparison of areas. As a matter of fact, for  $p \geq n$ , we have (cf Figure 1) :

$$\int_n^p \frac{1}{t} dt + \frac{1}{p} \leq \sum_{k=n}^p \frac{1}{k} \leq \int_{n+1}^{p+1} \frac{1}{t-1} dt + \frac{1}{n} = \int_n^p \frac{1}{t} dt + \frac{1}{n}$$

*i.e. :*

$$\ln\left(\frac{p}{n}\right) + \frac{1}{p} \leq \sum_{k=n}^p \frac{1}{k} \leq \ln\left(\frac{p}{n}\right) + \frac{1}{n}$$

◻

In our case, for  $C \geq 3$  (and thus  $v_c \leq C$ ), we have:

$$\alpha(C) = \sum_{k=v_C}^C \frac{1}{k} + \underbrace{\frac{1}{v_C} \left( \frac{C+1}{C} \left\lfloor \frac{v_C-1}{2} \right\rfloor + 2 \left\lceil \frac{v_C-1}{2} \right\rceil \right)}_{\gamma(C)}$$

and the previous lemma proves:

$$\ln \left( \frac{C}{v_C} \right) + \frac{1}{C} + \gamma(C) \leq \alpha(C) \leq \ln \left( \frac{C}{v_C} \right) + \frac{1}{v_C} + \gamma(C) \quad (2)$$

now:

$$\begin{aligned} \gamma(C) &= \frac{1}{v_C} \left( \left( 2 - \frac{C-1}{C} \right) \left\lfloor \frac{v_C-1}{2} \right\rfloor + 2 \left\lceil \frac{v_C-1}{2} \right\rceil \right) \\ &= \frac{1}{v_C} \left( 2 \left( \left\lfloor \frac{v_C-1}{2} \right\rfloor + \left\lceil \frac{v_C-1}{2} \right\rceil \right) - \frac{C-1}{C} \left\lfloor \frac{v_C-1}{2} \right\rfloor \right) \\ &= \frac{1}{v_C} \left( 2v_C - 2 - \underbrace{\frac{C-1}{C} \left\lfloor \frac{v_C-1}{2} \right\rfloor}_{\substack{\leq 1 \\ \frac{v_C-2}{2} \leq \frac{v_C-1}{2}}} \right) \end{aligned}$$

from that:

$$\gamma(C) \geq \frac{1}{v_C} \left( 2v_C - 2 - \frac{v_C-1}{2} \right) = \frac{3}{2} - \frac{3}{2v_C}$$

using (2), we obtain:

$$\alpha(C) \geq \ln \left( \frac{C}{v_C} \right) + \frac{1}{C} + \frac{3}{2} - \frac{3}{2v_C} = \Gamma(C)$$

which is the announced lower bound. We also have:

$$\begin{aligned} \gamma(C) &\leq \frac{1}{v_C} \left( 2v_C - 2 - \frac{C-1}{C} \frac{v_C-2}{2} \right) \\ &\leq \frac{1}{v_C} \left( 2v_C - 2 - \frac{v_C}{2} + 1 + \frac{v_C}{2C} - \frac{1}{C} \right) \\ &\leq \frac{3}{2} - \frac{1}{v_C} + \frac{1}{2C} - \frac{1}{Cv_C} \\ &\leq \frac{3}{2} + \frac{1}{2C} - \frac{C+1}{Cv_C} \end{aligned}$$

using equation (2), we obtain:

$$\alpha(C) \leq \Gamma(C) + \frac{3}{2v_C} - \frac{1}{2C} - \frac{1}{Cv_C}$$

which is the announced upper bound.

Remarking that  $\frac{C}{v_C} = \frac{C}{\lceil \frac{1+\sqrt{1+8C}}{2} \rceil} \leq \frac{C}{\frac{\sqrt{8C}}{2}} = \sqrt{\frac{C}{2}}$ , we get:

$$\alpha(C) \leq \ln\left(\sqrt{\frac{C}{2}}\right) + \frac{3}{2} + \frac{1}{2C} - \frac{1}{Cv_C} \leq \ln\left(\sqrt{\frac{C}{2}}\right) + \frac{14}{9}$$

( $\frac{1}{2C} - \frac{1}{Cv_C} = \frac{v_C-2}{2Cv_C}$  is maximum for  $C = 3$ )

For the equivalent in corollary 2, notice that in the inequalities of corollary 1 the term  $\ln\left(\frac{C}{v_C}\right)$  is the only one which tends to infinity. So,  $\alpha(C) \sim_{+\infty} \ln\left(\frac{C}{v_C}\right)$ .

Moreover, if two functions  $f_1$  and  $f_2$  are strictly positive, equivalent at infinity, and tend to infinity, then  $\ln(f_1) \sim_{+\infty} \ln(f_2)$ . Here, these hypothesis hold for  $\frac{C}{v_C}$  and  $\sqrt{\frac{C}{2}}$  and this ends the proof by transitivity of the equivalence relation.

### 3 Conclusion

We prove that Chvátal's greedy algorithm for the set-covering problem, when used in the special case of ADRL, has an improved performance guarantee, which is the best known guarantee for this particular case. However the sub problem of finding the best ring in the demand graph is  $\mathcal{NP}$ -hard in the general case (reduction to CLIQUE) and thus the algorithm is unlikely to be polynomial.

Yet these results give insight of what can be expected from a set-covering approach of this problem. For instance column generation methods, for which finding a good column correspond to finding a good ring, are promising and their performances should be compared with the methods already tried, like tabu search.

### Acknowledgements

The authors are grateful to Yves Crama for pointing out the relevance of this approach, and for all his comments and corrections. We are also grateful to Gerd Finke for his continuous encouraging.

### A Some numerical values

Figures 2 et 3 show the evolution of the value of  $\alpha$ , respectively for small and big values of  $C$ .

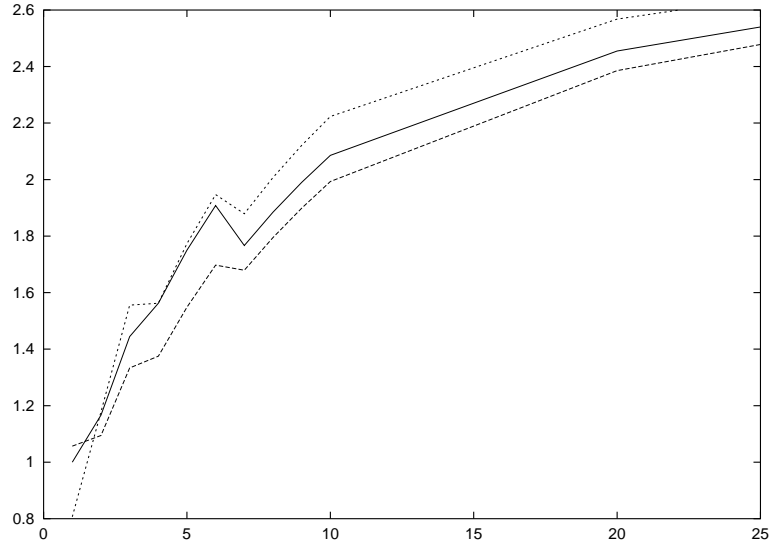


Figure 2: Evolution of the value of  $\alpha(C)$  depending on  $C$ . Plain line:  $\alpha(C)$ , dotted line: lower and upper bounds from corollary 1.

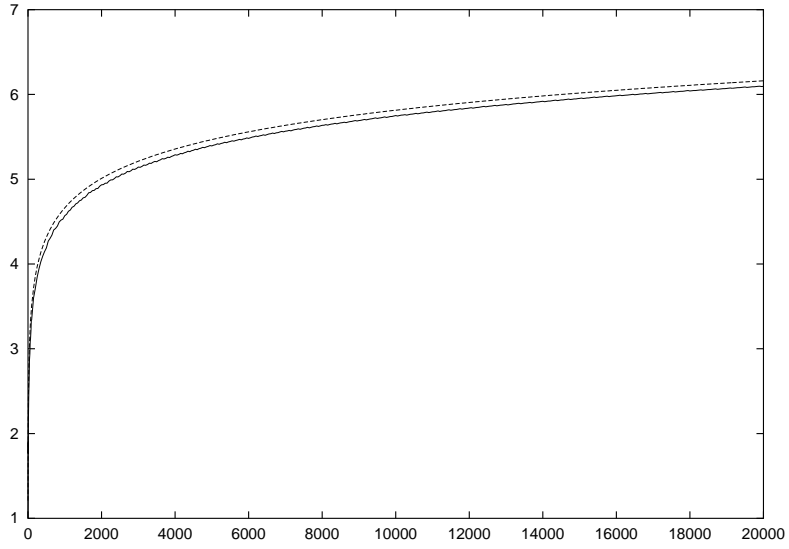


Figure 3: Evolution of the value of  $\alpha(C)$  depending on  $C$ . Plain line:  $\alpha(C)$ , dotted line:  $\frac{14}{9} + \ln\left(\sqrt{\frac{C}{2}}\right)$ .



## B Minimum number of vertices in a graph with $C$ edges

**Property 1 :**

*The minimum number of vertices  $v_C$  of a graph with  $C$  edges is:*

$$v_c = \left\lceil \frac{1 + \sqrt{1 + 8C}}{2} \right\rceil$$

◦

**proof :**

A graph with  $v_C$  vertices is contained in the complete graph of  $v_C$  vertices. Therefore, the minimum  $v_C$  is reached for the smallest complete graph with at least  $C$  edges.

A complete graph with  $v$  vertices has  $\frac{v(v-1)}{2}$  edges. And thus  $v_C$  is the solution of:

$$\min \left\{ v : v \geq 0, \frac{v(v-1)}{2} \geq C \right\}$$

This leads to a second-degree equation which straightforwardly gives:

$$v_c = \left\lceil \frac{1 + \sqrt{1 + 8C}}{2} \right\rceil$$

□

## References

- [1] Nadia Brauner, Yves Crama, Pierre Lemaire, and Christelle Wynants. Complexité et approximation pour la conception de réseaux SONET/SDH. Technical Report 61, Les Cahiers du Laboratoire Leibniz-IMAG, 2002.
- [2] Vasek Chvátal. A Greedy Heuristic for the Set-Covering Problem. *Math. of Oper. Res.*, 4(3):233–235, 1979.
- [3] Olivier Goldschmidt, Dorit S. Hochbaum, Asaf Levin, and Eli V. Olinick. The SONET Edge-Partition Problem. *Networks*, 2002 (to appear).
- [4] Pierre Lemaire, Nadia Brauner, and Gerd Finke. Une méthode tabou pour la décomposition de réseaux SONET/SDH en anneaux. In *Roadef 2002, 4<sup>o</sup> congrès de la société française de recherche opérationnelle et d'aide à la décision*, Paris, February 2002. Roadef.
- [5] The SONET Home Page. <http://www.sonet.com>.

Le laboratoire Leibniz est fortement pluridisciplinaire. Son activité scientifique couvre un large domaine qui comprend aussi bien des thèmes fondamentaux que des thèmes très liés aux applications, aussi bien en mathématiques qu'en informatique.

Les recherches sur les Environnements Informatiques d'Apprentissage Humain et la didactique des mathématiques ouvrent cette pluridisciplinarité sur les sciences humaines, elles jouent un rôle particulier en favorisant les coopérations entre différentes composantes du laboratoire.

- \* mathématiques discrètes et recherche opérationnelle
- \* logique et mathématique pour l'informatique
- \* informatique de la connaissance
- \* EIAH et didactique des mathématiques

*Les cahiers du laboratoire Leibniz* ont pour vocation la diffusion des rapports de recherche, des séminaires ou des projets de publication réalisés par des membres du laboratoire. Au-delà, Les cahiers peuvent accueillir des textes de chercheurs qui ne sont pas membres du laboratoire Leibniz mais qui travaillent sur des thèmes proches et ne disposent pas de tels supports de publication. Dans ce dernier cas, les textes proposés sont l'objet d'une évaluation par deux membres du Comité de Rédaction.

### **Comité de rédaction**

- \* mathématiques discrètes et recherche opérationnelle  
Gerd Finke, András Sebő
- \* logique et mathématique pour l'informatique  
Ricardo Caferra, Rachid Echahed
- \* informatique de la connaissance  
Yves Demazeau, Daniel Memmi,
- \* EIAH et didactique des mathématiques  
Nicolas Balacheff, Jean-Luc Dorier, Denise Grenier

Contact Gestion & Réalisation : Jacky Coutin  
Directeur de la publication : Nicolas Balacheff  
ISSN : 1298-020X - © laboratoire Leibniz