



HAL
open science

Measurement of acoustic attenuation in South Pole ice

R. Abbasi, Y. Abdou, T. Abu-Zayyad, J. Adams, J.A. Aguilar, M. Ahlers, K. Andeen, J. Auffenberg, X. Bai, Mark D. Baker, et al.

► **To cite this version:**

R. Abbasi, Y. Abdou, T. Abu-Zayyad, J. Adams, J.A. Aguilar, et al.. Measurement of acoustic attenuation in South Pole ice. *Astroparticle Physics*, 2010, 34 (6), pp.382. 10.1016/j.astropartphys.2010.10.003 . hal-00710482

HAL Id: hal-00710482

<https://hal.science/hal-00710482>


Submitted on 21 Jun 2012

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Measurement of acoustic attenuation in South Pole ice

R. Abbasi, Y. Abdou, T. Abu-Zayyad, J. Adams, J.A. Aguilar, M. Ahlers, K. Andeen, J. Auffenberg, X. Bai, M. Baker, S.W. Barwick, R. Bay, J.L. Bazo Alba, K. Beattie, J.J. Beatty, S. Bechet, J.K. Becker, K.-H. Becker, M.L. Benabderrahmane, J. Berdermann, P. Berghaus, D. Berley, E. Bernardini, D. Bertrand, D.Z. Besson, M. Bissok, E. Blaufuss, D.J. Boersma, C. Boehm, S. Böser, O. Botner, L. Bradley, J. Braun, S. Buitink, M. Carson, D. Chirkin, B. Christy, J. Clem, F. Clevermann, S. Cohen, C. Colnard, D.F. Cowen, M.V. D'Agostino, M. Danninger, C. De Clercq, L. Demirörs, O. Depaepe, F. Descamps, P. Desiati, G. de Vries-Uiterweerd, T. De Young, J.C. Díaz-Vélez, J. Dreyer, J.P. Dumm, M.R. Duvoort, R. Ehrlich, J. Eisch, R.W. Ellsworth, O. Engdegård, S. Euler, P.A. Evenson, O. Fadiran, A.R. Fazely, T. Feusels, K. Filimonov, C. Finley, M.M. Foerster, B.D. Fox, A. Franckowiak, R. Franke, T.K. Gaisser, J. Gallagher, R. Ganugapati, M. Geisler, L. Gerhardt, L. Gladstone, T. Glüsenkamp, A. Goldschmidt, J.A. Goodman, D. Grant, T. Griesel, A. Groß, S. Grullon, R.M. Gunasingha, M. Gurtner, L. Gustafsson, C. Ha, A. Hallgren, F. Halzen, K. Han, K. Hanson, K. Helbing, P. Herquet, S. Hickford, G.C. Hill, K.D. Hoffman, A. Homeier, K. Hoshina, D. Hubert, W. Huelsnitz, J.-P. Hülß, P.O. Hulth, K. Hultqvist, S. Hussain, R.L. Imlay, A. Ishihara, J. Jacobsen, G.S. Japaridze, H. Johansson, J.M. Joseph, K.-H. Kampert, A. Kappes, T. Karg, A. Karle, J.L. Kelley, N. Kemming, P. Kenny, J. Kiryluk, F. Kislak, S.R. Klein, S. Knops, J.-H. Köhne, G. Kohnen, H. Kolanoski, L. Köpke, D.J. Koskinen, M. Kowalski, T. Kowarik, M. Krasberg, T. Krings, G. Kroll, K. Kuehn, T. Kuwabara, M. Labare, S. Lafebre, K. Laihem, H. Landsman, R. Lauer, R. Lehmann, D. Lennarz, J. Lünemann, J. Madsen, P. Majumdar, R. Maruyama, K. Mase, H.S. Matis, M. Matusik, K. Meagher, M. Merck, P. Mészáros, T. Meures, E. Middell, N. Milke, T. Montaruli, R. Morse, S.M. Movit, R. Nahnauer, J.W. Nam, U. Naumann, P. Nießen, D.R. Nygren, S. Odrowski, A. Olivas, M. Olivo, M. Ono, S. Panknin, L. Paul, C. Pérez de los Heros, J. Petrovic, A. Piegsa, D. Pieloth, R. Porrata, J. Posselt, P.B. Price, M. Prikockis, G.T. Przybylski, K. Rawlins, P. Redl, E. Resconi, W. Rhode, M. Ribordy, A. Rizzo, J.P. Rodrigues, P. Roth, F. Rothmaier, C. Rott, C. Roucelle, T. Ruhe, D. Rutledge, B. Ruzybayev, D. Ryckbosch, H.-G. Sander, S. Sarkar, K. Schatto, S. Schlenstedt, T. Schmidt, D. Schneider, A. Schukraft, A. Schultes, O. Schulz, M. Schunck, D. Seckel, B. Semburg, S.H. Seo, Y. Sestayo, S. Seunarine, A. Silvestri, A. Slipak, G.M. Spiczak, C. Spiering, M. Stamatikos, T. Stanev, G. Stephens, T. Stezelberger, R.G. Stokstad, S. Stoyanov, E.A. Strahler, T. Straszheim, G.W. Sullivan, Q. Swillens, I. Taboada, A. Tamburro, O. Tarasova,

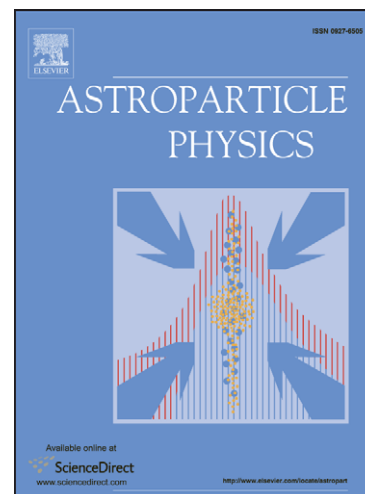

A. Tepe, S. Ter-Antonyan, S. Tilav, P.A. Toale, D. Tosi, D. Turčan, N. van Eijndhoven, J. Vandenbroucke, A. Van Overloop, J. van Santen, B. Voigt, C. Walck, T. Waldenmaier, M. Wallraff, M. Walter, C. Wendt, S. Westerhoff, N. Whitehorn, K. Wiebe, C.H. Wiebusch, G. Wikström, D.R. Williams, R. Wischniewski, H. Wissing, K. Woschnagg, C. Xu, X.W. Xu, J.P. Yanez, G. Yodh, S. Yoshida, P. Zarzhitsky, IceCube Collaboration

PII: S0927-6505(10)00184-2
 DOI: [10.1016/j.astropartphys.2010.10.003](https://doi.org/10.1016/j.astropartphys.2010.10.003)
 Reference: ASTPHY 1528

To appear in: *Astroparticle Physics*

Received Date: 10 April 2010
 Revised Date: 5 October 2010
 Accepted Date: 5 October 2010

Please cite this article as: R. Abbasi, Y. Abdou, T. Abu-Zayyad, J. Adams, J.A. Aguilar, M. Ahlers, K. Andeen, J. Auffenberg, X. Bai, M. Baker, S.W. Barwick, R. Bay, J.L. Bazo Alba, K. Beattie, J.J. Beatty, S. Bechet, J.K. Becker, K.-H. Becker, M.L. Benabderrahmane, J. Berdermann, P. Berghaus, D. Berley, E. Bernardini, D. Bertrand, D.Z. Besson, M. Bissok, E. Blaufuss, D.J. Boersma, C. Boehm, S. Böser, O. Botner, L. Bradley, J. Braun, S. Buitink, M. Carson, D. Chirkin, B. Christy, J. Clem, F. Clevermann, S. Cohen, C. Colnard, D.F. Cowen, M.V. D'Agostino, M. Danninger, C. De Clercq, L. Demirörs, O. Depaeppe, F. Descamps, P. Desiati, G. de Vries-Uiterweerd, T. De Young, J.C. Díaz-Vélez, J. Dreyer, J.P. Dumm, M.R. Duvoort, R. Ehrlich, J. Eisch, R.W. Ellsworth, O. Engdegård, S. Euler, P.A. Evenson, O. Fadiran, A.R. Fazely, T. Feusels, K. Filimonov, C. Finley, M.M. Foerster, B.D. Fox, A. Franckowiak, R. Franke, T.K. Gaisser, J. Gallagher, R. Ganugapati, M. Geisler, L. Gerhardt, L. Gladstone, T. Glüsenskamp, A. Goldschmidt, J.A. Goodman, D. Grant, T. Griesel, A. Groß, S. Grullon, R.M. Gunasingha, M. Gurtner, L. Gustafsson, C. Ha, A. Hallgren, F. Halzen, K. Han, K. Hanson, K. Helbing, P. Herquet, S. Hickford, G.C. Hill, K.D. Hoffman, A. Homeier, K. Hoshina, D. Hubert, W. Huelsnitz, J.-P. Hülß, P.O. Hulth, K. Hultqvist, S. Hussain, R.L. Imlay, A. Ishihara, J. Jacobsen, G.S. Japaridze, H. Johansson, J.M. Joseph, K.-H. Kampert, A. Kappes, T. Karg, A. Karle, J.L. Kelley, N. Kemming, P. Kenny, J. Kiryluk, F. Kislat, S.R. Klein, S. Knops, J.-H. Köhne, G. Kohnen, H. Kolanoski, L. Köpke, D.J. Koskinen, M. Kowalski, T. Kowarik, M. Krasberg, T. Krings, G. Kroll, K. Kuehn, T. Kuwabara, M. Labare, S. Lafebre, K. Laihem, H. Landsman, R. Lauer, R. Lehmann, D. Lennarz, J. Lünemann, J. Madsen, P. Majumdar, R. Maruyama, K. Mase, H.S. Matis, M. Matusik, K. Meagher, M. Merck, P. Mészáros, T. Meures, E. Middell, N. Milke, T. Montaruli, R. Morse, S.M. Movit, R. Nahnauer, J.W. Nam, U. Naumann, P. Nießen, D.R. Nygren, S. Odrowski, A. Olivás, M. Olivo, M. Ono, S. Panknin, L. Paul, C. Pérez de los Heros, J. Petrovic, A. Piegsa, D. Pieloth, R. Porrata, J. Posselt, P.B. Price, M. Prikockis, G.T. Przybylski, K. Rawlins, P. Redl, E. Resconi, W. Rhode, M. Ribordy, A. Rizzo, J.P. Rodrigues, P. Roth, F. Rothmaier, C. Rott, C. Roucelle, T. Ruhe, D. Rutledge, B. Ruzybayev, D. Ryckbosch, H.-G. Sander, S. Sarkar, K. Schatto, S. Schlenstedt, T. Schmidt, D. Schneider, A. Schukraft, A. Schultes, O. Schulz, M. Schunck, D. Seckel, B. Semburg, S.H. Seo, Y. Sestayo, S. Seunarine, A. Silvestri, A. Slipak, G.M. Spiczak, C. Spiering, M. Stamatikos, T. Stanev, G. Stephens, T. Stezelberger, R.G. Stokstad, S. Stoyanov, E.A. Strahler, T. Straszheim, G.W. Sullivan, Q. Swillens, I. Taboada, A.

Tamburro, O. Tarasova, A. Tepe, S. Ter-Antonyan, S. Tilav, P.A. Toale, D. Tosi, D. Turčan, N. van Eijndhoven, J. Vandenbroucke, A. Van Overloop, J. van Santen, B. Voigt, C. Walck, T. Waldenmaier, M. Wallraff, M. Walter, C. Wendt, S. Westerhoff, N. Whitehorn, K. Wiebe, C.H. Wiebusch, G. Wikström, D.R. Williams, R. Wischnewski, H. Wissing, K. Woschnagg, C. Xu, X.W. Xu, J.P. Yanez, G. Yodh, S. Yoshida, P. Zarzhitsky, IceCube Collaboration Measurement of acoustic attenuation in South Pole ice, *Astroparticle Physics* (2010), doi: [10.1016/j.astropartphys.2010.10.003](https://doi.org/10.1016/j.astropartphys.2010.10.003)

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Measurement of acoustic attenuation in South Pole ice

R. Abbasi^{ab}, Y. Abdou^v, T. Abu-Zayyad^{ag}, J. Adams^p, J. A. Aguilar^{ab}, M. Ahlers^{af},
 K. Andeen^{ab}, J. Auffenberg^{am}, X. Bai^{ae}, M. Baker^{ab}, S. W. Barwick^x, R. Bay^g,
 J. L. Bazo Alba^{an}, K. Beattie^h, J. J. Beatty^{r,s}, S. Bechet^m, J. K. Becker^j, K.-H. Becker^{am},
 M. L. Benabderrahmane^{an}, J. Berdermann^{an}, P. Berghaus^{ab}, D. Berley^q, E. Bernardini^{an},
 D. Bertrand^m, D. Z. Besson^z, M. Bissok^a, E. Blaufuss^q, D. J. Boersma^a, C. Bohm^{ah},
 S. Böser^k, O. Botner^{ak}, L. Bradley^{aj}, J. Braun^{ab}, S. Buitink^h, M. Carson^v, D. Chirkin^{ab},
 B. Christy^q, J. Clem^{ae}, F. Clevermann^t, S. Cohen^y, C. Colnard^w, D. F. Cowen^{aj,ai},
 M. V. D'Agostino^g, M. Danninger^{ah}, C. De Clercqⁿ, L. Demirörs^y, O. Depaepeⁿ,
 F. Descamps^v, P. Desiati^{ab}, G. de Vries-Uiterweerd^v, T. DeYoung^{aj}, J. C. Díaz-Vélez^{ab},
 J. Dreyer^j, J. P. Dumm^{ab}, M. R. Duvoort^{al}, R. Ehrlich^q, J. Eisch^{ab}, R. W. Ellsworth^q,
 O. Engdegård^{ak}, S. Euler^a, P. A. Evenson^{ae}, O. Fadiran^d, A. R. Fazely^f, T. Feusels^v,
 K. Filimonov^g, C. Finley^{ah}, M. M. Foerster^{aj}, B. D. Fox^{aj}, A. Franckowiakⁱ, R. Franke^{an},
 T. K. Gaiser^{ae}, J. Gallagher^{aa}, R. Ganugapati^{ab}, M. Geisler^a, L. Gerhardt^{h,g},
 L. Gladstone^{ab}, T. Glüsenkamp^a, A. Goldschmidt^h, J. A. Goodman^q, D. Grant^u,
 T. Griesel^{ac}, A. Groß^{p,w}, S. Grullon^{ab}, R. M. Gunasingha^f, M. Gurtner^{am}, L. Gustafsson^{ak},
 C. Ha^{aj}, A. Hallgren^{ak}, F. Halzen^{ab}, K. Han^p, K. Hanson^{ab}, K. Helbing^{am}, P. Herquet^{ad},
 S. Hickford^p, G. C. Hill^{ab}, K. D. Hoffman^q, A. Homeierⁱ, K. Hoshina^{ab}, D. Hubertⁿ,
 W. Huelsnitz^q, J.-P. Hülß^a, P. O. Hulth^{ah}, K. Hultqvist^{ah}, S. Hussain^{ae}, R. L. Imlay^f,
 A. Ishihara^o, J. Jacobsen^{ab}, G. S. Japaridze^d, H. Johansson^{ah}, J. M. Joseph^h,
 K.-H. Kampert^{am}, A. Kappes^{ab,1}, T. Karg^{am}, A. Karle^{ab}, J. L. Kelley^{ab}, N. Kemmingⁱ,
 P. Kenny^z, J. Kiryluk^{h,g}, F. Kislak^{an}, S. R. Klein^{h,g}, S. Knops^a, J.-H. Köhne^t, G. Kohnen^{ad},
 H. Kolanoskiⁱ, L. Köpke^{ac}, D. J. Koskinen^{aj}, M. Kowalski^k, T. Kowarik^{ac}, M. Krasberg^{ab},
 T. Krings^a, G. Kroll^{ac}, K. Kuehn^r, T. Kuwabara^{ae}, M. Labare^m, S. Lafebre^{aj}, K. Laihem^a,
 H. Landsman^{ab}, R. Lauer^{an}, R. Lehmannⁱ, D. Lennarz^a, J. Lünemann^{ac}, J. Madsen^{ag},
 P. Majumdar^{an}, R. Maruyama^{ab}, K. Mase^o, H. S. Matis^h, M. Matusik^{am}, K. Meagher^q,
 M. Merck^{ab}, P. Mészáros^{ai,aj}, T. Meures^a, E. Middell^{an}, N. Milke^t, T. Montaruli^{ab,2},
 R. Morse^{ab}, S. M. Movit^{ai}, R. Nahnhauser^{an}, J. W. Nam^x, U. Naumann^{am}, P. Nießen^{ae},
 D. R. Nygren^h, S. Odrowski^w, A. Olivas^q, M. Olivo^{ak,j}, M. Ono^o, S. Pankninⁱ, L. Paul^a,
 C. Pérez de los Heros^{ak}, J. Petrovic^m, A. Piegsa^{ac}, D. Pieloth^t, R. Porrata^g, J. Posselt^{am},
 P. B. Price^g, M. Prikockis^{aj}, G. T. Przybylski^h, K. Rawlins^c, P. Redl^q, E. Resconi^w,
 W. Rhode^t, M. Ribordy^y, A. Rizzoⁿ, J. P. Rodrigues^{ab}, P. Roth^q, F. Rothmaier^{ac},
 C. Rott^r, C. Roucelle^w, T. Ruhe^t, D. Rutledge^{aj}, B. Ruzybayev^{ae}, D. Ryckbosch^v,
 H.-G. Sander^{ac}, S. Sarkar^{af}, K. Schatto^{ac}, S. Schlenstedt^{an}, T. Schmidt^q, D. Schneider^{ab},
 A. Schukraft^a, A. Schultes^{am}, O. Schulz^w, M. Schunck^a, D. Seckel^{ae}, B. Semburg^{am},

1
2
3
4
5
6 S. H. Seo^{ah}, Y. Sestayo^w, S. Seunarine^l, A. Silvestri^x, A. Slipak^{aj}, G. M. Spiczak^{ag},
7 C. Spiering^{an}, M. Stamatikos^{r,3}, T. Stanev^{ae}, G. Stephens^{aj}, T. Stezelberger^h,
8 R. G. Stokstad^h, S. Stoyanov^{ae}, E. A. Strahlerⁿ, T. Straszheim^q, G. W. Sullivan^q,
9 Q. Swillens^m, I. Taboada^e, A. Tamburro^{ag}, O. Tarasova^{an}, A. Tepe^e, S. Ter-Antonyan^f,
10 S. Tilav^{ae}, P. A. Toale^{aj}, D. Tosi^{an,*}, D. Turčan^q, N. van Eijndhovenⁿ, J. Vandenbroucke^g,
11 A. Van Overloop^v, J. van Santenⁱ, B. Voigt^{an}, C. Walck^{ah}, T. Waldenmaierⁱ, M. Wallraff^a,
12 M. Walter^{an}, C. Wendt^{ab}, S. Westerhoff^{ab}, N. Whitehorn^{ab}, K. Wiebe^{ac}, C. H. Wiebusch^a,
13 G. Wikström^{ah}, D. R. Williams^b, R. Wischnewski^{an}, H. Wissing^q, K. Woschnagg^g,
14 C. Xu^{ae}, X. W. Xu^f, J. P. Yanez^{ak}, G. Yodh^x, S. Yoshida^o, P. Zarzhitsky^b

15
16
17
18 (IceCube Collaboration)

19
20
21 ^a*III. Physikalisches Institut, RWTH Aachen University, D-52056 Aachen, Germany*

22 ^b*Dept. of Physics and Astronomy, University of Alabama, Tuscaloosa, AL 35487, USA*

23 ^c*Dept. of Physics and Astronomy, University of Alaska Anchorage, 3211 Providence Dr., Anchorage, AK 99508, USA*

24 ^d*CTSPS, Clark-Atlanta University, Atlanta, GA 30314, USA*

25 ^e*School of Physics and Center for Relativistic Astrophysics, Georgia Institute of Technology, Atlanta, GA 30332, USA*

26 ^f*Dept. of Physics, Southern University, Baton Rouge, LA 70813, USA*

27 ^g*Dept. of Physics, University of California, Berkeley, CA 94720, USA*

28 ^h*Lawrence Berkeley National Laboratory, Berkeley, CA 94720, USA*

29 ⁱ*Institut für Physik, Humboldt-Universität zu Berlin, D-12489 Berlin, Germany*

30 ^j*Fakultät für Physik & Astronomie, Ruhr-Universität Bochum, D-44780 Bochum, Germany*

31 ^k*Physikalisches Institut, Universität Bonn, Nussallee 12, D-53115 Bonn, Germany*

32 ^l*Dept. of Physics, University of the West Indies, Cave Hill Campus, Bridgetown BB11000, Barbados*

33 ^m*Université Libre de Bruxelles, Science Faculty CP230, B-1050 Brussels, Belgium*

34 ⁿ*Vrije Universiteit Brussel, Dienst ELEM, B-1050 Brussels, Belgium*

35 ^o*Dept. of Physics, Chiba University, Chiba 263-8522, Japan*

36 ^p*Dept. of Physics and Astronomy, University of Canterbury, Private Bag 4800, Christchurch, New Zealand*

37 ^q*Dept. of Physics, University of Maryland, College Park, MD 20742, USA*

38 ^r*Dept. of Physics and Center for Cosmology and Astro-Particle Physics, Ohio State University, Columbus, OH 43210, USA*

39 ^s*Dept. of Astronomy, Ohio State University, Columbus, OH 43210, USA*

40 ^t*Dept. of Physics, TU Dortmund University, D-44221 Dortmund, Germany*

41 ^u*Dept. of Physics, University of Alberta, Edmonton, Alberta, Canada T6G 2G7*

42 ^v*Dept. of Subatomic and Radiation Physics, University of Gent, B-9000 Gent, Belgium*

43 ^w*Max-Planck-Institut für Kernphysik, D-69177 Heidelberg, Germany*

44 ^x*Dept. of Physics and Astronomy, University of California, Irvine, CA 92697, USA*

45 ^y*Laboratory for High Energy Physics, École Polytechnique Fédérale, CH-1015 Lausanne, Switzerland*

46 ^z*Dept. of Physics and Astronomy, University of Kansas, Lawrence, KS 66045, USA*

47 ^{aa}*Dept. of Astronomy, University of Wisconsin, Madison, WI 53706, USA*

48 ^{ab}*Dept. of Physics, University of Wisconsin, Madison, WI 53706, USA*

49 ^{ac}*Institute of Physics, University of Mainz, Staudinger Weg 7, D-55099 Mainz, Germany*

50 ^{ad}*Université de Mons, 7000 Mons, Belgium*

51 ^{ae}*Bartol Research Institute and Department of Physics and Astronomy, University of Delaware, Newark, DE 19716, USA*

52 ^{af}*Dept. of Physics, University of Oxford, 1 Keble Road, Oxford OX1 3NP, UK*

53 ^{ag}*Dept. of Physics, University of Wisconsin, River Falls, WI 54022, USA*

54 ^{ah}*Oskar Klein Centre and Dept. of Physics, Stockholm University, SE-10691 Stockholm, Sweden*

55 ^{ai}*Dept. of Astronomy and Astrophysics, Pennsylvania State University, University Park, PA 16802, USA*

56 ^{aj}*Dept. of Physics, Pennsylvania State University, University Park, PA 16802, USA*

57 ^{ak}*Dept. of Physics and Astronomy, Uppsala University, Box 516, S-75120 Uppsala, Sweden*

58 ^{al}*Dept. of Physics and Astronomy, Utrecht University/SRON, NL-3584 CC Utrecht, The Netherlands*

59 ^{am}*Dept. of Physics, University of Wuppertal, D-42119 Wuppertal, Germany*

60 ^{an}*DESY, D-15735 Zeuthen, Germany*

Abstract

Using the South Pole Acoustic Test Setup (SPATS) and a retrievable transmitter deployed in holes drilled for the IceCube experiment, we have measured the attenuation of acoustic signals by South Pole ice at depths between 190 m and 500 m. Three data sets, using different acoustic sources, have been analyzed and give consistent results. The method with the smallest systematic uncertainties yields an amplitude attenuation coefficient $\alpha = 3.20 \pm 0.57 \text{ km}^{-1}$ between 10 and 30 kHz, considerably larger than previous theoretical estimates. Expressed as an attenuation length, the analyses give a consistent result for $\lambda \equiv 1/\alpha$ of ~ 300 m with 20% uncertainty. No significant depth or frequency dependence has been found.

Key words: neutrino astronomy, acoustics, South Pole, acoustic attenuation, ice

1. Introduction

Experiments to study ultra-high-energy neutrinos have been the subject of increasing interest during recent years [1,2,3]. As observed by HiRes [4] and the Pierre Auger Observatory [5], the charged cosmic ray flux decreases steeply above $10^{19.5}$ eV. This is most likely due to the interactions of charged cosmic particles with the cosmic microwave background radiation, known as the GZK effect [6,7]. The detection of neutrinos from this interaction would confirm this explanation. Spectral, temporal, and directional distributions of such neutrinos, enabled by detecting a significant number of them, would address important questions of cosmology, astrophysics and particle physics [8].

Estimates of the small flux of GZK neutrinos vary by an order of magnitude. The results from Engel, Seckel, and Stanev [9] are often used as a standard for the discussion of possible detector scenarios. In all cases, detector effective volumes of 100 km^3 or larger are required.

Several past and current experimental projects seek to detect GZK neutrinos. The best limits currently come from searches for radio signals from neutrino interactions. Presently the most stringent flux limit is from the ANITA project [10]. However, all experiments searching for weak particle fluxes must contend with challenging systematic effects

and background separation. This may be overcome in the future by using a hybrid detector. The radio technology could be complemented by adding acoustic detectors, searching for the sound produced by the interactions of neutrinos above 10^{18} eV [11,12]. Simulations of a radio-acoustic hybrid detector encompassing the optical IceCube neutrino observatory at the South Pole [13], assuming an attenuation length on the order of a few kilometers as theorized in [14], gave a predicted detection rate of 20 neutrino events per year, half of them detected by both radio and acoustic sensors [15].

Ice seems to be a favorable medium for the application of the optical, radio and acoustic detection techniques. Ice properties have been measured for optical signals by the AMANDA experiment [16] and for radio waves by the RICE experimental program [17,18]. As far as the propagation of acoustic signals is concerned, theoretical estimates [14] have indicated low absorption and scattering corresponding to an attenuation length greater than 1 km.

To test the theoretical estimates, the South Pole Acoustic Test Setup (SPATS) was deployed in January and December 2007 in the shallowest 500 m of IceCube holes at the South Pole. SPATS is used to study the following four properties:

- the speed of sound as a function of depth in the ice, important for the expected neutrino signal strength, event localization and reconstruction
- the acoustic noise level at the South Pole, determining the energy threshold of a future neutrino detector
- the rate and nature of transient acoustic signals which could mimic neutrino interactions, presenting a serious background source
- the attenuation of acoustic signals by the ice, which determines the necessary density of acous-

* Corresponding author. Address: DESY, D-15735 Zeuthen, Germany, (delia.tosi@desy.de).

¹ affiliated with Universität Erlangen-Nürnberg, Physikalisches Institut, D-91058, Erlangen, Germany

² on leave of absence from Università di Bari and Sezione INFN, Dipartimento di Fisica, I-70126, Bari, Italy


³ NASA Goddard Space Flight Center, Greenbelt, MD 20771, USA

66 tic sensors in the ice for a reasonable detection
 67 efficiency for neutrino interactions.
 68 The sound speed has been measured in [19]. Noise
 69 and transients are currently under study. Our mea-
 70 surement of attenuation by the ice is reported here.

71 2. Experimental setup

72 2.1. The South Pole Acoustic Test Setup

73 Figure 1 shows the geometry of the acoustic instru-
 74 mentation used for the measurement. In this
 75 section we provide a description of all the hardware
 76 used, while in the next we explain which sound
 77 source and which subset of sensors we used for each
 78 measurement. The permanently deployed in-ice
 79 SPATS hardware consists of four vertical instru-
 80 mented cables (*strings*), which were deployed in the
 81 shallowest 500 m of four IceCube holes. The esti-
 82 mated surveying error on the position of each hole
 83 center is ± 0.1 m in each of the x and y coordinates.

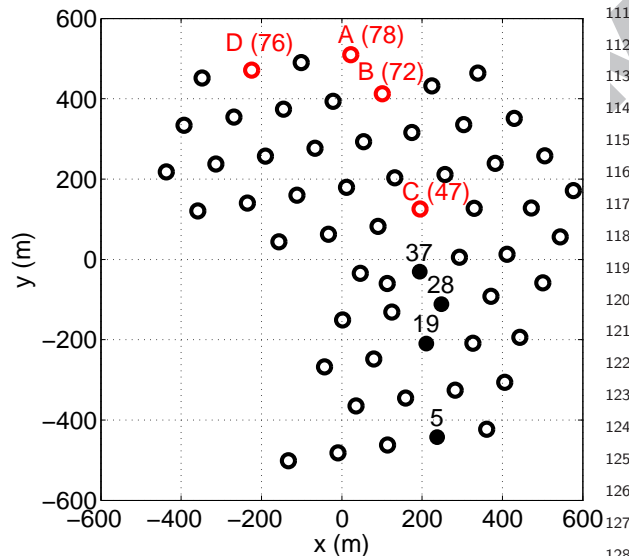

49 Fig. 1. SPATS geometry and IceCube footprint in 2009.
 50 The permanently deployed SPATS hardware is indicated by
 51 open circles with the string ID (ABCD) and corresponding
 52 IceCube hole number. The full circles indicate the location
 53 of the holes, indexed by the corresponding IceCube hole
 54 number, where the pinger was deployed in the 2008-2009
 55 season.

56 The maximum string-to-string horizontal distance is 543 m between String C and String D.
 57 Strings A, B and C have *acoustic stages* (described
 58 below) installed at 80, 100, 140, 190, 250, 320 and
 59 400 m depth. String D has instrumentation at 140,
 60 190, 250, 320, 400, 430 and 500 m depth.

89 190, 250, 320, 400, 430 and 500 m depth. A diagram
 90 of the deployed instrumentation is presented in [19].

91 An acoustic stage consists of a transmitter module
 92 and a sensor module. The transmitter module con-
 93 sists of a steel pressure vessel of 10 cm diameter that
 94 houses a high-voltage (HV) pulse generator board
 95 and a temperature or pressure sensor. The active ele-
 96 ment, a ring-shaped piezo-ceramic element cast in
 97 epoxy for electrical insulation, is positioned ~ 13 cm
 98 below the steel housing. The HV pulse stimulates
 99 the piezo-ceramic element, resulting in an acoustic
 100 pulse. The amplitude of the acoustic pulse can be
 101 modified externally by adjusting two additional in-
 102 put signals: the steering voltage and the trigger pulse
 103 length.

104 The SPATS sensor module has three channels,
 105 separated by 120° in azimuth to ensure good an-
 106 gular coverage. A channel consists of a cylindrical
 107 piezo-ceramic element that is directly soldered to a
 108 three-stage amplifier and pressed against the steel
 109 housing. The three channels of each sensor are inde-
 110 pendent and therefore can be treated as three stand-
 111 alone receivers. From previous laboratory tests, it is
 112 known that the sensitivity of each sensor depends on
 113 both the polar and the azimuthal angles [20]. Most
 114 of the sensors were calibrated in water before instal-
 115 lation, but there is evidence that the sensitivities
 116 have changed since deployment. The effect on the
 117 sensor sensitivity of simultaneous low temperature,
 118 high pressure and ice coupling (compared to water
 119 coupling where calibration was performed in the lab-
 120 oratory) is unknown, as is the precise location of the
 121 10 cm diameter sensor vessels in the 75 cm wide Ice-
 122 Cube hole. During re-freezing of the holes, ice with
 123 bubbles and perhaps cracks is formed around the
 124 sensors, possibly leading to a strong but unknown
 125 angular dependence. A method to calibrate the sen-
 126 sors' beam pattern *in situ* has not yet been devel-
 127 oped.

128 The *Hydrophone for Acoustic Detection at the*
 129 *South Pole (HADES)* was designed and constructed
 130 to offer an alternative sensor with a different dy-
 131 namic range. A ring-shaped piezo-ceramic element
 132 is connected to a two-stage differential amplifier
 133 placed inside the ring. The assembly is located out-
 134 side of the housing of the SPATS sensor module and
 135 is coated with polyurethane plastic resin in order
 136 to protect the electronics from water and ice. Two
 137 HADES modules, each with one sensor channel, are
 138 installed in place of SPATS sensors on String D, at
 139 190 m and 430 m depth.

140 We refer to each sensor channel by the string iden-

tifier letter (ABCD), the number of the stage (1-7, from shallowest to deepest) and the number of the channel (0-2). For example, AS6-0 indicates channel 0 of sensor module number 6 of String A.

Each of the acoustic stages is connected to an *Acoustic Junction Box* (AJB) at the surface. This AJB is a strong aluminum box buried under ~ 2 m of snow and contains a rugged embedded computer (*String PC*) with the electronic components necessary to digitize locally all signals. Each AJB is connected to a computer (the *Master PC*), located in the IceCube Laboratory, which stores the data until it is transferred by satellite to the Northern hemisphere or copied locally to tape. A GPS-based IRIG-B time code signal provides absolute time stamping. For a detailed technical description of the SPATS permanent hardware and its development, see [19,20].

2.2. Retrievable pinger

In addition to the equipment deployed in the ice, a retrievable transmitter (*pinger*) was designed as a unique acoustic source to be operated in multiple water-filled IceCube holes, prior to IceCube string deployment. A previous version of the pinger was used in the 2007-2008 season to measure the sound speed profile. Here we describe the pinger as modified for the attenuation measurement in the 2008-2009 season, when it was deployed in IceCube holes 5, 19, 28 and 37 (Figure 1).

The pinger is an autonomous transportable device consisting of an acoustic stage which is lowered into the water, and an auxiliary box, sitting on the surface, which provides power and a trigger signal. The box was connected to the acoustic stage during operation through a steel-armored four-conductor cable, about 2700 m long, spooled on a winch, used to lower and raise the pinger.

The acoustic stage consists of a custom designed high-voltage pulser circuit and of a spherical piezoelectric ceramic emitter⁴ from the International Transducer Company (ITC). The Transmitting Voltage Response (TVR) specification provided by ITC has dominant components in the frequency range between 10 and 30 kHz, with a peak of 149 dB re ($\mu\text{Pa}/\text{V}$ @ 1 m) at the resonance peak. The resonance frequency has been measured to be $f_{res} = 17.7$ kHz.

⁴ model ITC-1001

The box on the surface, (the *Acoustic Pinger Box*, APB) contains a 24 V sealed lead acid rechargeable battery pack (Hawker-Cyclon) rated to low temperatures. A GPS clock (Garmin model *GPS 18 LVC*) generates a 1 pulse-per-second (PPS) signal. A frequency multiplier circuit, consisting of a Complex Programmable Logic Device (CPLD) and an oscillator, produces a continuous train of electric pulses at a rate which is adjustable by a switch. The rate of the pulses was 10 Hz (in holes 28, 19 5) or 8 Hz (in hole 37) during operation at the South Pole. This means that a sequence of pulses equally spaced in time (by 100 or 125 ms) was produced by the CPLD, with every 10th (or 8th) pulse synchronized with the PPS rising edge. Each electric pulse is delivered through the APB to the acoustic stage. Here it triggers a timer in monostable configuration which charges an LC circuit for a defined time, at the end of which the energy accumulated is transferred to the piezoelectric ceramic, resulting in acoustic emission. The electric pulse exciting the piezoelectric ceramic is unipolar, about 300 V high, and has a full-width-half-maximum width of $60 \mu\text{s}$. The pressure signal transmitted to the ice is the convolution of the stimulating electrical pulse and the TVR. The calculation of the spectrum, displayed in Figure 2, shows that most of the power is emitted in two lobes, one around 10 kHz and one around 20 kHz, with a minimum at the resonance frequency of the piezoelectric ceramic.

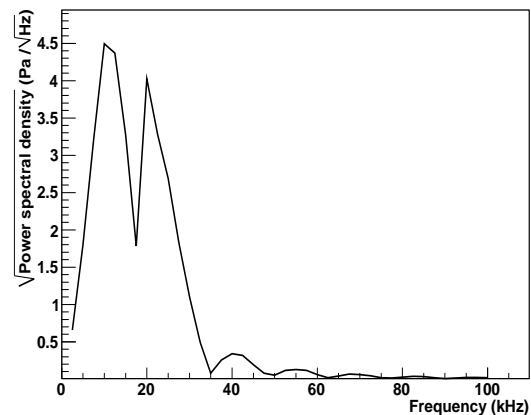


Fig. 2. Spectrum of the acoustic pinger pulse, calculated as the convolution of the electrical high-voltage pulse and the Transmitting Voltage Response of the *ITC-1001*.

The pinger was used in 2007-2008 to measure the sound speed vs. depth in South Pole ice for both longitudinal or pressure waves (P waves) and transver-

sal or shear waves (S waves) [19]. The production of shear waves (from mode conversion at the water-ice boundary) in that data set was favored by the fact that the pinger's lateral position in the hole was off-center and varying. However, this made attenuation measurement difficult due to the change in shape of the waveform recorded by one sensor channel for different pinger holes. For the 2008-2009 season, the acoustic stage was equipped with mechanical centralizers, suitable to keep the acoustic emitter close to the central axis of the hole (see description in [21]). This prevented the stage from swinging and stabilized the acoustic pulse transmitted in the ice. The centralization of the pinger (and the generally longer distances between pinger and sensors in 2008-2009 than 2007-2008) minimized the appearance of shear waves in the 2008-2009 data set; consequently it has been possible to measure the attenuation of P waves without the complication of S waves.

3. Data processing and analysis techniques

3.1. Data sets

Three different types of data were acquired and analyzed to measure the acoustic attenuation;

- (i) Pinger data: multiple acoustic pulses were emitted from several water-filled IceCube holes and recorded by sensors of the SPATS array. For each pinger depth, 180 (144 in hole 37) single acoustic pulses were recorded by each sensor channel.
- (ii) Inter-string data: transmitters of the SPATS array emitted acoustic pulses that were recorded by the SPATS sensors. For each transmitter 500 pulses were recorded by each single sensor channel.
- (iii) Transient data: sound produced in re-freezing IceCube holes at depths of about 250 m was recorded by the sensors of the SPATS array.

An overview of hardware components involved in the analysis, together with the corresponding range of distances (baselines) and number of pulses recorded for each channel, is shown in Table 1.

3.2. Data processing

For each of the analyses described below, N_p consecutive acoustic pulses from one source (transmitter or pinger) are recorded by one sensor channel

Table 1

Overview of data used for the attenuation measurement. The last column gives the number of pulses in each sensor recording.

Data type	Receiver	Source	Distance	Number of pulses
Pinger	SPATS sensors	pinger	125-1023 m	144-180
Inter-string	SPATS sensors	SPATS transmitters	125-686 m	500
Transients	SPATS sensors	transient events	243-750 m	1

and are averaged to improve the signal-to-noise ratio. Each string uses a single clock to drive both its analog-to-digital converters (ADCs) and its digital-to-analog converters (DACs). The ADCs are used to record the sensor waveforms with a sampling frequency of 200 kHz. The DACs are used to pulse SPATS transmitters. The clocks drift at a rate that is typically several parts per million, or tens of μs over the duration of a single sensor recording. This cumulative amount of drift is on the order of one signal oscillation period and therefore can cause severe decoherence in pulse averaging if the nominal rather than true sampling frequency is used. On the sensor side we correct the clock drift effect by using the IRIG-B GPS signal (which is recorded synchronously with each sensor channel) to determine the actual sampling frequency at the time of the recording. We then use this actual sampling frequency to average the recorded pulses.

The pinger pulse emission is driven by the GPS receiver and by the frequency multiplier. The GPS receiver provides the PPS pulse with a delay of about $1\ \mu\text{s}$ relative to the GPS signal which drives the String PC ADCs. The frequency multiplier synchronizes the train of electric pulses with the PPS pulse, but introduces some jitter in time which we measured in the laboratory to be $\pm 5\ \mu\text{s}$ over the recorded duration for a single channel. Time jitter smears out the amplitudes contributing to each single point in the averaged sensor waveform, the effect of which is automatically included in the statistical uncertainty of the average pulse amplitude.

Inter-string data (recorded with the frozen-in transmitters rather than the retrievable pinger) have the additional complication that the transmitters are not synchronized to GPS. These transmitters pulse at a rate which can drift relative to absolute time. Therefore in this data, in addition to the drift of the recording sensor, we must correct for the clock drift on the transmitting string, which causes the actual transmitter repetition rate to be different

from the nominal one. For each run we measured the actual repetition rate using IRIG-B GPS signals in the same way as described above for the sensors. The true repetition rate varied from string to string but was constant on each string at the few-percent level over the course of the two-day inter-string data taking campaign. Therefore for each string we used the mean value of the transmitter repetition rate in averaging the recorded pulses. The effect of residual clock drift due to using the average drift rate at each transmitting string rather than using the instantaneous drift rate is < 0.3 sample over the duration of a 20 s sensor recording, much less than a single signal oscillation period and therefore not sufficient to cause any residual decoherence in pulse averaging.

After correcting the sample times for clock drift, we wrap the waveform samples in time modulo the pulse repetition period, in order to overlay all N_p pulses recorded in a single sensor recording. We then time-order the samples and bin them in groups of N_{bin} consecutive samples. The number of samples per bin N_{bin} was chosen to be one-half the number of pulses for the inter-string data, and equal to the number of pulses for the pinger data. The choice of bin size was made independently for the inter-string and pinger data because they have different frequency content and signal-to-noise ratio. For each bin j , we compute the mean voltage V_j and the standard error of the mean σ_{V_j} , which we use as an estimate of the uncertainty on the sample amplitude because the noise is observed to be stable and Gaussian. The resulting average pulse is one repetition period in duration. For a detailed description of the algorithm used see [22,21].

3.3. Analysis techniques

The basic quantity measured by the sensors is a pressure wave exciting their piezo-ceramics for a duration which depends on the sensor construction, the signal strength and the distance between emitter and receiver (see Figures 3(a) and 3(b)). The signal amplitude A recorded by a sensor is proportional to the input acoustic pressure. For a point source with spherical emission, A depends on the distance to the source and the amount of attenuation by the ice:

$$A = \frac{A_0}{d} e^{-\alpha d} = \frac{A_0}{d} e^{-d/\lambda}, \quad (1)$$

where A_0 is constant for a given transmitter and sensor channel and depends on the amplitude of the sound emitted at the source and the sensitivity of

the receiver; d is the distance to the source; α is the acoustic attenuation coefficient and the attenuation length λ is its inverse. We assume here that α is independent of frequency, position, and direction. We multiply both sides of Equation 1 by the known distance d and take the natural logarithm to define a new variable y :

$$y = \ln(Ad) \quad (2)$$

In this way we can turn the previous nonlinear equation into a linear one:

$$y = \ln A_0 - \alpha d = -\alpha d + b, \quad (3)$$

where b is a free normalization parameter related to the sensitivity of the particular sensor piezoceramic. Linear regression can be applied to determine the best fit and uncertainty on each of the two parameters α and b .

The measured signal has a complex waveform that depends on the particular choice of transmitter and sensor (see Figures 3(a) and 3(b)). It is difficult to use one particular peak amplitude of this waveform directly to characterize an arriving signal. A better measure of this quantity is the *energy* of the recorded pulse,

$$E \sim \sum_{i=1}^n V_i^2, \quad (4)$$

where V_i is the amplitude of the sample i (after averaging, as explained in section 3.1) and the number of samples n is waveform-dependent. Because every sample i of the mean waveform has a statistical uncertainty σ_{V_i} , we can calculate a statistical uncertainty σ_E for the energy. We note that this quantity is an “energy” in the signal-processing sense and is directly proportional to the acoustic energy in the pressure pulse.

From the energy E , once the noise has been subtracted as explained below, we can also calculate the *effective amplitude* of the pulse:

$$A_{eff} = \sqrt{E} \quad (5)$$

and thereby extract the amplitude attenuation coefficient from Equation 3 (using $A = A_{eff}$) rather than the energy attenuation coefficient. The statistical uncertainty of the effective amplitude is determined with standard error propagation from σ_E . This method has been used for most of the studies described below.

An alternative approach is to apply Eqs. 1 - 3 to a calculation of the waveform energy in the frequency

domain. In this case, the effective amplitude A_{eff} is given by

$$A_{eff} = \sqrt{\sum_m |\hat{S}_m|^2}, \quad (6)$$

with the coefficients of the noise-subtracted Fourier spectrum \hat{S}_m . Results of both methods will be given below.

In both methods, we do not deal directly with the response function of the sensors, which is implicitly included in A_0 . The frequency-dependent sensitivity of our sensors exhibits several resonances due to both the piezoelectric ceramics and the housing, with their corresponding couplings. As discussed in section 4.2, in the pinger measurements we assume that the sensor response function is constant over time for all waveforms recorded with the same sensor channel (therefore Equations 1-3 can be applied exactly since A_0 is really independent of d). In the other analyses (inter-string and transient data) the variation of A_0 is included as a source of systematic uncertainty.

4. Pinger measurement

4.1. Pinger data acquisition

As described in Section 2.2, the pinger was operated in four IceCube holes (28, 19, 5, 37), shown in Figure 1, in the 2008-2009 season. The pulse repetition rate was 10 Hz in all holes except for hole 37, for which the repetition rate was 8 Hz. The distances from the SPATS array ranged from 156 m (String C to Hole 37) to 1023 m (String D to Hole 5). The range in azimuth angles spanned by the pinger holes as seen from an acoustic sensor was small: 13 degrees for String D, 7.2 degrees for String A, 6.6 degrees for String B, and 8.2 degrees for String C.

The pinger was lowered from the surface to a maximum depth of 500 m and then raised back to the surface. Both on the way down and on the way up, the pinger was stopped for ~ 5 min at nominal depths of 190, 250, 320, 400, 500 m, which are instrumented with SPATS sensors. The depth was monitored using the cable payout, initially calibrated by counting the number of turns of the winch. In addition, multiple calibrated pressure sensors attached to the acoustic stage recorded the hydrostatic pressure as a function of time. After deployment we averaged the pressure and the payout data and verified that

the stop depths were within ± 5 m of the nominal values.

Only those recordings of sensors at the same depth of each pinger stop depth were analyzed for attenuation, in order to perform the measurement along horizontal paths (see more details in the section 4.2); all three channels of the same sensor were recorded simultaneously (differently from [19]).

Due to the time necessary to transfer the data from the String PC to the Master PC through a DSL connection over a surface cable, the optimal duration of the recording at 200 kHz on the 3 channels of one sensor was found to be 18 s and this duration was used for the pinger runs.

As can be seen in Figure 3(a), two waveforms recorded while the pinger was stopped during lowering and raising, respectively, within the same hole look very similar and overlap very well. This is thanks to the mechanical stabilization of the pinger in the hole, in contrast to the 2007-2008 data set where the pinger was freely swinging. The comparison of these waveforms with those of Figure 3(b) shows that waveforms recorded by the same channel are very similar even when the pinger is moved to a different hole.

4.2. Pinger data analysis

For all analyses described below, we selected data recorded by each channel when the pinger was at the same depth as the sensor, in every instrumented hole. This selection provides 49 combinations (four times three SPATS channels on each of the four strings, plus one HADES channel) which can be used for the same number of independent attenuation measurements. This data set allows the most systematic-free attenuation analysis, since data recorded by the same channel at multiple distances and both minimum polar angle and minimum azimuthal angle variation are available and can be used independently, allowing for a depth-dependent attenuation analysis. We emphasize that for each single measurement only data recorded by one single channel have been used. This means that we are not sensitive to variation of sensitivity between channels and we can neglect the sensor response function, unknown in our case, assuming the following:

- The sensor response is constant throughout the pinger data taking. This is supported by the fact that the noise spectra measured by the sensors has been demonstrated to be very stable in time.

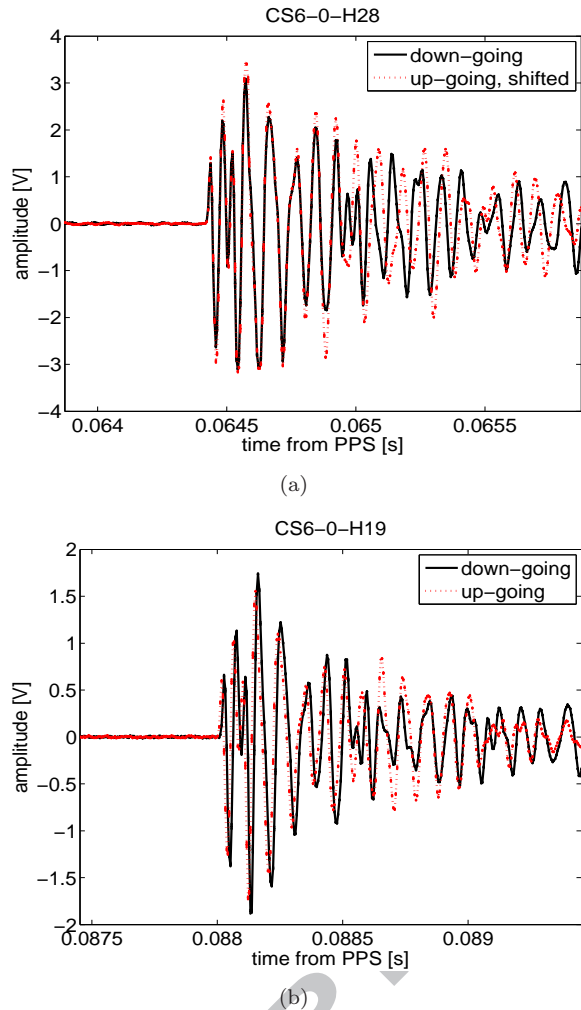


Fig. 3. Waveforms recorded by the same channel when the pinger was stopped while lowering and while raising, for two different holes at a distance of 243 m (top) and 336 m (bottom). Clock drift correction and averaging of the 180 recorded pulses have been applied. In the top plot, one of the waveforms has been shifted in time to overlap with the other one. This slight shift is due to a slight difference in the pinger depth between the two runs (see [21]).

The sensor output is linear in amplitude with respect to the input amplitude. This has been demonstrated in the laboratory for signals which are within the range of amplitudes considered here. Waveforms which are saturated are excluded.

We also make two additional important assumptions, which are supported by the similarity of the waveforms recorded by each channel for multiple pinger distances and by the analysis of the received

signal in the frequency domain (see section 4.2.2 and in particular Fig. 8):

- The pinger emission is constant throughout all sets of measurements taken.
 - The sound transmission in the medium is not affected by dispersion, *i.e.*, the frequency content of the pulse is independent of the traveled distance.
- Two types of analyses have been performed on the pinger data: the energy of the full waveform calculated in the time domain and the energy calculated in the frequency domain.

4.2.1. Time domain pinger analysis

The energy analysis integrates over the complete waveform. The full waveform recorded when the pinger was stopped at the depths of the sensors was processed as explained in Section 3.1. The high quality averaged pulse obtained was used to calculate the energy E_{S+N} for each channel-hole combination by applying Equation 4. This includes both a signal and a noise contribution. The noise energy E_N is calculated using the data recorded immediately before and after the pinger operation, which was verified to be very stable over the time. The processing of the waveform is done in the same way for both kinds of data (signal plus noise or noise-only). The noise was subtracted to estimate the signal energy $E = E_{S+N} - E_N$. Next, the effective amplitude was calculated (Equation 5). The number of valid measurements was 48 of the 49 channels available, as one channel (HADES, at level 190 m in string D) did not have more than two data points which pass the cut $E > 0$.

The statistical error on the effective amplitude was determined by error propagation from the statistical uncertainty of the sample amplitudes as explained in section 3.3. To determine the systematic uncertainty, we calculated for each of the 48 measurements the χ^2/n_d (where n_d is the number of degrees of freedom of the fit) for different hypothesized systematic error values and we observed how the distribution of these values changed. We found that adding 15% systematic uncertainty to each fit brings this distribution to have mean equal to 1. We therefore used this value as an estimate of the systematic uncertainties among data points for each fit, which can be attributed to residual azimuthal and polar variation of the sensor sensitivity (due to a non-perfect alignment of holes and stopping depths). We also found that variation of the assumed systematic uncertainty within a reasonable range does not sig-

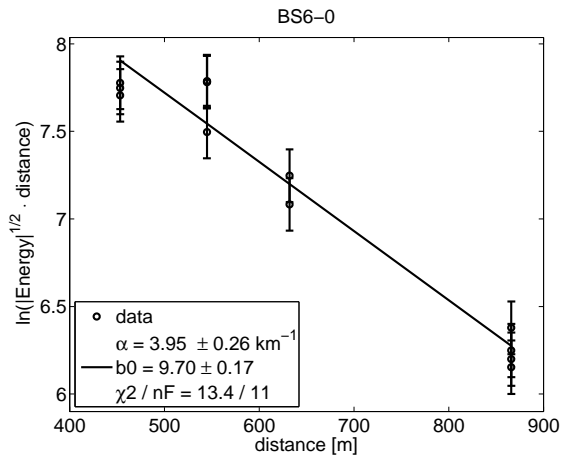


Fig. 4. Example fit of effective amplitude vs distance for sensor channel BS6-0 installed at 320 m depth. Error bars include the statistical and systematic uncertainty, estimated as explained in the text.

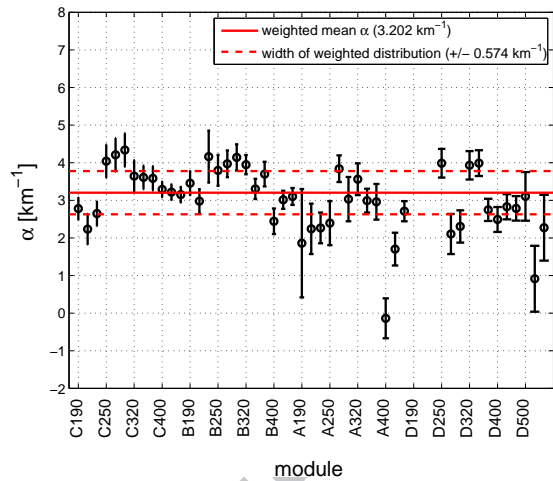


Fig. 5. Attenuation coefficients (with standard error) obtained by energy analysis in time domain. The three channels of each module are indicated by the three data points at and to the right of the corresponding label on the horizontal axis.

nificantly affect the final result (see [21]).

Taking into account the statistical and systematic uncertainties, we fit Equation 3 to determine the amplitude attenuation coefficient α . A typical fit of the data, from sensor channel BS6-0, is shown in Figure 4.

A compilation of results obtained by fitting the single-channel data is shown in Figure 5. The strings have been sorted from nearest to farthest from the pinger holes and, within each string, modules have been sorted by depth. For details of each single-channel fit see [21]. A consideration must be made

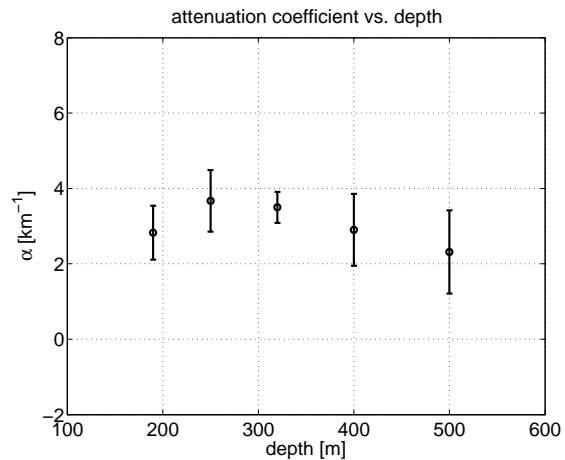


Fig. 6. Mean attenuation coefficient as a function of the depth.

looking at the distribution of the points: the scatter of the data, greater than the error bars, implies that there are additional systematic uncertainties (for example, local properties of the ice, or of the interface between hole ice and sensors) which we are not able to identify and quantify without looking at the spread of the data. Nevertheless, the 48 measurements allow us to constrain the attenuation coefficient within a narrow range. To take into account the uncertainties of the individual measurements we assign to each entry a weight inversely proportional to the error of the value:

$$w_i = \frac{1}{\sigma_{\alpha,i}^2} \quad (7)$$

where $\sigma_{\alpha,i}$ is the 1- σ error on the value of α in the measurement i obtained from the fit. We then build a histogram using all the weighted entries and we take the mean and the standard deviation (indicated by the dashed line in Figure 5) as final value and error:

$$\langle \alpha \rangle = 3.20 \pm 0.57 \text{ km}^{-1}. \quad (8)$$

In Figure 6 the average attenuation coefficient is shown for each depth. No clear depth dependence is observed.

4.2.2. Frequency domain pinger analysis

The data selected for the frequency domain analysis are the same as in the previous analysis, *i.e.* the attenuation coefficient is obtained from the horizontal pinger-sensor configuration. However, the differences in the method, including averaging and background handling, allow for a cross-check

of the methodology. Moreover the analysis software used for the two methods was completely separate, allowing for an independent cross-check.

For each channel a series of pinger pulses ($l = 1, \dots, N_p$; $N_p = 180$ or 144) is recorded. Each pulse is the sum of signal s and an additive stationary noise component n (uncorrelated with the signal), therefore the amplitude x of a sample k at time t_k can be written as:

$$x^l(t_k) = s^l(t_k) + n^l(t_k). \quad (9)$$

The discrete Fourier transform yields the complex numbers

$$X^l(\omega_m) = S^l(\omega_m) + N^l(\omega_m) \quad (10)$$

$$= \frac{1}{\sqrt{M}} \sum_{k=0}^M x_k^l e^{-i\omega_m t_k}, \quad (11)$$

where ($k = 1, \dots, M$) is the sample number within each pinger pulse ($M = 20$ or 25).

The average noise, \hat{N} , is estimated from the off-pulse portion of the waveforms (according to the methods described in [23,24,25]) by averaging over a set of pure noise samples taken from each waveform. To avoid any overlap with the signal, the noise intervals are taken before each recorded pulse. Examples of a raw signal plus noise spectrum, a pure noise spectrum and a signal spectrum are shown in Figure 7.

As can be seen from Figure 8, the spectral shape is approximately constant for the same sensor, but attenuated with increasing distance, i.e. for different pinger hole measurements. The peak at 10 kHz reflects a characteristic peak in the sensor response.

We compute the average signal spectrum density \hat{S}_m after subtracting the noise density from each pinger pulse:

$$|\hat{S}_m|^2 = \frac{1}{N} \sum_l \left[|X_m^l|^2 - |\hat{N}_m|^2 \right] \quad (12)$$

where the sum extends over the pulses and applies in the region 5 - 30 kHz. Next we compute the effective amplitude A_{eff} via Equation 6 and apply the same fit procedure as in the time domain analysis.

The weighted mean of α for the available channels from the frequency domain analysis is

$$\langle \alpha \rangle = 3.75 \pm 0.61 \text{ km}^{-1}, \quad (13)$$

where the uncertainty is given by the width of the weighted distribution. The difference of the value

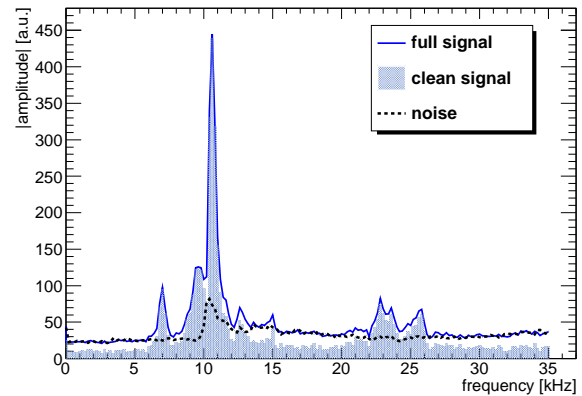


Fig. 7. Example of frequency spectra of signal plus noise, pure noise and signal after noise subtraction

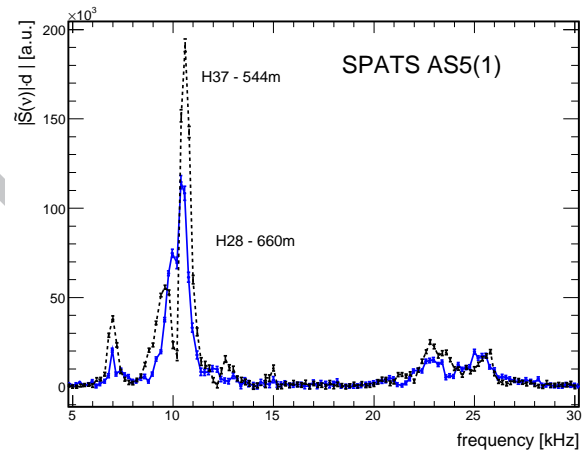


Fig. 8. Example of typical noise-subtracted spectra. The two spectra are taken from the same sensor, but for different distances. The Fourier magnitudes are multiplied by distance, which then allows a direct estimate of the attenuation, as described by Equation 3.

from that of the time domain analysis is explained by the different method used to separate signal from noise; the two results are nevertheless compatible.

A similar study has been done using as input the averaged waveforms, separating the energy contribution for the frequency intervals between 5 and 17 kHz, between 17 and 35 kHz, and for the whole interval 5 to 35 kHz. We investigated the possible presence of a trend in the variation of α over each interval compared to the one obtained using the full spectrum, and we have not found any significant frequency dependence. In some cases the attenuation below 20 kHz is stronger than around 30 kHz (as seen for example in Figure 8); in other cases the vari-

651 ation is opposite. In all cases, the obtained α values 698
652 agree within uncertainties [21]. 699

653 Both SPATS and HADES sensors obtain the same 700
654 shape for the frequency distribution, despite their 701
655 different frequency responses. The recorded spec- 702
656 trum in both cases is dominated by the pinger fre- 703
657 quency content rather than by the response of the 704
658 sensors. 705

659 5. Inter-string measurement 706

660 In addition to the measurement performed with 707
661 the retrievable pinger operated in water, we mea- 708
662 sured the acoustic attenuation using the frozen-in 709
663 SPATS transmitters. Two independent analyses of a 710
664 single data set were performed. The processing tech- 711
665 niques used to average the waveforms and estimate 712
666 the noise-subtracted signal energies use the same al- 713
667 gorithms, in the time domain (see Section 3.1) but 714
668 were implemented independently to cross-check one 715
669 another. The signal energies determined by the two 716
670 analyses are consistent. 717

671 5.1. Inter-string data acquisition and processing 718

672 Data were taken for each transmitter recorded by 721
673 each sensor in the SPATS array. In each run, one 722
674 transmitter was pulsed at a 25 Hz repetition rate for 723
675 40 s. Data from all inter-string transmitter-sensor 724
676 combinations were collected over a two-day period 725
677 (April 1-2, 2009). The transmitters require several 726
678 seconds to reach steady pulse-to-pulse performance, 727
679 likely due to self-heating of the electronics during 728
680 initial operation followed by temperature equilibra- 729
681 tion. The initial acoustic pulse amplitude is some- 730
682 what larger than in the steady state, followed by de- 731
683 cay to the steady-state amplitude with a time con- 732
684 stant of ~ 2 s. To be sure we are recording in the 733
685 steady state, we start the sensor recording 11 s after 734
686 the transmitter begins pulsing. In each run, all three 735
687 channels of a single sensor module are recorded con- 736
688 tinuously for 20 s, enough time to record 500 trans- 737
689 mitter pulses. The three channels are sampled syn- 738
690 chronously, at 200 kilosamples per second on each 739
691 channel. 740

692 The ambient acoustic noise conditions at the 741
693 South Pole have been determined by SPATS to be 742
694 very stable [26]. In particular we checked that they 743
695 were stable during the two-day inter-string data- 744
696 taking period. Several raw noise runs were taken on 745
697 each channel, interspersed among the transmitter 746

recordings, using the same sampling frequency and 700
time duration but with no transmitter pulsing. The 701
noise runs were processed with the same waveform 702
averaging algorithm as the transmitter runs. From 703
this data the DC offset (μ) and the standard de- 704
viation of the noise samples (σ) were calculated 705
for each sensor channel. Each of μ and σ , on each 706
sensor channel, was stable at the few-percent level 707
during the two-day period. 708

709 For each sensor recording, the mean waveform 710
was processed to determine the noise-subtracted sig- 711
nal energy following the algorithm described in Sec- 712
tion 3.1. 713

714 5.2. Inter-string single-depth direct analysis 715

716 This analysis uses a single transmitter recorded by 717
all sensor channels at the same depth as the trans- 718
mitter. A single transmitter is used because the dif- 719
ferent transmitters are known to have different in- 720
herent transmittivity and perhaps different coupling 721
to the ice with respect to one another. Only those 722
sensor channels at the same depth as the transmit- 723
ter were used in order to mitigate effects due to the 724
unknown change of transmittivity with varying po- 725
lar angle. 726

727 For each transmitter there are typically three sen- 728
sor modules, each with three channels, located at 729
the same depth as the transmitter but on other 730
strings. The acoustic attenuation was measured for 731
each transmitter in the array, after applying the fol- 732
lowing two quality cuts to the data. First, the statis- 733
tical uncertainty of the effective amplitude at a given 734
channel was required to be 20% or smaller, in order 735
to be considered a “good” channel and included in 736
the fit. Second, there had to be at least one good 737
channel at each of at least two distances from the 738
transmitter, at the same depth as the transmitter, 739
in order for a fit to be performed for a given trans- 740
mitter. Note that only five of the nine instrumented 741
depths are instrumented on all four strings. 12 of 742
the 28 SPATS transmitters met these two selection 743
criteria. 744

745 For each good sensor channel, the quantity y (de- 746
fined by Equation 2) was determined following the 747
procedure described in Section 4.2. We performed 748
a linear fit for each of the 12 transmitters to deter- 749
mine the acoustic attenuation coefficient α and the 750
free normalization parameter b related to the emis- 751
sion strength of the transmitter. 752

Both statistical and systematic uncertainties were

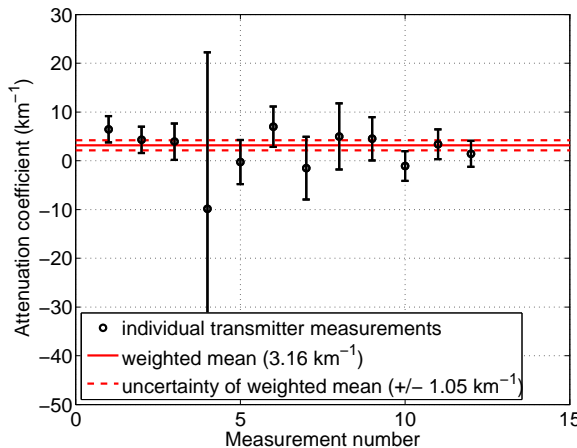


Fig. 9. Compilation of attenuation fits for the 12 transmitters used in the single-depth inter-string analysis. The weighted mean is shown as a solid horizontal line, and the one-sigma uncertainty of the global fit is indicated with dashed lines.

calculated for each y value for each channel recording each transmitter. The statistical contribution was determined by propagating errors from the statistical uncertainty of the effective amplitude. The systematic uncertainty is dominated by the unknown relative sensitivity of the sensor channels. We estimate the channel-to-channel variation in sensitivity by treating the pinger results as an *in situ* calibration of the sensor channels. Since the pinger analysis fits the b parameter for each channel independently, e^b can be taken as a measure of the sensitivity of each channel. The results of this *in situ* calibration were used to estimate the systematic uncertainty in y for the inter-string attenuation analysis, which combines different sensor channels for each fit. The absolute systematic uncertainty in y was 0.97. This was added in quadrature to the statistical uncertainty of y for each channel.

Results of the fits for the 12 transmitters are compiled in Figure 9. For each transmitter i , the best fit attenuation coefficient α_i and corresponding uncertainty σ_i are shown. Many of the single-transmitter fits individually give a result consistent with zero attenuation. However, the 12 results can be combined to improve the precision of the measurement. Determining the weighted mean of the measurements (weighting by $1/\sigma_i^2$) gives a global best fit of

$$\langle \alpha \rangle = 3.16 \pm 1.05 \text{ km}^{-1}. \quad (14)$$

5.3. Inter-string multi-depth ratio analysis

None of the permanently deployed transmitters or sensors has been calibrated in ice. Therefore, both an unknown inherent sensitivity \mathcal{S}_j and transmittivity \mathcal{T}_i enter into the equation for a single inter-string amplitude measurement. With these variables, Equation 1 can be written for the combination of transmitter i and sensor j as:

$$A_{ij} = \frac{\mathcal{T}_i \mathcal{S}_j}{d_{ij}} e^{-\alpha d_{ij}}, \quad (15)$$

where A_{ij} is the recorded amplitude of the pulse transmitted by transmitter i as detected by sensor j and d_{ij} is the distance between transmitter i and sensor j . If we then take two transmitter-sensor pairs, transmitters T_i and T_k heard both by sensors S_j and S_l , it is possible to construct a ratio [20] of amplitudes:

$$\ln(\mathcal{R}_A \mathcal{R}_d) = \ln\left(\frac{A_{ij} A_{kl} d_{ij} d_{kl}}{A_{il} A_{kj} d_{il} d_{kj}}\right) = -\alpha D_x + b, \quad (16)$$

where \mathcal{R}_A and \mathcal{R}_d are ratios of amplitudes and distances respectively, $D_x = ([d_{ij} - d_{il}] - [d_{kj} - d_{kl}])$ and b is a free fit parameter introduced to allow for a systematic shift in y . All three channels of both sensor modules are required to have $A > 1.5\sigma_{\text{stat}}(A)$, where $\sigma_{\text{stat}}(A)$ is the statistical error on the amplitude A . Dead and saturated channels are excluded.

One single measurement would yield the attenuation coefficient α if the transmitters and sensors were all perfectly isotropic. However, the azimuthal orientation of each sensor module is unknown and the transmitter signal is known to vary significantly with polar angle. Both effects need to be minimized and need to be accounted for. Therefore, for the analysis presented here, only transmitter-sensor combinations from the lower neighboring levels were used: (190, 250), (250, 320), and (320, 400) m depth. This limits the difference in polar angle for an amplitude ratio to a maximum of 32° . The maximum difference in azimuth angle is $\sim 120^\circ$. An average sensor-module response is used so that the azimuth effect is less significant. A total uncertainty on the single amplitude ratio of 100% has been estimated by studying the spread of the b values obtained from the pinger analysis, as described in Section 5.2. On top of that, the variation due to the angular variation of the SPATS transmitters needs to be included. This was studied in the laboratory, where a maximum amplitude variation of 40% in transmitter emission

821 was observed for the inter-string geometry discussed
 822 here. For the ratios with amplitudes at minimal polar
 823 angles, the assumed uncertainty on a single ratio
 824 is conservative.

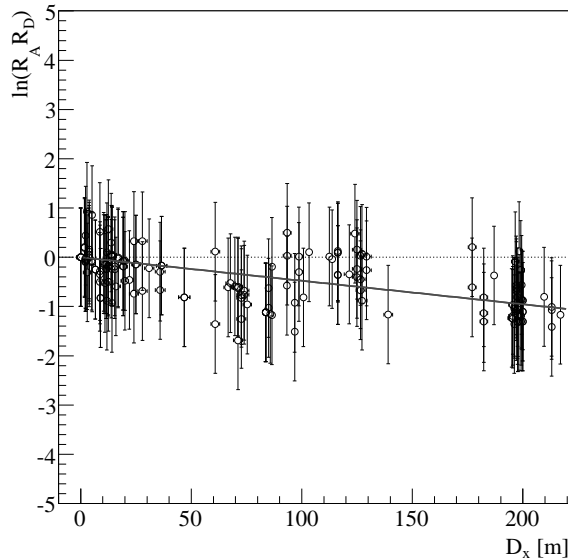


Fig. 10. The 2-level inter-string ratios as a function of D_x . The spread on the points is an indication of the residual polar and azimuthal systematic dependencies. The solid line shows the best fit; the dotted line shows $y = 0$ for reference.

825 Figure 10 shows all 172 ratios with the estimated
 826 systematic error bars and the best fit obtained by
 827 constraining the offset (*i.e.* the parameter b of Equation
 828 16) to be 0. As mentioned above, the figure reflects the fact that the systematic errors are overestimated. However this does not influence the central value of the linear fit coefficient α . The fit results in a value

$$833 \alpha = 4.77 \pm 0.67 \text{ km}^{-1}. \quad (17)$$

834 6. Transients measurement

835 In addition to the signals from the retrievable
 836 pinger and the frozen-in transmitters, we can use
 837 ambient transient events to estimate the attenuation
 838 coefficient. SPATS runs in a transient data acquisition
 839 mode during most of each hour. Three channels
 840 from each of the four strings are monitored for
 841 large-amplitude events, and when they occur they
 842 are recorded with an absolute GPS time stamp. A
 843 simple threshold trigger is used, where the threshold
 844 is $\sim 5\sigma$, where σ is the Gaussian noise amplitude.
 845 The Gaussian noise is determined on each channel
 846 and accordingly a different absolute threshold is

847 used on each channel. This occurs with a frequency
 848 of ~ 1 Hz per channel. The hits from the four strings
 849 (where a *hit* is defined to be a timestamped waveform
 850 recorded from an individual channel) are time
 851 ordered offline and processed through an algorithm
 852 to find hits within a coincidence time window of 200
 853 ms (the time necessary for a pressure wave signal
 854 to cross the SPATS array). Each cluster of hits occurring
 855 within the coincidence window is an *event*. For events
 856 with more than four hits and at least three strings,
 857 a vertex location is calculated.

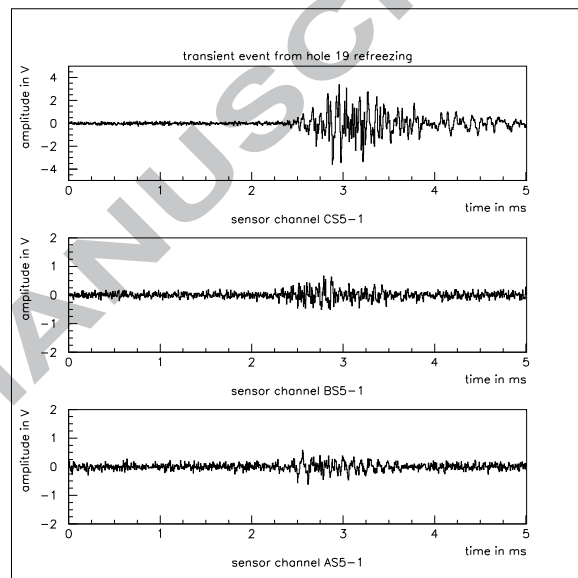


Fig. 11. Waveforms produced by sound from refreezing ice in Hole 19 received at the 250 m sensors of Strings C, B and A at a distance of 336 m, 632 m, and 744 m respectively. The time scale refers to the trigger time which is independent for each channel.

858 Using this data taking mode for 45 minutes out of
 859 every hour, data have been collected since the end
 860 of August 2008. Acoustic signals have been observed
 861 for several days from re-freezing IceCube holes with
 862 precisely known x-y coordinates. Because some of
 863 these holes were also used for collecting pinger data,
 864 the corresponding sensor calibration constants calculated
 865 from those data can be applied to signals whose source
 866 is localized to near the corresponding pinger stop depths.
 867 Thirteen appropriate events have been found with source
 868 location at the coordinates of holes 19, 20 and 28, and
 869 depths between 230 and 270 m, which fit in the dynamic
 870 range of the SPATS sensors at all strings involved. The
 871 waveforms of an example event are shown in Figure
 872 11. Single-event analysis using effective ampli-

874 tudes derived from energy in the time domain (see 910
875 Section 4.2) leads to a mean attenuation coefficient 911

$$876 \alpha = 3.64 \pm 0.29 \text{ km}^{-1}, \quad (18) \quad 912$$

877 compatible with the results from both the retriev- 913
878 able pinger and the frozen-in transmitters. The rela- 914
879 tively small errors in comparison to the pinger anal- 915
880 yses may be due to the fact that here only sensors 916
881 installed at one depth (250 m) have been used. The 917
882 error shown is the statistical error only and neglects 918
883 any additional uncertainty of the sensor calibration 919
884 in comparison to the pinger analysis. The frequency 920
885 spectrum of the transient events needs further study 921
886 but contains contributions up to 80 kHz. 922

887 7. Discussion and outlook

888 The results from the various analyses described 923
889 above are summarized in Table 2. 924

Table 2
Summary of results from various attenuation analyses.

Analysis	Measurements	α [km ⁻¹]
Pinger (time dom.)	48	3.20 ± 0.57
Pinger (freq. dom.)	39	3.75 ± 0.61
Inter-string direct	12	3.16 ± 1.05
Inter-string ratio	1	4.77 ± 0.67
Transients	13	3.64 ± 0.29

890 All of the analyses yield consistent results. How- 939
891 ever, we cannot simply average them, due to the 940
892 quite different systematic effects (as well as corre- 941
893 lations among them) which affect each of them as 942
894 discussed in detail in previous sections. In Table 3 943
895 the different effects are summarized and attributed 944
896 to the individual studies they affect. The pinger ap- 945
897 proach uses the same sensor and the same transmit- 946
898 ter at the same zenith angle and nearly the same 947
899 azimuthal angle at different distances, thereby mit- 948
900 igating all effects connected with unknown sensi- 949
901 tivities of emitter and receiver. For this reason we 950
902 believe it provides the most reliable result. Relying 951
903 on the same data set, the pinger analyses in time 952
904 and frequency domain are not independent but cross 953
905 check one another using different signal and back- 954
906 ground averaging and subtraction methods. Because 955
907 there is a higher number of measurements passing 956
908 selection criteria in the time domain analysis than 957
909 in the frequency domain analysis (see Table 2), we 958

quote this result as our best estimate of the attenu-
ation coefficient:

$$\langle \alpha \rangle = 3.20 \pm 0.57 \text{ km}^{-1}. \quad (19)$$

which expressed as an attenuation length is:

$$\langle \lambda \rangle = 312_{-47}^{+68} \text{ m}. \quad (20)$$

The results of all analyses are consistent with an
attenuation length of $\sim 300 \text{ m} \pm 20\%$.

Up to 30 kHz no strong frequency dependence of
 α has been found. There are also no indications of
depth dependence of the attenuation up to 500 m
depth.

Our measured value for the attenuation coeffi-
cient is an order of magnitude larger than expected.
In [14], it was estimated that South Pole ice grains
are sufficiently small that Rayleigh scattering is neg-
ligible and attenuation is dominated by absorption
due to proton reorientation. However, new data [27]
from the SPRESSO site near the South Pole indicate
that the ice grains are larger than previously esti-
mated. Because Rayleigh scattering increases with
the cubic power of the grain length, it could be that
the attenuation we have measured is dominated by
scattering. Another possible mechanism of absorp-
tion, not previously considered, is internal friction
at linear crystallographic dislocations.

The weak frequency dependence observed in our
measurements below 30 kHz disfavors the Rayleigh
scattering hypothesis. New pinger measurements
have been taken in the 2009-2010 South Pole sum-
mer in order to clarify the situation. A modified
pinger, emitting a sequence of acoustic pulses at
three different frequencies up to 60 kHz, was de-
ployed up to 1000 m depth in three additional bore
holes. Analysis of these data is currently under-
way, and should allow for a more conclusive study
of both the frequency and depth dependence of
acoustic attenuation in South Pole ice.

Given some of the inherent advantages of the
acoustic technique relative to the radio technique
(such better shielding from anthropogenic surface
backgrounds), this study was undertaken primarily
to determine whether the acoustic method could be
a basic ingredient of a 100 km³ hybrid detector for
ultra-high energy neutrino detection at the South
Pole. The design chosen in [15] with horizontal
string distances of order 1 km will not reach the
necessary sensitivity, given the 300 m attenuation
length reported here. New geometries are under
study to assess whether detectors with closer string

Table 3
Systematic effects present in individual analyses.

Systematic Effect	pinger	inter-string single level	inter-string ratio	transients
Channel-to-channel sensitivity variation	no	yes	no	minimal
Azimuthal sensitivity variation	minimal	yes	yes	minimal
Polar sensitivity variation	minimal	no	yes	minimal
Channel-to-channel transmittivity variation	no	no	no	no
Azimuthal transmittivity variation	no	yes	yes	no
Polar transmittivity variation	no	no	yes	no

spacing but larger area at smaller depth could be an alternative solution. Measurements are also in preparation to measure the absolute noise level of the Gaussian noise, which is the most important remaining ingredient to determine the feasibility of the acoustic method for detecting neutrinos in South Pole ice.

8. Acknowledgments

We acknowledge the support from the following agencies: U.S. National Science Foundation-Office of Polar Program, U.S. National Science Foundation-Physics Division, University of Wisconsin Alumni Research Foundation, U.S. Department of Energy and National Energy Research Scientific Computing Center, the Louisiana Optical Network Initiative (LONI) grid computing resources; Swedish Research Council, Swedish Polar Research Secretariat, Swedish National Infrastructure for Computing (SNIC), and Knut and Alice Wallenberg Foundation, Sweden; German Ministry for Education and Research (BMBF), Deutsche Forschungsgemeinschaft (DFG), Research Department of Plasmas with Complex Interactions (Bochum), Germany; Fund for Scientific Research (FNRS-FWO), FWO Odysseus programme, Flanders Institute to encourage scientific and technological research in industry (IWT), Belgian Federal Science Policy Office (Belspo); Marsden Fund, New Zealand; Japan Society for Promotion of Science (JSPS); the Swiss National Science Foundation (SNSF), Switzerland; A. Kappes and A. Groß acknowledge support by the EU Marie Curie OIF Program; J. P. Rodrigues acknowledge support by the Capes Foundation, Ministry of Education of Brazil.

References

- [1] R. Nahnauer, S. Böser (Eds.), Proceedings of the ARENA Workshop 2005, *Int. J. of Mod. Phys. A*, Vol. 21, 2006.
- [2] L. Thompson, S. Danaher (Eds.), Proceedings of the ARENA Workshop 2006, *J. Phys. Conf. Ser.*, Vol. 81, 2007.
- [3] A. Capone, et al. (Eds.), Proceedings of the ARENA Workshop 2008, *Nucl. Instr. and Meth. A*, Vol. 604, 2009.
- [4] R. U. Abbasi, et al., First observation of the Greisen-Zatsepin-Kuzmin suppression, *Phys. Rev. Lett.* 100 (10) (2008) 101101.
- [5] J. Abraham, et al., Measurement of the energy spectrum of cosmic rays above 10^{18} eV using the Pierre Auger Observatory, *Physics Letters B* 685 (4-5) (2010) 239 – 246.
- [6] K. Greisen, End to the cosmic-ray spectrum?, *Phys. Rev. Lett.* 16 (17) (1966) 748–750.
- [7] G. Zatsepin, V. Kuzmin, Upper limit of the spectrum of cosmic rays, *JETP Lett.* 4 (1966) 78.
- [8] A. Ringwald, Extremely energetic cosmic neutrinos: Opportunities for astrophysics, particle physics and cosmology, in: Proceedings of the ARENA Workshop 2005, Vol. A21S1, 2006, pp. 12–19.
- [9] R. Engel, D. Seckel, T. Stanev, Neutrinos from propagation of ultra-high energy protons, *Phys. Rev. D* 64 (2001) 093010.
- [10] P. W. Gorham, et al., Observational constraints on the ultrahigh energy cosmic neutrino flux from the second flight of the ANITA experiment, *Phys. Rev. D* 82 (2) (2010) 022004.
- [11] G. Askaryan, B. Dolgoshein, A. Kalinovsky, N. Mokhov, Acoustic detection of high energy particle showers in water, *Nuclear Instruments and Methods* 164 (2) (1979) 267 – 278.
- [12] J. G. Learned, Acoustic radiation by charged atomic particles in liquids: An analysis, *Phys. Rev. D* 19 (11) (1979) 3293–3307.
- [13] A. Achterberg, et al., First year performance of the IceCube neutrino telescope, *Astropart. Phys.* 26 (2006) 155–173.
- [14] P. B. Price, Attenuation of acoustic waves in glacial ice and salt domes, *J. Geophys. Res.* 111 (2006) B02201.

- 1
2
3
4
5
6 1038 [15] D. Besson, S. Böser, R. Nahnauer, P. B.
7 1039 Price, J. Vandenbroucke, Simulation of a hybrid
8 1040 optical/radio/acoustic extension to IceCube for EeV
9 1041 neutrino detection, *Int. J. Mod. Phys. A21S1* (2006)
10 1042 259–264.
11 1043 [16] M. Ackermann, et al., Optical properties of deep glacial
12 1044 ice at the South Pole, *J. Geophys. Res.* 111 (2006)
13 1045 D13203.
14 1046 [17] S. Barwick, D. Besson, P. Gorham, D. Saltzberg,
15 1047 South Polar in situ radio-frequency ice attenuation, *J.*
16 1048 *Glaciology* 51 (2005) 231–238.
17 1049 [18] I. Kravchenko, et al., RICE limits on the diffuse ultra-
18 1050 high energy neutrino flux, *Phys. Rev. D73* (2006)
19 1051 082002.
20 1052 [19] R. Abbasi, et al., Measurement of sound speed vs. depth
21 1053 in South Pole ice for neutrino astronomy, *Astropart.*
22 1054 *Phys.* 33 (2010) 277–286.
23 1055 [20] S. Böser, Acoustic detection of ultra-high energy
24 1056 cascades in ice, Ph.D. thesis, Humboldt Universität zu
25 1057 Berlin (2007).
26 1058 [21] D. Tosi, Measurement of acoustic attenuation in south
27 1059 pole ice with a retrievable transmitter, Ph.D. thesis,
28 1060 Humboldt Universität zu Berlin (2010).
29 1061 [22] J. Vandenbroucke, Acoustic detection of astrophysical
30 1062 neutrinos in South Pole ice, Ph.D. thesis, University of
31 1063 California at Berkeley (2009).
32 1064 [23] S. Boll, Suppression of acoustic noise in speech using
33 1065 spectral subtraction, *Acoustics, Speech and Signal*
34 1066 *Processing, IEEE Transactions on* 27 (2) (1979) 113–
35 1067 120.
36 1068 [24] M. Berouti, R. Schwartz, J. Makhoul, Enhancement
37 1069 of speech corrupted by acoustic noise, in: *Acoustics,*
38 1070 *Speech, and Signal Processing, IEEE International*
39 1071 *Conference on ICASSP '79.*, Vol. 4, 1979, pp. 208–211.
40 1072 [25] N. Esfandian, E. Nadernejad, Quality improvement of
41 1073 speech signals using lpc analysis, *Adv. Studies Theor.*
42 1074 *Phys.* 2 (14) (2008) 673 – 685.
43 1075 [26] T. Karg, Acoustic noise in deep ice and environmental
44 1076 conditions at the South Pole, *Nucl. Instr. and Meth. A*
45 1077 604 (S171).
46 1078 [27] D. Meese, private communication (2009).
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65