

## Two-photon Doppler cooling of a three-level ladder system with an intermediate metastable level

Caroline Champenois, Gaetan Hagel, Martina Knoop, Marie Houssin, Cedric Zumsteg, Fernande Vedel, Michael Drewsen

### ▶ To cite this version:

Caroline Champenois, Gaetan Hagel, Martina Knoop, Marie Houssin, Cedric Zumsteg, et al.. Two-photon Doppler cooling of a three-level ladder system with an intermediate metastable level. 2007. hal-00182596v1

## HAL Id: hal-00182596 https://hal.science/hal-00182596v1

Preprint submitted on 26 Oct 2007 (v1), last revised 14 Feb 2008 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Two-photon Doppler cooling of a three-level ladder system with an intermediate metastable level

C. Champenois,\* G. Hagel, M. Knoop, M. Houssin, C. Zumsteg, and F. Vedel Physique des Interactions Ioniques et Moléculaires (CNRS UMR 6633),

Université de Provence, Centre de Saint Jérôme,

Case C21, 13397 Marseille Cedex 20, France

#### M. Drewsen

QUANTOP, Danish National Research foundation Center for Quantum Optics,

Department of Physics and Astronomy,

University of Aarhus, DK-8000 Århus C., Denmark

(Dated: October 26, 2007)

### Abstract

Doppler laser cooling of a three-level ladder system using two near-resonant laser fields is analyzed in the case of the intermediate level being metastable while the upper level is short-lived. Analytical as well as numerical results for e.g. obtainable scattering rates and achievable temperatures are presented and compared with results of standard two-level single-photon Doppler laser cooling. These results are relevant to recent experimental Doppler laser cooling investigations addressing intercombination lines in alkali-earth metal atoms and quadrupole transitions in alkali-earth metal ions.

 $PACS \ numbers: \ \ 42.50.Vk; \ 32.80.Pj; \ 32.80.Wr;$ 

 $<sup>{\</sup>rm *Electronic~address:~caroline.champenois@univ-provence.fr}$ 

#### I. INTRODUCTION

Today, laser cooling of atoms is widely used in experiments where high precision spectroscopy or precise control of the atomic motion is required. A large variety of schemes has been developed and applied to suit atoms with specific level structures and for obtaining particular temperature ranges [1]. In general, the lower the wanted temperature, the more sensitive does the light scattering process has to be on the velocity of the atom. For the most simple laser cooling scheme relying on the Doppler shift of an optical transition, Doppler laser cooling, this means the narrower the linewidth of the optical transition, the lower the obtainable temperature. However, since the maximum cooling force in the Doppler cooling scheme is dependent on the photon scattering rate, narrow linewidth transitions will lead to longer cooling times than wider transitions.

The aim of the present study is to show that by driving a three-level ladder system, having an intermediate metastable level and a dipole emitting upper level, with two step-wise near-resonant laser fields, it is indeed possible to obtain both short cooling times and at the same time low temperatures through changes of the laser parameters. The present results concern in particular alkali-like ions Ba<sup>+</sup>, Sr<sup>+</sup>, or Ca<sup>+</sup> [2], but also contain information relevant for Doppler cooling of alkali-earth metal atoms using intercombination lines [3, 4]. In addition to the excellent laser cooling properties, the presented scheme has the major advantage that individual ions can be detected by dipole emitted light from the upper level to the ground level at a wavelength being the sum of those of the two excitation fields. By the appropriate choice of laser parameters, a large scattering rate can be obtained, which can lead to an essentially background-free detection as it has been demonstrated experimentally recently [2].

Previously, ladder- (or cascade-) schemes have been studied in [5, 6, 7] in the prospect of two-photon two-color Doppler cooling on narrow lines like demonstrated experimentally on alkaline-earth metals in [6]. In these studies, the excited state of a laser-driven transition is coupled by a second laser to an upper more stable level. In the present study, the excited metastable level is coupled to a higher short-lived level, to enhance its coupling with the ground state. Such an excitation scheme is used for example for sideband cooling, but while sideband cooling processes have already been studied theoretically [8] and experimentally [9, 10] in the low saturation regime, the purpose of the present study is to go beyond the low

saturation regime and to consider Doppler cooling in the regime where the sidebands are not resolved, as considered experimentally previously [2]. Our analysis applies to any atomic system that can be described by the ladder scheme depicted on Fig. 1. Nevertheless, when numerical applications are needed, we refer to parameters describing the alkali-like ions Ba<sup>+</sup>, Sr<sup>+</sup>, or Ca<sup>+</sup>.

This article is organized as follows. Sec. II introduces the theoretical model used to predict the population of the internal states. In Sec. III the response of an atom at rest to the lasers excitation is studied, focusing on the expected signal. The Doppler cooling efficiency of the proposed excitation scheme is studied in Sec. IV, and in Sec. V conclusions are reported.

#### II. THEORETICAL MODEL

The considered atomic system is composed by three electronic levels which are coupled by laser fields, according to the ladder-scheme depicted in Fig. 1. State  $|g\rangle$  is the ground state,  $|m\rangle$  is metastable, and the excited state  $|e\rangle$  decays radiatively into  $|g\rangle$  and  $|m\rangle$ . This configuration of levels occurs, for instance, in alkaline-earth atoms such as Sr and Ca, rare-earth atoms like Yb and in alkali-like ions with a metastable d-orbital, such as  $Hg^+$ , Yb<sup>+</sup>, Ba<sup>+</sup>, Sr<sup>+</sup>, or Ca<sup>+</sup>. In these last cases, the relevant levels can be identified with the states  $|g\rangle=|S_{1/2}\rangle,\ |m\rangle=|D_{3/2}\rangle$  and  $|e\rangle=|P_{1/2}\rangle.$  Then, the transition  $|g\rangle\to|m\rangle$  is an electric quadrupole transition with a linewidth in the range from 0.01 to 0.1 Hz, while  $|q\rangle$ and  $|m\rangle$  couple to the excited state  $|e\rangle$  with electric dipole transitions. We denote by  $\omega_{ij}$ (i, j = g, m, e) the resonance frequencies of the transitions. Transitions  $|g\rangle \to |m\rangle$ , marked by w (weak), and  $|m\rangle \to |e\rangle$ , marked by st (strong) are coupled by lasers at frequency  $\omega_w$ and  $\omega_{st}$ , the strengths of the couplings are characterized by the Rabi frequencies  $\Omega_w$  and  $\Omega_{st}$ and the detunings defined as  $\Delta_w = \omega_w - \omega_{mg}$ , and  $\Delta_{st} = \omega_{st} - \omega_{em}$ . The radiative process coupling  $|e\rangle$  to states  $|g\rangle$  and  $|m\rangle$  is characterized by the decay rate  $\gamma$  and the branching ratio  $\beta_{eg}/\beta_{em}$  ( $\beta_{em}+\beta_{eg}=1$ ). The radiative decay of state  $|m\rangle$ , whose natural lifetime is of the order of 1 s for the mentioned ions, is neglected in the analytical model we present below.

We denote by  $\rho$  the density matrix for the atom's internal degrees of freedom, while we treat the center of mass variables classically. x(t) denotes the time-dependent position of




FIG. 1: Ladder level scheme. The straight arrows represent the laser coupling between states  $|g\rangle$ ,  $|m\rangle$  and  $|e\rangle$ . The wavy lines indicate radiative decay.

the atom. The master equation for the density matrix  $\rho$  is

$$\frac{\partial}{\partial t}\rho = -\frac{\mathrm{i}}{\hbar}[H,\rho] + \mathcal{L}\rho \tag{1}$$

where Hamiltonian H gives the coherent dynamics and is decomposed into the terms

$$H = H_0 + H_I \tag{2}$$

where

$$H_0 = -\hbar \Delta_w |m\rangle \langle m| - \hbar (\Delta_w + \Delta_{st}) |e\rangle \langle e| \tag{3}$$

gives the internal energies in the reference frames of the lasers while

$$H_I = \frac{\hbar\Omega_w}{2} e^{ik_w x(t)} |m\rangle\langle g| + \frac{\hbar\Omega_{st}}{2} e^{ik_{st} x(t)} |e\rangle\langle m| + \text{H.c.}$$
(4)

gives the laser coupling, where  $k_j$  denotes the laser wave vectors (j = w, st). The relaxation operator

$$\mathcal{L}\rho = -\frac{1}{2}\gamma \left(\rho|e\rangle\langle e| + |e\rangle\langle e|\rho\right) + \beta_{eq}\gamma|g\rangle\langle e|\rho|e\rangle\langle g| + \beta_{em}\gamma|m\rangle\langle e|\rho|e\rangle\langle m|$$
(5)

describes the radiative processes.

The response of the atomic system to laser excitation is revealed by the occupation probabilities of the atomic levels, which can be monitored by the number of scattered photons.

Detection of the atoms is made on the transition with the highest fluorescence rate  $|e\rangle \rightarrow |g\rangle$  (branching ratio  $\beta_{eg}/\beta_{em} > 1$  for the ions mentioned above) which lies in the blue domain (< 500 nm). For the excitation scheme discussed in the following, this allows for photon detection without scattered light background since the excitation wavelengths lie in the red and near infra-red domain (> 680 nm). This major advantage does not hold for Hg<sup>+</sup> nor Yb<sup>+</sup> for which the excitation and emission wavelengths are very close. In the following, we focus on the case of Ba<sup>+</sup>, Sr<sup>+</sup> and Ca<sup>+</sup> for the choice of the relevant parameters needed to describe the atomic system.

It should be noted that the dipole (strong) and the quadrupole (weak) couplings differ by some orders of magnitude. Nevertheless, powerful lasers in the red and near infra-red domain are now widely available and, assuming proper focusing of the laser beam, Rabi frequencies of the order of 1 MHz can be reached on the quadrupole transition. To give an idea of the feasible Rabi frequencies, let us mention that, for Ca<sup>+</sup>, 200 mW of laser power at 729 nm focussed on a waist radius of 50  $\mu$ m results in  $\Omega_w \simeq 1$  MHz [2].

#### III. INTERNAL DYNAMICS OF A LOCALIZED PARTICLE

In this section we look for the solutions of Eq. (1) when the motion of the particle can be neglected. For numerical applications and when approximations are needed in analytical expressions, parameters leading to a strong driving of the  $|m\rangle \to |e\rangle$  transition with reduced sensitivity to Doppler shift are chosen ( $\gamma^2 \ll \Omega_{st}^2, \Delta_{st}^2$ ). Furthermore, to remain close to experimental conditions, we do not require excessively large Rabi frequency on the  $|g\rangle \to |m\rangle$  transition and assume  $\Omega_w^2 \ll \gamma^2, \Omega_{st}^2$ .

In order to get some insight in the problem, the dressed state picture of the system can be of help in the limiting case where the weak coupling beam can be considered as a probe of the atom dressed by the photons of the strong transition. In this picture, the  $|m\rangle$  state is broadened and shifted by the strong coupling  $\Omega_{st}$ . For negative detuning  $\Delta_{st}$  we expect the  $|g\rangle \to |m\rangle$  transition resonance to be shifted to  $\delta_{LS} = -(\sqrt{\Omega_{st}^2 + \Delta_{st}^2} + \Delta_{st})/2$ . This is confirmed on Fig. 2 where the lineshape of the excitation probability in the  $|m\rangle$  state  $\wp_m = \langle m|\rho|m\rangle$  shows a maximum very close to this value. Increasing the detuning  $\Delta_{st}$  decreases the light-shift as well as the power-broadened linewidth of the  $|g\rangle \to |m\rangle$  transition, resulting in an increase of the maximum of  $\wp_m$  for constant coupling strength

 $\Omega_{st}$ .




FIG. 2: Steady state population of level  $|m\rangle$  (b) and  $|e\rangle$  (a) versus  $\Delta_w$  for  $\gamma/2\pi = 20$  MHz,  $\Omega_{st}/2\pi = 100$  MHz and  $\Omega_w/2\pi = 1$  MHz.  $\Delta_{st}/2\pi = -100$  MHz (solid line),  $\Delta_{st}/2\pi = -200$  MHz (dot-dashed line),  $\Delta_{st}/2\pi = -400$  MHz (dashed line). In each case, the thick lines give result for  $\beta_{eg} = 1$  and the narrow line for  $\beta_{eg} = 0.75$ . The vertical dashed lines show the light-shifts  $\delta_{LS}$  calculated for the three sets of curves.

In an experiment, the measured signal is proportional to the probability  $\wp_e = \langle e|\rho|e\rangle$  to be in the  $|e\rangle$  state. Its evolution with the detuning  $\Delta_{st}$  does not follow the same rule as  $\wp_m$  and Fig. 2 clearly shows that a maximum excitation probability can be reached for a good choice of this detuning. This evolution is studied in the following through resolution of the optical Bloch equations resulting from the master equation Eq. (1)

#### A. Maximum fluorescence rate

The steady state solution of Eq. (1) can be written analytically, assuming conservation of the total population ( $\wp_g + \wp_m + \wp_e = 1$ ) and without any approximation made. For the population  $\wp_e$ , this solution can be written like

$$\wp_e = \Omega_{st}^2 \Omega_w^2 / \mathcal{D} \tag{6}$$

with

$$\mathcal{D} = \beta_{eg} \left( 4\Delta_w (\Delta_w + \Delta_{st}) \left( 4\Delta_w (\Delta_w + \Delta_{st}) + 2\Omega_w^2 - 2\Omega_{st}^2 \right) + 4\Delta_w^2 \gamma^2 + \Omega_{st}^4 \right) + (\beta_{eg} - 1) 2\Omega_w^2 (2\Delta_w^2 + 4\Delta_w \Delta_{st} - \Omega_{st}^2) + 2\Omega_w^2 \left( 4(\Delta_w + \Delta_{st})^2 + \gamma^2 + \Omega_w^2 \right).$$
 (7)

This equation is used to estimate the maximum scattering rate that can be expected from this excitation scheme, the effective linewidth of the forbidden transition once coupled by the strong laser excitation, and the dependence of these two entities on the laser coupling parameters. Despite its complexity, Eq. 6 can be connected to the dressed state picture if one keeps in mind that for  $\Delta_w = \delta_{LS}$ ,  $4\Delta_w(\Delta_w + \Delta_{st}) = \Omega_{st}^2$ .

In the limit where  $\Omega_w^2 \ll \gamma^2 |\Delta_w/\Delta_{st}|$ , the condition for maximum occupation probability of the  $|e\rangle$  state, and thus for maximum fluorescence signal, can also be derived analytically from Eq. 6. In first order in  $\gamma^2/(\Omega_{st}^2 + \Delta_{st}^2)$ , this maximum is found for

$$\Delta_w = \delta_{LS} \left( 1 - \frac{\gamma^2}{4(\Omega_{st}^2 + \Delta_{st}^2)} \right). \tag{8}$$

This correction to the light-shift can be omitted in the evaluation of the maximum population  $\wp_e^m$  as it adds a correction in second order in  $\gamma^2/(\Omega_{st}^2 + \Delta_{st}^2)$ , which is negligible for the set of parameters of interest. For  $\Omega_w^2 \ll \Omega_{st}^2$ , this maximum is

$$\wp_e^M = 1 / \left( 4 + \frac{2\Delta_{st}}{\delta_{LS}} + \beta_{eg} \frac{4\delta_{LS}^2 \gamma^2}{\Omega_{st}^2 \Omega_{sv}^2} + (\beta_{eg} - 1) \frac{4\delta_{LS}(\delta_{LS} + 2\Delta_{st})}{\Omega_{st}^2} + \frac{2\gamma^2}{\Omega_{st}^2} \right). \tag{9}$$

This last equation rules the maximum scattering rate, observed when the detuning of the weak transition is adjusted to the light-shift induced by the strong coupling. Assuming this detuning  $\Delta_w$  is adjusted, for each Rabi frequency  $\Omega_w$  (which is experimentally the limiting factor) there is an optimal set  $(\Omega_{st}, \Delta_{st})$  which maximises  $\wp_e^M$ . This optimal set can be found numerically but better understanding can be gained in the particular case of large detunings  $\Delta_{st}^2 \gg \Omega_{st}^2$  for which the light-shift takes the simple form  $\delta_{LS} = \Omega_{st}^2/4\Delta_{st}$ . With this simplification, the optimal set is described by the analytic expression:

$$\left(\frac{\Omega_{st}}{\Delta_{st}}\right)_{opt}^2 = 4\frac{\Omega_w}{\gamma}\sqrt{\frac{2}{\beta_{eg}}},\tag{10}$$

which corresponds to the maximum population

$$\wp_e^M|_{opt} = \frac{1}{4 + 2(\beta_{eg} - 1) + 2\sqrt{2\beta_{eg}}\gamma/\Omega_w + 2\gamma^2/\Omega_{st}^2}.$$
 (11)

This expression is simplified in

$$\wp_e^M|_{opt} \simeq \frac{\Omega_w}{\gamma} \frac{1}{2\sqrt{2\beta_{eg}}},$$
(12)

if  $\gamma^2/\Omega_{st}^2$  is negligible compared to  $\gamma/\Omega_{st}$ .

Equation (12) confirms the dependance of the maximum population  $\wp_e^m$  with  $\beta_{eg}$ , observed on Fig. 2. Indeed, this population increases when the branching factor  $\beta_{eg}$  decreases. For the ions considered in this work, this factor is of the order of 0.75 for Ba<sup>+</sup> and 0.95 for Ca<sup>+</sup> and Sr<sup>+</sup>. Since the previous equations show that different values of  $\beta_{eg}$  do not result in different processes but only in a variation of the maximum population (Eq. 12) and optimal set of parameters to reach it (Eq. 10),  $\beta_{eg}$  is fixed to 1 in the following. This simplification results mainly in a slight underestimation of the number of scattered photons but allows to handle more general equations.




FIG. 3: Steady state population of level  $|g\rangle$  (c),  $|m\rangle$  (b),  $|e\rangle$  (a) versus  $-\Delta_{st}$  for an atomic system close to Ba<sup>+</sup>, Sr<sup>+</sup>, or Ca<sup>+</sup>:  $\gamma/2\pi = 20$  MHz, in the simplified case where  $\beta_{eg} = 1$ . The different curves are for different values of  $\Omega_w/2\pi$ : 0.1 MHz (solid line), 0.5 MHz (dashed line) and 1 MHz (dotted line).  $\Omega_{st}/2\pi = 100$  MHz for all curves and  $\Delta_w$  is adjusted to  $\delta_{LS}$  for each value of  $\Delta_{st}$ . The vertical dashed lines show the optimum detunings like defined by Eq. 10, for the three sets of curves.

Beside the dependance on the branching factors, it is worth noting that the optimal population given in Eq. 12 behaves like  $\Omega_w/\gamma$ , and not like  $\Omega_w^2/\gamma^2$ , as a simple two level picture would have suggested. This linear behaviour is confirmed by numerical calculations, even out of the range of the simplifying approximation  $\Omega_{st}^2 \ll \Delta_{st}^2$ . This is illustrated on Fig. 3 where the probabilities of occupation of the three levels, derived from Eq. 1 with no approximations, are plotted for different values of  $\Omega_w$ . For each detuning on the strong transition  $\Delta_{st}$ , the weak transition detuning is adjusted to the light-shift due to the strong coupling:  $\Delta_w = \delta_{LS}$ . For a given value of  $\Omega_{st}$ , these curves confirm an optimum value for  $\Delta_{st}$  which maximises the resonance value of  $\wp_e^M$ . The numerical results also confirm the linear dependance of the maximal population with  $\Omega_w$  and obey the simplified analytic solution given in Eq. 12 to better than 3%. Following Eq. 10, the optimum of  $\Delta_{st}$  is expected to behave like  $1/\sqrt{\Omega_w}$ . This is also confirmed by the numerical results which show that the simplified equation Eq. 10 reproduces numerical observation for optimal  $\Delta_{st}$  to better than 7% for the value of  $\Omega_w$  chosen for this figure.

We can compare this result with the case where the strong coupling is maximum ( $\Delta_{st} = 0$ ). Then  $\delta_{LS} = \pm \Omega_{st}/2$  and in the regime described by  $\Omega_{st} > \gamma/2$ , the maximum of  $\wp_e^M$  is  $(\Omega_w/\gamma)^2/\beta_{eg}$ . For the realistic conditions we are concerned with (namely  $\Omega_w < \gamma$ ), the maximum population in  $|e\rangle$  and thus the maximum number of scattered photons is smaller by a factor proportional to  $\gamma/\Omega_w$  that what can be expected for large detuning  $\Delta_{st}$  (see Eq. 12 for comparison).

To know if the ladder-scheme can result in enough scattered photons to be efficiently detected, it is useful to compare this scheme with the one usually used for detection and Doppler cooling of the considered trapped ions [11]. It consists in the excitation on the  $|g\rangle \to |e\rangle$  and  $|m\rangle \to |e\rangle$  transitions, the last one being required for repumping ions decayed in the metastable state. This system forms a  $\Lambda$ -scheme and solving the optical Bloch equations for this system, one can show that the maximum occupation probability in the  $|e\rangle$  state is close to 20 %. The parameters chosen for Fig. 3 show a maximum close to 2 % for the ladder-scheme. The complete absence of background signal due to scattered light largely compensates a reduction of absolute fluorescence signal by an order of magnitude. Furthermore, an occupation probability of the excited state as high as 10 % can be found by numerical calculations with Rabi frequencies on the weak transition of 7 MHz. These are achieved by tight focussing of laser power superior to 500 mW.

#### B. Resonance linewidth

The linewidth  $\Gamma_{eff}$  of the fluorescence resonance profile with the laser detuning  $\Delta_w$  and its dependance on the two couplings can be also studied numerically. This study gives evidence for two different types of behaviour for the evolution of this linewidth (see Fig. 4): When  $\Omega_{st}$  is small compared to  $\Delta_{st}$ , the linewidth has a constant value, which increases linearly with  $\Omega_w$ . Once  $\Omega_{st} > \Delta_{st}$ , the linewidth grows with  $\Omega_{st}$  and becomes independent on  $\Omega_w$ . To reflect this behaviour in the analytic expression of the resonance linewidth, we first assume that  $\Omega_w$  is the smallest parameter of the problem  $(\Omega_w^2 \ll \Omega_{st}^2, \Delta_{st}^2, \gamma^2, \Delta_w^2)$ , to extract a limit linewidth we call  $\Gamma_0$  (FWHM):

$$\Gamma_0 = \frac{2\delta_{LS}}{1 + 4(\Omega_{st}^2 + \Delta_{st}^2)/\gamma^2} \sqrt{2 + 4(\Omega_{st}^2 + \Delta_{st}^2)/\gamma^2}.$$
 (13)

This expression is simplified in the regime where  $\gamma^2 \ll \Omega_{st}^2 + \Delta_{st}^2$  and can be written like:

$$\Gamma_0 \simeq \frac{\gamma}{2} \left( 1 - \frac{1}{\sqrt{1 + \Omega_{st}^2 / \Delta_{st}^2}} \right).$$
(14)

Then, we assume that the increasing weak transition coupling power broadens this limit linewidth, resulting in the effective linewidth  $\Gamma_{eff}$ 

$$\Gamma_{eff} = \sqrt{\Gamma_0^2 + 2\Omega_w^2}. (15)$$

For strong saturation  $(\Omega_{st}^2/\Delta_{st}^2 \gg 1)$ ,  $\Gamma_0 \simeq \gamma/2(1-\Delta_{st}/\Omega_{st})$  tends to the maximum value of  $\gamma/2$ , and  $\Gamma_{eff} \simeq \Gamma_0$ . For low saturation, the limit linewidth behaves like  $\Gamma_0 \simeq \gamma/2(\Omega_{st}^2/2\Delta_{st}^2)$  and tends to 0, the main contribution to the linewidth is then due to the weak coupling:  $\Gamma_{eff} \simeq \sqrt{2}\Omega_w$ .

This evolution of  $\Gamma_{eff}$  with  $|\Omega_{st}/\Delta_{st}|$  is shown on Fig. 4 for different values of  $\Omega_w$  and a far detuned strong coupling laser  $\Delta_{st} = -10\gamma$ . The comparison between Eq. 15 and the exact FWHM of the resonance profile of  $\wp_e$ , with  $\Delta_w$  calculated numerically, shows a very good agreement as long as  $\Omega_w$  remains weak compared to  $\gamma/2$ . When this approximation is not valid, the methods used above result in an overestimation of the linewidth for  $\Omega_{st} \geq \Delta_{st}$  (dash-dotted line of Fig. 4). These curves show that the effective linewidth of the excitation scheme can be adjusted continuously by the ratio  $|\Omega_{st}/\Delta_{st}|$ . When this ratio is chosen to optimize the maximum of  $\wp_e$  (see Eq. 10), the effective linewidth can be evaluated through Eq. 15. For  $\Omega_w/\gamma \ll 1$ ,  $\Gamma_0 \simeq \sqrt{2}\Omega_w$  and  $\Gamma_{eff} \simeq 2\Omega_w$ . This value gives the lower boundary

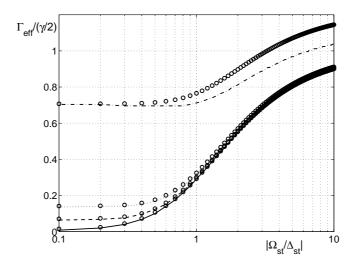


FIG. 4: FWHM of the resonance curve of  $\wp_e$  with  $\Delta_w$ , in units of  $\gamma/2$ , as a function of the ratio  $|\Omega_{st}/\Delta_{st}|$ , for a system identical to Fig. 3.  $\Delta_{st}/2\pi = -200$  MHz and  $\Omega_{st}$  varies from  $0.1|\Delta_{st}|$  to  $10|\Delta_{st}|$ . The different curves are for different values of  $\Omega_w$  which are 0.1 MHz (solid line), 0.5 MHz (dashed line), 1 MHz (dotted line) and 5 MHz (dot-dashed line). The lines give the numerical calculation from the resolution of the master equation, with no approximations. The symbols plots the FWHM as given by Eq. 15.

for an estimation of the effective linewidth when parameters are set to optimise the excited population.

#### IV. TWO-PHOTON DOPPLER COOLING

So far we have neglected the effect of the center-of-mass motion on the atomic dynamics. If the considered atoms are trapped in a harmonic potential, like in [2], their motion is periodic and gives rise to sidebands [12]. To quantify the efficiency of the proposed two-photon Doppler cooling, we assume that the effective linewidth  $\Gamma_{eff}$  is larger than the frequencies of oscillation  $\omega_i$  of the ions in the trap. Practically, it means that the sidebands are not resolved in the absorption spectra and from the point of view of laser-atom interactions, the atoms can be considered as free [12]. Furthermore, we also assume that the recoil frequency  $\hbar k_x^2/2m$  (x being w or st) is smaller than the effective linewidth [13]. Within these boundary conditions, the effect of the atom motion can be taken into account in the master equation (Eq. 1) and its stationary state solution (Eq. 6) by the Doppler effect which shifts the

detuning from  $\Delta_{st}$  to  $\Delta_{st} - \mathbf{k}_{st}.\mathbf{v}$  and  $\Delta_w$  to  $\Delta_w - \mathbf{k}_w.\mathbf{v}$ .

To simplify the notations, we consider a one dimensional problem, extrapolation to three dimensions being obvious. We assume that the two lasers propagate along the same axis, so v is the velocity along that axis and the positive sign is defined with respect to  $\mathbf{k}_w$ . Consequently, the projection  $k_{st}$  is positive (negative) if the laser on the strong transition copropagates (counterpropagates) with the laser on the weak transition. By definition,  $k_w$  is always positive.

For travelling waves, the radiative force F leading to Doppler cooling results from momentum transferred to the atom by photons on absorption/emission cycles. It is exactly the gradient of the atom-light interaction potential [13] given in Eq. 4 and in the simplifying case where the decay from  $|e\rangle$  to  $|m\rangle$  is neglected ( $\beta_{eg} = 1$ ), it is

$$F(v) = \hbar (k_w + k_{st}) \gamma \wp_e(v) \tag{16}$$

This is exactly the result one would obtain by analogy with a two level system where the momentum transferred on each absorption/emission cycle is  $\hbar(k_w + k_{st})$  (when averaged on several cycles) and where the number of cycle per unit time is the excited state scattering rate  $\gamma$  times the probability to be in this excited state  $\wp_e$ . The introduction of the effective momentum  $\mathbf{k}_{eff} = (\mathbf{k}_w + \mathbf{k}_{st})$  as the momentum transferred to the atoms is very significant. It demonstrates that the role of the coupling on the strong transition is not only to shorten the lifetime of the metastable state  $|m\rangle$ , which would be independent on the relative direction of the two lasers. This sensitivity of the cooling process to the relative direction of propagation has been experimentally demonstrated in [2].

F(v) can be split in a constant force  $F^0$ , which acts on an immobile atom and in a velocity dependent force F(v) - F(0), responsible for the cooling process. For trapped particles,  $F^0$  shifts the center of the trajectory by  $F^0/m\omega_i^2$  and is not involved in the cooling. The cooling force, proportional to  $\wp_e(v) - \wp_e(v=0)$  can be considered as a damping force  $-\beta v$  only at first order in v (i.e. for  $v \ll \Gamma_{eff}/k_x$ )[14].

In the approximation where  $\Omega_w$  is the smallest relevant coupling parameter, the analytic expression of the slope of  $\wp_e$  with v is simple enough to give an insight to the dependence of  $\beta$  with the coupling parameters:

$$\beta \simeq -\hbar (k_w + k_{st})^2 \gamma \wp_e^2(0) \frac{8\gamma^2 \Delta_w k_w + 8 \left(4\Delta_w (\Delta_{st} + \Delta_w) - \Omega_{st}^2\right) \left(\Delta_w (k_{st} + k_w) + (\Delta_{st} + \Delta_w) k_w\right)}{\Omega_{st}^2 \Omega_w^2 (k_w + k_{st})}.$$
(17)

First, one can check that for negative detuning  $\Delta_{st}$  and negative relative detuning  $\Delta_w - \delta_{LS}$ , the  $\beta$  coefficient is positive and damping effectively takes place. Secondly, the particularity of the regime of large detunings  $\Delta_{st}$  and low saturation ( $\Omega_{st}^2 \ll \Delta_{st}^2$ ) for the strong transition is revealed by Eq. 17. Indeed, in this limit, the detuning  $\Delta_w$  (which is very close to  $\delta_{LS}$ ), is negligible compared to  $\Delta_{st}$  and then, only  $k_w$  controls the slope of  $\wp_e$  with v. It means that the velocity dependance of the force is proportional to  $k_w v$ , and that, at first order in v, the efficiency of the strong coupling is not reduced by the Doppler effect. Nevertheless, the relative direction of the two lasers remains relevant for the effective momentum  $\mathbf{k}_{eff}$  transferred to the atoms as the ratio between the sum and the difference of the two wavevectors  $k_w$  and  $k_{st}$  is equal to 11.9 for Ca<sup>+</sup>, 4.4 for Sr<sup>+</sup> and 1.9 for Ba<sup>+</sup>.

When the light-shift becomes non-negligible compared to  $\Delta_{st}$ , the slope becomes steeper for copropagating lasers. However, the major effect of the relative direction of propagation remains the size of the effective momentum  $\mathbf{k}_{eff}$ . In the following, we consider only the case where the two lasers are copropagating and call k the maximum effective momentum. Fig. 5 shows the damping coefficient  $\beta$  for two different values of  $\Omega_w$ , in a regime where the effective linewidth depends on  $\Omega_w$ . The efficiency of the damping shows a maximum for detuning  $\Delta_w - \delta_{LS}$  increasing with the linewidth of the signal. The curves also show that, in this regime, the maxima of the damping are very close and that the advantage of an increase in  $\Omega_w$  is mainly to broaden the capture range of the cooling process.

The temperature reached by Doppler cooling results from the equilibrium between the damping due to the momentum transfer and the diffusion induced by spontaneous emission. By conservation of energy, the scattered photons have the momentum k and by analogy with two-level systems, the diffusion coefficient is [15]

$$D = \frac{1}{2}\hbar^2 k^2 \gamma \wp_e(0) \tag{18}$$

and the temperature reached is  $k_BT = D/\beta$ .

Numerical calculations show that the minimum temperature  $T_D$  is reached for  $\Delta_w - \delta_{LS} = -\Gamma_{eff}/2$  like expected by analogy with a two level system. They also show that the relevant parameter for the strong coupling is the ratio  $|\Omega_{st}/\Delta_{st}|$  since for identical ratio, different values of  $\Delta_{st}$  or  $\Omega_{st}$  give the same results. The minimum temperature  $T_D$  is plotted on Fig. 6 versus  $|\Omega_{st}/\Delta_{st}|$ , for the wavelengths of Ca<sup>+</sup> and with copropagating lasers. Like the effective linewidth, the limit temperature can be adjusted continuously down to few  $\mu$ K by




FIG. 5: Damping factor  $\beta$  in units of  $\hbar k^2$ , versus the relative detuning of the weak transition from the light-shift. Ca<sup>+</sup> wavelengths are used ( $\lambda_w = 732$  nm and  $\lambda_{st} = 866$  nm) and  $\gamma/2\pi = 20$  MHz. The two curves are for different values of  $\Omega_w/2\pi$ : 0.1 MHz (solid line), 1 MHz (dashed line),  $\Delta_{st}/2\pi$  is fixed to  $-10\gamma$  and  $\Omega_{st}$  is chosen to obtain the maximum signal, according to Eq.12.

the choice of  $\Omega_{st}/\Delta_{st}$ , the lowest temperature being controlled by  $\Omega_w$ . As a comparison, the limit temperature reached by Doppler cooling on the allowed dipole  $|g\rangle \rightarrow |e\rangle$  transition on Ca<sup>+</sup> ions is 0.55 mK. The lowest temperatures shown on Fig. 6 have only a theoretical meaning as, in practice, for reaching these temperatures, the effective linewidth of the system must be reduced and reach values smaller than the recoil and the oscillation frequencies. Then, to make predictions, other mechanisms than the Doppler cooling have to be taken into account, as the well known sideband cooling which will not be developed here but for which efficiency has been experimentally demonstrated [9, 10].

#### V. CONCLUSIONS

We have studied a two-photon process where the lower transition is a dipole forbidden transition, enhanced by coupling on a dipole allowed transition, like can be met in trapped ions like Ca<sup>+</sup>, Sr<sup>+</sup> and Ba<sup>+</sup>. For these ion species, the two excitation wavelengths belong to the red or infrared domain whereas the scattered photons lie in the blue domain, which offers the possibility of detection without stray light background. Our numerical and analytical studies show that this excitation process can be an powerful alternative for the detection of ions or readout of their internal state. Indeed, the number of photons can easily reached




FIG. 6: Doppler limit temperature versus  $|\Omega_{st}/\Delta_{st}|$  for Ca<sup>+</sup> wavelength ( $\lambda_w = 732$  nm and  $\lambda_{st} = 866$  nm) and  $\gamma/2\pi = 20$  MHz,  $\beta_{eg} = 1$ . For a given ratio  $|\Omega_{st}/\Delta_{st}|$  the curves are identical for different  $\Delta_{st}$ . The different curves are for different values of  $\Omega_w/2\pi$ : 0.1 MHz (solid line), 0.5 MHz (dashed line) and 1 MHz (dotted line).

a tenth of what is expected from direct excitation on a dipole allowed transition and the absence of background signal due to scattered light can compensate this lower signal. Furthermore, we demonstrate that two-photon Doppler cooling can efficiently take place and that resolution of oscillation sidebands is not required to reach temperatures lower than 100  $\mu$ K. The width of the resonance profile and the Doppler limit temperature can be varied continuously by tuning the power and/or detuning on the dipole allowed transition. This cooling mechanism can be of great interest for traps with low oscillation frequencies or with geometry leading to a high stray light level like microtraps.

#### Acknowledgments

C.C. is grateful to Jean Dalibard for precious advise and M.D. acknowledges the hospitality of laboratory PIIM and thanks Université de Provence for his grant as a guest professor. The present collaboration has benefitted from financial support by the French Embassy in Denmark.

<sup>[1]</sup> H. Metcalf and P. van der Straten, Laser cooling and trapping (Springer, 1999).

- [2] R. Hendricks, J. Sorensen, C. Champenois, M. Knoop, and M. Drewsen, submitted to Phys.Rev.Lett.
- [3] E. A. Curtis, C. W. Oates, and L. Hollberg, Phys. Rev. A 64, 031403 (2001).
- [4] T. Binnewies, G. Wilpers, U. Sterr, F. Riehle, J. Helmcke, T. E. Mehlstäubler, E. M. Rasel, and W. Ertmer, Phys. Rev. Lett. 87, 123002 (2001).
- [5] W. C. Magno, R. L. Cavasso Filho, and F. C. Cruz, Phys. Rev. A 67, 043407 (2003).
- [6] N. Malossi, S. D. Damkjær, P. L. Hansen, L. B. Jacobsen, L. Kindt, S. Sauge, J. W. Thomsen, F. C. Cruz, M. Allegrini, and E. Arimondo, Physical Review A 72, 051403 (2005).
- [7] G. Morigi and E. Arimondo, Physical Review A 75, 051404 (pages 4) (2007).
- [8] I. Marzoli, J. I. Cirac, R. Blatt, and P. Zoller, Phys. Rev. A 49, 2771 (1994).
- [9] F. Diedrich, J. C. Bergquist, W. M. Itano, and D. J. Wineland, Phys. Rev. Lett. **62**, 403 (1989).
- [10] C. Roos, T. Zeiger, H. Rohde, H. C. Nägerl, J. Eschner, D. Leibfried, F. Schmidt-Kaler, and R. Blatt, Phys. Rev. Lett. 83, 4713 (1999).
- [11] W. Neuhauser, M. Hohenstatt, P. Toschek, and H. Dehmelt, Phys. Rev. A 22, 1137 (1980).
- [12] D. Wineland and W. Itano, Phys. Rev. A 20, 1521 (1979).
- [13] J. Dalibard, S. Reynaud, and C. Cohen-Tannoudji, J. Phys. B 17, 4577 (1984).
- [14] W. M. Itano and D. J. Wineland, Phys. Rev. A 25, 35 (1982).
- [15] J. P. Gordon and A. Ashkin, Phys. Rev. A 21, 1606 (1980).